

Your Project Calculations



Project Name: MTSOLAR_2I32BH7701K5C

S3D Model Link:

https://platform.skyciv.com/structural?preload_name=MTSOLAR_2I32BH7701K5C&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/6_2023

Public Model Link:

https://platform.skyciv.com/structural-viewer?project_id=2uPcTXceSizjENoSTO6GChKV450In436X6dxOImxgoGQeXPXmgn6OJRNi2i7J6g4

Array Specification

Product:	Beam
Unique ID:	2P-19.75-8TOP-HD-45-L-4Hx5W-A50C
Duty Classification:	HD
Module Width:	44.65 in
Module Length:	82.44in
Number of Rows:	4
Number of Columns:	5
Total Number of Modules:	20
Desired Tilt Angle:	40
Front Edge Clearance:	10
Total Array Height at Tilt:	19.62 ft
Total Frame Length:	34.75 ft
Frame Weight:	1972 lbs
Array Dimensions N/S:	15.05 ft
Array Dimensions E/W:	34.77 ft
Rail Length:	180.60 in
Rail Spacing:	3.44 ft
Rail Check:	Not Checked

Support Specifications


Pole Size:	8in Pipe Sch 40
Pole Length above Grade:	14.84 ft
Number of Poles:	2
Pole Spacing:	19.75 ft

Foundation Specifications

Foundation Type:	Square
Foundation Dimensions:	48 x 48 in
Foundation Depth (below grade):	Pile 1: 7.25 ft Pile 2: 7.25 ft
Foundation Volume:	8.593 y ³
Foundation Result:	PASSED
Mount Twist:	0.332984 kip

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	24319 E Clark Lake Rd, Nisswa, MN 56468, USA
Wind Speed:	101 mph
Snow Load:	60 psf
Design Uplift Pressure:	Multiple pressures
Design Downforce Pressure:	Multiple pressures
Design Snow Pressure:	0.019793 ksf

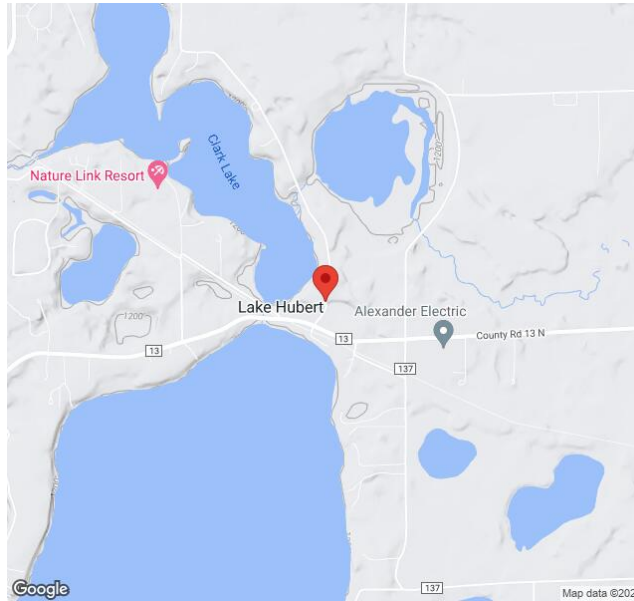

Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



AutoDesigner Input



```
{
  "wind_speed_override": null,
  "snow_load_override": null,
  "direct_snow_load": false,
  "product_type": "Beam",
  "project_id": "MTSOLAR_2I32BH7701K5C",
  "site_address": "24319 E Clark Lake Rd, Nisswa, MN 56468, USA",
  "module_width": 44.65,
  "module_length": 82.44,
  "number_rows": 4,
  "number_columns": 5,
  "pole_mount_section": "4_40",
  "core_pipe_width": 65,
  "core_pipe_section": "2_40",
  "adjuster_section": "2_40",
  "core_beam_height": 65,
  "core_beam_section": "HSS3x2x1/8",
  "main_pipe_section": "2_12GA",
  "pole_spacing": 15,
  "tilt_angle": 40,
  "ground_clearance": 10,
  "risk_category": "I",
  "exposure_category": "B",
  "frame_duty_override": "auto",
  "pole_override": "auto",
  "soil_type": "sand",
  "foundation_type": "Square",
  "foundation_size": 48,
  "check_rails": false
}
```

Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Design and Sizing is approximate only


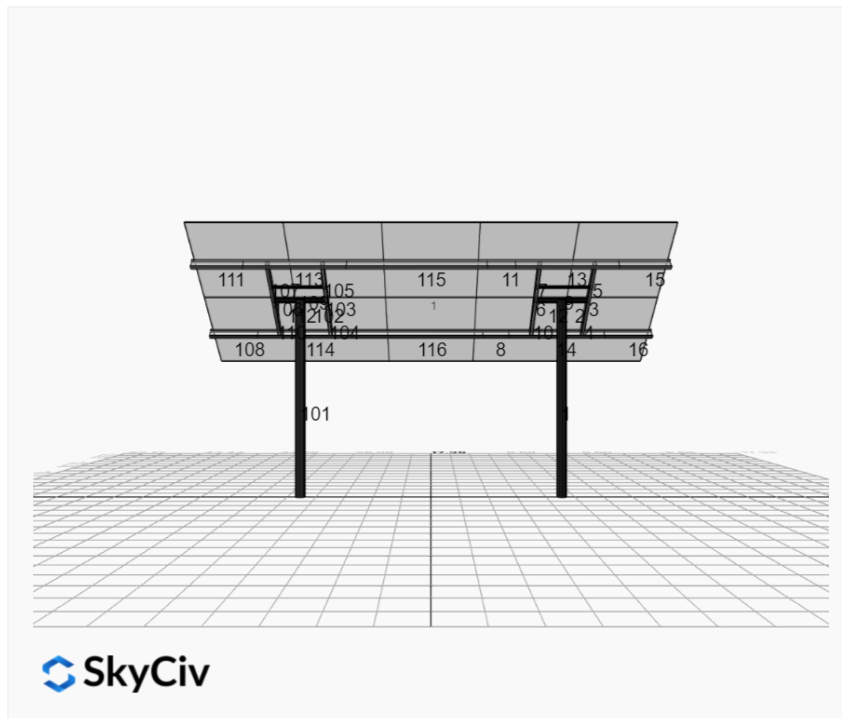


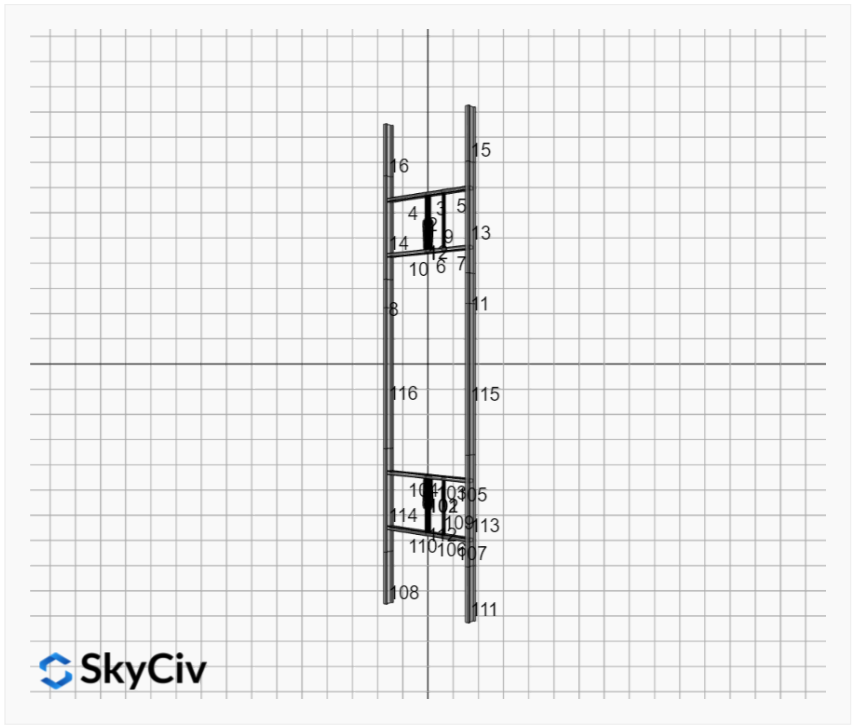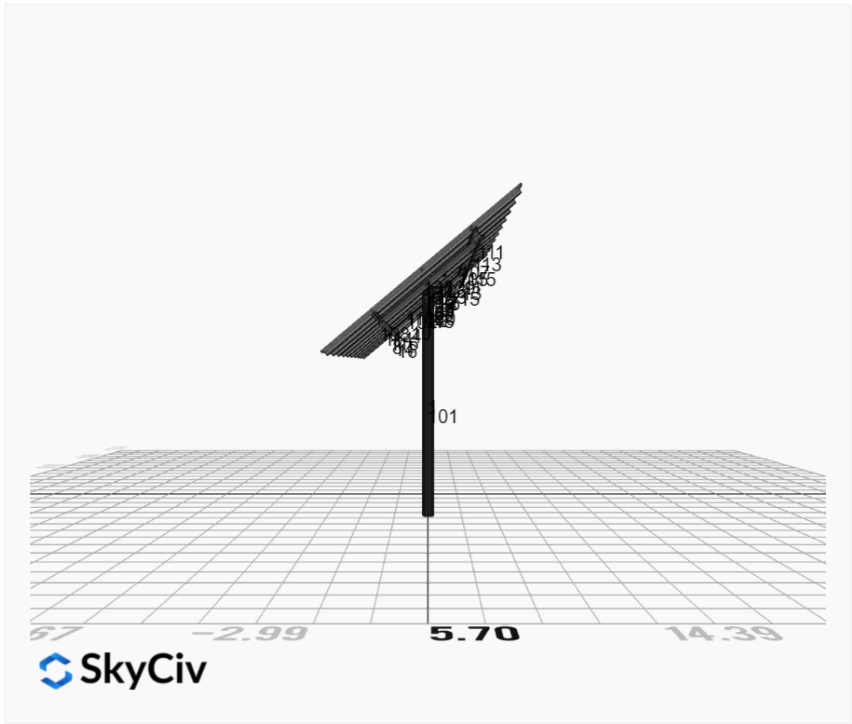


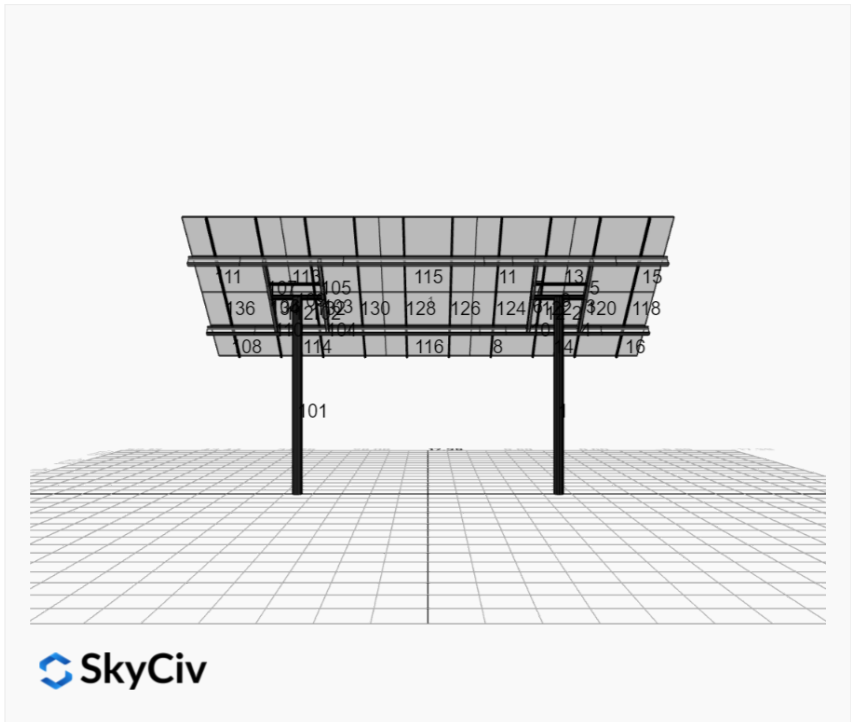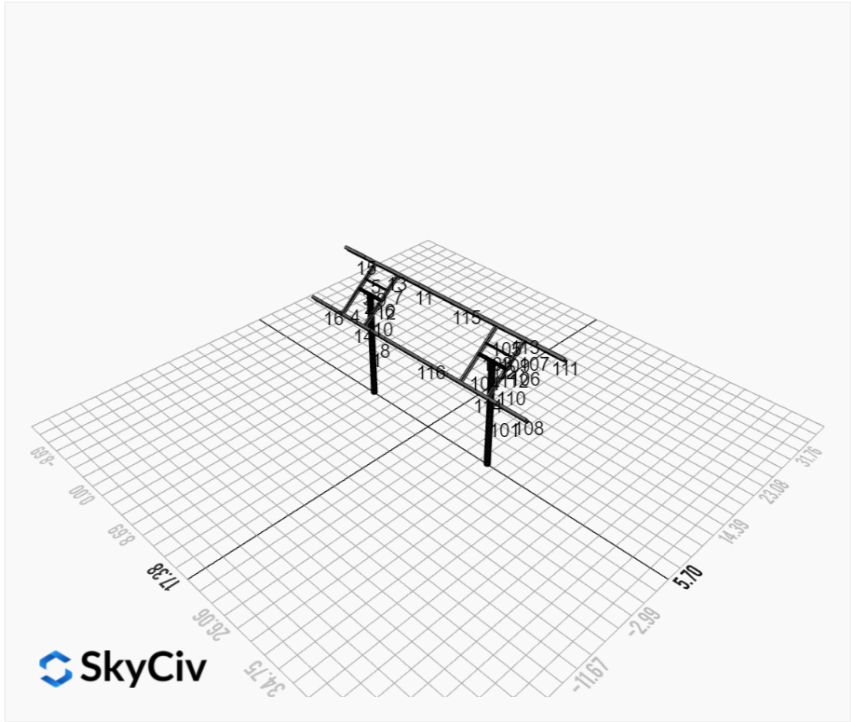

FEM Results (Envelope Worst Case for each member)

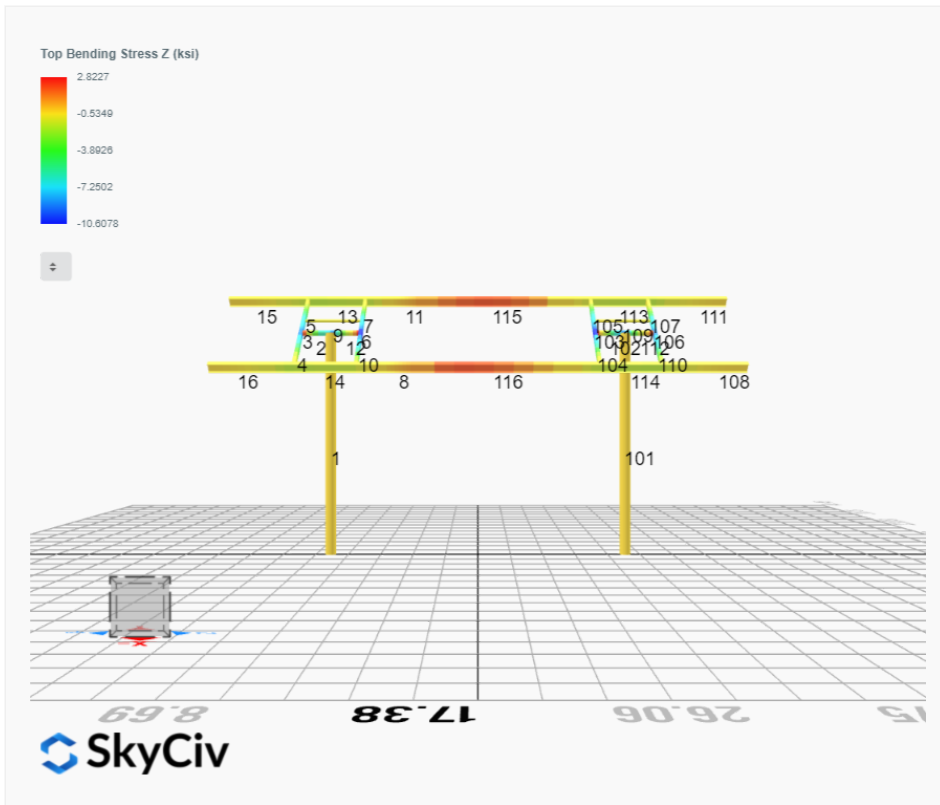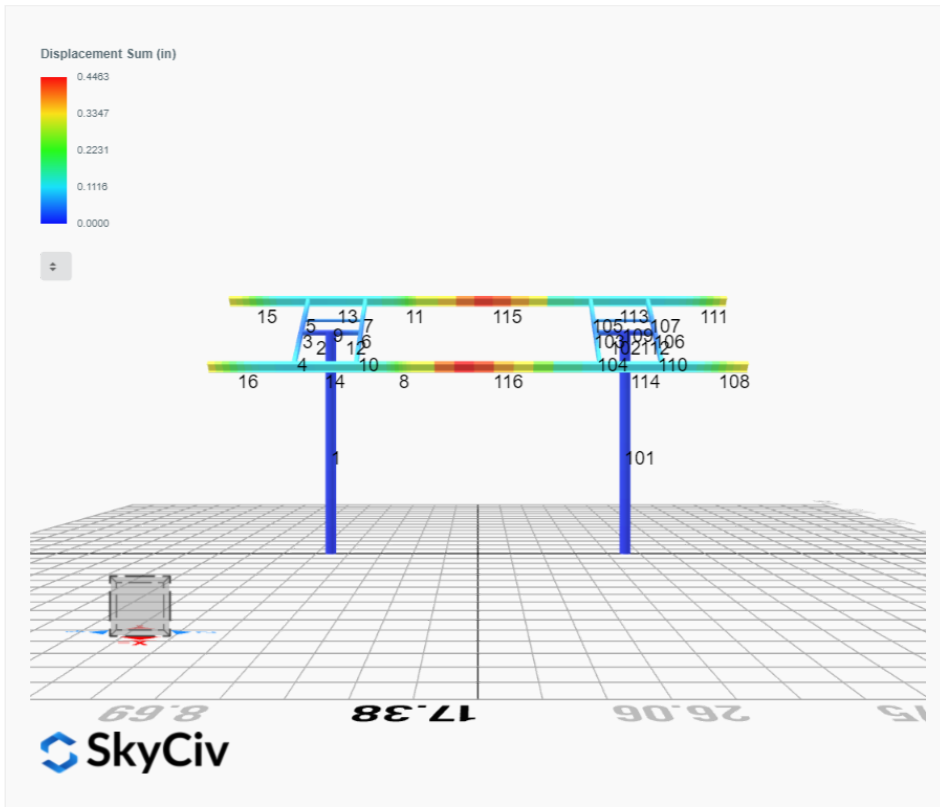

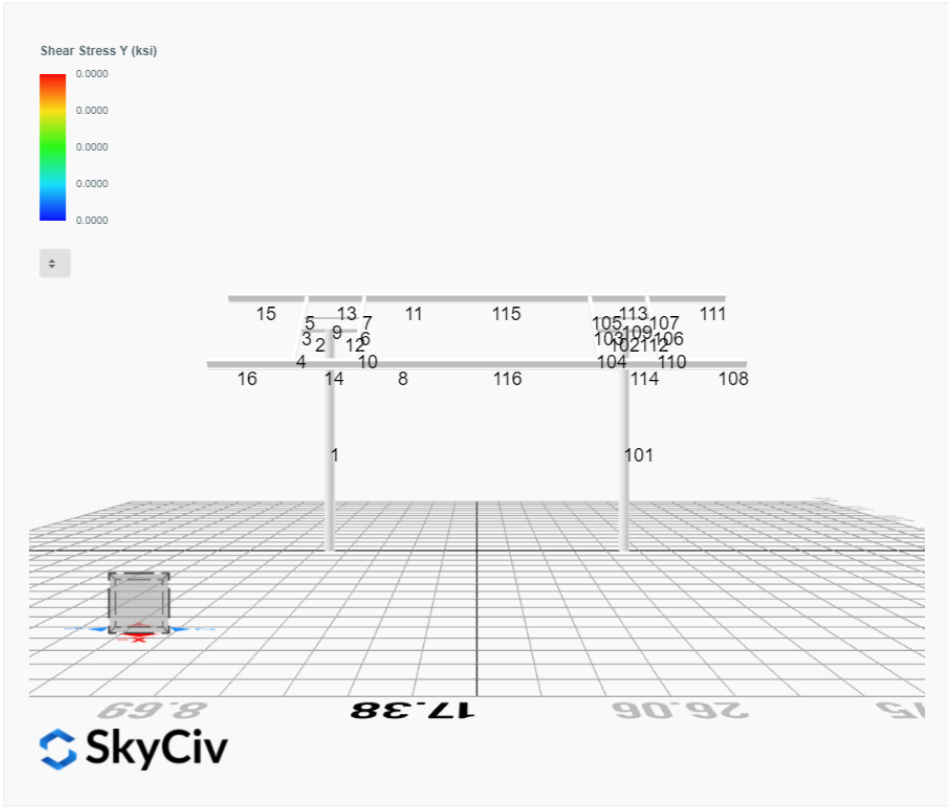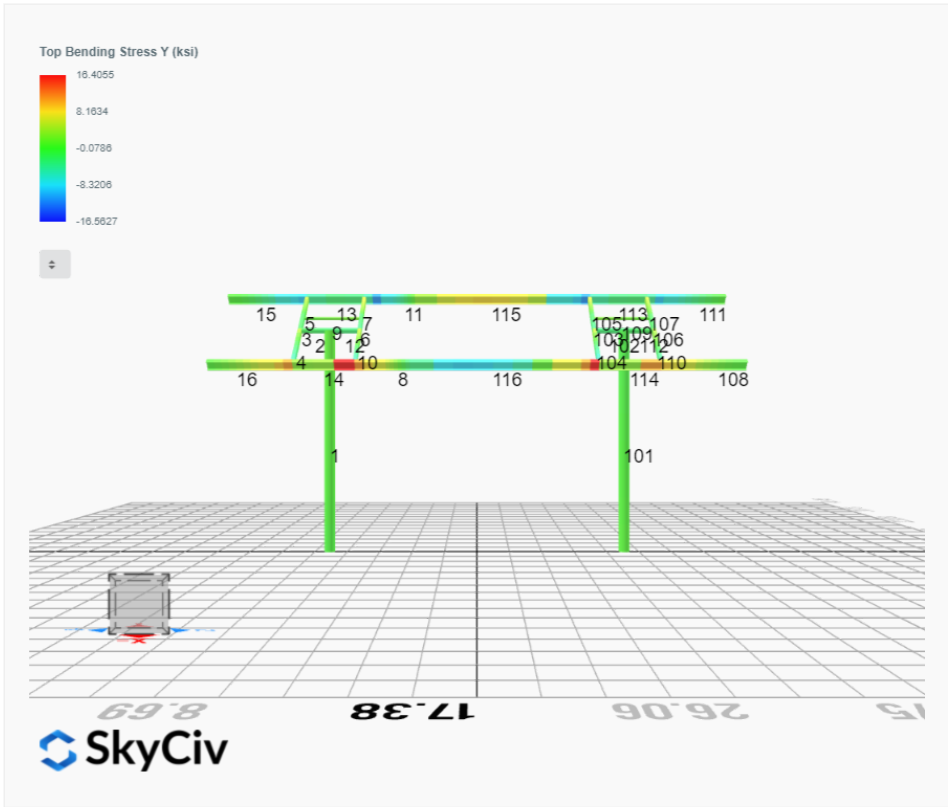

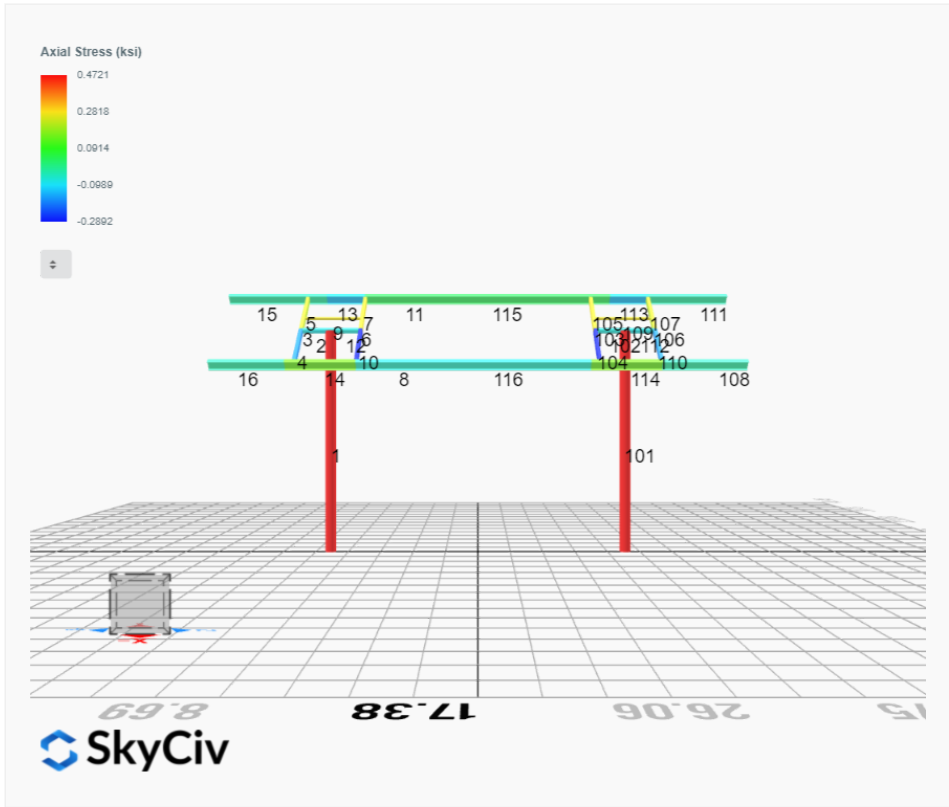

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	2.1823	0.0223	0.1061	-0.0137	0.0240
ULS: 2. D + L	0.0000	2.1823	0.0223	0.1061	-0.0137	0.0240
ULS: 3. D + (S or Lr or R)	0.0000	6.1473	0.0798	0.3807	-0.0498	0.0446
ULS: 3. D + (S or Lr or R)	0.0000	2.1823	0.0223	0.1061	-0.0137	0.0240
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	5.1560	0.0654	0.3121	-0.0407	0.0395
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	2.1823	0.0223	0.1061	-0.0137	0.0240
ULS: 5b. D + 0.7E	0.0000	2.1823	0.0223	0.1061	-0.0137	0.0240
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	5.1560	0.0654	0.3121	-0.0407	0.0395
ULS: 8. 0.6D + 0.7E	0.0000	1.3094	0.0134	0.0637	-0.0082	0.0144
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.3205	4.9478	0.0709	0.3301	-0.1940	35.8011
ULS: 5a. D + 0.6W_Wind downforce Case B only	-2.3205	4.9478	0.0709	0.3301	-0.1940	35.8011
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.8494	-0.0217	-0.0164	-0.0713	0.1300	-26.7222
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.5703	0.3109	-0.0108	-0.0458	0.1093	-28.0864
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7404	7.2301	0.1019	0.4801	-0.1760	26.8722
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.7404	7.2301	0.1019	0.4801	-0.1760	26.8722
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3871	3.5030	0.0364	0.1790	0.0670	-20.0202
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1777	3.7525	0.0406	0.1981	0.0515	-21.0434
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7404	4.2564	0.0588	0.2741	-0.1489	26.8568
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.7404	4.2564	0.0588	0.2741	-0.1489	26.8568
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3871	0.5293	-0.0067	-0.0270	0.0941	-20.0356
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1777	0.7788	-0.0025	-0.0078	0.0786	-21.0588
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.3205	4.0749	0.0620	0.2877	-0.1885	35.7914
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-2.3205	4.0749	0.0620	0.2877	-0.1885	35.7914
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.8494	-0.8947	-0.0253	-0.1138	0.1355	-26.7318
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.5703	-0.5620	-0.0197	-0.0882	0.1148	-28.0961

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	11.2673
Shear X	-3.8675
Shear Z	0.1592
Moment X	0.7561
Moment Y (Twist)	0.3332
Moment Z	61.1977

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.2301
Shear X	-2.3205
Shear Z	0.1019
Moment X	0.4801
Moment Y (Twist)	0.1940
Moment Z	35.8011

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0000	2.1823	-0.0223	-0.1061	0.0137	0.0240
ULS: 2. D + L	-0.0000	2.1823	-0.0223	-0.1061	0.0137	0.0240
ULS: 3. D + (S or Lr or R)	-0.0000	6.1473	-0.0798	-0.3808	0.0498	0.0447
ULS: 3. D + (S or Lr or R)	-0.0000	2.1823	-0.0223	-0.1061	0.0137	0.0240
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	5.1560	-0.0654	-0.3121	0.0408	0.0395
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	2.1823	-0.0223	-0.1061	0.0137	0.0240
ULS: 5b. D + 0.7E	-0.0000	2.1823	-0.0223	-0.1061	0.0137	0.0240

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0000	5.1560	-0.0654	-0.3121	0.0408	0.0395
ULS: 8. 0.6D + 0.7E	-0.0000	1.3094	-0.0134	-0.0637	0.0082	0.0144
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.3205	4.9478	-0.0709	-0.3301	0.1940	35.8011
ULS: 5a. D + 0.6W_Wind downforce Case B only	-2.3205	4.9478	-0.0709	-0.3301	0.1940	35.8011
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.8494	-0.0217	0.0164	0.0713	-0.1300	-26.7222
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.5703	0.3109	0.0108	0.0458	-0.1093	-28.0864
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7404	7.2301	-0.1019	-0.4801	0.1760	26.8723
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.7404	7.2301	-0.1019	-0.4801	0.1760	26.8723
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3871	3.5030	-0.0364	-0.1790	-0.0670	-20.0201
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1777	3.7525	-0.0406	-0.1982	-0.0515	-21.0434
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7404	4.2564	-0.0588	-0.2741	0.1489	26.8568
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.7404	4.2564	-0.0588	-0.2741	0.1489	26.8568
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3871	0.5293	0.0067	0.0270	-0.0941	-20.0356
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1777	0.7788	0.0025	0.0078	-0.0786	-21.0588
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.3205	4.0749	-0.0620	-0.2877	0.1885	35.7915
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-2.3205	4.0749	-0.0620	-0.2877	0.1885	35.7915
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.8494	-0.8947	0.0253	0.1138	-0.1355	-26.7318
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.5703	-0.5620	0.0197	0.0882	-0.1148	-28.0960

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	11.2673
Shear X	-3.8675
Shear Z	-0.1592
Moment X	-0.7563
Moment Y (Twist)	0.3330
Moment Z	61.1987

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.2301
Shear X	-2.3205
Shear Z	-0.1019
Moment X	-0.4801
Moment Y (Twist)	0.1940
Moment Z	35.8011

Project Details

Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States

User Name: sales@mtsolar.us
 Project Name: MTSOLAR_2132BH7701K5C
 Unit System: imperial



Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F _y (ksi)	F _u (ksi)
1	29000	50	65

Section Dimensions							

ID	Name	d (in)	t _w (in)				
2	2in Pipe Sch 80	2.38	0.22				
5	4in Pipe Sch 80	4.50	0.34				
9	8in Pipe Sch 40	8.63	0.32				

ID	Name	d (in)	b (in)	t _w (in)	t _b (in)	r (in)	
16	HSS5x3x3/16	5.00	3.00	0.17	0.17	0.17	

ID	Name	d (in)	t _w (in)	b _t (in)	b _b (in)	t _t (in)	t _b (in)	r (in)
19	W8x10	7.89	0.17	3.94	3.94	0.20	0.20	0.30

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I _{yp} (in ⁴)	I _{zp} (in ⁴)	I _w (in ⁶)	S _{yp} (in ³)	S _{zp} (in ³)
2	2in Pipe Sch 80	1.48	1.74	0.87	0.87	0.00	1.02	1.02
5	4in Pipe Sch 80	4.41	19.22	9.61	9.61	0.00	5.85	5.85

115	133.20	69.16	17.33	6.12	40.24	43.62
116	133.20	69.16	16.87	6.12	40.24	43.62


Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.096	0.735	0.019	0.034	0.001	0.782	#13	0.636	Not Required	Pass
2	0.004	0.352	0.174	0.083	0.033	0.480	#21	0.114	Not Required	Pass
3	0.010	0.539	0.050	0.053	0.003	0.593	#21	0.045	Not Required	Pass
4	0.010	0.521	0.159	0.052	0.034	0.636	#21	0.080	Not Required	Pass
5	0.010	0.335	0.157	0.053	0.039	0.375	#21	0.074	Not Required	Pass
6	0.013	0.601	0.094	0.060	0.018	0.702	#21	0.045	Not Required	Pass
7	0.013	0.373	0.216	0.059	0.054	0.430	#21	0.074	Not Required	Pass
8	0.002	0.079	0.186	0.040	0.021	0.192	#21	0.095	Not Required	Pass
9	0.014	0.044	0.069	0.002	0.002	0.109	#21	0.204	Not Required	Pass
10	0.014	0.583	0.206	0.058	0.044	0.722	#21	0.080	Not Required	Pass
11	0.003	0.080	0.192	0.041	0.021	0.199	#21	0.095	Not Required	Pass
12	0.003	0.425	0.189	0.098	0.033	0.563	#21	0.035	Not Required	Pass
13	0.007	0.178	0.496	0.053	0.027	0.635	#21	0.286	Not Required	Pass
14	0.008	0.178	0.490	0.052	0.027	0.623	#21	0.190	Not Required	Pass
15	0.000	0.058	0.174	0.025	0.013	0.232	#21	Not Required	Not Required	Pass
16	0.000	0.056	0.174	0.025	0.013	0.231	#21	Not Required	Not Required	Pass
101	0.096	0.735	0.019	0.034	0.001	0.782	#13	0.636	Not Required	Pass
102	0.003	0.425	0.189	0.098	0.033	0.563	#21	0.035	Not Required	Pass
103	0.013	0.601	0.094	0.060	0.018	0.702	#21	0.045	Not Required	Pass
104	0.014	0.582	0.206	0.058	0.044	0.722	#21	0.080	Not Required	Pass
105	0.013	0.373	0.216	0.059	0.054	0.430	#21	0.074	Not Required	Pass
106	0.010	0.539	0.050	0.053	0.003	0.593	#21	0.045	Not Required	Pass
107	0.010	0.335	0.157	0.053	0.039	0.375	#21	0.074	Not Required	Pass
108	0.000	0.056	0.174	0.025	0.013	0.231	#21	Not Required	Not Required	Pass
109	0.014	0.044	0.069	0.002	0.002	0.109	#21	0.204	Not Required	Pass
110	0.010	0.521	0.159	0.052	0.034	0.636	#21	0.080	Not Required	Pass
111	0.000	0.058	0.174	0.025	0.013	0.232	#21	Not Required	Not Required	Pass
112	0.004	0.352	0.174	0.083	0.033	0.480	#21	0.114	Not Required	Pass
113	0.007	0.178	0.496	0.053	0.027	0.635	#21	0.190	Not Required	Pass
114	0.008	0.178	0.490	0.052	0.027	0.623	#21	0.286	Not Required	Pass
115	0.005	0.281	0.276	0.041	0.021	0.559	#21	0.473	Not Required	Pass
116	0.002	0.275	0.276	0.040	0.021	0.552	#21	0.473	Not Required	Pass

Definitions

Φ _t	Safety factor for tensile
Φ _c	Safety factor for compression
Φ _b	Safety factor for flexure
Φ _v	Safety factor for shear
E	Modulus of elasticity
F _y	Specified minimum yield stress
F _u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I _{yp}	Moment of inertia about the Y axes
I _{zp}	Moment of inertia about the Z axes
I _w	Warping constant
S _{yp}	Plastic section modulus about the Y axis
S _{zp}	Plastic section modulus about the Z axis
KL	Effective length
C _n	Buckling modification factor (from all load combinations)

L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z , M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

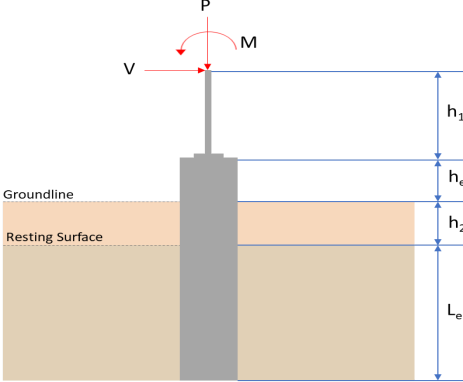REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.25$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1285 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>7.230</td> <td>11.267</td> </tr> <tr> <td>V_x (kip)</td> <td>-2.321</td> <td>-3.868</td> </tr> <tr> <td>V_z (kip)</td> <td>0.102</td> <td>0.159</td> </tr> <tr> <td>M_x (kipft)</td> <td>0.480</td> <td>0.756</td> </tr> <tr> <td>M_z (kipft)</td> <td>35.801</td> <td>61.198</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 2.5$ ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	7.230	11.267	V_x (kip)	-2.321	-3.868	V_z (kip)	0.102	0.159	M_x (kipft)	0.480	0.756	M_z (kipft)	35.801	61.198	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	7.230	11.267																										
V_x (kip)	-2.321	-3.868																										
V_z (kip)	0.102	0.159																										
M_x (kipft)	0.480	0.756																										
M_z (kipft)	35.801	61.198																										
	<p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-2.321 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.36959 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(35.801 \text{ kipft}) + ((-2.321 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.7008 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.7426 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.102 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.016242 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.48 \text{ kipft}) + ((0.102 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.076433 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 2.0057 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.7426 \text{ ft}), (2.0057 \text{ ft})]$$

$$L_{e,req} = 6.743 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.743 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.93007$$

Status: **PASS**
Ratio: **0.930**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(7.23 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.451875 \text{ kip/ft}^2$$

$$q = 0.45187 \text{ kip/ft}$$

Check bearing capacity ratio:

Ratio - Capacity

$$Ratio = \frac{q}{q_a}$$

$$Ratio = \frac{(0.45187 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$Ratio = 0.22594$$

Status: **PASS**
Ratio: **0.230**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.36959 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 5.7008 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.7008 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (5.7008 \text{ kipft/ft})) + (4 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9775 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.7008 \text{ kipft/ft})) + (3 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (5.7008 \text{ kipft/ft})) + (2 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.26487 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.7008 \text{ kipft/ft})) + ((-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.99563 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{q}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.9775 \text{ ft})}{2}$$

$$p_a = 0.37331 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.26487 \text{ kip/ft}^2)}{(0.37331 \text{ kip/ft}^2)}$$

$$Ratio = 0.70953$$

p_a - Allowable lateral soil pressure at depth L_e ,


Status: **PASS**
Ratio: **0.710**

	$p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$ $p_s = 1.0875 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(0.99563 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.91552$	Status: PASS Ratio: 0.920
	<p>Considering z-direction:</p> <p>$H_o = 0.016242 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.076433 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.076433 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.016242 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.076433 \text{ kipft/ft})) + (4 \times (0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))}$ $a = 5.1395 \text{ ft}$ <p>p - Earth pressure against the pile at distance $a/2$ from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.076433 \text{ kipft/ft})) + (3 \times (0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (0.076433 \text{ kipft/ft})) + (2 \times (0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$ $p = 0.013331 \text{ kip/ft}^2$ <p>s - Earth pressure against the pile at distance L_e,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.076433 \text{ kipft/ft})) + ((0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$ $s = 0.030891 \text{ kip/ft}^2$ <p>Check lateral soil pressure capacity:</p> <p>p_a - Allowable lateral soil pressure at depth $a/2$,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.1395 \text{ ft})}{2}$ $p_a = 0.38546 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.013331 \text{ kip/ft}^2)}{(0.38546 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.034586$ <p>p_s - Allowable lateral soil pressure at depth L_e,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$ $p_s = 1.0875 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$	Status: PASS Ratio: 0.030

$$Ratio = \frac{(0.030891 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.028406$$

Status: **PASS**
Ratio: **0.030**

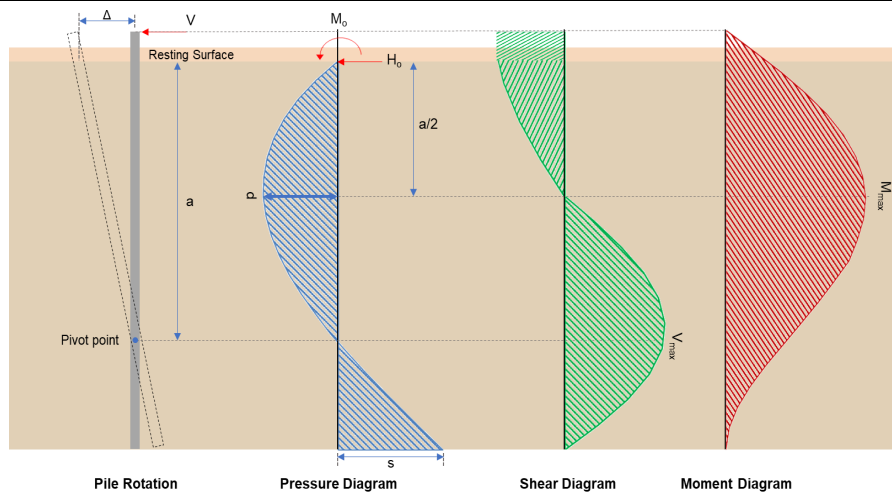

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.868 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.61592 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(61.198 \text{ kipft}) + ((-3.868 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 9.7449 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(9.7449 \text{ kipft/ft})}{(-0.61592 \text{ kip/ft})}$$

$$E = 15.822 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (9.7449 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.61592 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (9.7449 \text{ kipft/ft})) + (4 \times (-0.61592 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9747 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{L_c} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-0.61592 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.9747 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.9747 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 11.142 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.61592 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(15.822 \text{ ft})}{(7.25 \text{ ft})} + \frac{(4.9747 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.9747 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.9747 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 38.762 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.159 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.025318 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.756 \text{ kipft}) + ((0.159 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.12038 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.12038 \text{ kipft/ft})}{(0.025318 \text{ kip/ft})}$$

$$E = 4.7547 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.12038 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.025318 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.12038 \text{ kipft/ft})) + (4 \times (0.025318 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.1379 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.025318 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.1379 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.1379 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.18474 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.025318 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(4.7547 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.1379 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.1379 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.1379 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.60393 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(11.267 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.222 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.222 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2

Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1

s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(11.267 \text{ kip})}{(2675.2 \text{ kip})}$$

$$\text{Ratio} = 0.0042117$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 11.267 \text{ kip} \rightarrow 11267 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(11267 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

V_c - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120 \text{ kip}$$

<p>22.5.1.2</p> <p>22.5.8.5.3</p> <p>22.5.1.1</p>	<p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$.</p> <p>$V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>$V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yties} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((120 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 111.07 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 11.142 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(11.142 \text{ kip})}{(111.07 \text{ kip})}$ $\text{Ratio} = 0.10031$ <p>Considering z-direction:</p> <p>$V_{max} = 0.18474 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.18474 \text{ kip})}{(111.07 \text{ kip})}$ $\text{Ratio} = 0.0016632$	<p>Status: PASS Ratio: 0.100</p> <p>Status: PASS Ratio: 0.000</p>
	<p>Flexural Strength (ACI 318-19, LFRD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ <p>Considering x-direction: $M_{max} = 38.762 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(38.762 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.1553$	<p>Status: PASS Ratio: 0.160</p>
	<p>Considering z-direction: $M_{max} = 0.60393 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.60393 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.0024196$	<p>Status: PASS Ratio: 0.000</p>

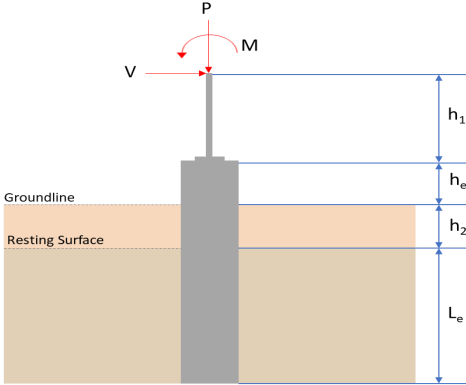REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.25$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1193"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1288 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>7.230</td> <td>11.267</td> </tr> <tr> <td>V_x (kip)</td> <td>-2.321</td> <td>-3.868</td> </tr> <tr> <td>V_z (kip)</td> <td>-0.102</td> <td>-0.159</td> </tr> <tr> <td>M_x (kipft)</td> <td>-0.480</td> <td>-0.756</td> </tr> <tr> <td>M_z (kipft)</td> <td>35.801</td> <td>61.199</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 2.5$ ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	7.230	11.267	V_x (kip)	-2.321	-3.868	V_z (kip)	-0.102	-0.159	M_x (kipft)	-0.480	-0.756	M_z (kipft)	35.801	61.199	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	7.230	11.267																										
V_x (kip)	-2.321	-3.868																										
V_z (kip)	-0.102	-0.159																										
M_x (kipft)	-0.480	-0.756																										
M_z (kipft)	35.801	61.199																										
	<p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-2.321 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.36959 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(35.801 \text{ kipft}) + ((-2.321 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.7008 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.7426 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.102 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.016242 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.48 \text{ kipft}) + ((-0.102 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.076433 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.6516 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.7426 \text{ ft}), (1.6516 \text{ ft})]$$

$$L_{e,req} = 6.743 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.743 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.93007$$

Status: **PASS**
Ratio: **0.930**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(7.23 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.451875 \text{ kip/ft}^2$$

$$q = 0.45187 \text{ kip/ft}$$

Check bearing capacity ratio:

Ratio - Capacity

$$Ratio = \frac{q}{q_a}$$

$$Ratio = \frac{(0.45187 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$Ratio = 0.22594$$

Status: **PASS**
Ratio: **0.230**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.36959 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 5.7008 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.7008 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (5.7008 \text{ kipft/ft})) + (4 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9775 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.7008 \text{ kipft/ft})) + (3 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (5.7008 \text{ kipft/ft})) + (2 \times (-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.26487 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.7008 \text{ kipft/ft})) + ((-0.36959 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.99563 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.9775 \text{ ft})}{2}$$

$$p_a = 0.37331 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.26487 \text{ kip/ft}^2)}{(0.37331 \text{ kip/ft}^2)}$$

$$Ratio = 0.70953$$

p_a - Allowable lateral soil pressure at depth L_e ,

Status: **PASS**
Ratio: **0.710**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.99563 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.91552$$

Status: **PASS**
Ratio: **0.920**

Considering z-direction:

$H_o = -0.016242 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 0.076433 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.076433 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.016242 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.076433 \text{ kipft/ft})) + (4 \times (-0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.1395 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.076433 \text{ kipft/ft})) + (3 \times (-0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (0.076433 \text{ kipft/ft})) + (2 \times (-0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = -0.005191 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.076433 \text{ kipft/ft})) + ((-0.016242 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.004008 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.1395 \text{ ft})}{2}$$

$$p_a = 0.38546 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(-0.005191 \text{ kip/ft}^2)}{(0.38546 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.013467$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**
Ratio: **-0.010**

$$Ratio = \frac{(0.004008 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.0036855$$

Status: **PASS**
Ratio: **0.000**

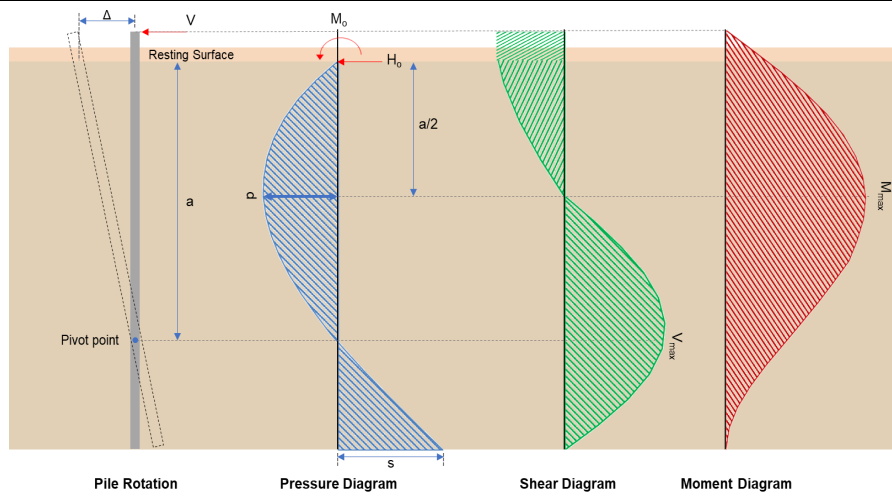

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.868 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.61592 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(61.199 \text{ kipft}) + ((-3.868 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 9.7451 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(9.7451 \text{ kipft/ft})}{(-0.61592 \text{ kip/ft})}$$

$$E = 15.822 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (9.7451 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.61592 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (9.7451 \text{ kipft/ft})) + (4 \times (-0.61592 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9747 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{L_c} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-0.61592 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.9747 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.9747 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 11.142 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.61592 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(15.822 \text{ ft})}{(7.25 \text{ ft})} + \frac{(4.9747 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.9747 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (15.822 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.9747 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 38.763 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.159 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.025318 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.756 \text{ kipft}) + ((-0.159 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.12038 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.12038 \text{ kipft/ft})}{(-0.025318 \text{ kip/ft})}$$

$$E = 4.7547 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.12038 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.025318 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.12038 \text{ kipft/ft})) + (4 \times (-0.025318 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.1379 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.025318 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.1379 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.1379 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.18474 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.025318 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(4.7547 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.1379 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.1379 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (4.7547 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.1379 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.60393 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\left(\frac{11.267 \text{ kip}}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2)) \right)}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.222 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.222 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3 s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(11.267 \text{ kip})}{(2675.2 \text{ kip})}$$

$$\text{Ratio} = 0.0042117$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 11.267 \text{ kip} \rightarrow 11267 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(11267 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

V_c - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$.</p> <p>$V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yties} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((120 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 111.07 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 11.142 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(11.142 \text{ kip})}{(111.07 \text{ kip})}$ $\text{Ratio} = 0.10031$ <p>Considering z-direction:</p> <p>$V_{max} = 0.18474 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.18474 \text{ kip})}{(111.07 \text{ kip})}$ $\text{Ratio} = 0.0016632$	<p>Status: PASS Ratio: 0.100</p> <p>Status: PASS Ratio: 0.000</p>
	<p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ksi}} \times 18432.001 \text{in}^3$ $\phi M_{n,1} = 249.600 \text{kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ksi}) \times (18432 \text{in}^3)$ $\phi M_{n,2} = 2121.6 \text{kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{kipft}), (2121.6 \text{kipft})]$ $\phi M_n = 249.6 \text{kipft}$ <p>Considering x-direction: $M_{max} = 38.763 \text{kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(38.763 \text{kipft})}{(249.6 \text{kipft})}$ $\text{Ratio} = 0.1553$	<p>Status: PASS Ratio: 0.160</p>
	<p>Considering z-direction: $M_{max} = 0.60393 \text{kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.60393 \text{kipft})}{(249.6 \text{kipft})}$ $\text{Ratio} = 0.0024196$	<p>Status: PASS Ratio: 0.000</p>