


Project Details



Project Name: MTSOLAR_5KB7HB21868F **Date:** Wed Jul 09 2025
Location: 3935 El Monte Dr, Loomis, CA 95650, **Number of Modules:** 50
 USA **Number of Poles:** 3
Unique ID: 3P-19.75-6TOP-SD-57-L-5Hx10W-8L9H **Date Sold:**
Dealer: _____

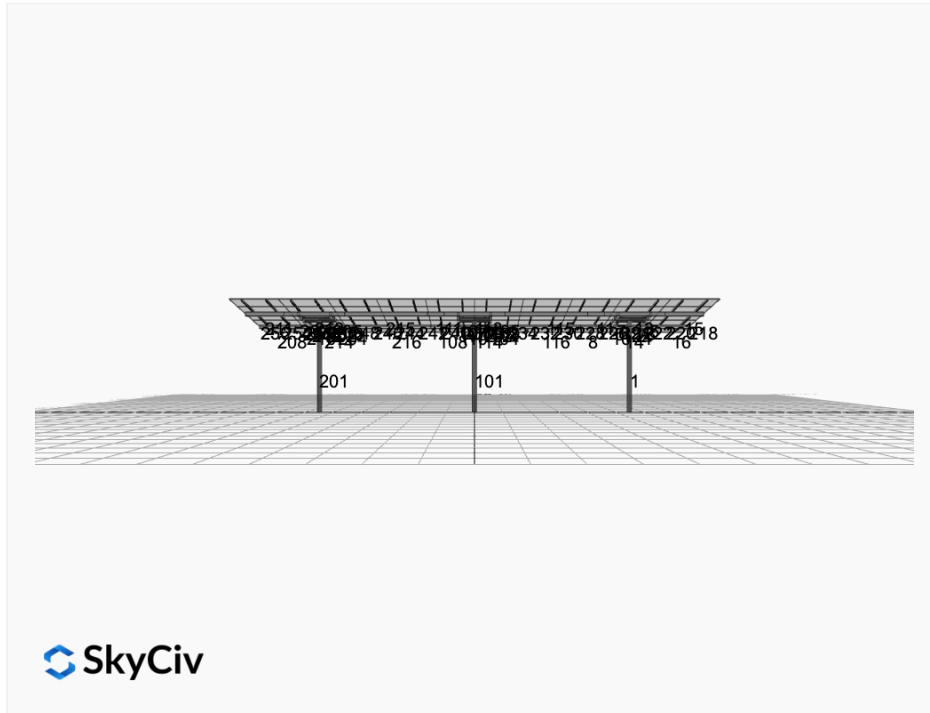

Array Dimensions N/S	18.96 ft
Array Dimensions E/W	57.50 ft
Winter Tilt Angle	10
Front Edge Clearance	10 ft


MT Solar Bill of Materials (3P-19.75-6TOP-SD-57-L-5Hx10W-8L9H)

Part	Short Description	BOM Qty
MTS-PC-6	6IN Pole Cap Assembly	3
MTS-HF-SD	H-Frame Assembly-SD	3
MTS-SD-Wing-57	57IN SD Wing	4
MTS-SD-Splice-90	90IN SD Splice	4
MTS-SD-Splice-57	57IN SD Splice	4
MTS-CLAMP-ANGLE-4PK	Angle Clamp	10

Rail Bill of Materials

Part	Qty
Rails (228in)	20
Rail Attachment	80
Module Mid Clamp	80
Module End Clamp	40
Ground Lug	10

Site Details:

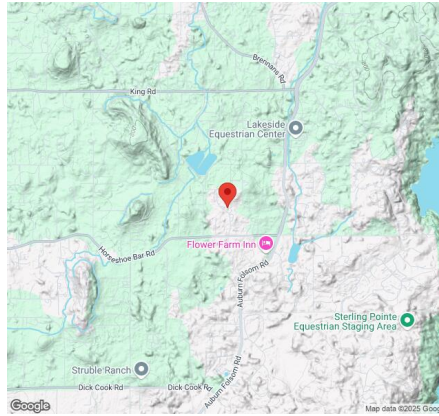

Site Address: 3935 El Monte Dr, Loomis, CA 95650, USA

Array Specification

Duty Classification:	SD
Module Width:	45.00 in
Module Length:	68.00in
Number of Rows:	5
Number of Columns:	10
Total Number of Modules:	50
Winter Tilt Angle:	10
Front Edge Clearance:	10
Total Array Height at Tilt:	13.29 ft
Total Frame Length:	56.50 ft
Module Info/Notes:	JAM54S31-405/MR x 50
Array Dimensions N/S:	18.96 ft
Array Dimensions E/W:	57.50 ft
Rail Length:	227.50 in
Rail Spacing:	2.88 ft

Support Specifications

Pole Size:	6in Pipe Sch 40
Pole Length above Grade:	11.65 ft
Number of Poles:	3
Pole Spacing:	19.75 ft

Foundation Specifications

Foundation Type:	Square
Foundation Dimensions:	48 x 48 in
Foundation Depth (below grade):	Pile 1: 4.50 ft Pile 2: 4.50 ft Pile 3: 4.50 ft
Foundation Volume:	8.000 y ³

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	3935 El Monte Dr, Loomis, CA 95650, USA
Wind Speed:	89 mph
Snow Load:	0 psf

Design Disclaimer



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



AutoDesigner Input


```
{"wind_speed_override":null,"snow_load_override":null,"direct_snow_load":false,"add_angle_brace":false,"product_type":"Beam","designer_name":"Kyle Waters","designer_email":"kyle@sunatworksolar.com","designer_phone":"5305751883","project_id":"MTSOLAR_5KB7HB21868F","site_address":"3935 El Monte Dr, Loomis, CA 95650, USA","module_info":"JAM54S31-405/MR x 50","module_width":45,"module_length":68,"number_rows":5,"number_columns":10,"pole_mount_section":"4_40","core_pipe_width":65,"core_pipe_section":"2_40","adjuster_section":"2_40","core_beam_height":65,"core_beam_section":"HSS3x2x1/8","main_pipe_section":"2_12GA","pole_spacing":15,"tilt_angle":10,"ground_clearance":10,"risk_category":"I","exposure_category":"B","frame_duty_override":"auto","pole_override":"auto","soil_type":"sand","customer_foundation_override":"48_Square","foundation_type":"Square","foundation_size":48,"check_rails":false}
```

Design Notes:

- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

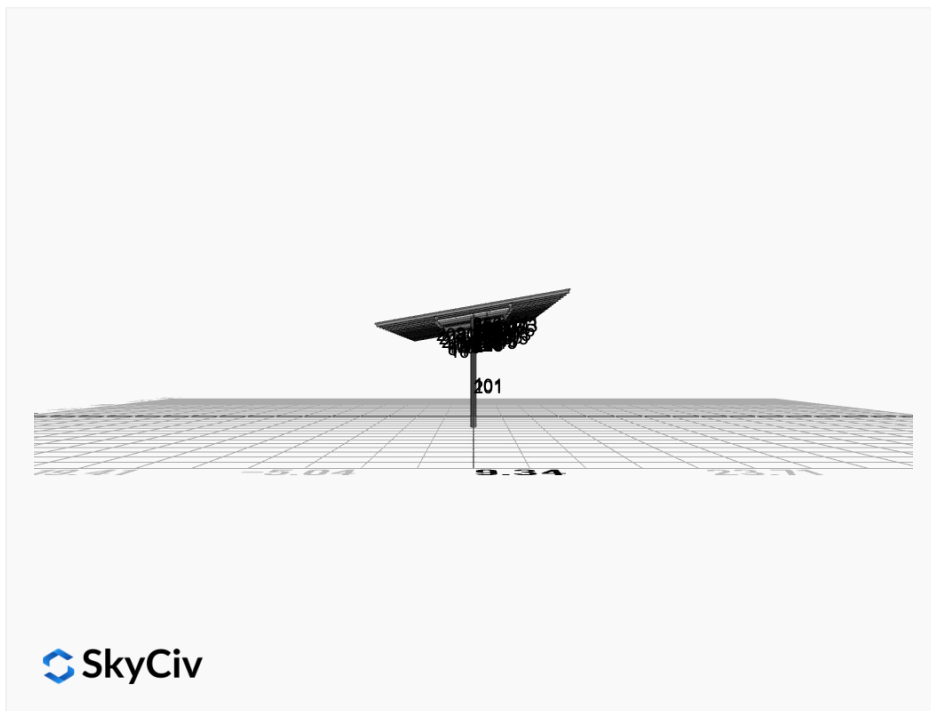
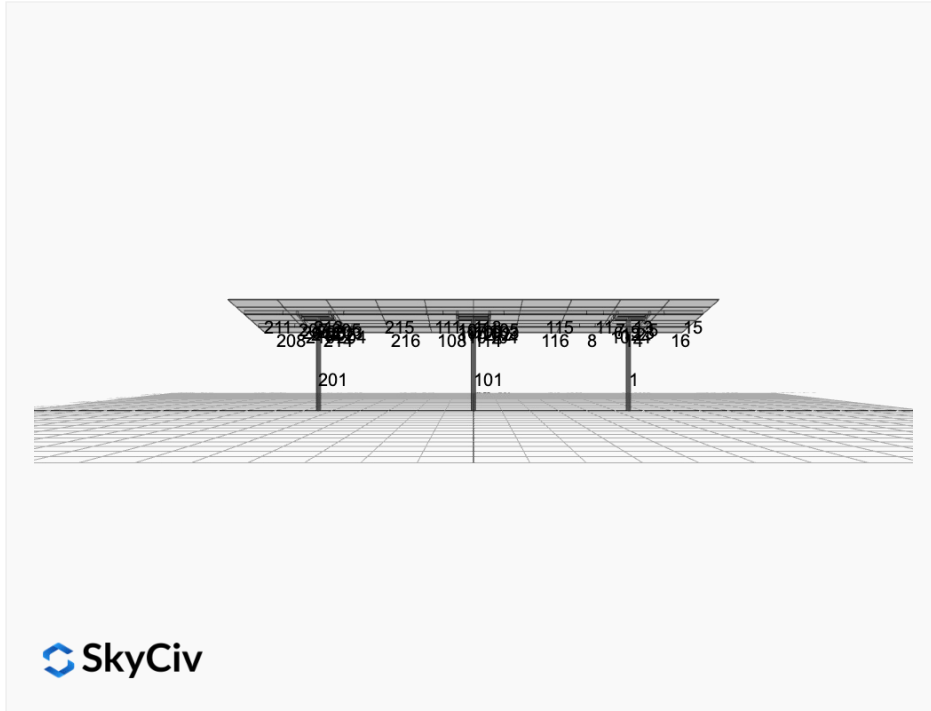


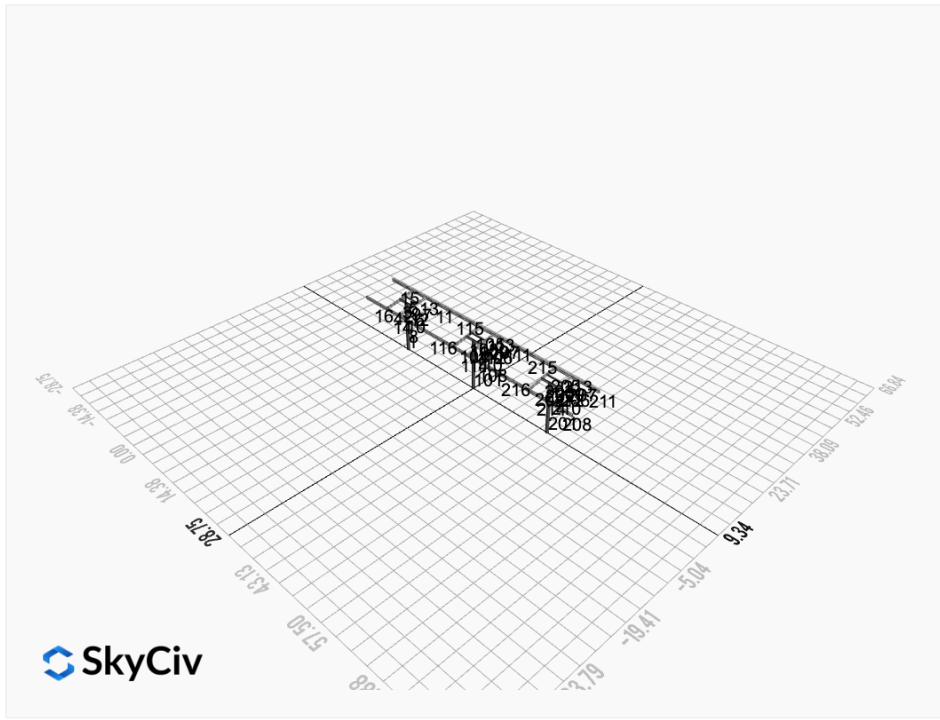
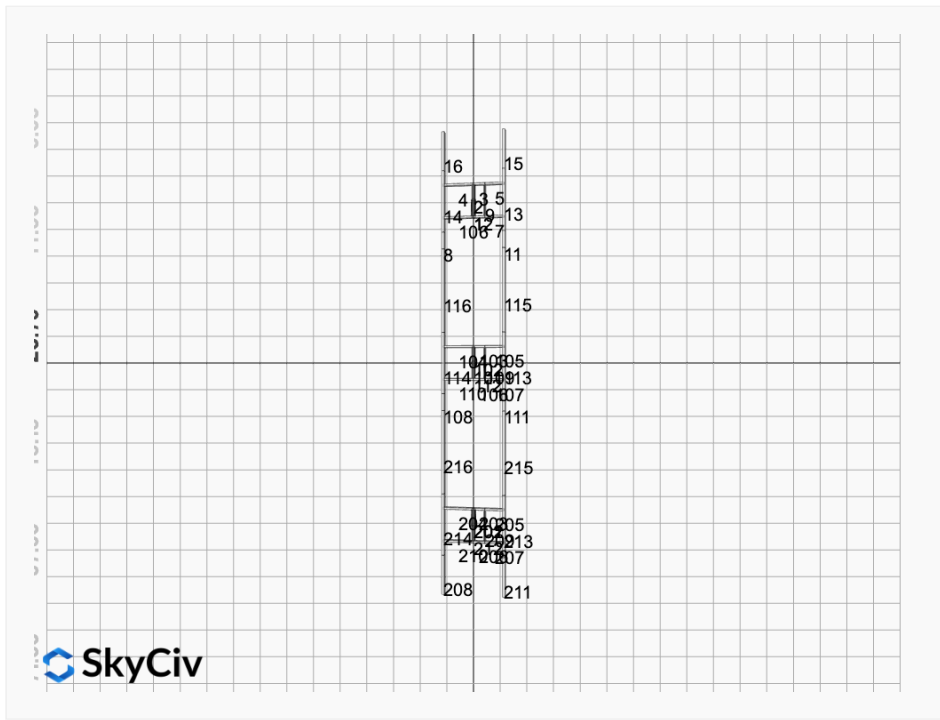



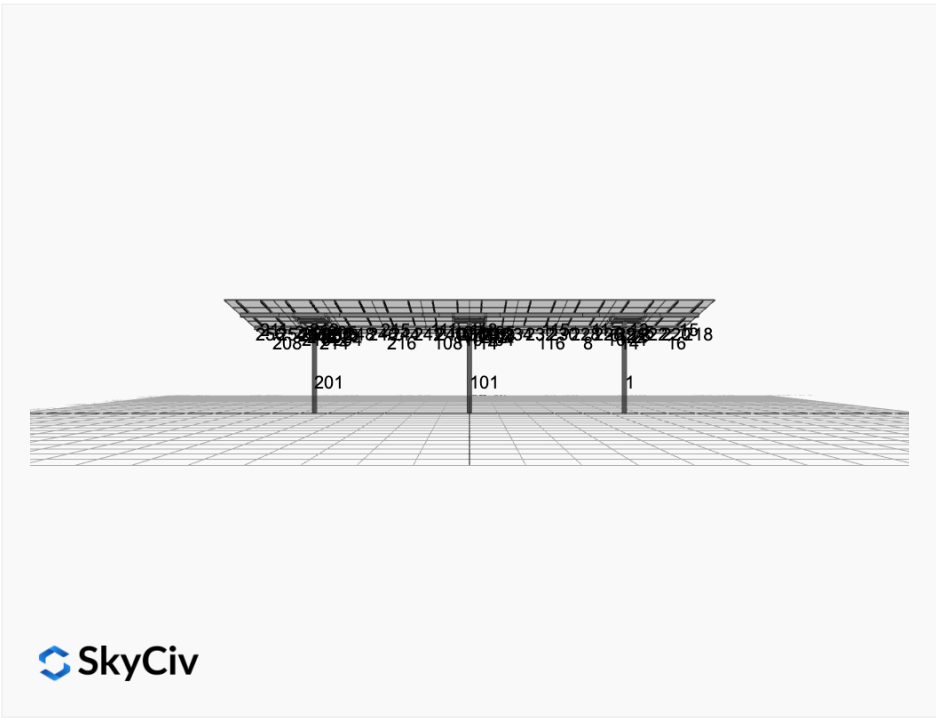


SkyCiv

FEM Results (Envelope Worst Case for each member)

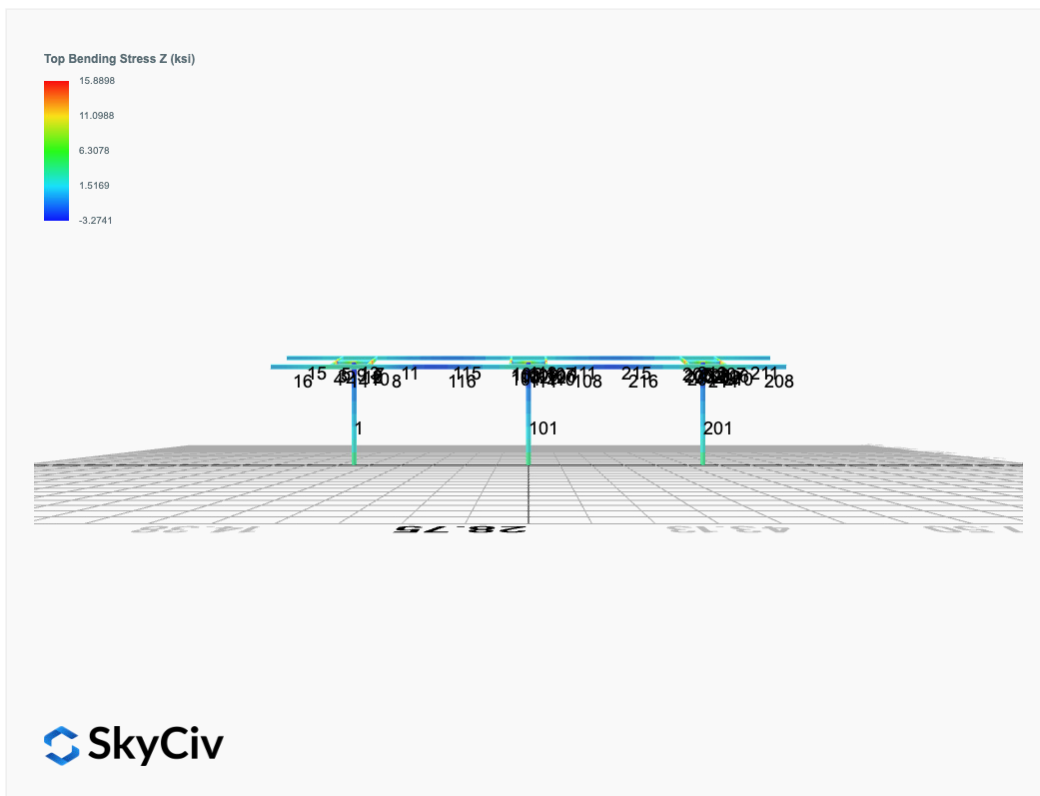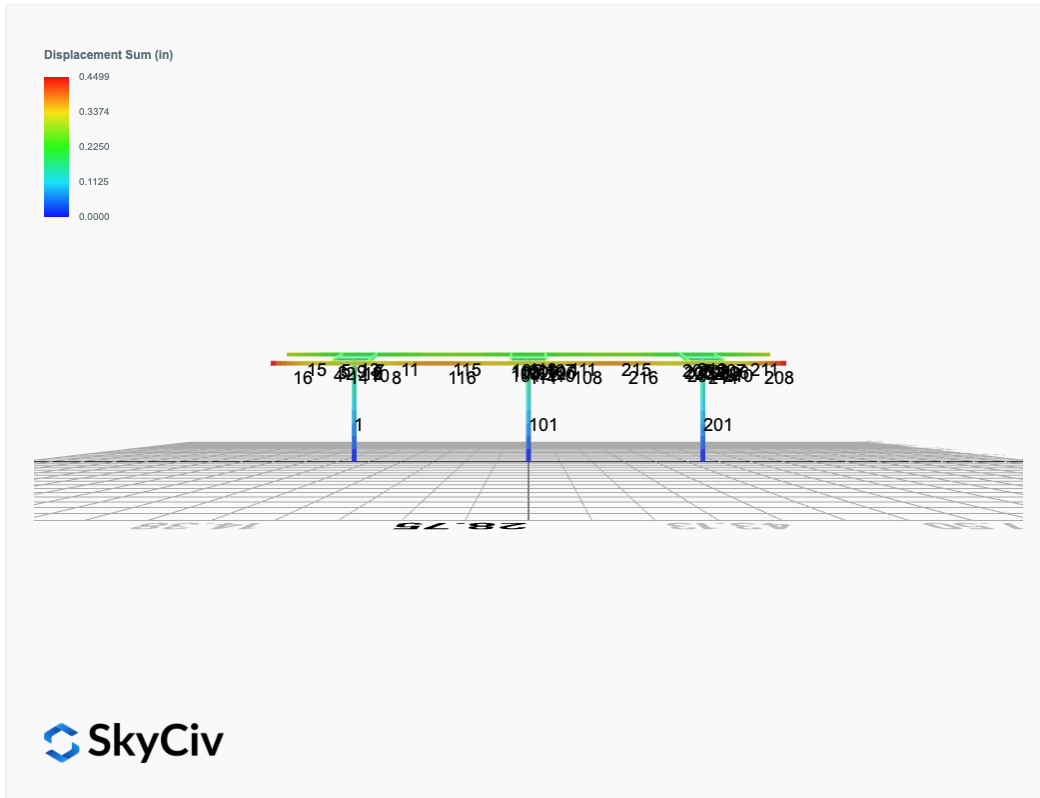

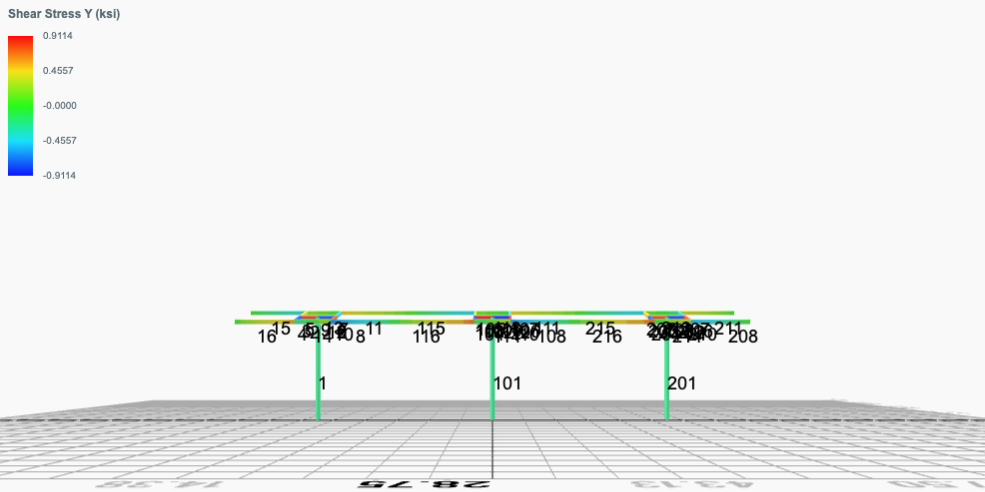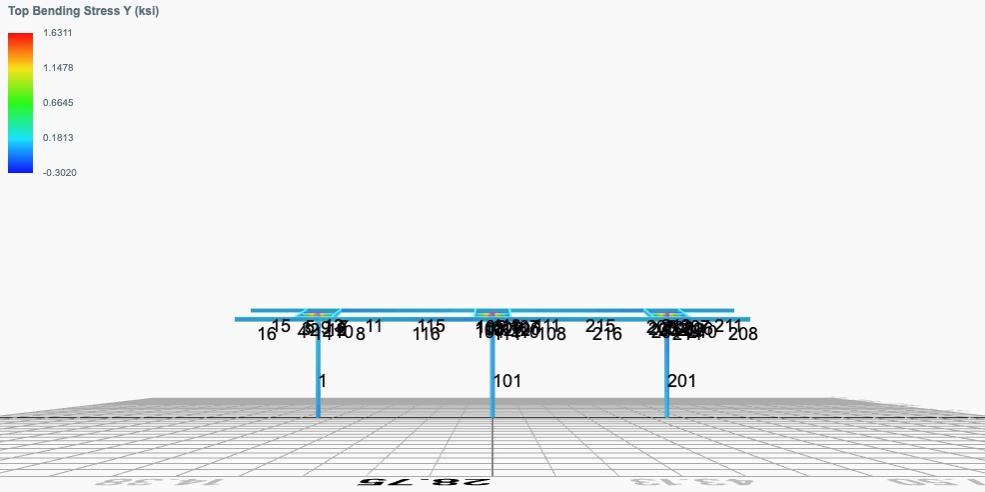

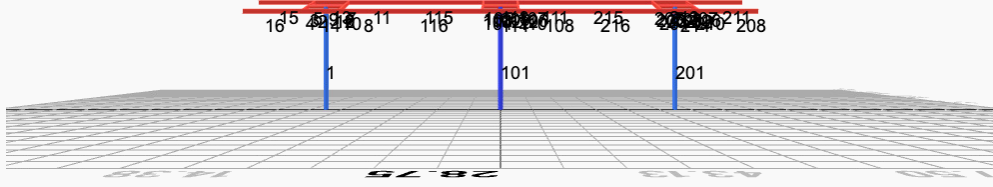

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 2. D + L	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 3. D + (S or Lr or R)	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 3. D + (S or Lr or R)	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 5b. D + 0.7E	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0015	2.3297	-0.0076	-0.0271	0.0080	0.0372
ULS: 8. 0.6D + 0.7E	-0.0009	1.3978	-0.0045	-0.0163	0.0048	0.0223
ULS: 5a. D + 0.6W_Wind downforce Case A only	-0.3980	4.5573	-0.0151	-0.0549	0.0101	6.5427
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.3980	4.5573	-0.0151	-0.0549	0.0101	6.5427
ULS: 5a. D + 0.6W_Wind uplift Case A only	0.2747	0.7678	-0.0017	-0.0058	0.0053	-1.8314
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.2430	0.9695	-0.0037	-0.0129	0.0085	-7.8295
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.2989	4.0004	-0.0132	-0.0480	0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.2989	4.0004	-0.0132	-0.0480	0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.2056	1.1583	-0.0032	-0.0111	0.0060	-1.3642
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.1819	1.3095	-0.0047	-0.0164	0.0084	-5.8628
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.2989	4.0004	-0.0132	-0.0480	0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.2989	4.0004	-0.0132	-0.0480	0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.2056	1.1583	-0.0032	-0.0111	0.0060	-1.3642
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.1819	1.3095	-0.0047	-0.0164	0.0084	-5.8628
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-0.3974	3.6255	-0.0121	-0.0441	0.0069	6.5278
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.3974	3.6255	-0.0121	-0.0441	0.0069	6.5278
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	0.2753	-0.1641	0.0013	0.0051	0.0021	-1.8462
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.2436	0.0376	-0.0007	-0.0020	0.0053	-7.8444

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.5084
Shear X	-0.6630
Shear Z	-0.0217
Moment X	-0.0790
Moment Y (Twist)	0.0129
Moment Z	13.4635

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.5573
Shear X	-0.3980
Shear Z	-0.0151
Moment X	-0.0549
Moment Y (Twist)	0.0101
Moment Z	7.8444

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071
ULS: 2. D + L	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071
ULS: 3. D + (S or Lr or R)	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071
ULS: 3. D + (S or Lr or R)	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071
ULS: 5b. D + 0.7E	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0031	2.4397	-0.0000	0.0000	-0.0000	-0.0071
ULS: 8. 0.6D + 0.7E	0.0018	1.4638	-0.0000	0.0000	-0.0000	-0.0043
ULS: 5a. D + 0.6W_Wind downforce Case A only	-0.4037	4.7886	-0.0000	0.0000	-0.0000	6.6764
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.4037	4.7886	-0.0000	0.0000	-0.0000	6.6764
ULS: 5a. D + 0.6W_Wind uplift Case A only	0.2920	0.7916	-0.0000	0.0000	-0.0000	-1.9539
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.2464	1.0068	-0.0000	0.0000	-0.0000	-8.0369
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.3020	4.2014	-0.0000	0.0000	-0.0000	5.0055
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.3020	4.2014	-0.0000	0.0000	-0.0000	5.0055
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.2198	1.2036	-0.0000	0.0000	-0.0000	-1.4672
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.1855	1.3650	-0.0000	0.0000	-0.0000	-6.0295
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.3020	4.2014	-0.0000	0.0000	-0.0000	5.0055
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.3020	4.2014	-0.0000	0.0000	-0.0000	5.0055
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.2198	1.2036	-0.0000	0.0000	-0.0000	-1.4672
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.1855	1.3650	-0.0000	0.0000	-0.0000	-6.0295
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-0.4049	3.8127	-0.0000	0.0000	-0.0000	6.6793
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.4049	3.8127	-0.0000	0.0000	-0.0000	6.6793
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	0.2908	-0.1843	-0.0000	0.0000	-0.0000	-1.9510
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.2451	0.0310	-0.0000	0.0000	-0.0000	-8.0341

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.8423
Shear X	-0.6779
Shear Z	-0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	13.8014

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.7886
Shear X	-0.4049
Shear Z	-0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	8.0369

Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 2. D + L	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 3. D + (S or Lr or R)	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 3. D + (S or Lr or R)	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 5b. D + 0.7E	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0015	2.3297	0.0076	0.0271	-0.0080	0.0372
ULS: 8. 0.6D + 0.7E	-0.0009	1.3978	0.0045	0.0163	-0.0048	0.0223
ULS: 5a. D + 0.6W_Wind downforce Case A only	-0.3980	4.5573	0.0151	0.0549	-0.0101	6.5427
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.3980	4.5573	0.0151	0.0549	-0.0101	6.5427
ULS: 5a. D + 0.6W_Wind uplift Case A only	0.2747	0.7678	0.0017	0.0058	-0.0053	-1.8314
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.2430	0.9695	0.0037	0.0129	-0.0085	-7.8295

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.2989	4.0004	0.0132	0.0480	-0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.2989	4.0004	0.0132	0.0480	-0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.2056	1.1583	0.0032	0.0111	-0.0060	-1.3642
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.1819	1.3095	0.0047	0.0164	-0.0084	-5.8628
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.2989	4.0004	0.0132	0.0480	-0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.2989	4.0004	0.0132	0.0480	-0.0096	4.9163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.2056	1.1583	0.0032	0.0111	-0.0060	-1.3642
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.1819	1.3095	0.0047	0.0164	-0.0084	-5.8628
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-0.3974	3.6255	0.0121	0.0441	-0.0069	6.5278
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.3974	3.6255	0.0121	0.0441	-0.0069	6.5278
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	0.2753	-0.1641	-0.0013	-0.0051	-0.0021	-1.8462
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.2436	0.0376	0.0007	0.0020	-0.0053	-7.8444

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.5084
Shear X	-0.6630
Shear Z	0.0217
Moment X	0.0790
Moment Y (Twist)	0.0130
Moment Z	13.4636

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.5573
Shear X	-0.3980
Shear Z	0.0151
Moment X	0.0549
Moment Y (Twist)	0.0101
Moment Z	7.8444

Project Details

Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States
 User Name: sales@mtsolar.us
 Unit System: imperial




Design Input Information


Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F _y (ksi)	F _u (ksi)
1	29000	50	65


Section Dimensions



ID	Name	d (in)	t _w (in)				
1	2in Pipe Sch 40	2.38	0.15				
4	4in Pipe Sch 40	4.50	0.24				
7	6in Pipe Sch 40	6.63	0.28				



ID	Name	d (in)	b (in)	t _w (in)	t _b (in)	r (in)	
15	HSS5x3x1/8	5.00	3.00	0.12	0.12	0.12	



ID	Name	d (in)	t _w (in)	b _t (in)	b _b (in)	t _t (in)	t _b (in)	r (in)
18	W6x9	5.90	0.17	3.94	3.94	0.21	0.21	0.25

Section Properties

ID	Name	A (in ²)	J (in ⁴)	I _{yp} (in ⁴)	I _{zp} (in ⁴)	I _w (in ⁶)	S _{yp} (in ³)	S _{zp} (in ³)
----	------	----------------------	----------------------	------------------------------------	------------------------------------	-----------------------------------	------------------------------------	------------------------------------

101	251.10	73.81	42.30	42.30	75.35	75.35
102	142.83	141.72	16.17	16.17	42.85	42.85
103	79.65	74.89	10.99	6.26	29.14	16.61
104	79.65	72.84	10.99	6.26	29.14	16.61
105	79.65	74.30	10.99	6.26	29.14	16.61
106	79.65	74.89	10.99	6.26	29.14	16.61
107	79.65	74.30	10.99	6.26	29.14	16.61
108	120.60	115.40	23.36	6.45	30.09	45.74
109	48.35	43.11	2.85	2.85	14.51	14.51
110	79.65	72.84	10.99	6.26	29.14	16.61
111	120.60	115.40	23.36	6.45	30.09	45.74
112	142.83	141.72	16.17	16.17	42.85	42.85
113	120.60	84.03	17.65	6.45	30.09	45.74
114	120.60	84.03	18.24	6.45	30.09	45.74
115	120.60	68.63	15.48	6.45	30.09	45.74
116	120.60	68.63	15.53	6.45	30.09	45.74
201	251.16	73.81	42.30	42.30	75.35	75.35
202	142.83	141.72	16.17	16.17	42.85	42.85
203	79.65	74.89	10.99	6.26	29.14	16.61
204	79.65	72.84	10.99	6.26	29.14	16.61
205	79.65	74.30	10.99	6.26	29.14	16.61
206	79.65	74.89	10.99	6.26	29.14	16.61
207	79.65	74.30	10.99	6.26	29.14	16.61
208	120.60	34.69	23.36	6.45	30.09	45.74
209	48.35	43.11	2.85	2.85	14.51	14.51
210	79.65	72.84	10.99	6.26	29.14	16.61
211	120.60	34.69	23.36	6.45	30.09	45.74
212	142.83	141.72	16.17	16.17	42.85	42.85
213	120.60	84.03	19.21	6.45	30.09	45.74
214	120.60	84.03	19.28	6.45	30.09	45.74
215	120.60	68.63	15.90	6.45	30.09	45.74
216	120.60	68.63	15.94	6.45	30.09	45.74

Design Ratio


Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.088	0.318	0.004	0.009	0.000	0.322	#16	0.653	Not Required	Pass
2	0.000	0.356	0.046	0.074	0.008	0.402	#13	0.034	Not Required	Pass
3	0.002	0.593	0.012	0.060	0.002	0.605	#13	0.044	Not Required	Pass
4	0.002	0.467	0.028	0.047	0.005	0.482	#13	0.078	Not Required	Pass
5	0.002	0.367	0.031	0.060	0.006	0.374	#13	0.073	Not Required	Pass
6	0.002	0.585	0.012	0.059	0.001	0.594	#13	0.044	Not Required	Pass
7	0.002	0.363	0.031	0.059	0.006	0.369	#13	0.073	Not Required	Pass
8	0.000	0.035	0.017	0.030	0.002	0.042	#13	0.059	Not Required	Pass
9	0.002	0.066	0.013	0.001	0.000	0.080	#13	0.198	Not Required	Pass
10	0.002	0.456	0.031	0.046	0.005	0.475	#13	0.078	Not Required	Pass
11	0.000	0.043	0.017	0.038	0.002	0.051	#13	0.088	Not Required	Pass
12	0.000	0.345	0.045	0.072	0.008	0.390	#13	0.034	Not Required	Pass
13	0.001	0.207	0.042	0.049	0.002	0.238	#13	0.265	Not Required	Pass
14	0.001	0.169	0.042	0.038	0.002	0.194	#13	0.177	Not Required	Pass
15	0.000	0.089	0.023	0.029	0.001	0.108	#13	Not Required	Not Required	Pass

16	0.000	0.070	0.023	0.023	0.001	0.089	#13	Not Required	Not Required	Pass
101	0.093	0.326	0.000	0.009	0.000	0.330	#16	0.653	Not Required	Pass
102	0.000	0.364	0.046	0.077	0.008	0.411	#13	0.034	Not Required	Pass
103	0.002	0.619	0.013	0.063	0.002	0.631	#13	0.044	Not Required	Pass
104	0.002	0.488	0.028	0.049	0.005	0.507	#13	0.078	Not Required	Pass
105	0.002	0.384	0.029	0.062	0.006	0.391	#13	0.073	Not Required	Pass
106	0.002	0.619	0.013	0.063	0.002	0.631	#13	0.044	Not Required	Pass
107	0.002	0.384	0.029	0.062	0.006	0.391	#13	0.073	Not Required	Pass
108	0.000	0.040	0.015	0.029	0.002	0.044	#13	0.059	Not Required	Pass
109	0.002	0.061	0.012	0.001	0.000	0.074	#13	0.198	Not Required	Pass
110	0.002	0.488	0.028	0.049	0.005	0.507	#13	0.078	Not Required	Pass
111	0.000	0.052	0.015	0.037	0.002	0.056	#13	0.088	Not Required	Pass
112	0.000	0.364	0.046	0.077	0.008	0.411	#13	0.034	Not Required	Pass
113	0.001	0.166	0.039	0.047	0.002	0.194	#13	0.265	Not Required	Pass
114	0.001	0.141	0.039	0.037	0.002	0.162	#13	0.177	Not Required	Pass
115	0.000	0.169	0.023	0.037	0.002	0.188	#13	0.439	Not Required	Pass
116	0.000	0.132	0.023	0.029	0.002	0.152	#13	0.293	Not Required	Pass
201	0.088	0.318	0.004	0.009	0.000	0.322	#16	0.653	Not Required	Pass
202	0.000	0.345	0.045	0.072	0.008	0.390	#13	0.034	Not Required	Pass
203	0.002	0.585	0.012	0.059	0.001	0.594	#13	0.044	Not Required	Pass
204	0.002	0.456	0.031	0.046	0.005	0.475	#13	0.078	Not Required	Pass
205	0.002	0.363	0.031	0.059	0.006	0.369	#13	0.073	Not Required	Pass
206	0.002	0.593	0.012	0.060	0.002	0.605	#13	0.044	Not Required	Pass
207	0.002	0.367	0.031	0.060	0.006	0.374	#13	0.073	Not Required	Pass
208	0.000	0.070	0.023	0.023	0.001	0.089	#13	Not Required	Not Required	Pass
209	0.002	0.066	0.013	0.001	0.000	0.080	#13	0.198	Not Required	Pass
210	0.002	0.467	0.028	0.047	0.005	0.482	#13	0.078	Not Required	Pass
211	0.000	0.089	0.023	0.029	0.001	0.108	#13	Not Required	Not Required	Pass
212	0.000	0.356	0.046	0.074	0.008	0.402	#13	0.034	Not Required	Pass
213	0.001	0.207	0.042	0.049	0.002	0.238	#13	0.177	Not Required	Pass
214	0.001	0.169	0.042	0.038	0.002	0.194	#13	0.177	Not Required	Pass
215	0.000	0.166	0.023	0.038	0.002	0.185	#13	0.439	Not Required	Pass
216	0.000	0.130	0.023	0.030	0.002	0.150	#13	0.293	Not Required	Pass

Definitions

Φ_t	Safety factor for tensile
Φ_c	Safety factor for compression
Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)

M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z, M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

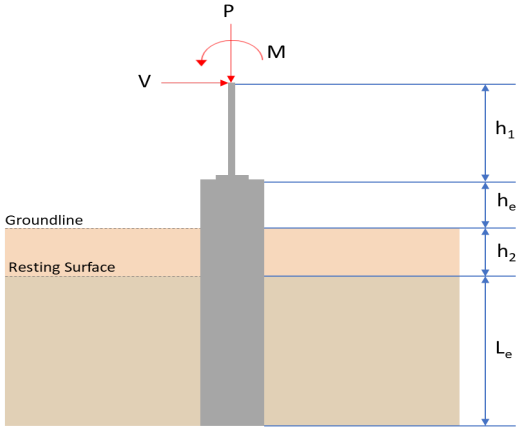REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry</p> <p>Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 4.5$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resisting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="368 1088 1225 1189"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="655 1290 940 1480"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>4.557</td> <td>6.508</td> </tr> <tr> <td>V_x (kip)</td> <td>-0.398</td> <td>-0.663</td> </tr> <tr> <td>V_z (kip)</td> <td>-0.015</td> <td>-0.022</td> </tr> <tr> <td>M_x (kipft)</td> <td>-0.055</td> <td>-0.079</td> </tr> <tr> <td>M_z (kipft)</td> <td>7.844</td> <td>13.463</td> </tr> </tbody> </table> <p>Material Properties</p> <p>$f'_{ck} = 2.5$ ksi - Concrete strength.</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	4.557	6.508	V_x (kip)	-0.398	-0.663	V_z (kip)	-0.015	-0.022	M_x (kipft)	-0.055	-0.079	M_z (kipft)	7.844	13.463	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	4.557	6.508																										
V_x (kip)	-0.398	-0.663																										
V_z (kip)	-0.015	-0.022																										
M_x (kipft)	-0.055	-0.079																										
M_z (kipft)	7.844	13.463																										
	<p>Required depth to resist lateral loads (ASD)</p> <p>H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction:</p> <p>H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-0.398 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.063376 \text{ kip/ft}$																											

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(7.844 \text{ kipft}) + ((-0.398 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 1.249 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.3676 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.015 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0023885 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.055 \text{ kipft}) + ((-0.015 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.008758 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.8345 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.3676 \text{ ft}), (0.8345 \text{ ft})]$$

$$L_{e,req} = 4.368 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (4.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 4.5 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.368 \text{ ft})}{(4.5 \text{ ft})}$$

$$\text{Ratio} = 0.97067$$

Status: **PASS**
Ratio: **0.970**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(4.557 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.28481 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.28481 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.14241$$

Status: **PASS**
Ratio: **0.140**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(4.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.125$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.063376 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 1.249 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (1.249 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (1.249 \text{ kipft/ft})) + (4 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.0495 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (1.249 \text{ kipft/ft})) + (3 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))]^2}{(4.5 \text{ ft})^2 \times [(3 \times (1.249 \text{ kipft/ft})) + (2 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))]}$$

$$p = 0.1999 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (1.249 \text{ kipft/ft})) + ((-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))]}{(4.5 \text{ ft})^2}$$

$$s = 0.65567 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.0495 \text{ ft})}{2}$$

$$p_a = 0.22872 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.1999 \text{ kip/ft}^2)}{(0.22872 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.87395$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.5 \text{ ft})$$

$$p_s = 0.675 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.65567 \text{ kip/ft}^2)}{(0.675 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.97137$$

Status: **PASS**
Ratio: **0.870**

Status: **PASS**
Ratio: **0.970**

Considering z-direction:

$H_o = -0.0023885 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 0.008758 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.008758 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (0.008758 \text{ kipft/ft})) + (4 \times (-0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.1688 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.008758 \text{ kipft/ft})) + (3 \times (-0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))]^2}{(4.5 \text{ ft})^2 \times [(3 \times (0.008758 \text{ kipft/ft})) + (2 \times (-0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))]}$$

$$p = 0.000060205 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.008758 \text{ kipft/ft})) + ((-0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))]}{(4.5 \text{ ft})^2}$$

$$s = 0.0020052 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.1688 \text{ ft})}{2}$$

$$p_a = 0.23766 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.000060205 \text{ kip/ft}^2)}{(0.23766 \text{ kip/ft}^2)}$$

$$Ratio = 0.00025333$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.5 \text{ ft})$$

$$p_s = 0.675 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0020052 \text{ kip/ft}^2)}{(0.675 \text{ kip/ft}^2)}$$

$$Ratio = 0.0029707$$

Status: **PASS**
Ratio: **0.000**

Status: **PASS**
Ratio: **0.000**

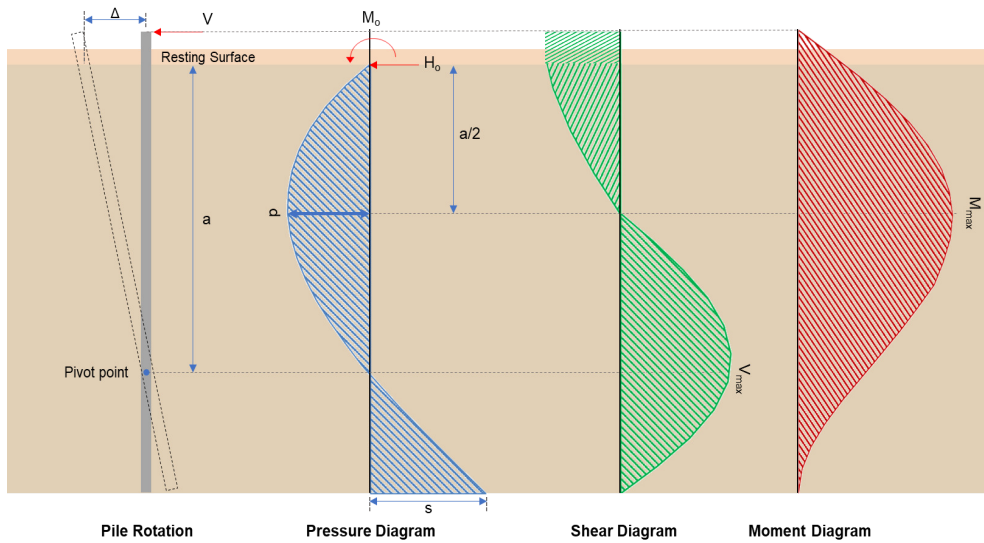

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.663 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.10557 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(13.463 \text{ kipft}) + ((-0.663 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.1438 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(2.1438 \text{ kipft/ft})}{(-0.10557 \text{ kip/ft})}$$

$$E = 20.306 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.1438 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.10557 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (2.1438 \text{ kipft/ft})) + (4 \times (-0.10557 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = \frac{(6 \times (2.1438 \text{ kipft/ft})) + (4 \times (-0.10557 \text{ kip/ft}) \times (4.5 \text{ ft}))}{}$$

$$a = 3.0483 \text{ ft}$$

V_{max} - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.10557 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (20.306 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.0483 \text{ ft})}{(4.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (20.306 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.0483 \text{ ft})}{(4.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 3.6566 \text{ kip}$$

M_{max} - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.10557 \text{ kip/ft}) \times (48 \text{ in}) \times (4.5 \text{ ft})) \times \left[\left(\frac{(20.306 \text{ ft})}{(4.5 \text{ ft})} + \frac{(3.0483 \text{ ft})}{2 \times (4.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (20.306 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.0483 \text{ ft})}{(2 \times (4.5 \text{ ft}))} \right)^3 \right] + \left[\left(\frac{3 \times (20.306 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.0483 \text{ ft})}{(2 \times (4.5 \text{ ft}))} \right)^4 \right] \right]$$

$$M_{max} = 8.0531 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.022 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0035032 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.079 \text{ kipft}) + ((-0.022 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.01258 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.01258 \text{ kipft/ft})}{(-0.0035032 \text{ kip/ft})}$$

$$E = 3.5909 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.01258 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.0035032 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (0.01258 \text{ kipft/ft})) + (4 \times (-0.0035032 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.1707 \text{ ft}$$

V_{max} - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0035032 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.1707 \text{ ft})}{(4.5 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[4 \times \left(\frac{3 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.1707 \text{ ft})}{(4.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.029063 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.0035032 \text{ kip/ft}) \times (48 \text{ in}) \times (4.5 \text{ ft})) \times \left[\left(\frac{(3.5909 \text{ ft})}{(4.5 \text{ ft})} + \frac{(3.1707 \text{ ft})}{2 \times (4.5 \text{ ft})} \right) \right. \\ \left. - \left[\left(\frac{4 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.1707 \text{ ft})}{2 \times (4.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.1707 \text{ ft})}{2 \times (4.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.059729 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength,

$f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,

$\phi = 0.65$ - Reduction factor for axial strength,

$\alpha = 0.8$ - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(6.508 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.38 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.38 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;">$Ratio = 0.96556$</p> <p>$s_{rebar} = Minimum\ spacing\ of\ reinforcement,$</p> $s_{rebar} = Max[1.5, (1.5 d_{bar})]$ $s_{rebar} = Max[1.5, (1.5 \times (0.625\ in))]$ $s_{rebar} = 1.5\ in$ <p>Ties:</p> <p>Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)</p> <p>s_{ties} - Maximum spacing of ties,</p> $s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$ $s_{ties} = Min[(16 \times (0.625\ in)), (48 \times (0.375\ in)), Min((48\ in), (48\ in))]$ $s_{ties} = 10\ in$ <p>Summary:</p> <p style="text-align: center;">Main reinforcement: 14 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in</p>	<p>Status: PASS Ratio: 0.970</p>
<p>22.4.2.2</p>	<p>Axial Compression Strength (ACI 318-19, LRFD)</p> <p>ϕP_N - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5\ ksi) \times [(2304\ in^2) - (4.2951\ in^2)]) + ((60\ ksi) \times (4.2951\ in^2))]$ $\phi P_N = 2675.2\ kip$ <p><i>Ratio</i> - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(6.508\ kip)}{(2675.2\ kip)}$ $Ratio = 0.0024327$	<p>Status: PASS Ratio: 0.000</p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p>Shear Strength (ACI 318-19, LRFD)</p> <p>Parameters:</p> <p>$b_w = 48\ in$ - Effective width, d - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48\ in)$ $d = 38.4\ in$ <p>λ_s - size effect modification factor</p> $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4\ in)}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ <p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5\ ksi \rightarrow 2500\ psi$,</p> <p>$V_{c,max}$ - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500\ psi)} \times (48\ in) \times (38.4\ in)$	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 6.508 \text{ kip} \rightarrow 6508 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(6508 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.35 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

V_c - Governing shear strength of concrete

$$V_c = \text{Min} [V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min} [(296.21 \text{ kip}), (119.35 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.35 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{s,a}$ - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

A_v - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

V_s - Governing shear strength of steel

$$V_s = \text{MIN} [V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN} [(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1 ϕV_n - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.35 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.66 \text{ kip}$$

Considering x-direction:

$V_{max} = 3.6566 \text{ kip}$ - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(3.6566 \text{ kip})}{(110.66 \text{ kip})}$$

$$Ratio = 0.033044$$

Status: **PASS**
Ratio: **0.030**

Considering z-direction:

$V_{max} = 0.029063 \text{ kip}$ - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.029063 \text{ kip})}{(110.66 \text{ kip})}$$

$$Ratio = 0.00026263$$

Status: **PASS**
Ratio: **0.000**

Flexural Strength (ACI 318-19, LRFD)

S_m - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$ - Concrete modification factor (Normal concrete),

Allowable flexural strength:

M_n shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

ϕM_n - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

Considering x-direction:

$M_{max} = 8.0531 \text{ kipft}$ - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(8.0531 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.032264$$

Status: **PASS**
Ratio: **0.030**

Considering z-direction:

$M_{max} = 0.059729 \text{ kipft}$ - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(0.059729 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.0002393$$

Status: **PASS**
Ratio: **0.000**

REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


SkyCiv Foundation Design

Pile Foundation

Design Information :

Design code : IBC 2021 (International Building Code)
Unit System : Imperial

Pile Input

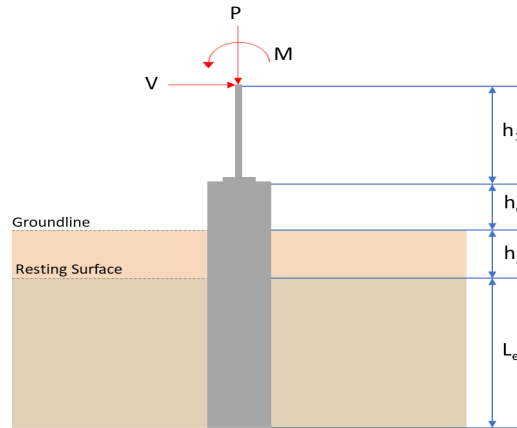

Geometry

Pile shape: rectangular
 $b = 48$ in - Pile width
 $D = 48$ in - Pile depth
 $L = 4.5$ ft - Total pile length
 $h_1 = 0$ ft - Lateral load height from the top of the pile,
 $h_2 = 0$ ft - Depth to resisting surface
 $h_e = 0$ ft - Length of pile above the ground

Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

Tabulation of Loads

Load Component	ASD	LRFD
P (kip)	4.789	6.842
V_x (kip)	-0.405	-0.678
V_z (kip)	0.000	0.000
M_x (kipft)	0.000	0.000
M_z (kipft)	8.037	13.801

Material Properties

$f'_{ck} = 2.5$ ksi - Concrete strength.

Required depth to resist lateral loads (ASD)

H - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

Considering x-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.405 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.06449 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(8.037 \text{ kipft}) + ((-0.405 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 1.2798 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.4028 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

$L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.4028 \text{ ft}), (0 \text{ ft})]$$

$$L_{e,req} = 4.403 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (4.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 4.5 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.403 \text{ ft})}{(4.5 \text{ ft})}$$

$$\text{Ratio} = 0.97844$$

Status: **PASS**
Ratio: **0.980**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(4.789 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.29931 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.29931 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.14966$$

Status: **PASS**
Ratio: **0.150**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(4.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.125$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.06449 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 1.2798 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (1.2798 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.06449 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (1.2798 \text{ kipft/ft})) + (4 \times (-0.06449 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.0492 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (1.2798 \text{ kipft/ft})) + (3 \times (-0.06449 \text{ kip/ft}) \times (4.5 \text{ ft}))]^2}{(4.5 \text{ ft})^2 \times [(3 \times (1.2798 \text{ kipft/ft})) + (2 \times (-0.06449 \text{ kip/ft}) \times (4.5 \text{ ft}))]}$$

$$p = 0.20513 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (1.2798 \text{ kipft/ft})) + ((-0.06449 \text{ kip/ft}) \times (4.5 \text{ ft}))]}{(4.5 \text{ ft})^2}$$

$$s = 0.6724 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.0492 \text{ ft})}{2}$$

$$p_a = 0.22869 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.20513 \text{ kip/ft}^2)}{(0.22869 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.89697$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.5 \text{ ft})$$


$$p_s = 0.675 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.6724 \text{ kip/ft}^2)}{(0.675 \text{ kip/ft}^2)}$$

Status: **PASS**
Ratio: **0.900**

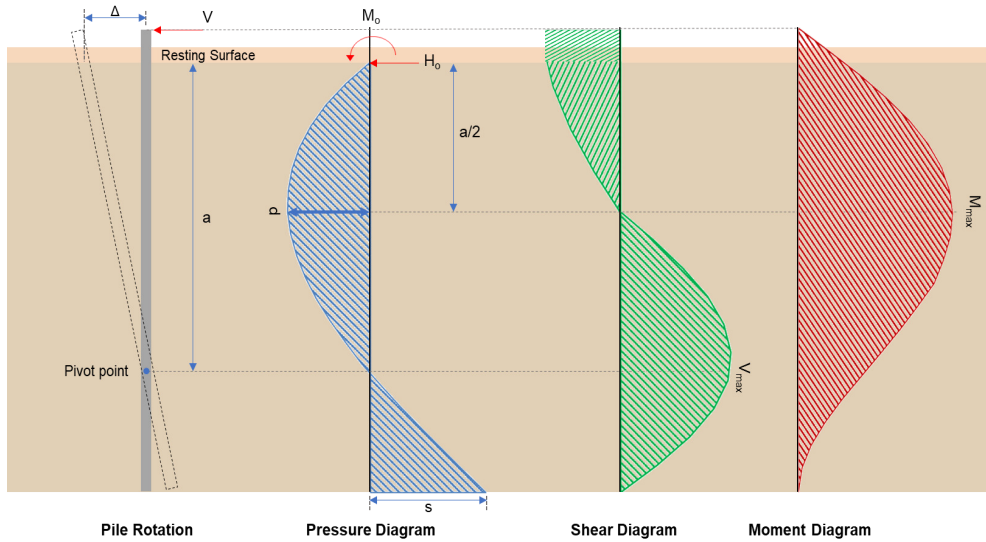

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.678 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.10796 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(13.801 \text{ kipft}) + ((-0.678 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.1976 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(2.1976 \text{ kipft/ft})}{(-0.10796 \text{ kip/ft})}$$

$$E = 20.355 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.1976 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.10796 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (2.1976 \text{ kipft/ft})) + (4 \times (-0.10796 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.0482 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.10796 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (20.355 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.0482 \text{ ft})}{(4.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (20.355 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.0482 \text{ ft})}{(4.5 \text{ ft})} \right)^3 \right] \right]$$

$$v_{max} = 3.1418 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.10796 \text{ kip/ft}) \times (48 \text{ in}) \times (4.5 \text{ ft})) \times \left[\left(\frac{(20.355 \text{ ft})}{(4.5 \text{ ft})} + \frac{(3.0482 \text{ ft})}{2 \times (4.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (20.355 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.0482 \text{ ft})}{2 \times (4.5 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (20.355 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.0482 \text{ ft})}{2 \times (4.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 8.2542 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(6.842 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.369 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.369 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

Status: **PASS**
Ratio: **0.970**

<p>25.7.2.2 25.7.2.1</p>	<p style="text-align: center;">$s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$</p> <p style="text-align: center;">$s_{rebar} = 1.5 \text{ in}$</p> <p>Ties: Since longitudinal reinforcement is \leq No. 10\emptyset: Use #3(0.375 in) s_{ties} - Maximum spacing of ties,</p> <p style="text-align: center;">$s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$</p> <p style="text-align: center;">$s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]$</p> <p style="text-align: center;">$s_{ties} = 10 \text{ in}$</p> <p>Summary:</p> <p style="text-align: center;">Main reinforcement: 14 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in</p>	
<p>22.4.2.2</p>	<p>Axial Compression Strength (ACI 318-19, LRFD)</p> <p>ϕP_N - Allowable axial compressive strength</p> <p style="text-align: center;">$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$</p> <p style="text-align: center;">$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$</p> <p style="text-align: center;">$\phi P_N = 2675.2 \text{ kip}$</p> <p>Ratio - Capacity</p> <p style="text-align: center;">$Ratio = \frac{P}{\phi P_N}$</p> <p style="text-align: center;">$Ratio = \frac{(6.842 \text{ kip})}{(2675.2 \text{ kip})}$</p> <p style="text-align: center;">$Ratio = 0.0025576$</p>	<p>Status: PASS Ratio: 0.000</p>
<p>22.5.2.2 22.5.5.1.3 22.5.5.1.1 22.5.5.1.1(a)</p>	<p>Shear Strength (ACI 318-19, LRFD)</p> <p>Parameters: $b_w = 48 \text{ in}$ - Effective width, d - Effective depth</p> <p style="text-align: center;">$d = 0.80 D$</p> <p style="text-align: center;">$d = 0.80 \times (48 \text{ in})$</p> <p style="text-align: center;">$d = 38.4 \text{ in}$</p> <p>λ_s - size effect modification factor</p> <p style="text-align: center;">$\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$</p> <p style="text-align: center;">$\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$</p> <p style="text-align: center;">$\lambda_s = 0.64282$</p> <p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,</p> <p>$V_{c,max}$ - Max shear strength of concrete</p> <p style="text-align: center;">$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$</p> <p style="text-align: center;">$V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$</p> <p style="text-align: center;">$V_{c,max} = 296.21 \text{ kip}$</p> <p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 6.842 \text{ kip} \rightarrow 6842 \text{ lbf}$,</p> <p>$V_{c,a}$ - Shear strength of concrete (a)</p> <p style="text-align: center;">$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$</p>	

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(6842 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.4 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

V_c - Governing shear strength of concrete

$$V_c = \text{Min} [V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min} [(296.21 \text{ kip}), (119.4 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.4 \text{ kip}$$

22.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{s,a}$ - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

A_v - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

V_s - Governing shear strength of steel

$$V_s = \text{MIN} [V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN} [(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1 ϕV_n - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.4 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.69 \text{ kip}$$

Considering x-direction:

$V_{max} = 3.7478 \text{ kip}$ - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$\text{Ratio} = \frac{(3.7478 \text{ kip})}{(110.69 \text{ kip})}$$

$$\text{Ratio} = 0.033858$$

Status: **PASS**
Ratio: **0.030**

Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

 $\lambda = 1$ - Concrete modification factor (Normal concrete),

Allowable flexural strength:

 M_n shall be the lesser of: $\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

 $\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

 ϕM_n - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

Considering x-direction: $M_{max} = 8.2542 \text{ kipft}$ - Maximum moment in the x-direction,


Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(8.2542 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.03307$$

Status: **PASS**
Ratio: **0.030**

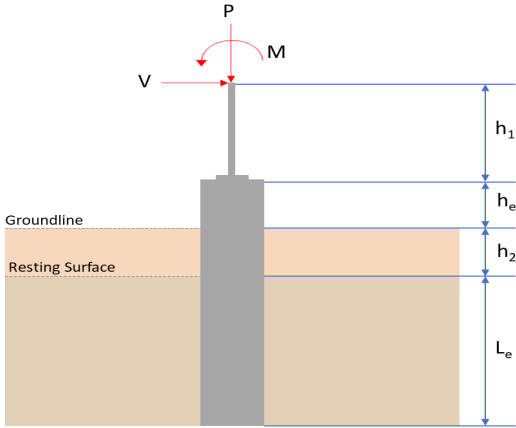REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry</p> <p>Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 4.5$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resisting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="368 1088 1225 1189"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="655 1290 940 1480"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>4.557</td> <td>6.508</td> </tr> <tr> <td>V_x (kip)</td> <td>-0.398</td> <td>-0.663</td> </tr> <tr> <td>V_z (kip)</td> <td>0.015</td> <td>0.022</td> </tr> <tr> <td>M_x (kipft)</td> <td>0.055</td> <td>0.079</td> </tr> <tr> <td>M_z (kipft)</td> <td>7.844</td> <td>13.464</td> </tr> </tbody> </table> <p>Material Properties</p> <p>$f'_{ck} = 2.5$ ksi - Concrete strength.</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	4.557	6.508	V_x (kip)	-0.398	-0.663	V_z (kip)	0.015	0.022	M_x (kipft)	0.055	0.079	M_z (kipft)	7.844	13.464	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	4.557	6.508																										
V_x (kip)	-0.398	-0.663																										
V_z (kip)	0.015	0.022																										
M_x (kipft)	0.055	0.079																										
M_z (kipft)	7.844	13.464																										
	<p>Required depth to resist lateral loads (ASD)</p> <p>H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction:</p> <p>H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-0.398 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.063376 \text{ kip/ft}$																											

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(7.844 \text{ kipft}) + ((-0.398 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 1.249 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.3676 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.015 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0023885 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.055 \text{ kipft}) + ((0.015 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.008758 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.942 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.3676 \text{ ft}), (0.942 \text{ ft})]$$

$$L_{e,req} = 4.368 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (4.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 4.5 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.368 \text{ ft})}{(4.5 \text{ ft})}$$

$$\text{Ratio} = 0.97067$$

Status: **PASS**
Ratio: **0.970**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(4.557 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.28481 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.28481 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.14241$$

Status: **PASS**
Ratio: **0.140**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(4.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.125$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.063376 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 1.249 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (1.249 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (1.249 \text{ kipft/ft})) + (4 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.0495 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (1.249 \text{ kipft/ft})) + (3 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))]^2}{(4.5 \text{ ft})^2 \times [(3 \times (1.249 \text{ kipft/ft})) + (2 \times (-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))]}$$

$$p = 0.1999 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (1.249 \text{ kipft/ft})) + ((-0.063376 \text{ kip/ft}) \times (4.5 \text{ ft}))]}{(4.5 \text{ ft})^2}$$

$$s = 0.65567 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.0495 \text{ ft})}{2}$$

$$p_a = 0.22872 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.1999 \text{ kip/ft}^2)}{(0.22872 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.87395$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.5 \text{ ft})$$

$$p_s = 0.675 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.65567 \text{ kip/ft}^2)}{(0.675 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.97137$$

Status: **PASS**
Ratio: **0.870**

Status: **PASS**
Ratio: **0.970**

Considering z-direction:

$H_o = 0.0023885 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 0.008758 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.008758 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (0.008758 \text{ kipft/ft})) + (4 \times (0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.1688 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.008758 \text{ kipft/ft})) + (3 \times (0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))]^2}{(4.5 \text{ ft})^2 \times [(3 \times (0.008758 \text{ kipft/ft})) + (2 \times (0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))]}$$

$$p = 0.0035092 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.008758 \text{ kipft/ft})) + ((0.0023885 \text{ kip/ft}) \times (4.5 \text{ ft}))]}{(4.5 \text{ ft})^2}$$

$$s = 0.0083746 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.1688 \text{ ft})}{2}$$

$$p_a = 0.23766 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.0035092 \text{ kip/ft}^2)}{(0.23766 \text{ kip/ft}^2)}$$

$$Ratio = 0.014766$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.5 \text{ ft})$$

$$p_s = 0.675 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0083746 \text{ kip/ft}^2)}{(0.675 \text{ kip/ft}^2)}$$

$$Ratio = 0.012407$$

Status: **PASS**
Ratio: **0.010**

Status: **PASS**
Ratio: **0.010**

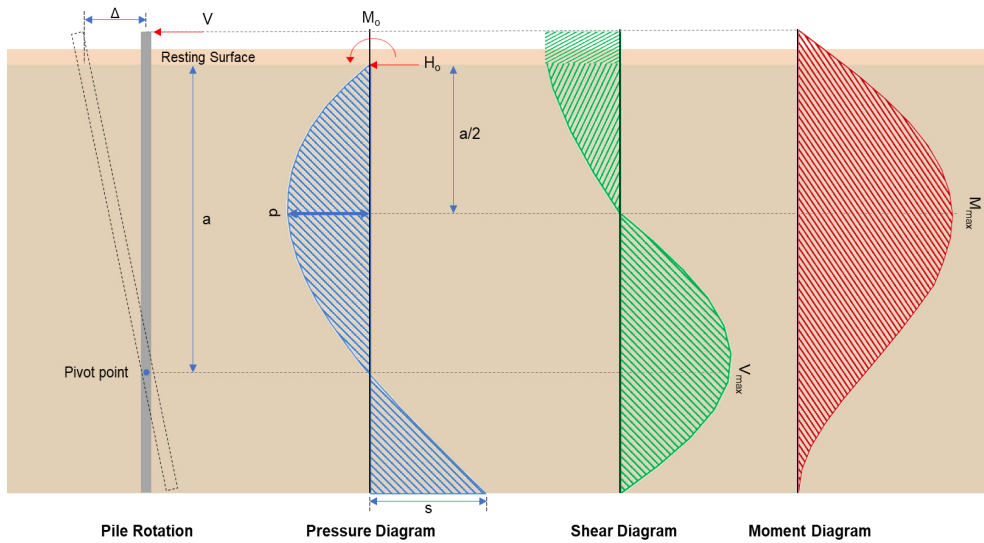

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.663 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.10557 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(13.464 \text{ kipft}) + ((-0.663 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.1439 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(2.1439 \text{ kipft/ft})}{(-0.10557 \text{ kip/ft})}$$

$$E = 20.308 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.1439 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (-0.10557 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times 2.1439) + (4 \times (-0.10557) \times 4.5)}$$

$$a = \frac{(6 \times (2.1439 \text{ kipft/ft})) + (4 \times (-0.10557 \text{ kip/ft}) \times (4.5 \text{ ft}))}{}$$

$$a = 3.0483 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.10557 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (20.308 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.0483 \text{ ft})}{(4.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (20.308 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.0483 \text{ ft})}{(4.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 3.6569 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.10557 \text{ kip/ft}) \times (48 \text{ in}) \times (4.5 \text{ ft})) \times \left[\left(\frac{(20.308 \text{ ft})}{(4.5 \text{ ft})} + \frac{(3.0483 \text{ ft})}{2 \times (4.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (20.308 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.0483 \text{ ft})}{(2 \times (4.5 \text{ ft}))} \right)^3 \right] + \left[\left(\frac{3 \times (20.308 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.0483 \text{ ft})}{(2 \times (4.5 \text{ ft}))} \right)^4 \right] \right]$$

$$M_{max} = 8.0537 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.022 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0035032 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.079 \text{ kipft}) + ((0.022 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.01258 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.01258 \text{ kipft/ft})}{(0.0035032 \text{ kip/ft})}$$

$$E = 3.5909 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.01258 \text{ kipft/ft}) \times (4.5 \text{ ft})) + (3 \times (0.0035032 \text{ kip/ft}) \times (4.5 \text{ ft})^2)}{(6 \times (0.01258 \text{ kipft/ft})) + (4 \times (0.0035032 \text{ kip/ft}) \times (4.5 \text{ ft}))}$$

$$a = 3.1707 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0035032 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.1707 \text{ ft})}{(4.5 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[4 \times \left(\frac{3 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.1707 \text{ ft})}{(4.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.029063 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.0035032 \text{ kip/ft}) \times (48 \text{ in}) \times (4.5 \text{ ft})) \times \left[\left(\frac{(3.5909 \text{ ft})}{(4.5 \text{ ft})} + \frac{(3.1707 \text{ ft})}{2 \times (4.5 \text{ ft})} \right) \right. \\ \left. - \left[\left(\frac{4 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 3 \right) \times \left(\frac{(3.1707 \text{ ft})}{2 \times (4.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.5909 \text{ ft})}{(4.5 \text{ ft})} + 2 \right) \times \left(\frac{(3.1707 \text{ ft})}{2 \times (4.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.059729 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength,

$f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,

$\phi = 0.65$ - Reduction factor for axial strength,

$\alpha = 0.8$ - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(6.508 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.38 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.38 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;">$Ratio = 0.96556$</p> <p>$s_{rebar} = Minimum\ spacing\ of\ reinforcement,$</p> $s_{rebar} = Max[1.5, (1.5 d_{bar})]$ $s_{rebar} = Max[1.5, (1.5 \times (0.625\ in))]$ $s_{rebar} = 1.5\ in$ <p>Ties:</p> <p>Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)</p> <p>s_{ties} - Maximum spacing of ties,</p> $s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$ $s_{ties} = Min[(16 \times (0.625\ in)), (48 \times (0.375\ in)), Min((48\ in), (48\ in))]$ $s_{ties} = 10\ in$ <p>Summary:</p> <p style="text-align: center;">Main reinforcement: 14 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in</p>	<p>Status: PASS Ratio: 0.970</p>
<p>22.4.2.2</p>	<p>Axial Compression Strength (ACI 318-19, LRFD)</p> <p>ϕP_N - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5\ ksi) \times [(2304\ in^2) - (4.2951\ in^2)]) + ((60\ ksi) \times (4.2951\ in^2))]$ $\phi P_N = 2675.2\ kip$ <p><i>Ratio</i> - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(6.508\ kip)}{(2675.2\ kip)}$ $Ratio = 0.0024327$	<p>Status: PASS Ratio: 0.000</p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p>Shear Strength (ACI 318-19, LRFD)</p> <p>Parameters:</p> <p>$b_w = 48\ in$ - Effective width, d - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48\ in)$ $d = 38.4\ in$ <p>λ_s - size effect modification factor</p> $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4\ in)}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ <p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5\ ksi \rightarrow 2500\ psi$,</p> <p>$V_{c,max}$ - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500\ psi)} \times (48\ in) \times (38.4\ in)$	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 6.508 \text{ kip} \rightarrow 6508 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(6508 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.35 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

V_c - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.35 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.35 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{s,a}$ - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

A_v - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

V_s - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1 ϕV_n - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.35 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.66 \text{ kip}$$

Considering x-direction:

$V_{max} = 3.6569 \text{ kip}$ - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(3.6569 \text{ kip})}{(110.66 \text{ kip})}$$

$$Ratio = 0.033046$$

Status: **PASS**
Ratio: **0.030**

Considering z-direction:

$V_{max} = 0.029063 \text{ kip}$ - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.029063 \text{ kip})}{(110.66 \text{ kip})}$$

$$Ratio = 0.00026263$$

Status: **PASS**
Ratio: **0.000**

Flexural Strength (ACI 318-19, LRFD)

S_m - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$ - Concrete modification factor (Normal concrete),

Allowable flexural strength:

M_n shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

ϕM_n - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

Considering x-direction:

$M_{max} = 8.0537 \text{ kipft}$ - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(8.0537 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.032266$$

Status: **PASS**
Ratio: **0.030**

Considering z-direction:

$M_{max} = 0.059729 \text{ kipft}$ - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.059729 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.0002393$$

Status: **PASS**
Ratio: **0.000**