

Project Details



Project Name: Rose-v2cu

Date: Fri Feb 07 2025

Location: 9625 Co Rd 18, Fairplay, CO 80440, USA


Number of Modules: 12

Unique ID: 1P-0-6TOP-XD-57-L-4Hx3W-STRUTS-C12D

Number of Poles: 1

Date Sold:

Dealer: _____

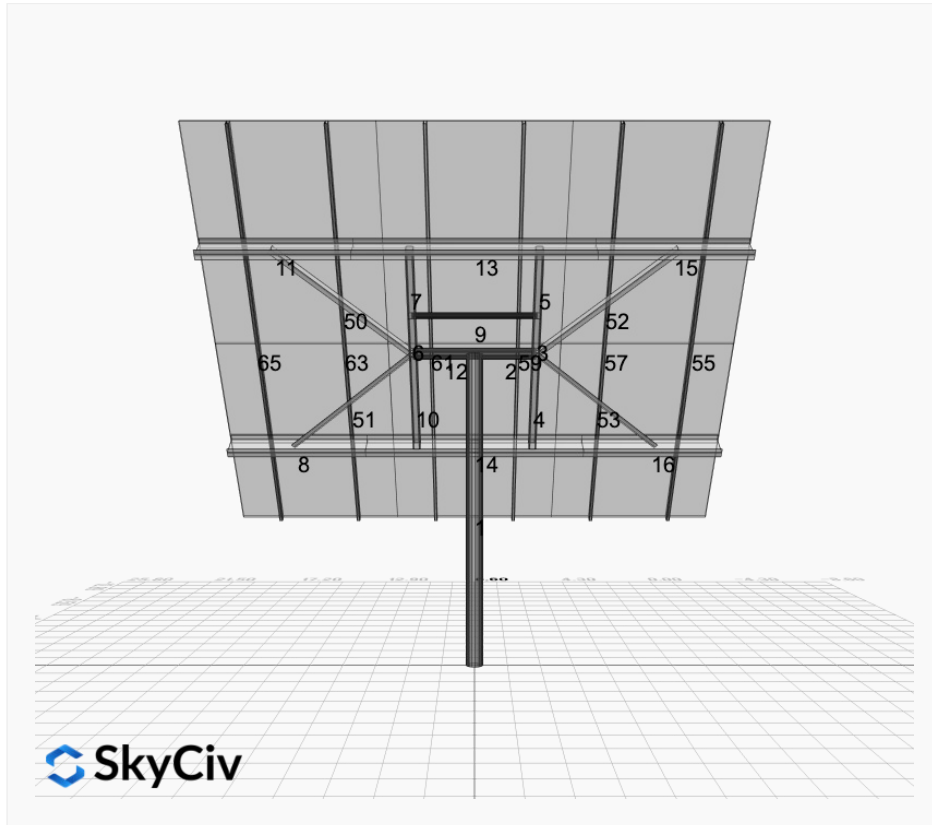

Array Dimensions N/S	15.03 ft
Array Dimensions E/W	17.20 ft
Winter Tilt Angle	55
Front Edge Clearance	4 ft


MT Solar Bill of Materials (1P-0-6TOP-XD-57-L-4Hx3W-STRUTS-C12D)

Part	Short Description	BOM Qty
MTS-PC-6	6IN Pole Cap Assembly	1
MTS-HF-XD	H-Frame Assembly-XD	1
MTS-XD-Wing-57	57IN XD Wing	4
MTS-CLAMP-HOOK-4PK	Hook Clamp	3

Rail Bill of Materials

Part	Qty
Rails (178in)	6
Rail Attachment	12
Module Mid Clamp	18
Module End Clamp	12
Ground Lug	3

Site Details:

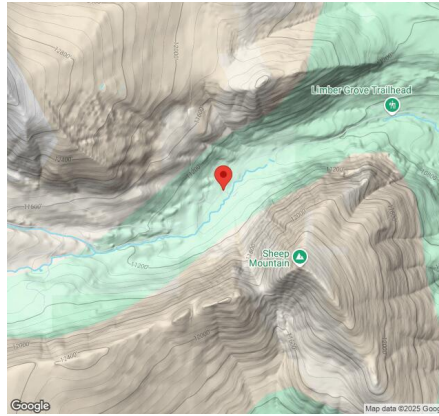

Site Address: 9625 Co Rd 18, Fairplay, CO 80440, USA

Array Specification

Duty Classification:	XD
Module Width:	44.60 in
Module Length:	67.80in
Number of Rows:	4
Number of Columns:	3
Total Number of Modules:	12
Winter Tilt Angle:	55
Front Edge Clearance:	4
Total Array Height at Tilt:	16.31 ft
Total Frame Length:	17.00 ft
Frame Weight:	1198 lbs
Array Dimensions N/S:	15.03 ft
Array Dimensions E/W:	17.20 ft
Rail Length:	180.40 in
Rail Spacing:	2.87 ft

Support Specifications

Pole Size:	6in Pipe Sch 40
Pole Length above Grade:	10.16 ft
Number of Poles:	1
Pole Spacing:	0

Foundation Specifications

Foundation Type:	Square
Foundation Dimensions:	48 x 48 in
Foundation Depth (below grade):	Pile 1: 6.00 ft
Foundation Volume:	3.556 y ³

Site Info

Risk Category:	II
Exposure:	C
Soil Classification:	sand
Site Location:	9625 Co Rd 18, Fairplay, CO 80440, USA
Wind Speed:	105 mph
Snow Load:	257 psf

Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



AutoDesigner Input



```
{ "wind_speed_override": 105, "snow_load_override": 257, "direct_snow_load": false, "add_angle_brace": true, "product_type": "Beam", "designer_name": "", "designer_email": "christina@mtsolar.us", "designer_phone": "", "project_id": "Rose-v2cu", "site_address": "9625 Co Rd 18, Fairplay, CO 80440, USA", "module_width": 44.6, "module_length": 67.8, "number_rows": 4, "number_columns": 3, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": "15", "tilt_angle": 55, "ground_clearance": 4, "risk_category": "II", "exposure_category": "C", "frame_duty_override": "XD", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "48_Square", "foundation_type": "Square", "foundation_size": 48, "check_rails": true }
```

Design Notes:

- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)

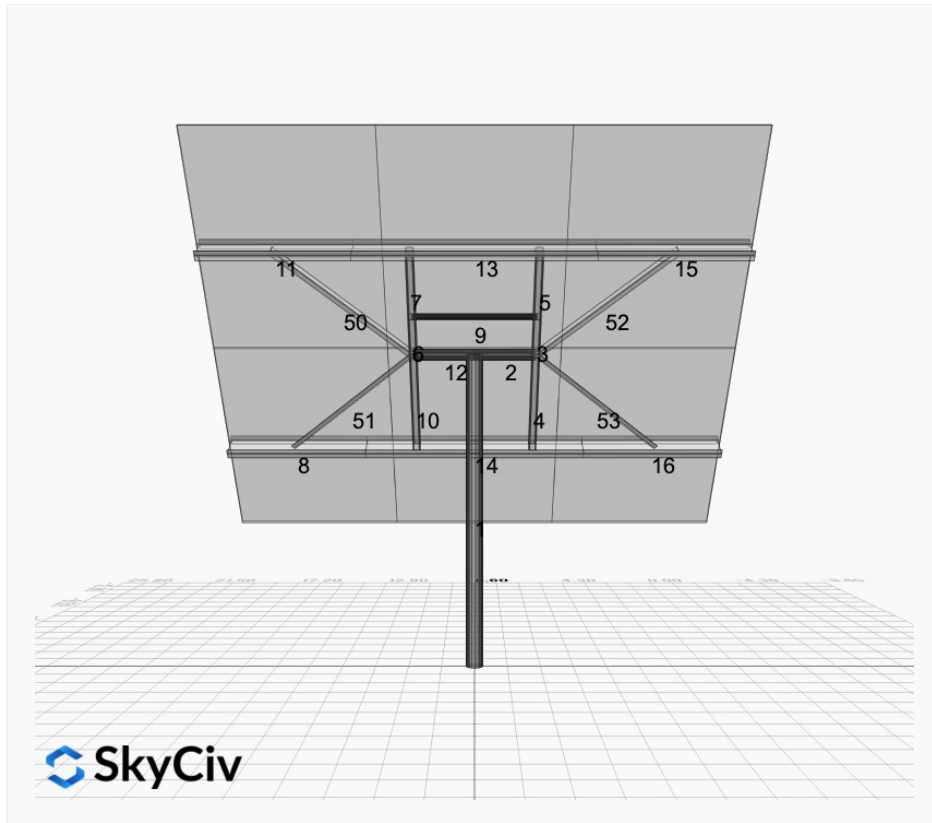


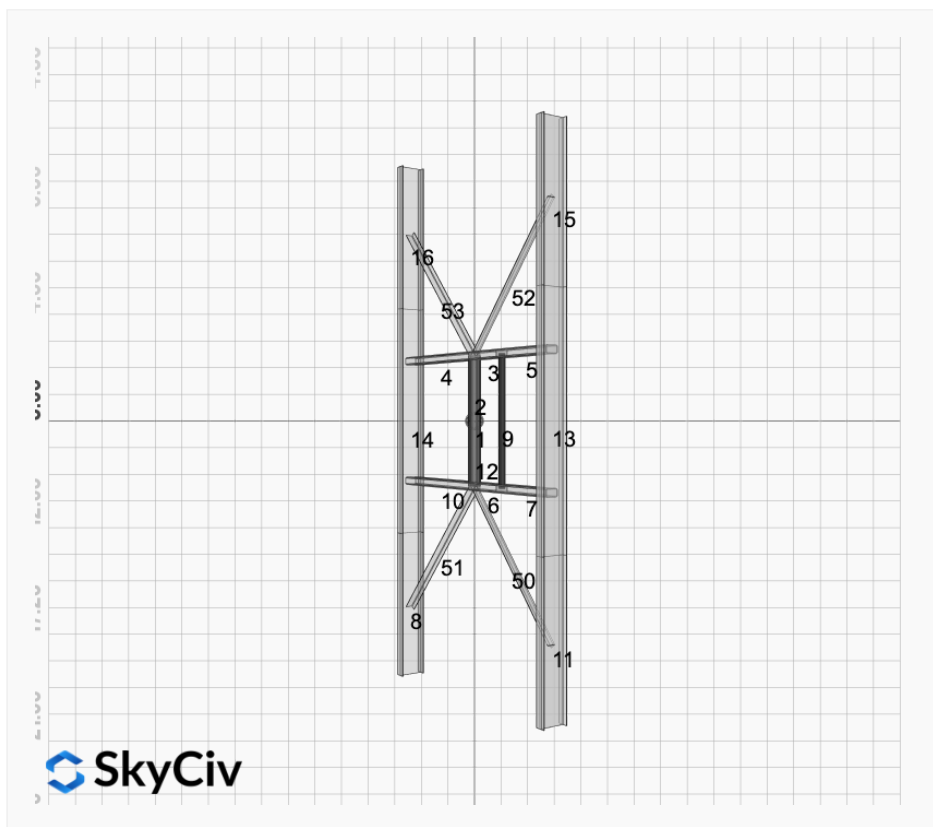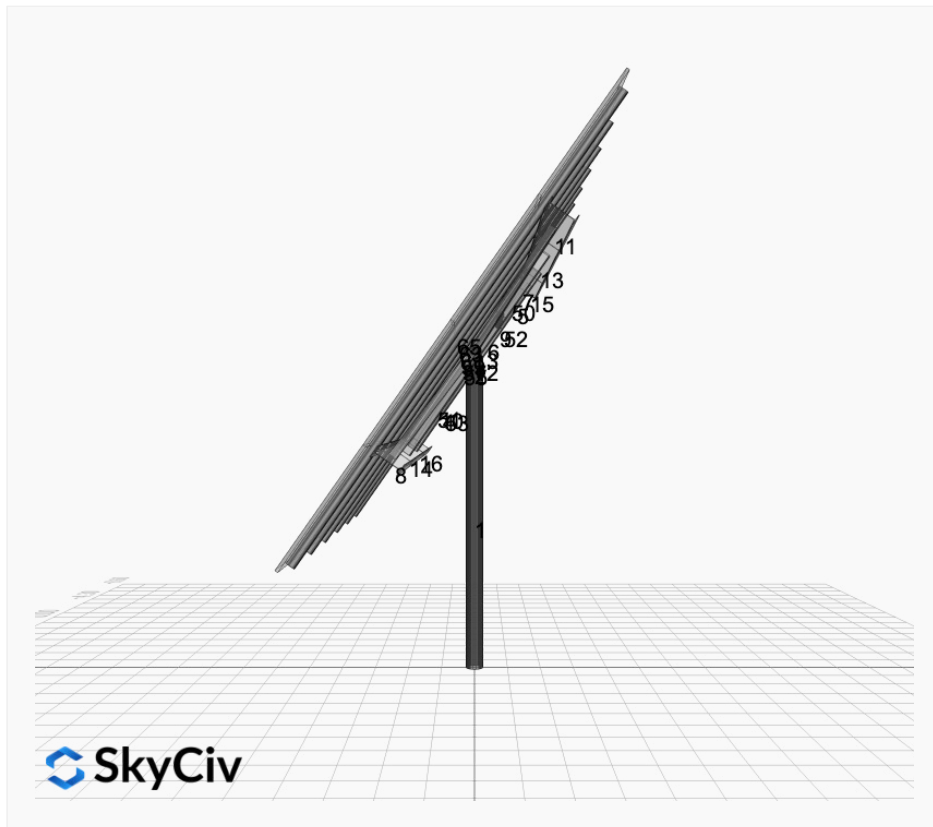

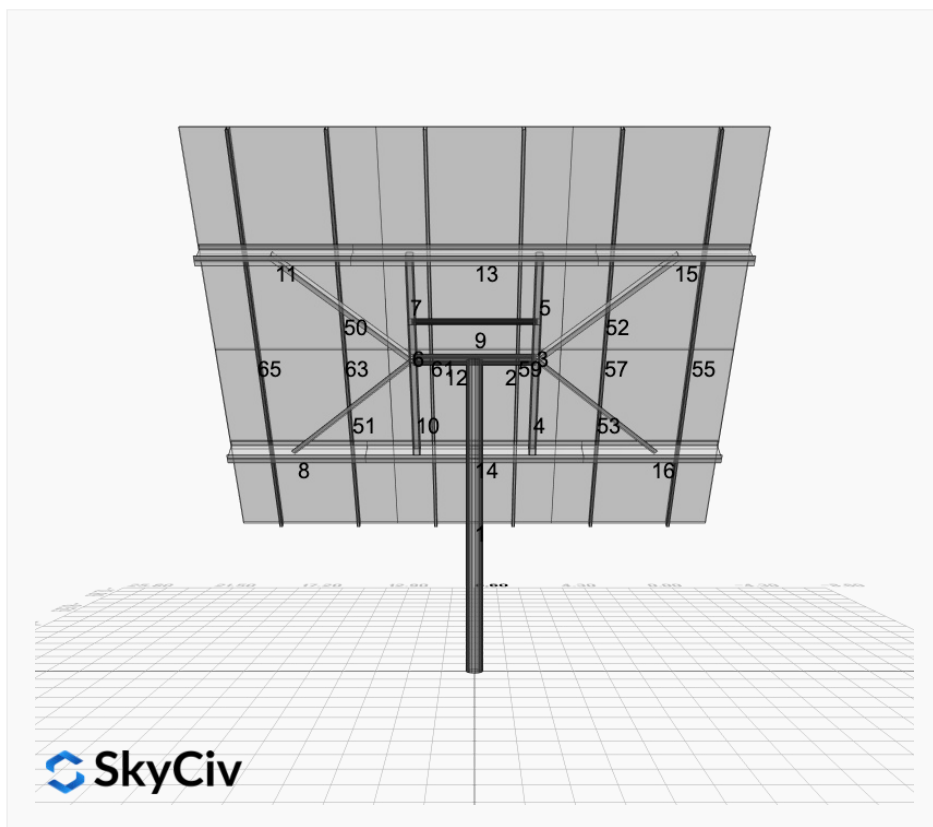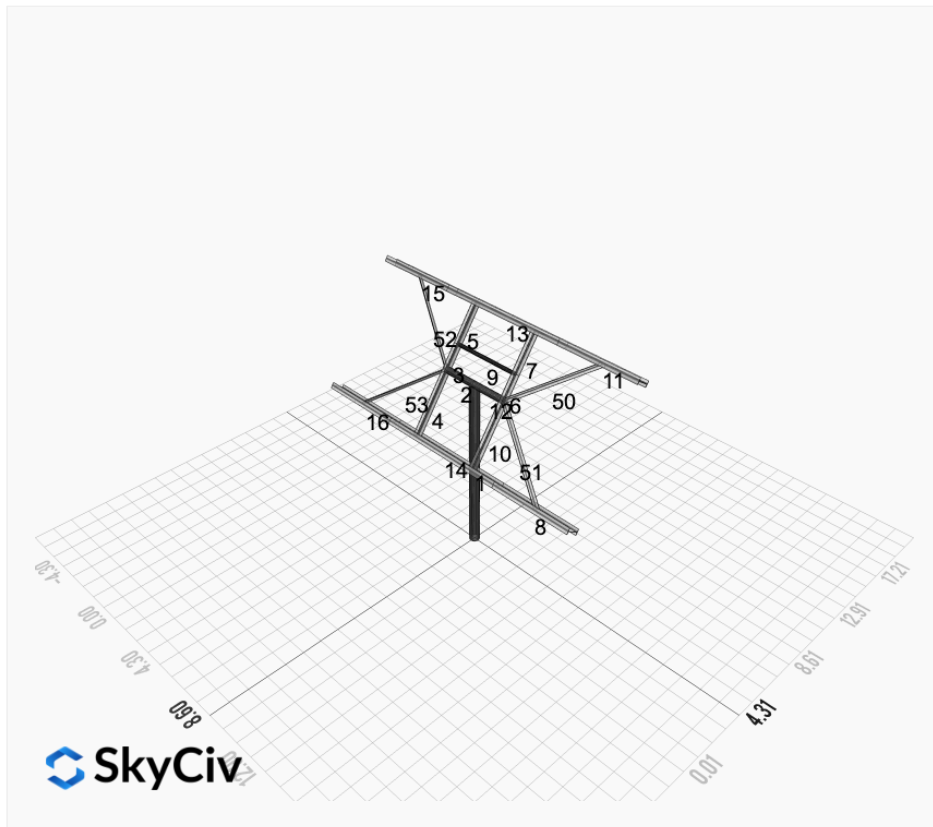


Rail Design Check

Rail Length: 15.033333333333333 ft
Additional Restraints Required: None
Tributary Width: 2.866666666666667 ft
Material: Aluminium
Density: 169 lb/ft³
Elasticity Modulus: 10000 ksi
Fy: 34.5 ksi
Fu: 37 ksi
Snow (X): 0.0871 kip/ft
Snow (Y): -0.1244 kip/ft
Wind uplift Case A: 0.0499 kip/ft
Wind downforce Case A: 0.0499 kip/ft
Dead (Panel load) (X): 0.0077 kip/ft
Dead (Panel load) (Y): -0.0110 kip/ft


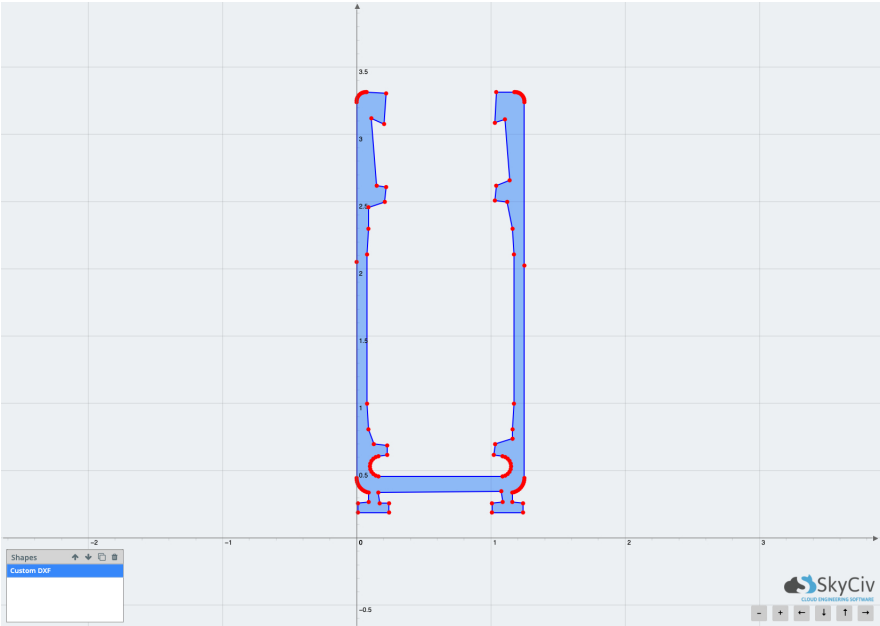


Result Check	Max Limit	Max Value	Utility	Status
Custom Stress Limit	34.5	37.06069537	1.074	FAIL
Material Yield	34.5	37.06069537	1.074	FAIL
Material Strength	37	37.06069537	1.002	FAIL


Member 1, ULS: 1.14D

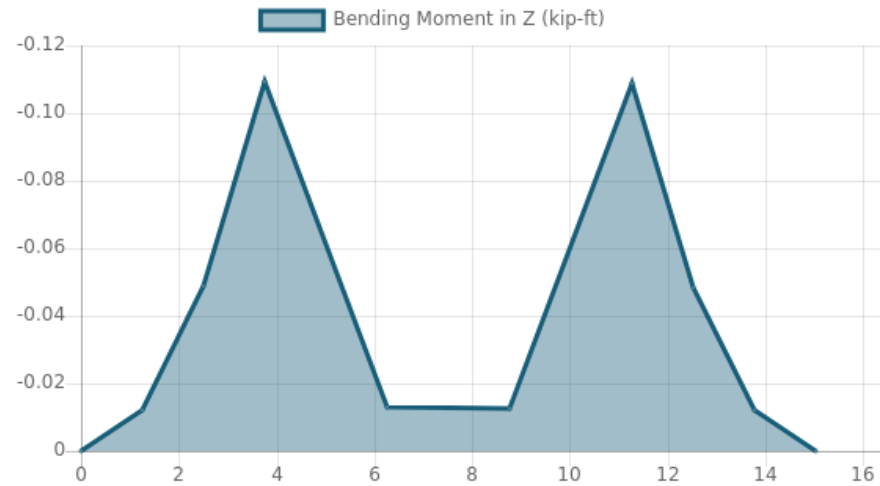

FEM Results (Envelope Worst Case for each member)

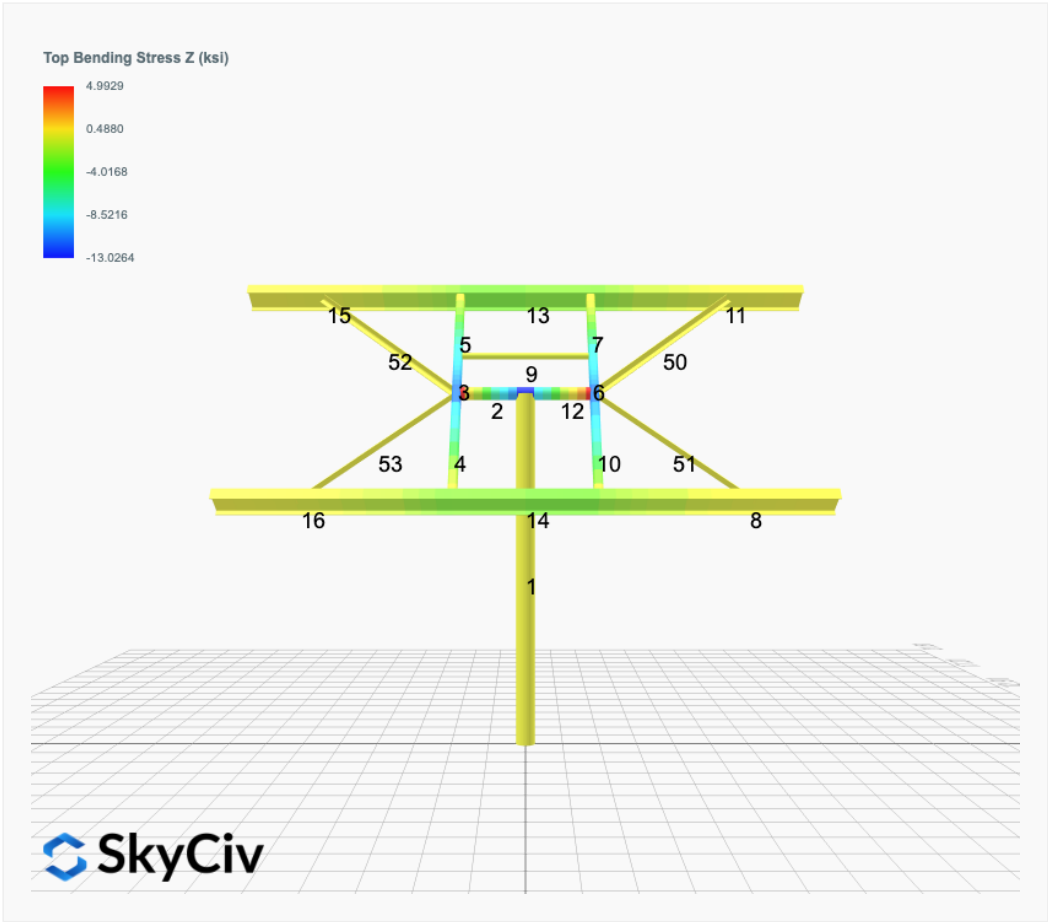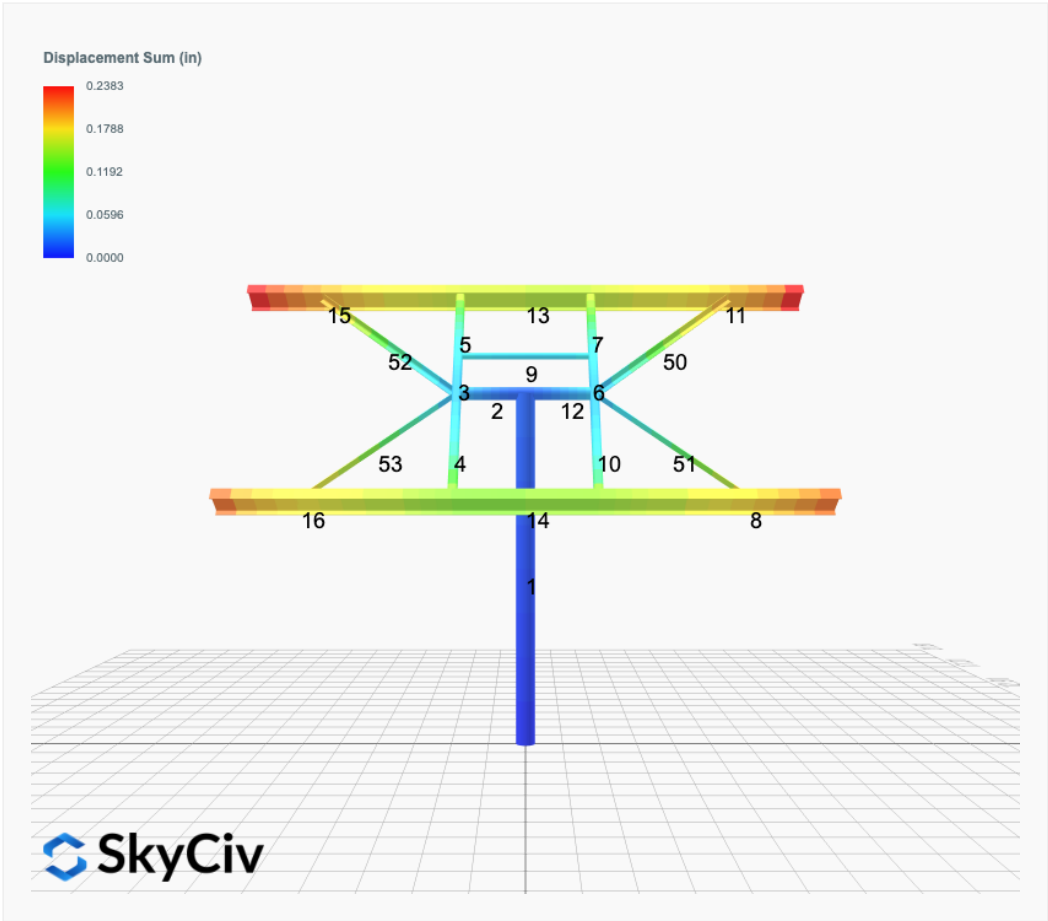


Top Bending Stress Y (ksi)

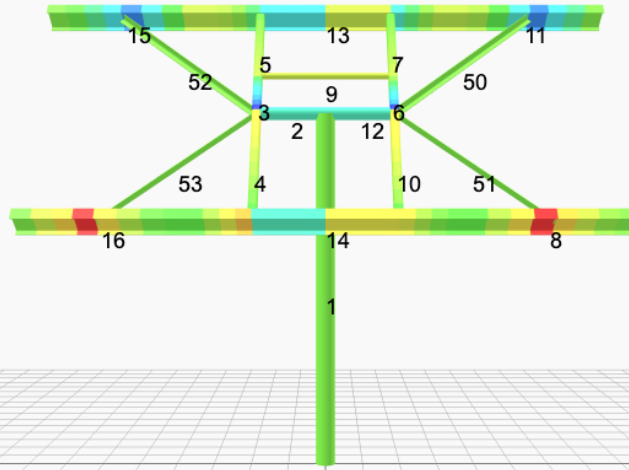



 SkyCiv

Shear Stress Y (ksi)

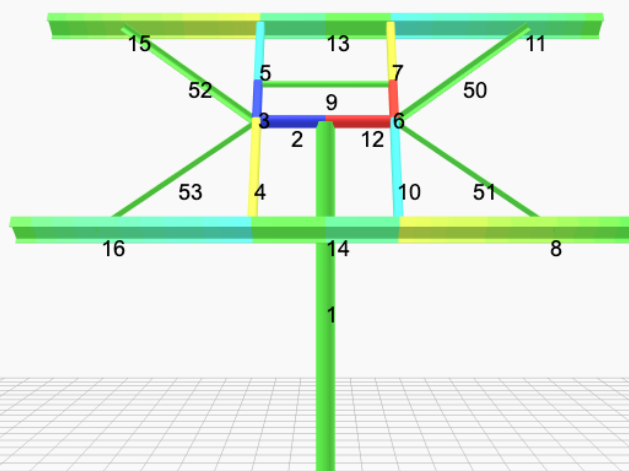

 SkyCiv

Axial Stress (ksi)

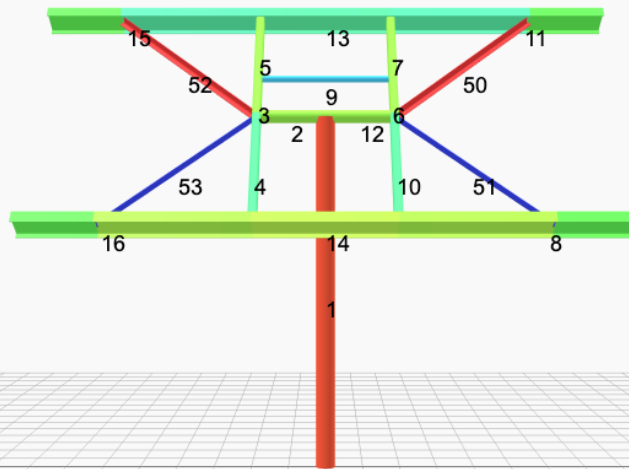

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 2. D + L	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 3. D + (S or Lr or R)	0.0000	9.9257	0.0000	-0.0000	-0.0000	0.0976
ULS: 3. D + (S or Lr or R)	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	7.9838	0.0000	-0.0000	-0.0000	0.0784
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 5b. D + 0.7E	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	7.9838	0.0000	-0.0000	-0.0000	0.0784
ULS: 8. 0.6D + 0.7E	0.0000	1.2949	0.0000	-0.0000	-0.0000	0.0124
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.2130	3.7077	0.0000	-0.0000	-0.0000	22.8578
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.2130	0.6086	0.0000	-0.0000	-0.0000	-22.1117
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.6598	9.1460	0.0000	-0.0000	-0.0000	17.2062
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	7.9838	0.0000	-0.0000	-0.0000	0.0784
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.6598	6.8217	0.0000	-0.0000	-0.0000	-16.5209
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	7.9838	0.0000	-0.0000	-0.0000	0.0784
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.6598	3.3203	0.0000	-0.0000	-0.0000	17.1485
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.6598	0.9960	0.0000	-0.0000	-0.0000	-16.5786
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	2.1582	0.0000	-0.0000	-0.0000	0.0207
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.2130	2.8444	0.0000	-0.0000	-0.0000	22.8495
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0000	1.2949	0.0000	-0.0000	-0.0000	0.0124
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.2130	-0.2546	0.0000	-0.0000	-0.0000	-22.1199
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0000	1.2949	0.0000	-0.0000	-0.0000	0.0124

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	16.3091
Shear X	-3.6883
Shear Z	0.0000
Moment X	-0.0022
Moment Y (Twist)	0.0014
Moment Z	39.8015

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	9.9257
Shear X	-2.2130
Shear Z	0.0000
Moment X	-0.0000
Moment Y (Twist)	0.0000
Moment Z	22.8578

Project Details

Design Code: AISC 360-16 LRFD
Provision: LRFD
Country: United States

User Name: sales@mtsolar.us
Unit System: imperial




Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65

Section Dimensions								
ID	Name	d (in)	t_w (in)					
3	2in Pipe Sch 120	2.38	0.25					
6	4in Pipe Sch 120	4.50	0.44					
7	6in Pipe Sch 40	6.63	0.28					
ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)		
17	HSS5x3x1/4	5.00	3.00	0.23	0.23	0.23		
ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
20	W10x12	9.87	0.19	3.96	3.96	0.21	0.21	0.30



ID	Name	d (in)	t _w (in)	b (in)	t _b (in)	r (in)		
34	L3x2x3/16	3.00	0.19	2.00	0.19	0.31		

Section Properties

ID	Name	A (in ²)	J (in ⁴)	I _{yp} (in ⁴)	I _{zp} (in ⁴)	I _w (in ⁶)	S _{yp} (in ³)	S _{zp} (in ³)
3	2in Pipe Sch 120	1.67	1.91	0.96	0.96	0.00	1.13	1.13
6	4in Pipe Sch 120	5.58	23.29	11.64	11.64	0.00	7.24	7.24
7	6in Pipe Sch 40	5.58	56.28	28.14	28.14	0.00	11.28	11.28
17	HSS5x3x1/4	3.37	11.00	4.81	10.70	0.93	3.77	5.38
20	W10x12	3.54	0.05	2.18	53.80	50.90	1.74	12.60
34	L3x2x3/16	0.92	0.01	0.17	0.98	0.01	0.33	0.82

Member Properties

Member ID	Section ID	K _z L (ft)	K _y L (ft)	L _b (ft)	C _b	LS T	LS C	LD
1	7	21.3 3	21.3 3	10.16	-	30 0	20 0	1
2	6	1.30	1.30	2.0 0	-	30 0	20 0	1
3	17	0.92	0.92	1.4 2	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.18,1.18,1.18,1.19,1.17,1.19,1.18,1.19	30 0	20 0	1
4	17	2.44	2.44	3.7 5	1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.68,1.64,1.68,1.67,1.69,1.66,1.69,1.67,1.67,1.67,1.67,1.69,1.64,1.69,1.67,1.69,1.66,1.69	30 0	20 0	1
5	17	1.52	1.52	2.3 3	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.65,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.67,1.67,1.68,1.65,1.68,1.67,1.68,1.66,1.68	30 0	20 0	1
6	17	0.92	0.92	1.4 2	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.18,1.18,1.18,1.19,1.17,1.19,1.18,1.19	30 0	20 0	1
7	17	1.52	1.52	2.3 3	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.65,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.67,1.67,1.68,1.65,1.68,1.67,1.68,1.66,1.68	30 0	20 0	1
8	20	4.75	4.75	4.7 5	2.34,2.32,2.34,2.32,2.33,2.34,2.33,2.32,2.36,2.32,2.33,2.34,2.32,2.34,2.33,2.32,2.30,2.32,2.33,2.34,2.31,2.34,2.32,2.34,2.32,2.34	30 0	20 0	1
9	3	2.60	2.60	4.0 0	-	30 0	20 0	1
10	17	2.44	2.44	3.7 5	1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.68,1.64,1.68,1.67,1.69,1.66,1.69,1.67,1.67,1.67,1.67,1.69,1.64,1.69,1.67,1.69,1.66,1.69	30 0	20 0	1
11	20	4.75	4.75	4.7 5	2.34,2.32,2.34,2.32,2.33,2.34,2.33,2.32,2.37,2.32,2.33,2.34,2.32,2.34,2.33,2.32,2.31,2.32,2.33,2.34,2.31,2.34,2.32,2.34,2.32,2.34	30 0	20 0	1
12	6	1.30	1.30	2.0 0	-	30 0	20 0	1
13	20	4.88	4.00	7.5 0	1.03,1.03	30 0	20 0	1
14	20	4.88	4.00	7.5 0	1.03,1.03	30 0	20 0	1
15	20	4.75	4.75	4.7 5	2.34,2.32,2.34,2.32,2.33,2.34,2.33,2.32,2.37,2.32,2.33,2.34,2.32,2.34,2.33,2.32,2.31,2.32,2.33,2.34,2.31,2.34,2.32,2.34,2.32,2.34	30 0	20 0	1
16	20	4.75	4.75	4.7 5	2.34,2.32,2.34,2.32,2.33,2.34,2.33,2.32,2.36,2.32,2.33,2.34,2.32,2.34,2.33,2.32,2.30,2.32,2.33,2.34,2.31,2.34,2.32,2.34,2.32,2.34	30 0	20 0	1
50	34	5.67	5.67	5.6 7	1.14,1.14	30 0	20 0	25 0
51	34	5.67	5.67	5.6 7	1.14,1.14	30 0	20 0	25 0
52	34	5.67	5.67	5.6 7	1.14,1.14	30 0	20 0	25 0
53	34	5.67	5.67	5.6 7	1.14,1.14	30 0	20 0	25 0

Member Design Capacity

Member Design Capacity

Member ID	$\Phi_t P_n$ (kip)	$\Phi_c P_n$ (kip)	$\Phi_b M_{zn}$ (k-ft)	$\Phi_b M_{yn}$ (k-ft)	$\Phi_v V_{yn}$ (kip)	$\Phi_v V_{zn}$ (kip)
1	251.16	97.04	42.30	42.30	75.35	75.35
2	251.01	248.88	27.16	27.16	75.30	75.30
3	151.65	150.70	20.17	14.14	54.12	28.95
4	151.65	145.15	20.17	14.14	54.12	28.95
5	151.65	149.10	20.17	14.14	54.12	28.95
6	151.65	150.70	20.17	14.14	54.12	28.95
7	151.65	149.10	20.17	14.14	54.12	28.95
8	159.30	105.96	46.90	6.46	56.26	44.91
9	75.10	66.32	4.25	4.25	22.53	22.53
10	151.65	145.15	20.17	14.14	54.12	28.95
11	159.30	105.96	46.90	6.46	56.26	44.91
12	251.01	248.88	27.16	27.16	75.30	75.30
13	159.30	97.43	31.49	6.46	56.26	44.91
14	159.30	97.43	31.48	6.46	56.26	44.91
15	159.30	105.96	46.90	6.46	56.26	44.91
16	159.30	105.96	46.90	6.46	56.26	44.91
50	41.27	8.45	1.63	0.88	15.23	10.15
51	41.27	8.45	1.63	0.88	15.23	10.15
52	41.27	8.45	1.63	0.88	15.23	10.15
53	41.27	8.45	1.63	0.88	15.23	10.15


Design Ratio

Member ID	P	M_z	M_y	V_y	V_z	(P, M_z , M_y)	Worst LC	KL/r	δ	Status
1	0.168	0.941	0.000	0.049	0.000	0.988	#13	0.570	Not Required	Warn
2	0.009	0.435	0.147	0.107	0.024	0.562	#21	0.054	Not Required	Pass
3	0.009	0.507	0.217	0.050	0.088	0.729	#21	0.046	Not Required	Pass
4	0.009	0.499	0.088	0.049	0.014	0.592	#21	0.082	Not Required	Pass
5	0.009	0.315	0.035	0.050	0.009	0.354	#21	0.076	Not Required	Pass
6	0.009	0.507	0.217	0.050	0.088	0.729	#21	0.046	Not Required	Pass
7	0.009	0.315	0.035	0.050	0.009	0.354	#21	0.076	Not Required	Pass
8	0.017	0.076	0.136	0.027	0.018	0.161	#21	0.363	Not Required	Pass
9	0.037	0.027	0.051	0.001	0.000	0.096	#21	0.137	Not Required	Pass
10	0.009	0.499	0.088	0.050	0.014	0.592	#21	0.082	Not Required	Pass
11	0.012	0.077	0.136	0.027	0.019	0.158	#21	0.242	Not Required	Pass
12	0.009	0.435	0.147	0.107	0.024	0.562	#21	0.054	Not Required	Pass
13	0.012	0.227	0.075	0.037	0.015	0.307	#21	0.204	Not Required	Pass
14	0.023	0.228	0.088	0.036	0.015	0.308	#21	0.306	Not Required	Pass
15	0.012	0.077	0.136	0.027	0.019	0.158	#21	0.242	Not Required	Pass
16	0.017	0.076	0.136	0.027	0.018	0.161	#21	0.242	Not Required	Pass
50	0.294	0.009	0.006	0.003	0.002	0.307	#21	0.783	Not Required	Pass
51	0.059	0.003	0.015	0.002	0.002	0.071	#21	0.522	Not Required	Pass
52	0.294	0.009	0.006	0.003	0.002	0.307	#23	0.783	Not Required	Pass
53	0.059	0.003	0.015	0.002	0.002	0.071	#23	0.522	Not Required	Pass

Definitions

Φ_t Safety factor for tensile

Φ_c	Safety factor for compression
Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z, M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

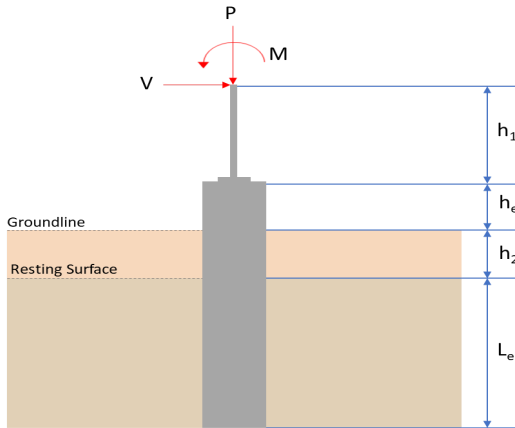REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: rectangular b = 48 in - Pile width D = 48 in - Pile depth L = 6 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><thead><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr></thead><tbody><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></tbody></table> Tabulation of Loads <table><thead><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr></thead><tbody><tr><td>P (kip)</td><td>9.926</td><td>16.309</td></tr><tr><td>Vx (kip)</td><td>-2.213</td><td>-3.688</td></tr><tr><td>Vz (kip)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mx (kipft)</td><td>0.000</td><td>-0.002</td></tr><tr><td>Mz (kipft)</td><td>22.858</td><td>39.802</td></tr></tbody></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	9.926	16.309	Vx (kip)	-2.213	-3.688	Vz (kip)	0.000	0.000	Mx (kipft)	0.000	-0.002	Mz (kipft)	22.858	39.802	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	9.926	16.309																										
Vx (kip)	-2.213	-3.688																										
Vz (kip)	0.000	0.000																										
Mx (kipft)	0.000	-0.002																										
Mz (kipft)	22.858	39.802																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load H = h1 + h2 + he H = (0 ft) + (0 ft) + (0 ft) H = 0 ft Considering x-direction: Ho - Lateral force per length of pile, Ho = Vx / 1.57 D Ho = (-2.213 kip) / 1.57 x (48 in) Ho = -0.35239 kip/ft																											

	M_o - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{1.57 D}$ $M_o = \frac{(22.858 \text{ kipft}) + ((-2.213 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 3.6398 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$ Solving the cubic equation: $L_{e,x} = 5.5753 \text{ ft}$ - Required depth in x-direction, Considering z-direction: $L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = MAX[L_{e,x}, L_{e,z}]$ $L_{e,req} = MAX[(5.5753 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 5.575 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (6 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 6 \text{ ft}$ Ratio - Embedded depth $Ratio = \frac{L_{e,req}}{L_e}$ $Ratio = \frac{(5.575 \text{ ft})}{(6 \text{ ft})}$ $Ratio = 0.92917$	Status: PASS Ratio: 0.930
	End-bearing Capacity (ASD) A - Pile cross-section area $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_v}{A}$ $q = \frac{(9.926 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.62038 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.62038 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.31019$	Status: PASS Ratio: 0.310
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio,	

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.5$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.35239 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 3.6398 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (3.6398 \text{ kipft/ft}) \times (6 \text{ ft})) + (3 \times (-0.35239 \text{ kip/ft}) \times (6 \text{ ft})^2)}{(6 \times (3.6398 \text{ kipft/ft})) + (4 \times (-0.35239 \text{ kip/ft}) \times (6 \text{ ft}))}$$

$$a = 4.1396 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (3.6398 \text{ kipft/ft})) + (3 \times (-0.35239 \text{ kip/ft}) \times (6 \text{ ft}))]^2}{(6 \text{ ft})^2 \times [(3 \times (3.6398 \text{ kipft/ft})) + (2 \times (-0.35239 \text{ kip/ft}) \times (6 \text{ ft}))]}$$

$$p = 0.2102 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (3.6398 \text{ kipft/ft})) + ((-0.35239 \text{ kip/ft}) \times (6 \text{ ft}))]}{(6 \text{ ft})^2}$$

$$s = 0.86088 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.1396 \text{ ft})}{2}$$

$$p_a = 0.31047 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.2102 \text{ kip/ft}^2)}{(0.31047 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.67704$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6 \text{ ft})$$

$$p_s = 0.9 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.86088 \text{ kip/ft}^2)}{(0.9 \text{ kip/ft}^2)}$$

Status: **PASS**
Ratio: **0.680**

$$Ratio = 0.95653$$

Status: **PASS**
Ratio: **0.960**

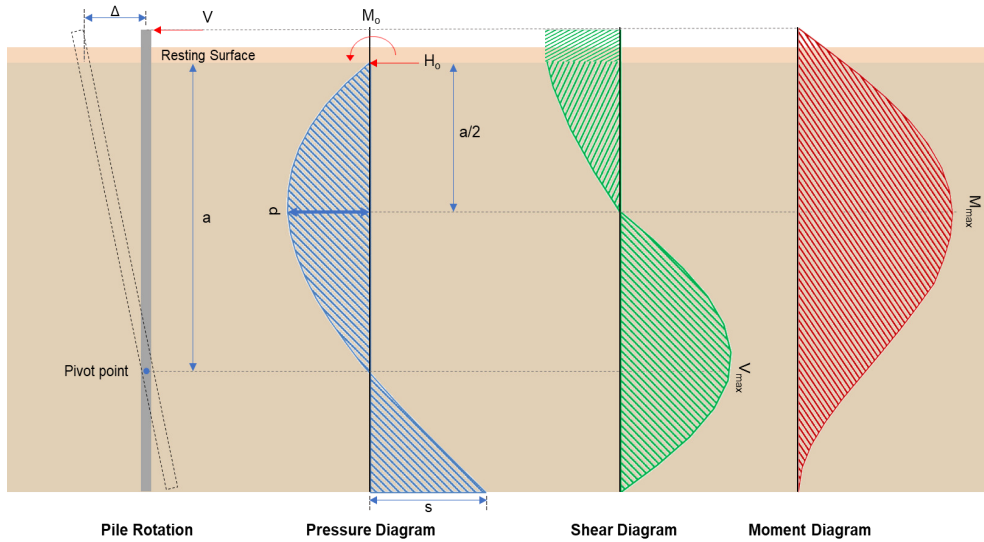

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.688 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.58726 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(39.802 \text{ kipft}) + ((-3.688 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.3379 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(6.3379 \text{ kipft/ft})}{(-0.58726 \text{ kip/ft})}$$

$$E = 10.792 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.3379 \text{ kipft/ft}) \times (6 \text{ ft})) + (3 \times (-0.58726 \text{ kip/ft}) \times (6 \text{ ft})^2)}{(6 \times (6.3379 \text{ kipft/ft})) + (4 \times (-0.58726 \text{ kip/ft}) \times (6 \text{ ft}))}$$

$$a = 4.1352 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.58726 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (10.792 \text{ ft})}{(6 \text{ ft})} + 3 \right) \times \left(\frac{(4.1352 \text{ ft})}{(6 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (10.792 \text{ ft})}{(6 \text{ ft})} + 2 \right) \times \left(\frac{(4.1352 \text{ ft})}{(6 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = -0.0069 \text{ kip}$$

	$V_{max} = 9.0203 \text{ kip}$ M_{max} - Max bending moment located at depth a/2, $M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right] \right]$ $M_{max} = ((-0.58726 \text{ kip/ft}) \times (48 \text{ in}) \times (6 \text{ ft})) \times \left[\left(\frac{(10.792 \text{ ft})}{(6 \text{ ft})} + \frac{(4.1352 \text{ ft})}{2 \times (6 \text{ ft})} \right) - \left[\left(\frac{4 \times (10.792 \text{ ft})}{(6 \text{ ft})} + 3 \right) \times \left(\frac{(4.1352 \text{ ft})}{2 \times (6 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (10.792 \text{ ft})}{(6 \text{ ft})} + 2 \right) \times \left(\frac{(4.1352 \text{ ft})}{2 \times (6 \text{ ft})} \right)^4 \right] \right] \right]$ $M_{max} = 25.799 \text{ kipft}$	
	Shear force and Bending moment (z-direction, LRFD) H_o - Lateral force per length of pile, $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(0 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = 0 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.002 \text{ kipft}) + ((0 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.00031847 \text{ kipft/ft}$ a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.00031847 \text{ kipft/ft}) \times (6 \text{ ft})) + (3 \times (0 \text{ kip/ft}) \times (6 \text{ ft})^2)}{(6 \times (0.00031847 \text{ kipft/ft})) + (4 \times (0 \text{ kip/ft}) \times (6 \text{ ft}))}$ $a = 4 \text{ ft}$ V_{max} - Max shear force located at depth a, $V_{max} = 12 \left(\frac{M_o b}{L_e} \right) \left(\frac{a}{L_e} - 1 \right) \left(\frac{a}{L_e} \right)^2$ $V_{max} = 12 \times \left(\frac{(0.00031847 \text{ kipft/ft}) \times (48 \text{ in})}{(6 \text{ ft})} \right) \times \left(\frac{(4 \text{ ft})}{(6 \text{ ft})} - 1 \right) \times \left(\frac{(4 \text{ ft})}{(6 \text{ ft})} \right)^2$ $V_{max} = 0.00037745 \text{ kip}$ M_{max} - Max bending moment at depth a/2, $M_{max} = (M_o b) \left[1 - \left(4 \frac{a}{2 L_e} \right)^3 + \left(3 \frac{a}{2 L_e} \right)^4 \right]$ $M_{max} = ((0.00031847 \text{ kipft/ft}) \times (48 \text{ in})) \times \left[1 - \left(4 \times \frac{(4 \text{ ft})}{2 \times (6 \text{ ft})} \right)^3 + \left(3 \times \frac{(4 \text{ ft})}{2 \times (6 \text{ ft})} \right)^4 \right]$ $M_{max} = 0.0011323 \text{ kipft}$	
Table 22.4.2.1 22.4.2.2, 10.6.1.1	Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.8$ - Alpha factor for axial strength, $A_g = 2304 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required}$	

$$A_{st,required} = Min \left[\frac{\frac{f'_c}{\phi} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = Min \left[\frac{\left(\frac{(16.309 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2)) \right)}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.054 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = Max[A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = Max[(-84.054 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$Ratio = \frac{A_{min}}{A_{st}}$$

$$Ratio = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$Ratio = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3 s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = Max[1.5, (1.5 d_{bar})]$$

$$s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is $\leq$ No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = Min[(16 d_{bar}), (48 s_{ties}), Min(D, b)]$$

$$s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: **#3(0.375 in) - 10 in**

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2 ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

	$Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(16.309 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0060964$	Status: PASS Ratio: 0.010
	Shear Strength (ACI 318-19, LRFD) Parameters: 22.5.2.2 $b_w = 48 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ 22.5.5.1.3 λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ 22.5.5.1.1 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$ 22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 16.309 \text{ kip} \rightarrow 16309 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(16309 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 120.66 \text{ kip}$ 22.5.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = MIN [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = MIN [(296.21 \text{ kip}), (120.66 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 120.66 \text{ kip}$ 22.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$	

	$V_{s,a} = 737.28 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ 22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ 22.5.1.1 ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((120.66 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 111.51 \text{ kip}$ Considering x-direction: $V_{max} = 9.0263 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(9.0263 \text{ kip})}{(111.51 \text{ kip})}$ $Ratio = 0.080946$	Status: PASS Ratio: 0.080
14.5.2.1b	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 f'_c S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$	

	Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = MIN[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = MIN[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ Considering x-direction: $M_{max} = 25.799 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $Ratio = \frac{M_{max}}{\phi M_n}$ $Ratio = \frac{(25.799 \text{ kipft})}{(249.6 \text{ kipft})}$ $Ratio = 0.10336$	Status: PASS Ratio: 0.100
	Considering z-direction: $M_{max} = 0.0011323 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity $Ratio = \frac{M_{max}}{\phi M_n}$ $Ratio = \frac{(0.0011323 \text{ kipft})}{(249.6 \text{ kipft})}$ $Ratio = 4.5366 \times 10^{-6}$	Status: PASS Ratio: 0.000