

Project Name: MTSOLAR_2BBAGIAEE10L9

Date: Thu Nov 13 2025

Location: 2601 Steel Creek Rd, Wisdom, MT 59761,

Number of Modules: 20


USA

Number of Poles: 2

Unique ID: 2P-17-6TOP-SD-24-L-4Hx5W-9IL0

Date Sold:

Dealer: _____

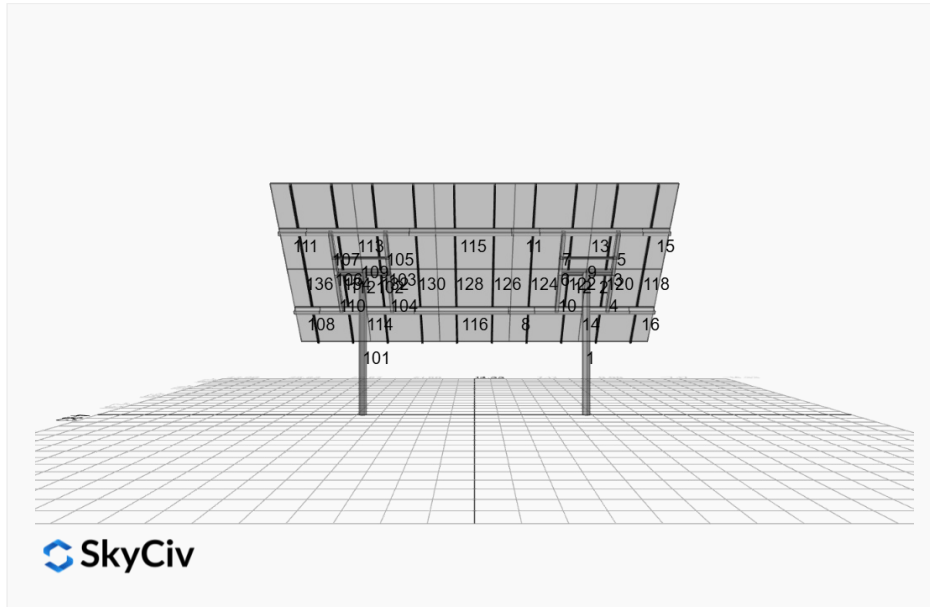

Array Dimensions N/S	15.03 ft
Array Dimensions E/W	28.67 ft
Winter Tilt Angle (Degrees)	50
Front Edge Clearance	5

MT Solar Bill of Materials (2P-17-6TOP-SD-24-L-4Hx5W-9IL0)

Part	Short Description	BOM Qty
MTS-PC-6	6IN Pole Cap Assembly	2
MTS-HF-SD	H-Frame Assembly-SD	2
MTS-SD-Wing-24	24IN SD Wing	4
MTS-SD-Splice-57	57IN SD Splice	4
MTS-CLAMP-HOOK-4PK	Hook Clamp	5

Rail Bill of Materials

Part	Qty
Rails (180in Long)	10x
Rail Attachment	20x
Module Mid Clamp	30x
Module End Clamp	20x
Ground Lug	5x

Site Details:



Site Address: 2601 Steel Creek Rd, Wisdom, MT 59761, USA

Array Specifications

Duty Classification:	SD
Module Width:	44.60 in
Module Length:	67.80 in
Number of Rows:	4
Number of Columns:	5
Total Number of Modules:	20
Winter Tilt Angle:	50
Front Edge Clearance:	5
Total Array Height at Tilt:	16.52 ft
Total Frame Length:	28.50 ft
Module Info/Notes:	Silfab QD 440
Array Dimensions N/S:	15.03 ft
Array Dimensions E/W:	28.67 ft
Rail Length:	180.40 in
Rail Spacing:	2.87 ft

Support Specifications

Pole Size:	6in Pipe Sch 40
Pole Length above Grade:	10.76 ft
Number of Poles:	2
Pole Spacing:	17 ft

Foundation Specifications

Foundation Type:	rectangular
Foundation Dimensions:	48x48 in
Foundation Depth (below grade):	6.3 ft
Foundation Volume:	100.00 ft ³

Site Info

Risk Category:	I
Exposure:	C
Soil Classification:	sand
Site Location:	2601 Steel Creek Rd, Wisdom, MT 59761, USA
Wind Speed:	120 mph

Snow Load:

40 psf

Design Disclaimer



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.




AutoDesigner Input

```
{ "product_type": "Beam", "designer_name": "Ryan", "designer_email": "ryan@mtbrightside.com", "designer_phone": "", "project_id": "MTSOLAR_2BBAGIAEE10L9", "site_address": "2601 Steel Creek Rd, Wisdom, MT 59761, USA", "module_info": "Silfab QD 440", "module_width": 44.6, "module_length": 67.8, "number_rows": 4, "number_columns": 5, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": "15", "tilt_angle": 50, "ground_clearance": 5, "risk_category": "I", "exposure_category": "C", "frame_duty_override": "auto", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "48_Square", "foundation_type": "Square", "foundation_size": 48, "check_rails": false, "wind_speed_override": 120, "snow_load_override": 40, "direct_snow_load": false, "add_angle_brace": false }
```



Design Notes:



- Deflection checks are set to L/1 due to manufacturer structural design intent
- Foundation Soil Parameters used in this Autodesigned are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7-16
- Steel frame design checks are based on AISC 360-16 LRFD
- Design / analysis of fixings and connections are not carried out by this module.
- Impacts of eccentrically applied, partial or pattern loading are not considered by this module.
- Foundation Design and Sizing is approximate only

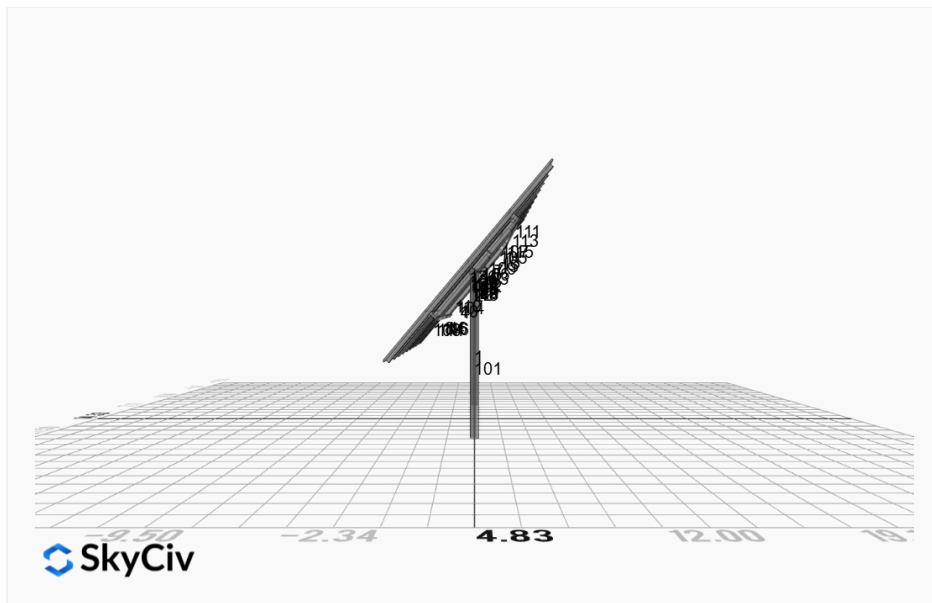
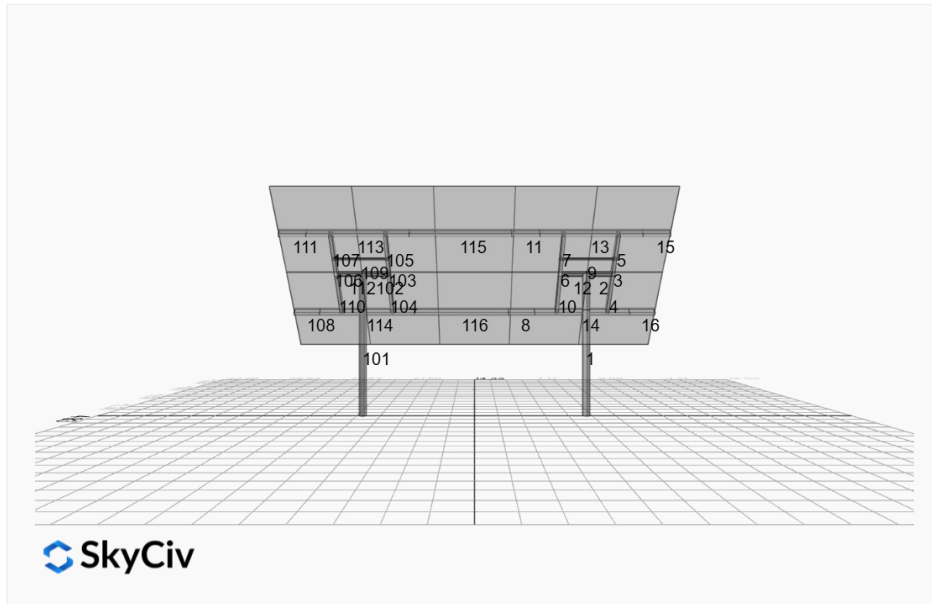


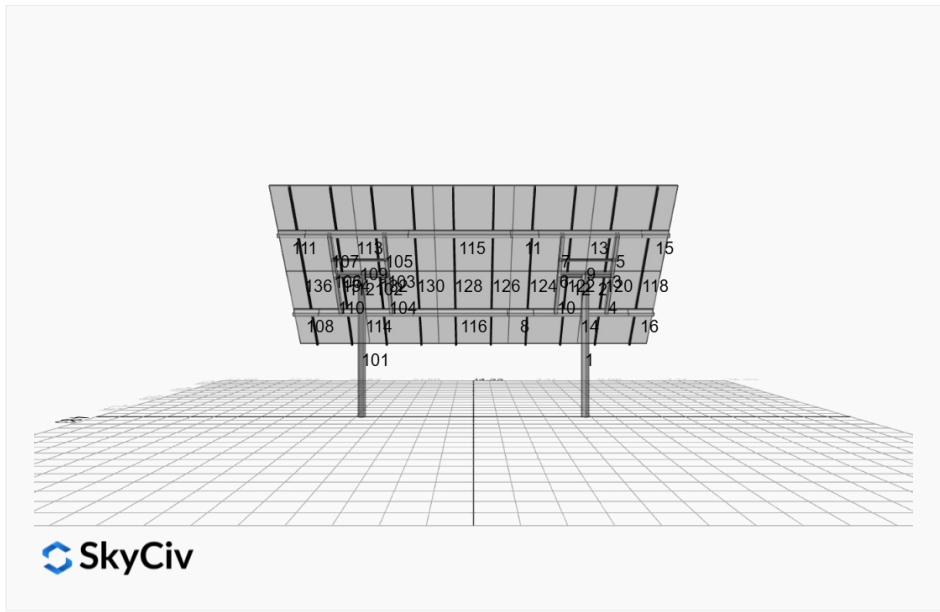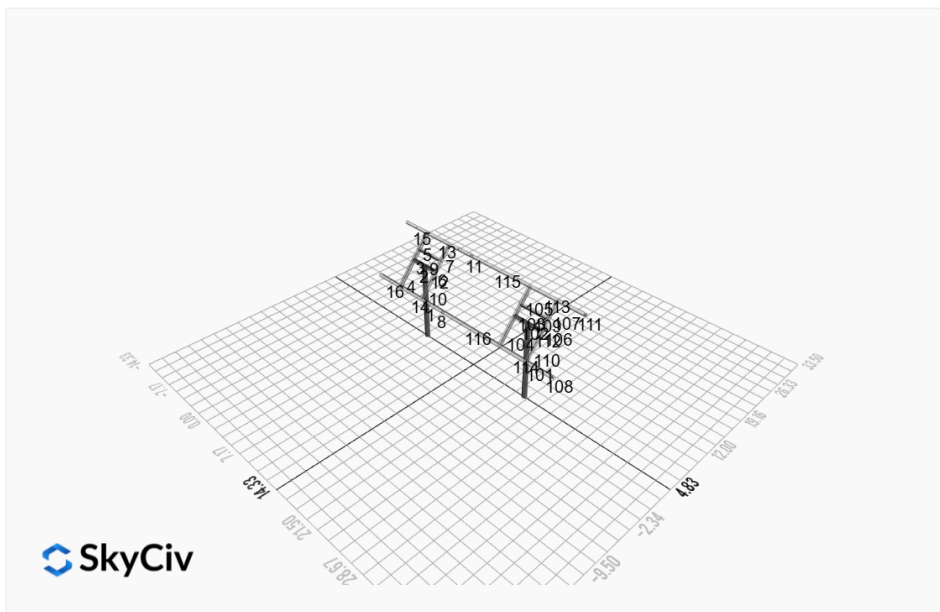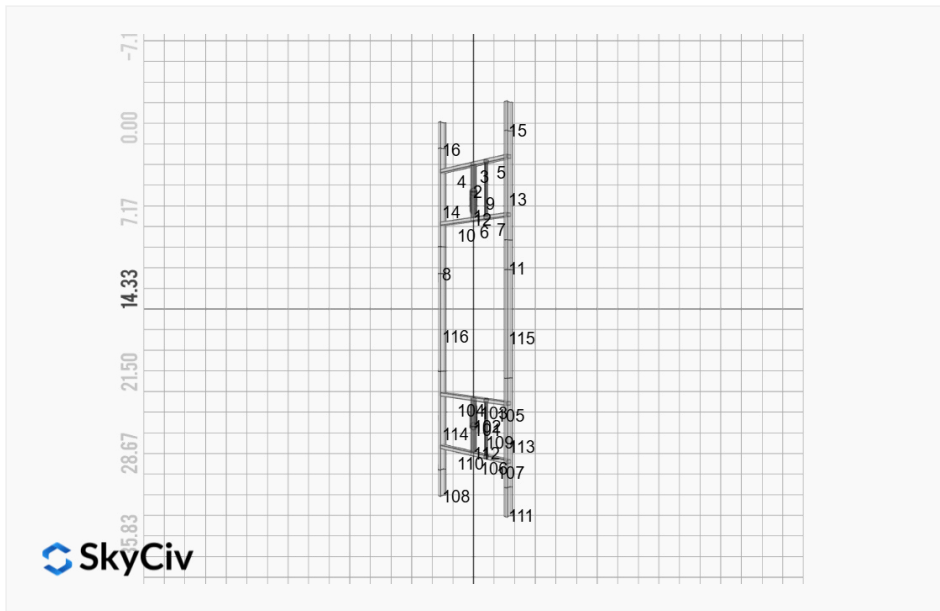

FEM Results (Envelope Worst Case)

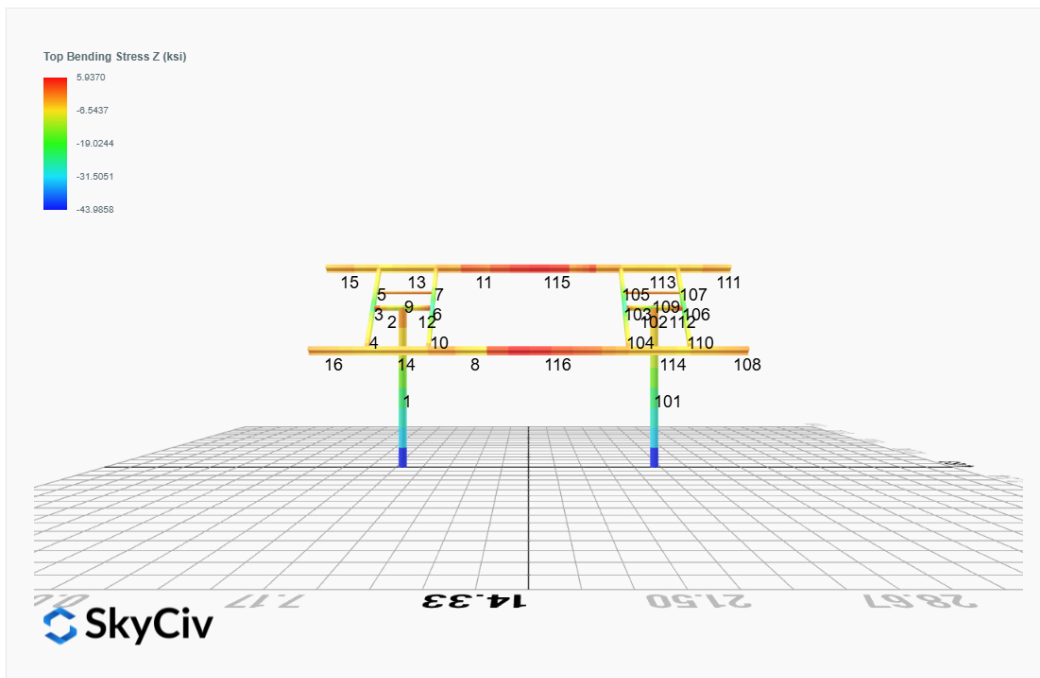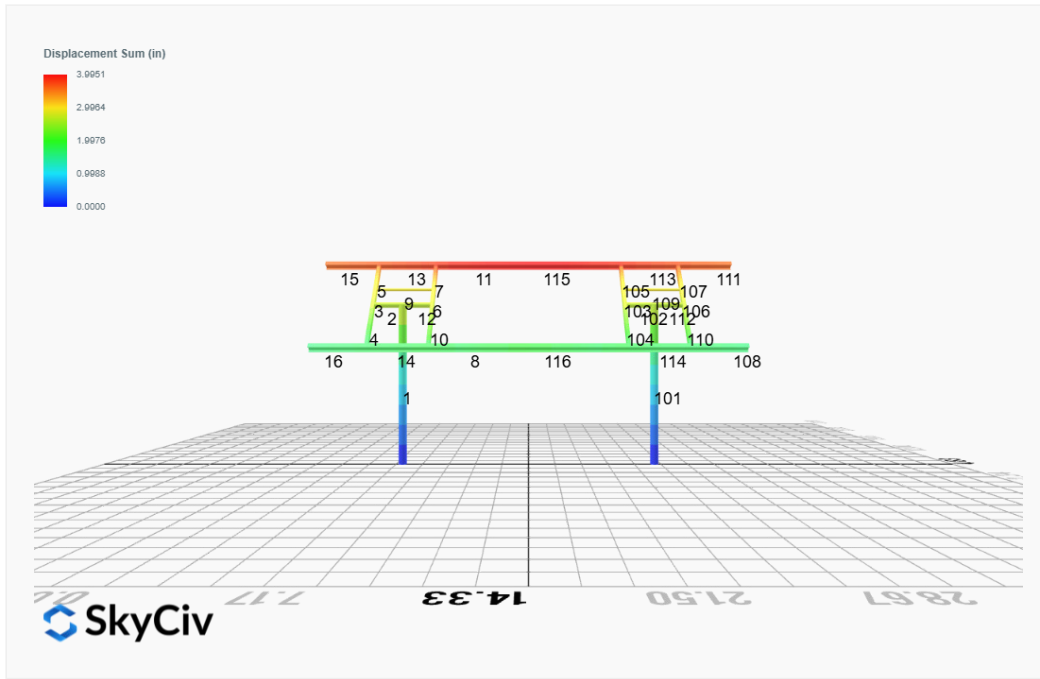

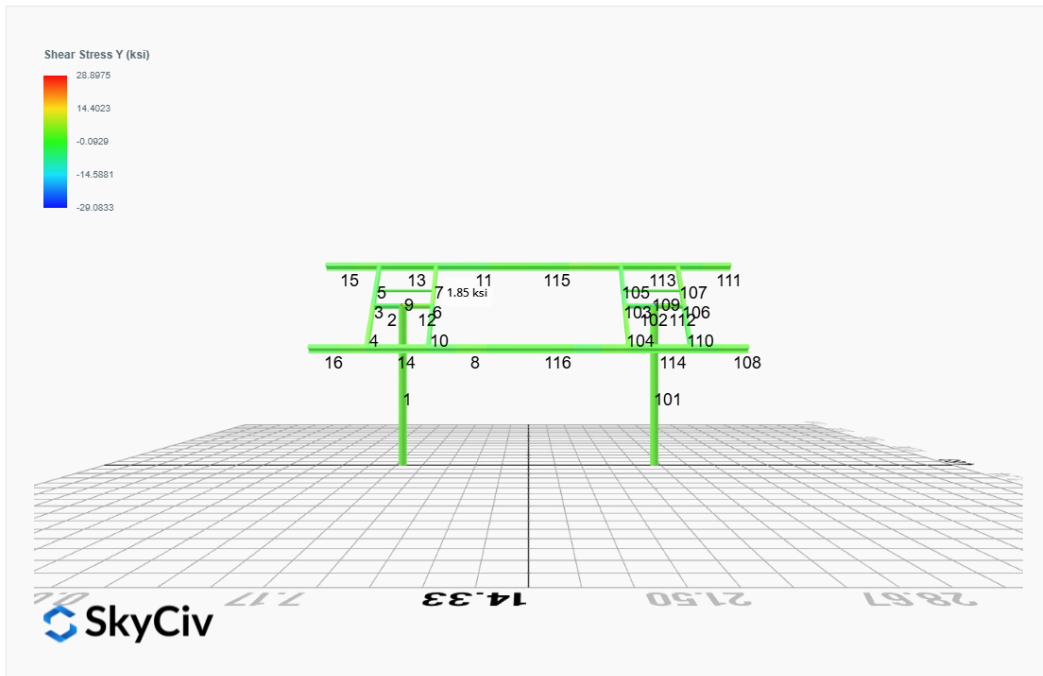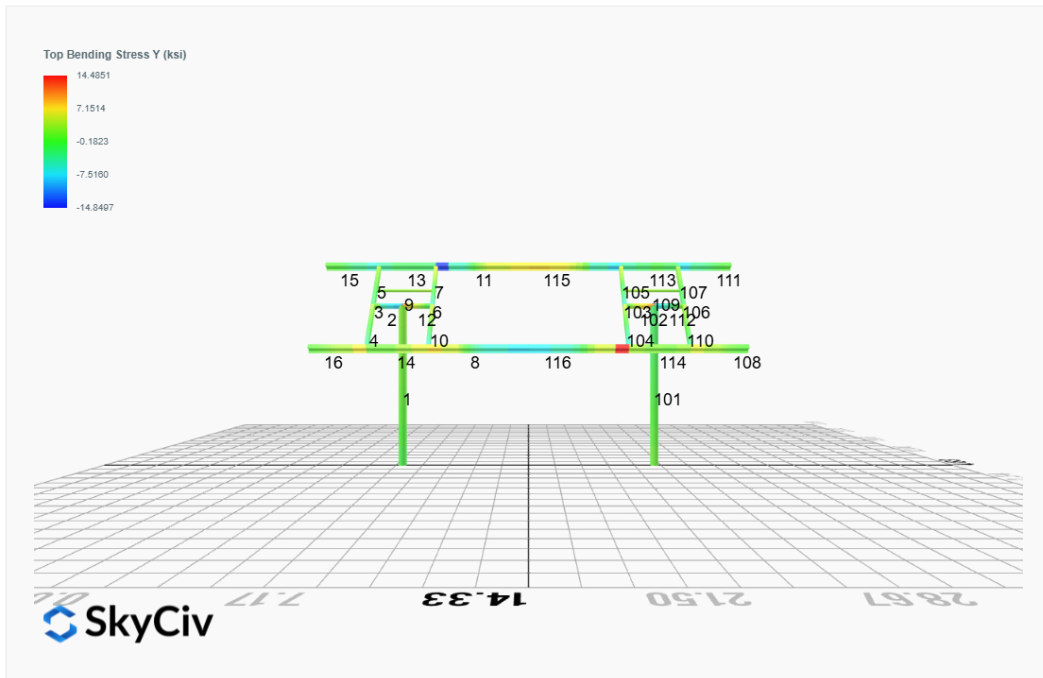

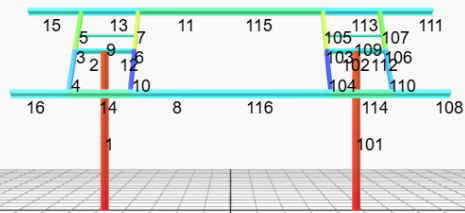

28.87 21.50 14.33 7.17 0.00

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

LRFD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. 1.4D	0.0000	2.5458	0.0507	0.1698	-0.0429	0.0288
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	0.0000	2.7914	0.0606	0.2026	-0.0518	0.0261
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	0.0000	2.1821	0.0434	0.1456	-0.0366	0.0242
ULS: 3. 1.2D + 1.6(S or Lr or R) + L	0.0001	4.1317	0.0989	0.3287	-0.0882	0.0323
ULS: 5. 1.2D + E + L + 0.2S	0.0000	2.4258	0.0503	0.1684	-0.0426	0.0249
ULS: 7. 0.9D + 1.0E	0.0000	1.6366	0.0326	0.1093	-0.0272	0.0177
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0438	6.1845	0.1982	0.6242	-0.5684	44.8064
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	0.0000	2.7914	0.0606	0.2026	-0.0518	0.0261
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0439	-0.6018	-0.0803	-0.2641	0.4458	-43.3242
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	0.0000	2.7914	0.0606	0.2026	-0.0518	0.0261
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0439	5.5753	0.1802	0.5658	-0.5485	44.6687
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	0.0000	2.1821	0.0434	0.1456	-0.0366	0.0242
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0439	-1.2111	-0.0966	-0.3195	0.4559	-43.1980
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	0.0000	2.1821	0.0434	0.1456	-0.0366	0.0242
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0218	5.8283	0.1697	0.5488	-0.3516	22.3921
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	0.0001	4.1317	0.0989	0.3287	-0.0882	0.0323
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0220	2.4351	0.0273	0.0974	0.1706	-21.9656
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	0.0001	4.1317	0.0989	0.3287	-0.0882	0.0323
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0219	3.8787	0.1123	0.3617	-0.2903	22.1683
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	0.0000	2.1821	0.0434	0.1456	-0.0366	0.0242
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0220	0.4855	-0.0262	-0.0817	0.2123	-21.7642
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	0.0000	2.1821	0.0434	0.1456	-0.0366	0.0242
ULS: 6. 0.9D + 1.0W_Wind downforce Case A only	-4.0439	5.0298	0.1689	0.5292	-0.5366	44.5515
ULS: 6. 0.9D + 1.0W_Wind downforce Case B only	0.0000	1.6366	0.0326	0.1093	-0.0272	0.0177
ULS: 6. 0.9D + 1.0W_Wind uplift Case A only	4.0439	-1.7566	-0.1070	-0.3554	0.4625	-43.1002
ULS: 6. 0.9D + 1.0W_Wind uplift Case B only	0.0000	1.6366	0.0326	0.1093	-0.0272	0.0177

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 2. D + L	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 3. D + (S or Lr or R)	0.0001	3.0369	0.0705	0.2354	-0.0609	0.0236
ULS: 3. D + (S or Lr or R)	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	2.7323	0.0619	0.2069	-0.0530	0.0224
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 5b. D + 0.7E	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	2.7323	0.0619	0.2069	-0.0530	0.0224
ULS: 8. 0.6D + 0.7E	0.0000	1.0911	0.0217	0.0730	-0.0181	0.0115
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.4263	3.8544	0.1185	0.3791	-0.3343	26.5917
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.4264	-0.2175	-0.0473	-0.1524	0.2666	-26.0414
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8197	4.2592	0.1243	0.4026	-0.2836	19.9935
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	2.7323	0.0619	0.2069	-0.0530	0.0224
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8198	1.2053	-0.0012	0.0020	0.1737	-19.6591
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	2.7323	0.0619	0.2069	-0.0530	0.0224

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8197	3.3454	0.0980	0.3163	-0.2577	19.9008
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8198	0.2915	-0.0263	-0.0824	0.1931	-19.5739
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	1.8184	0.0362	0.1214	-0.0303	0.0198
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.4263	3.1270	0.1037	0.3305	-0.3202	26.4961
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0000	1.0911	0.0217	0.0730	-0.0181	0.0115
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.4264	-0.9449	-0.0615	-0.2006	0.2769	-25.9656
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0000	1.0911	0.0217	0.0730	-0.0181	0.0115

Worst Case Reactions (LRFD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	6.1845
Shear X	-4.0439
Shear Z	0.1982
Moment X	0.6242
Moment Y (Twist)	0.5684
Moment Z	44.8064

Worst Case Reactions (ASD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	4.2592
Shear X	-2.4264
Shear Z	0.1243
Moment X	0.4026
Moment Y (Twist)	0.3343
Moment Z	26.5917

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

LRFD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. 1.4D	-0.0000	2.5458	-0.0507	-0.1699	0.0436	0.0289
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	-0.0000	2.7914	-0.0606	-0.2027	0.0526	0.0262
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	-0.0000	2.1821	-0.0434	-0.1457	0.0371	0.0244
ULS: 3. 1.2D + 1.6(S or Lr or R) + L	-0.0001	4.1316	-0.0989	-0.3290	0.0897	0.0317
ULS: 5. 1.2D + E + L + 0.2S	-0.0000	2.4258	-0.0503	-0.1685	0.0432	0.0251
ULS: 7. 0.9D + 1.0E	-0.0000	1.6366	-0.0326	-0.1094	0.0276	0.0179
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0442	6.1848	-0.1982	-0.6221	0.5716	44.8060
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	-0.0000	2.7914	-0.0606	-0.2027	0.0526	0.0262
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0441	-0.6021	0.0803	0.2622	-0.4470	-43.3231
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	-0.0000	2.7914	-0.0606	-0.2027	0.0526	0.0262
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0442	5.5756	-0.1802	-0.5637	0.5511	44.6691
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	-0.0000	2.1821	-0.0434	-0.1457	0.0371	0.0244
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0441	-1.2113	0.0966	0.3177	-0.4572	-43.1975
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	-0.0000	2.1821	-0.0434	-0.1457	0.0371	0.0244
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0222	5.8284	-0.1697	-0.5481	0.3545	22.3902
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	-0.0001	4.1316	-0.0989	-0.3290	0.0897	0.0317
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0220	2.4349	-0.0273	-0.0985	-0.1704	-21.9648
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	-0.0001	4.1316	-0.0989	-0.3290	0.0897	0.0317
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0221	3.8788	-0.1123	-0.3608	0.2918	22.1684
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	-0.0000	2.1821	-0.0434	-0.1457	0.0371	0.0244
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0220	0.4854	0.0262	0.0807	-0.2127	-21.7638
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	-0.0000	2.1821	-0.0434	-0.1457	0.0371	0.0244
ULS: 6. 0.9D + 1.0W_Wind downforce Case A only	-4.0441	5.0300	-0.1689	-0.5270	0.5389	44.5523
ULS: 6. 0.9D + 1.0W_Wind downforce Case B only	-0.0000	1.6366	-0.0326	-0.1094	0.0276	0.0179
ULS: 6. 0.9D + 1.0W_Wind uplift Case A only	4.0441	-1.7568	0.1070	0.3536	-0.4638	-43.1002
ULS: 6. 0.9D + 1.0W_Wind uplift Case B only	-0.0000	1.6366	-0.0326	-0.1094	0.0276	0.0179

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 2. D + L	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 3. D + (S or Lr or R)	-0.0001	3.0369	-0.0705	-0.2356	0.0619	0.0235
ULS: 3. D + (S or Lr or R)	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	2.7323	-0.0619	-0.2070	0.0539	0.0225
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 5b. D + 0.7E	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0000	2.7323	-0.0619	-0.2070	0.0539	0.0225
ULS: 8. 0.6D + 0.7E	-0.0000	1.0911	-0.0217	-0.0730	0.0183	0.0117
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.4265	3.8545	-0.1185	-0.3779	0.3358	26.5920
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.4264	-0.2176	0.0473	0.1512	-0.2672	-26.0412
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8199	4.2593	-0.1243	-0.4019	0.2855	19.9931
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0000	2.7323	-0.0619	-0.2070	0.0539	0.0225
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8198	1.2052	0.0012	-0.0029	-0.1738	-19.6585
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0000	2.7323	-0.0619	-0.2070	0.0539	0.0225
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8199	3.3455	-0.0980	-0.3154	0.2589	19.9010
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8198	0.2914	0.0263	0.0816	-0.1934	-19.5736
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0000	1.8184	-0.0362	-0.1215	0.0308	0.0200
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.4265	3.1271	-0.1037	-0.3293	0.3214	26.4968
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0000	1.0911	-0.0217	-0.0730	0.0183	0.0117
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.4264	-0.9450	0.0615	0.1995	-0.2776	-25.9658
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0000	1.0911	-0.0217	-0.0730	0.0183	0.0117

Worst Case Reactions (LRFD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	6.1848
Shear X	-4.0442
Shear Z	-0.1982
Moment X	-0.6221
Moment Y (Twist)	0.5716
Moment Z	44.8060

Worst Case Reactions (ASD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	4.2593
Shear X	-2.4265
Shear Z	-0.1243
Moment X	-0.4019
Moment Y (Twist)	0.3358
Moment Z	26.5920

Project Details

Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States

 User Name: sales@mtsolar.us
 Project Name: MTSOLAR_2BBAGIAEE10L9
 Unit System: imperial




Design Input Information


Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65
2	29000	46	62
4	29000	50	62


Section Dimensions



ID	Name	d (in)	t_w (in)					
2	2in Pipe Sch 80	2.38	0.22					
5	4in Pipe Sch 80	4.50	0.34					
8	6in Pipe Sch 80	6.63	0.43					



ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)		
16	HSS5x3x3/16	5.00	3.00	0.17	0.17	0.17		



ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
19	W8x10	7.89	0.17	3.94	3.94	0.20	0.20	0.30

105	116.10	114.23	15.79	11.10	42.08	23.28
106	116.10	115.41	15.79	11.10	42.08	23.28
107	116.10	114.23	15.79	11.10	42.08	23.28
108	133.20	102.39	32.87	6.12	40.24	43.62
109	61.16	54.71	3.51	3.51	18.35	18.35
110	116.10	111.33	15.79	11.10	42.08	23.28
111	133.20	102.39	32.87	6.12	40.24	43.62
112	182.47	179.25	20.19	20.19	54.74	54.74
113	133.20	85.85	29.14	6.12	40.24	43.62
114	133.20	85.85	28.90	6.12	40.24	43.62
115	133.20	86.20	24.74	6.12	40.24	43.62
116	133.20	58.22	24.74	6.12	40.24	43.62

Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.020	0.760	0.026	0.039	0.002	0.781	#13	0.191	Not Required	Pass
2	0.001	0.195	0.176	0.047	0.036	0.371	#13	0.081	Not Required	Pass
3	0.005	0.370	0.030	0.037	0.007	0.388	#13	0.045	Not Required	Pass
4	0.005	0.369	0.048	0.037	0.012	0.408	#13	0.080	Not Required	Pass
5	0.005	0.229	0.040	0.037	0.009	0.233	#13	0.074	Not Required	Pass
6	0.007	0.430	0.066	0.044	0.019	0.476	#13	0.045	Not Required	Pass
7	0.007	0.266	0.088	0.043	0.021	0.280	#13	0.074	Not Required	Pass
8	0.002	0.093	0.063	0.028	0.010	0.132	#13	0.095	Not Required	Pass
9	0.001	0.030	0.047	0.002	0.002	0.074	#13	0.204	Not Required	Pass
10	0.008	0.430	0.087	0.043	0.020	0.459	#13	0.080	Not Required	Pass
11	0.002	0.092	0.062	0.028	0.010	0.130	#13	0.095	Not Required	Pass
12	0.000	0.269	0.203	0.060	0.040	0.472	#13	0.053	Not Required	Pass
13	0.003	0.070	0.209	0.038	0.014	0.237	#21	0.286	Not Required	Pass
14	0.003	0.072	0.207	0.038	0.014	0.234	#21	0.190	Not Required	Pass
15	0.000	0.014	0.031	0.012	0.004	0.041	#21	Not Required	Not Required	Pass
16	0.000	0.014	0.031	0.012	0.004	0.041	#21	Not Required	Not Required	Pass
101	0.020	0.760	0.026	0.039	0.002	0.781	#13	0.191	Not Required	Pass
102	0.000	0.269	0.203	0.060	0.040	0.472	#13	0.053	Not Required	Pass
103	0.007	0.431	0.066	0.044	0.019	0.477	#13	0.045	Not Required	Pass
104	0.008	0.430	0.087	0.043	0.020	0.459	#13	0.080	Not Required	Pass
105	0.007	0.267	0.088	0.043	0.021	0.280	#13	0.074	Not Required	Pass
106	0.005	0.370	0.030	0.037	0.007	0.389	#13	0.045	Not Required	Pass
107	0.005	0.229	0.040	0.037	0.009	0.233	#13	0.074	Not Required	Pass
108	0.000	0.014	0.031	0.012	0.004	0.041	#21	Not Required	Not Required	Pass
109	0.001	0.030	0.047	0.002	0.002	0.074	#13	0.204	Not Required	Pass
110	0.005	0.369	0.048	0.037	0.012	0.408	#13	0.080	Not Required	Pass
111	0.000	0.014	0.031	0.012	0.004	0.041	#21	Not Required	Not Required	Pass
112	0.001	0.195	0.176	0.047	0.036	0.371	#13	0.081	Not Required	Pass
113	0.003	0.070	0.208	0.038	0.014	0.237	#21	0.190	Not Required	Pass
114	0.003	0.072	0.207	0.038	0.014	0.234	#21	0.286	Not Required	Pass
115	0.003	0.155	0.118	0.028	0.010	0.231	#21	0.346	Not Required	Pass
116	0.002	0.156	0.119	0.028	0.010	0.233	#21	0.532	Not Required	Pass

Definitions

Φ_t	Safety factor for tensile
Φ_c	Safety factor for compression
Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z , M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

IBC 2018 Pile Design



Input	Description
Region	American Standard
Concrete design code	American Concrete Institute (ACI 318:2019)

Cross-section

Input	Description	Value
Shape	Cross-sectional shape	Square
b	Section width	48 in
D	Section depth	48 in

Material Properties


Input	Description	Value
f'_{ck}	Concrete compressive strength	2.5 ksi
f_{yk}	Yield strength of steel	60 ksi
d_b	Rebar diameter	#5 (0.625) in
cover	Concrete cover	3 in

Soil Parameters (IBC 1806)

Input	Description	Value
Soil type	Sand, silty sand, clayey sand, silty gravel & clayey gravel	
q_a	Allowable bearing pressure	2000 psf
R	Allowable lateral pressure	150 psf/ft

Loading

Load	ASD	LRFD
P	4.259 kip	6.185 kip
V _x	-2.426 kip	-4.044 kip
V _z	-0.124 kip	-0.198 kip
M _x	-0.402 kip-ft	-0.622 kip-ft
M _z	26.59 kip-ft	44.81 kip-ft

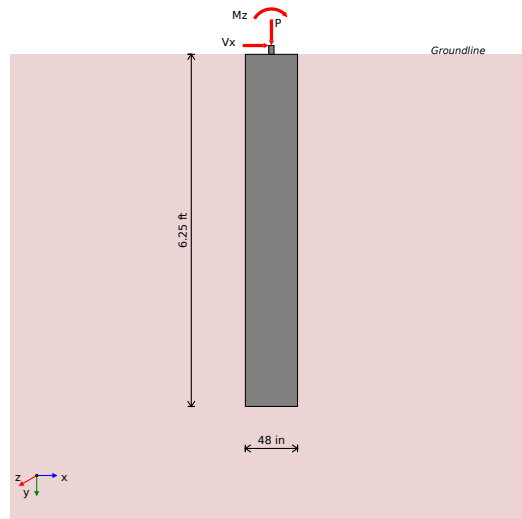

Required depth to resist lateral loads (ASD)

Allowable lateral pressure

$$R = 150 \text{ psf/ft}$$

Point of application of lateral load:

$$H = h_1 + h_2 + h_e = 0 + 0 + 0 = 0 \text{ ft}$$

Considering x-direction:

Lateral force per section length

$$H_o = \frac{V_x}{1.57 \times D} = \frac{-2.426}{1.57 \times 48} = -0.386 \frac{\text{kip}}{\text{ft}}$$

Moment per section length

$$M_o = \frac{M_z + (V_z \times H)}{1.57 \times D} = \frac{26.59 + (-2.426 \times 0)}{1.57 \times 48} = 4.234 \frac{\text{kip-ft}}{\text{ft}}$$

Required depth of embedment in earth:

$$L_e^3 - \left(9 \times \frac{H_o \times L_z}{R}\right) - \left(12 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$$L_{e,z} = 5.873 \text{ ft}$$

Considering z-direction:

Lateral force per section length

$$H_o = \frac{V_z}{1.57 \times b} = \frac{-0.124}{1.57 \times 48} = -0.02 \frac{\text{kip}}{\text{ft}}$$

Moment per section length

$$M_o = \frac{M_z + (V_z \times H)}{1.57 \times b} = \frac{-0.402 + (-0.124 \times 0)}{1.57 \times 48} = -0.064 \frac{\text{kip-ft}}{\text{ft}}$$

Required depth of embedment in earth:

$$L_e^3 - \left(9 \times \frac{H_o \times L_z}{R}\right) - \left(12 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$$L_{e,z} = -1.495 \text{ ft}$$

Minimum embedded depth

Depth of pile required

$$L_{e,req} = \text{MAX}[L_{e,z}, L_{e,z}] = \text{MAX}[5.873, -1.495] = 5.873 \text{ ft}$$

Actual embedded length

$$L_e = L - h_2 - h_e = 6.25 - 0 - 0 = 6.25 \text{ ft}$$

Utilisation

$$\text{Ratio} = \frac{L_{e,req}}{L_e} = \frac{5.873}{6.25} = 0.94$$

UTILITY: 0.94

REFERENCES

CALCULATIONS

RESULTS

End-bearing Capacity (ASD)

Allowable bearing pressure
Unit weight of concrete

$q_a = 2000 \text{ psf}$
 $w_c = 0.15 \text{ kip/ft}^3$

Cross-sectional area:

$$A = b \times D = 48 \times 48 = 16 \text{ ft}^2$$

End-bearing pressure:

$$q = \frac{P}{A} = \frac{4.259}{16} = 266.2 \text{ psf}$$

Utilisation

$$\text{Ratio} = \frac{q}{q_a} = \frac{266.2}{2000} = 0.133$$

UTILITY: 0.13

Lateral Soil Pressure (ASD)

Allowable lateral pressure

$R = 150 \text{ psf/ft}$

Length to least lateral dimension ratio:

$$\frac{L}{\text{MIN}[b, D]} = \frac{6.25}{\text{MIN}[4, 4]} = 1.563$$

L/D ratio ≤ 10 . This pile is classified as a short pile.

Considering x-direction:

Distance from resting surface to pivot point:

$$a = \frac{(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)}{R}$$

$$(6 \times M_o) + (4 \times H_o \times L_e)$$

$$a = \frac{(4 \times 4.234 \times 6.25) + (3 \times 0.386 \times 6.25^2)}{(6 \times 4.234) + (4 \times 0.386 \times 6.25)} = 4.31 \text{ ft}$$

Earth pressure against the pile at a distance a/2 from the resting surface:

$$p = \frac{0.75 \times [(4 \times M_o) + (3 \times H_o \times L_e)]^2}{L_e^2 \times [(3 \times M_o) + (2 \times H_o \times L_e)]}$$

$$p = \frac{0.75 \times [(4 \times 4.234) + (3 \times -0.386 \times 6.25)]^2}{6.25^2 \times [(3 \times 4.234) + (2 \times -0.386 \times 6.25)]} = 0.229 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of a/2:

$$p_a = R \times \frac{a}{2} = 0.15 \times \frac{4.31}{2} = 0.323 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of a/2

$$\text{Ratio} = \frac{p}{p_a} = \frac{0.229}{0.323} = 0.709$$

UTILITY: 0.71

Earth pressure against the pile at distance L_e:

$$s = \frac{6 \times [(2 \times M_o) + (H_o \times L_e)]}{L_e^2} = \frac{6 \times [(2 \times 4.234) + (-0.386 \times 6.25)]}{6.25^2} = 0.93 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of L_e:

$$p_s = R \times L_e = 0.15 \times 6.25 = 0.938 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of L_e

$$\text{Ratio} = \frac{s}{p_s} = \frac{0.93}{0.938} = 0.992$$

UTILITY: 0.99

Considering z-direction:

Distance from resting surface to pivot point:

$$a = \frac{(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)}{(6 \times M_o) + (4 \times H_o \times L_e)}$$

$$a = \frac{(4 \times 0.064 \times 6.25) + (3 \times 0.02 \times 6.25^2)}{(6 \times 0.064) + (4 \times 0.02 \times 6.25)} = 4.46 \text{ ft}$$

Earth pressure against the pile at a distance a/2 from the resting surface:

$$p = \frac{0.75 \times [(4 \times M_o) + (3 \times H_o \times L_e)]^2}{L_e^2 \times [(3 \times M_o) + (2 \times H_o \times L_e)]}$$

$$p = \frac{0.75 \times [(4 \times -0.064) + (3 \times -0.02 \times 6.25)]^2}{6.25^2 \times [(3 \times -0.064) + (2 \times -0.02 \times 6.25)]} = -0.017 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of a/2:

$$p_a = R \times \frac{a}{2} = 0.15 \times \frac{4.46}{2} = 0.334 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of a/2

$$\text{Ratio} = \frac{p}{p_a} = \frac{-0.017}{0.334} = -0.051$$

UTILITY: 0.05

Earth pressure against the pile at distance L_e:

$$s = \frac{6 \times [(2 \times M_o) + (H_o \times L_e)]}{L_e^2} = \frac{6 \times [(2 \times -0.064) + (-0.02 \times 6.25)]}{6.25^2} = -0.039 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of L_e:

$$p_s = R \times L_e = 0.15 \times 6.25 = 0.938 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of L_e

$$\text{Ratio} = \frac{s}{p_s} = \frac{-0.039}{0.938} = -0.041$$

UTILITY: 0.04

REFERENCES

CALCULATIONS

RESULTS

Shear force and bending moment (LRFD)

Considering x-direction:

Lateral force per section length

$$H_o = \frac{V_z}{1.57 \times D} = \frac{-4.044}{1.57 \times 48} = -0.644 \frac{\text{kip}}{\text{ft}}$$

Moment per section length

$$M_o = \frac{M_z + (V_z \times H)}{1.57 \times D} = \frac{44.81 + (-4.044 \times 0)}{1.57 \times 48} = 7.135 \frac{\text{kip-ft}}{\text{ft}}$$

Distance from resting surface to pivot point:

$$a = \frac{(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)}{(6 \times M_o) + (4 \times H_o \times L_e)}$$

$$a = \frac{(4 \times 7.135 \times 6.25) + (3 \times 0.644 \times 6.25^2)}{(6 \times 7.135) + (4 \times 0.644 \times 6.25)} = 4.309 \text{ ft}$$

Max shear force located at depth a:

$$E = \frac{M_o}{H_o} = \frac{7.135}{-0.644} = 11.08 \text{ ft}$$

$$V_{max,x} = (H_o \times D) \times \left[1 - \left[3 \times \left(\frac{4 \times E}{L_e} + 3 \right) \times \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \times \left(\frac{3 \times E}{L_e} + 2 \right) \times \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max,x} = (-0.644 \times 48) \times \left[1 - \left[3 \times \left(\frac{4 \times 11.08}{6.25} + 3 \right) \times \left(\frac{4.309}{6.25} \right)^2 \right] + \left[4 \times \left(\frac{3 \times 11.08}{6.25} + 2 \right) \times \left(\frac{4.309}{6.25} \right)^3 \right] \right]$$

$$V_{max,x} = 9.779 \text{ kip}$$

Max bending moment located at a depth of a/2:

$$M_{max,x} = (H_o \times D \times L_e) \times \left[\left(\frac{E}{L_e} + \frac{a}{2 \times L_e} \right) - \left[\left(\frac{4 \times E}{L_e} + 3 \right) \times \left(\frac{a}{2 \times L_e} \right)^3 \right] + \left[\left(\frac{3 \times E}{L_e} + 2 \right) \times \left(\frac{a}{2 \times L_e} \right)^4 \right] \right]$$

$$M_{max,x} = (-0.644 \times 48 \times 6.25) \times \left[\left(\frac{11.08}{6.25} + \frac{4.309}{2 \times 6.25} \right) - \left[\left(\frac{4 \times 11.08}{6.25} + 3 \right) \times \left(\frac{4.309}{2 \times 6.25} \right)^3 \right] + \left[\left(\frac{3 \times 11.08}{6.25} + 2 \right) \times \left(\frac{4.309}{2 \times 6.25} \right)^4 \right] \right]$$

$$M_{max,x} = 29.1 \text{ kip-ft}$$

Considering z-direction:

Lateral force per section length

$$H_o = \frac{V_z}{1.57 \times b} = \frac{-0.198}{1.57 \times 48} = -0.032 \frac{\text{kip}}{\text{ft}}$$

Moment per section length

$$M_o = \frac{M_z + (V_z \times H)}{1.57 \times b} = \frac{-0.622 + (-0.198 \times 0)}{1.57 \times 48} = -0.099 \frac{\text{kip-ft}}{\text{ft}}$$

Distance from resting surface to pivot point:

$$a = \frac{(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)}{(6 \times M_o) + (4 \times H_o \times L_e)}$$

$$a = \frac{(4 \times 0.099 \times 6.25) + (3 \times 0.032 \times 6.25^2)}{(6 \times 0.099) + (4 \times 0.032 \times 6.25)} = 4.464 \text{ ft}$$

Max shear force located at depth a:

$$E = \frac{M_o}{H_o} = \frac{-0.099}{-0.032} = 3.139 \text{ ft}$$

$$V_{max,z} = (H_o \times b) \times \left[1 - \left[3 \times \left(\frac{4 \times E}{L_e} + 3 \right) \times \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \times \left(\frac{3 \times E}{L_e} + 2 \right) \times \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max,z} = (-0.032 \times 48) \times [1 - [3 \times \left(\frac{4 \times 3.139}{6.25} + 3\right) \times \left(\frac{4.464}{6.25}\right)^3] + [4 \times \left(\frac{3 \times 3.139}{6.25} + 2\right) \times \left(\frac{4.464}{6.25}\right)^2]$$


$$V_{max,z} = 0.196 \text{ kip}$$

Max bending moment located at a depth of a/2:

$$M_{max,z} = (H_o \times b \times L_e) \times \left[\left(\frac{E}{L_e} + \frac{a}{2 \times L_e} \right) - \left[\left(\frac{4 \times E}{L_e} + 3 \right) \times \left(\frac{a}{2 \times L_e} \right)^3 \right] + \left[\left(\frac{3 \times E}{L_e} + 2 \right) \times \left(\frac{a}{2 \times L_e} \right)^4 \right] \right]$$

$$M_{max,z} = (-0.032 \times 48 \times 6.25) \times \left[\left(\frac{3.139}{6.25} + \frac{4.464}{2 \times 6.25} \right) - \left[\left(\frac{4 \times 3.139}{6.25} + 3 \right) \times \left(\frac{4.464}{2 \times 6.25} \right)^3 \right] + \left[\left(\frac{3 \times 3.139}{6.25} + 2 \right) \times \left(\frac{4.464}{2 \times 6.25} \right)^4 \right] \right]$$

$$M_{max,z} = 0.543 \text{ kip-ft}$$

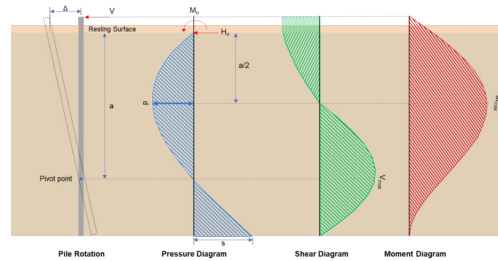

Minimum Reinforcement Check (LRFD)

Gross area of concrete:

$$A_g = b \times D = 48 \times 48 = 2304 \text{ in}^2$$

Main Reinforcement

22.4.2.2 Required reinforcement:

$$A_{st,req} = \frac{P - (0.85 \times f'_{ck} \times A_g)}{f_{yk} - (0.85 \times f'_{ck})} = \frac{6.185 - (0.85 \times 2.5 \times 2304)}{60 - (0.85 \times 2.5)} = -84.49 \text{ in}^2$$

10.6.1.1 Maximum reinforcement:

$$A_{st,max} = 0.08 \times A_g = 0.08 \times 2304 = 184.3 \text{ in}^2$$

7.6.1.1 Minimum reinforcement:

$$A_{st,min} = 0.0018 \times A_g = 0.0018 \times 2304 = 4.147 \text{ in}^2$$

Governing minimum reinforcement area:

$$(0.0018 \times A_g) \leq A_{st,req} \leq (0.08 \times A_g)$$

$$A_{min} = 4.147 \text{ in}^2$$

Minimum number of reinforcements:

$$A_{bar} = 0.307 \text{ in}^2$$

$$n_{min} = \frac{A_{min}}{A_{bar}} = \frac{4.147}{0.307} = 14$$

25.2.3 Minimum spacing:

$$s_{rebar} = \text{MAX}[1.5, 1.5 \times d_b] = \text{MAX}[1.5, (1.5 \times 0.625)] = 1.5 \text{ in}$$

Use: $n = 16$ pcs at 1.5 in minimum spacing

Total reinforcement area:

$$A_{st} = 16 \times 0.307 = 4.909 \text{ in}^2$$

Shear Reinforcement

25.7.2.2 For main reinforcement ≤ 1.41 in: Use #3(0.375 in)

Maximum spacing of shear Reinforcements:

$$s = \text{MIN}[16 \times d_b, 48 \times d_{b,tie}, \text{MIN}(b, D)] = \text{MIN}[(16 \times 0.625), (48 \times 0.375), \text{MIN}(48, 48)] = 10 \text{ in}$$

Detailing Summary

Main reinforcement

#5 (0.625 in) - 16pcs at 1.5 in min. spacing

Axial Compression Strength (LRFD)

22.4.2.2 Allowable axial compressive strength:

$$\phi P_N = \phi \times 0.8 \times [(0.85 \times f'_{ck} \times [A_g - A_{st}]) + (f_{yk} \times A_{st})]$$

$$\phi P_N = 0.65 \times 0.8 \times [(0.85 \times 2.5 \times [2304 - 4.909]) + (60 \times 4.909)] = 2694 \text{ kip}$$

Utilisation

$$\text{Ratio} = \frac{P}{\phi P_N} = \frac{6.185}{2694} = 0.002$$

UTILITY: 0.00

Shear Strength LRFD)

Effective shear width	$b_w = 48 \text{ in}$
Effective shear depth	$d = 44.31 \text{ in}$
Shear reinforcement area	$A_v = 0.221 \text{ in}^2$
Shear reinforcement spacing	$s = 10 \text{ in}$
Concrete type factor (Normal concrete)	$\lambda = 1$
Strength reduction factor for shear	$\phi = 0.75$
Maximum shear in the x-direction	$V_{max,x} = 9.779 \text{ kip}$
Maximum shear in the z-direction	$V_{max,z} = 0.196 \text{ kip}$

22.5.5.1.1 Max shear strength of concrete:

$$V_{c,max} = 5 \times \lambda \times \sqrt{f'_{ck}} \times b_w \times d = 5 \times 1 \times \sqrt{2.5} \times 48 \times 44.31 = 531.8 \text{ kip}$$

Table 22.5.5.1 Shear strength of concrete:

$$V_{c,a} = \left(2 \times \lambda \times \sqrt{f'_{ck}} + \text{MIN} \left[\frac{P}{6 \times A_g}, (0.05 \times f'_{ck}) \right] \right) \times (b_w \times d)$$

$$V_{c,a} = \left(2 \times 1 \times \sqrt{2.5} + \text{MIN} \left[\frac{6.185}{6 \times 2304}, (0.05 \times 2.5) \right] \right) \times (48 \times 44.31) = 213.7 \text{ kip}$$

Governing shear strength of concrete:

$$V_c = \text{MIN}[V_{c,max}, V_{c,a}] = \text{MIN}[531.8, 213.7] = 213.7 \text{ kip}$$

22.5.1.2 Shear strength of steel (a):

$$V_{s,a} = 8 \times \sqrt{f'_{ck}} \times b_w \times d = 8 \times \sqrt{2.5} \times 48 \times 44.31 = 850.8 \text{ kip}$$

22.5.8.5.3 Shear strength of steel (b):

$$V_{s,b} = \frac{A_v \times f_{yk} \times d}{s} = \frac{0.221 \times 60 \times 44.31}{10} = 58.73 \text{ kip}$$

Governing shear strength of steel:

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}] = \text{MIN}[850.8, 58.73] = 58.73 \text{ kip}$$

22.5.1.1 Allowable shear strength:

$$\phi V_n = \phi \times (V_c + V_s) = 0.75 \times (213.7 + 58.73) = 204.3 \text{ kip}$$

$$V_{max} = \text{MAX}[9.779, 0.196] = 9.779 \text{ kip}$$

Utilisation

$$\text{Ratio} = \frac{V_{max}}{\phi V_n} = \frac{9.779}{204.3} = 0.048$$

UTILITY: 0.05

Flexural Strength (LRFD)

Concrete type factor (Normal concrete)	$\lambda = 1$
Strength reduction factor for flexure	$\phi = 0.65$
Modulus of steel reinforcement	$E_s = 200 \text{e}3 \text{ ksi}$
Maximum concrete strain	$\epsilon_c = 0.0030$
Yield strain of steel f_y/E_s	$\epsilon_y = 0.0003$
Section width	$b = 48 \text{ in}$
Distance to the compression rebar	$d_c = 3.688 \text{ in}$
Distance to the tension rebar	$d = 44.31 \text{ in}$
Total bar area	$A_s = 4.909 \text{ in}^2$
Maximum applied axial load	$P = 6.185 \text{ kip}$
Maximum moment in the x-direction	$M_{max,x} = 29.1 \text{ kip-ft}$
Maximum moment in the z-direction	$M_{max,z} = 0.543 \text{ kip-ft}$

Compressive force due to concrete:

$$\beta_1 = 0.85$$

$$C_{rc} = 0.85 \times \beta_1 \times f'_c \times b \times c$$

Compressive force due to bars in compression:

$$C_{rs} = f_1 \times A_{sc}$$

$$\epsilon_1 = (c - d_s) \times \frac{\epsilon_c}{c}$$

$$f_1 = E_s \times \epsilon_1 \quad (\epsilon_1 < \epsilon_{sy}), \quad f_1 = f_y \quad (\epsilon_1 \geq \epsilon_{sy})$$

Tensile force due to bars in tension:

$$T_{rs} = f_2 \times A_{st}$$

$$\epsilon_2 = (d - c) \times \frac{\epsilon_{cu}}{c}$$

$$f_2 = E_s \times \epsilon_2 \quad (\epsilon_2 < \epsilon_{sy}), \quad f_2 = \phi_s \times f_y \quad (\epsilon_2 \geq \epsilon_{sy})$$


Interaction Diagram Summary

Point	Case	M _r	P _r
P1	Pure Tension	0	-265.1
P2	Pure Bending	498.4	0
P3	Balanced Failure	1303	2402
P4	Decompression	1077	2629
P5	Compression Limit	982	2694
P6	Pure Compression	0	2694

Uniaxial Bending Check

$$M_f = \text{MAX}[29.1, 0.543] = 29.1 \text{ kip-ft}$$

Interaction Diagram

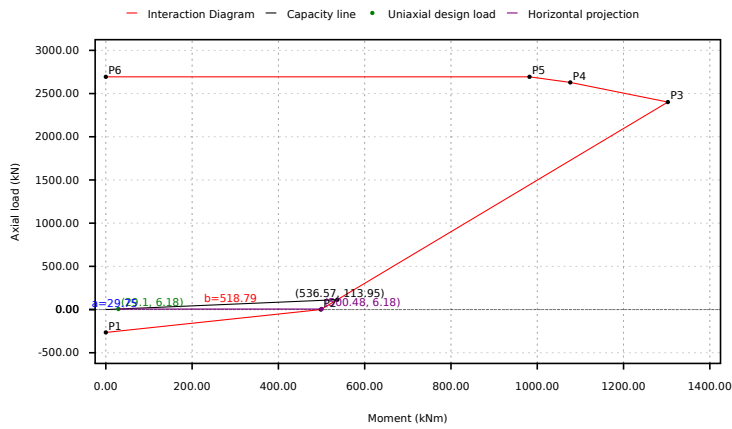

Segment	Signed Distance
P1 - P2	225.8
P2 - P3	447
P3 - P4	2593
P4 - P5	2755
P5 - P6	2687
Status	PASS: Point lies inside the curve

Utilisation

$$\text{Ratio} = \frac{a}{a + b} = \frac{29.75}{29.75 + 518.8} = 0.054$$

UTILITY: 0.05

Biaxial Bending Check

Maximum moment in the x-direction

$$M_{max,x} = 29.1 \text{ kip-ft}$$

Maximum moment in the z-direction

$$M_{max,z} = 0.543 \text{ kip-ft}$$

Nominal uniaxial moment strength about the x-axis

$$M_{nox} = 500.5 \text{ kip-ft}$$

Nominal uniaxial moment strength about the z-axis

$$M_{noz} = 500.5 \text{ kip-ft}$$

Interaction exponent

$$\alpha = 1$$

Bresler (1960)

According to Bresler (method B):

$$\left(\frac{M_{max,x}}{M_{nox}}\right)^\alpha + \left(\frac{M_{max,z}}{M_{noz}}\right)^\alpha = 1.0$$

$$\left(\frac{29.1}{500.5}\right)^1 + \left(\frac{0.543}{500.5}\right)^1 = 0.059$$

UTILITY: 0.06

REFERENCES

CALCULATIONS

RESULTS

Results Summary

Result Name	Results
PILE DETAILS	
Length of the pile	6.25 ft
Dimensions	48 x 48 in
Main bar reinforcement	#5-16pcs at 1.5 in min.
Shear reinforcement	#3 at 10 in max.
UTILISATIONS	
Required depth	0.94
End-bearing capacity	0.13
P _a	0.71
P _s	0.99
Axial compression strength	0.00
Shear strength	0.05
Uniaxial bending strength	0.05
Biaxial bending strength	0.06