

Your Project Calculations



Project Name: MTSOLAR_B09E6I79F9HB

S3D Model Link:

https://platform.skyciv.com/structural?preload_name=MTSOLAR_B09E6I79F9HB&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/5_2023

Public Model Link:

https://platform.skyciv.com/structural-viewer?project_id=SLRoCz8b8IkdR0T0t0kgRohkUXNjd0SfC5YP2nR1F4I1hJ7u38FN0ZwPXwRqVnSa

Array Specification

| | |
|-----------------------------|-------------------------------|
| Product: | Beam |
| Unique ID: | 3P-17-8TOP-SD-45-L-5Hx7W-BIJ9 |
| Duty Classification: | SD |
| Module Width: | 41.80 in |
| Module Length: | 83.90in |
| Number of Rows: | 5 |
| Number of Columns: | 7 |
| Total Number of Modules: | 35 |
| Desired Tilt Angle: | 60 |
| Front Edge Clearance: | 5 |
| Total Array Height at Tilt: | 20.17 ft |
| Total Frame Length: | 49.00 ft |
| Frame Weight: | 2984 lbs |
| Array Dimensions N/S: | 17.63 ft |
| Array Dimensions E/W: | 49.53 ft |
| Rail Length: | 211.50 in |
| Rail Spacing: | 3.50 ft |
| Rail Check: | Not Checked |

Support Specifications


| | |
|--------------------------|-----------------|
| Pole Size: | 8in Pipe Sch 80 |
| Pole Length above Grade: | 12.63 ft |
| Number of Poles: | 3 |
| Pole Spacing: | 17 ft |

Foundation Specifications

| | |
|---------------------------------|---|
| Foundation Type: | Square |
| Foundation Dimensions: | 48 x 48 in |
| Foundation Depth (below grade): | Pile 1: 7.75 ft Pile 2: 7.75 ft Pile 3: 7.75 ft |
| Foundation Volume: | 13.778 y ³ |
| Foundation Result: | PASSED |
| Mount Twist: | 0.199331 kip |

Site Info

| | |
|----------------------------|--|
| Risk Category: | I |
| Exposure: | C |
| Soil Classification: | sand |
| Site Location: | 2613 Peede Rd, North Pole, AK 99705, USA |
| Wind Speed: | 105 mph |
| Snow Load: | 32.45 psf |
| Design Uplift Pressure: | 0.026911 ksf |
| Design Downforce Pressure: | -0.026911 ksf |
| Design Snow Pressure: | 0.003568 ksf |

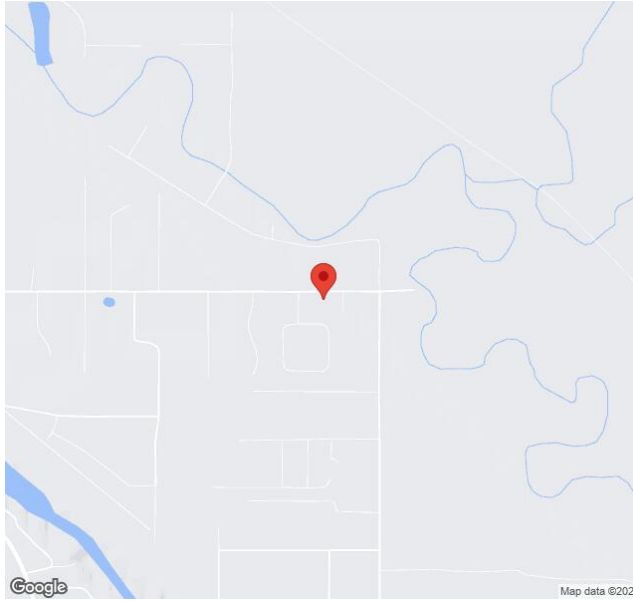

Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.


AutoDesigner Input

```
{"wind_speed_override":null,"snow_load_override":null,"direct_snow_load":false,"product_type":"Beam","project_id":"MTSOLAR_B09E6I79F9HB","site_address":"2613 Peede Rd, North Pole, AK 99705, USA","module_width":41.8,"module_length":83.9,"number_rows":5,"number_columns":7,"pole_mount_section":"4_40","core_pipe_width":65,"core_pipe_section":"2_40","adjuster_section":"2_40","core_beam_height":65,"core_beam_section":"HSS3x2x1/8","main_pipe_section":"2_12GA","pole_spacing":15,"tilt_angle":60,"ground_clearance":5,"risk_category":"I","exposure_category":"C","frame_duty_override":"auto","pole_override":"auto","soil_type":"sand","foundation_type":"Square","foundation_size":48,"check_rails":false}
```


Design Notes:

- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Design and Sizing is approximate only


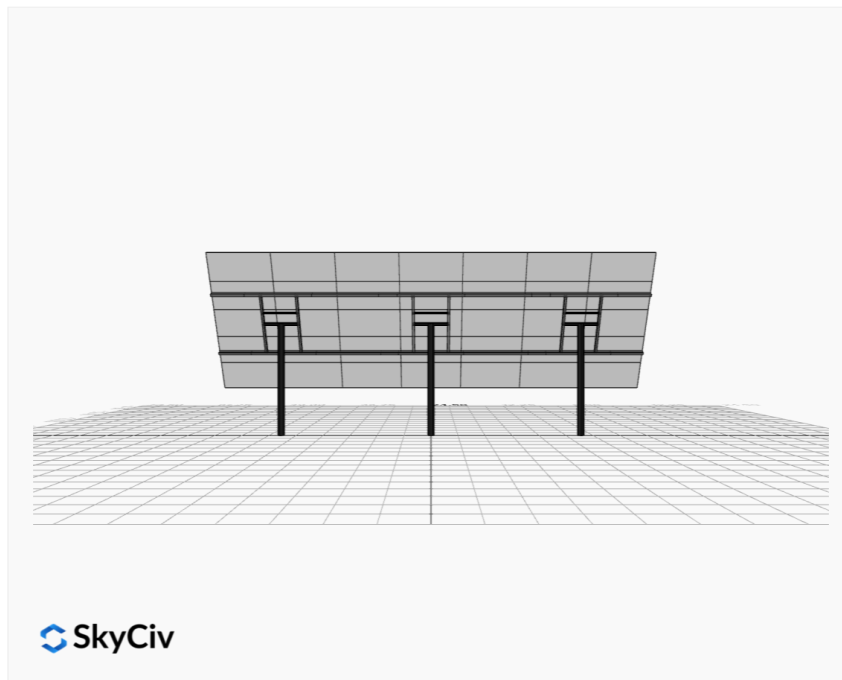


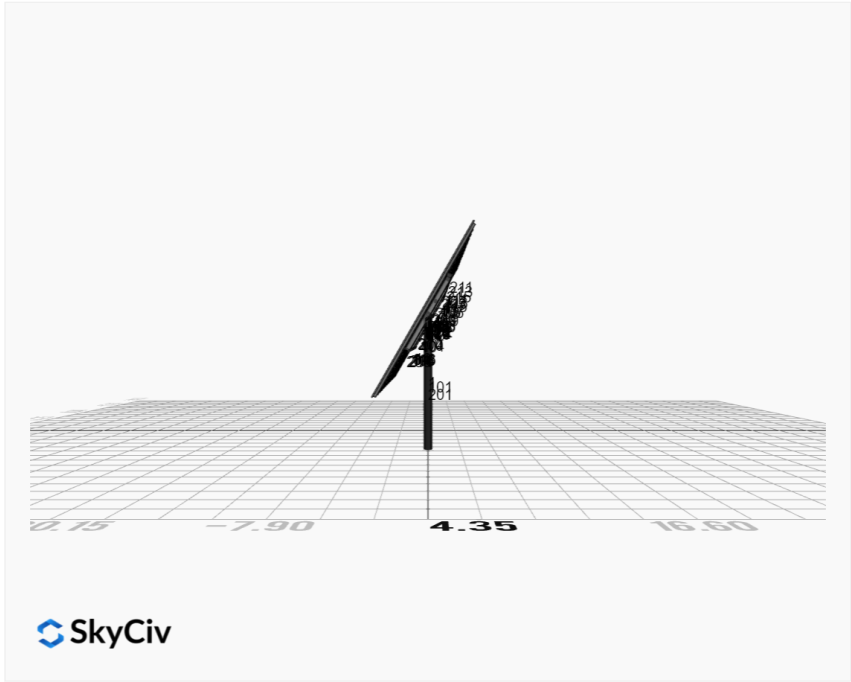



SkyCiv


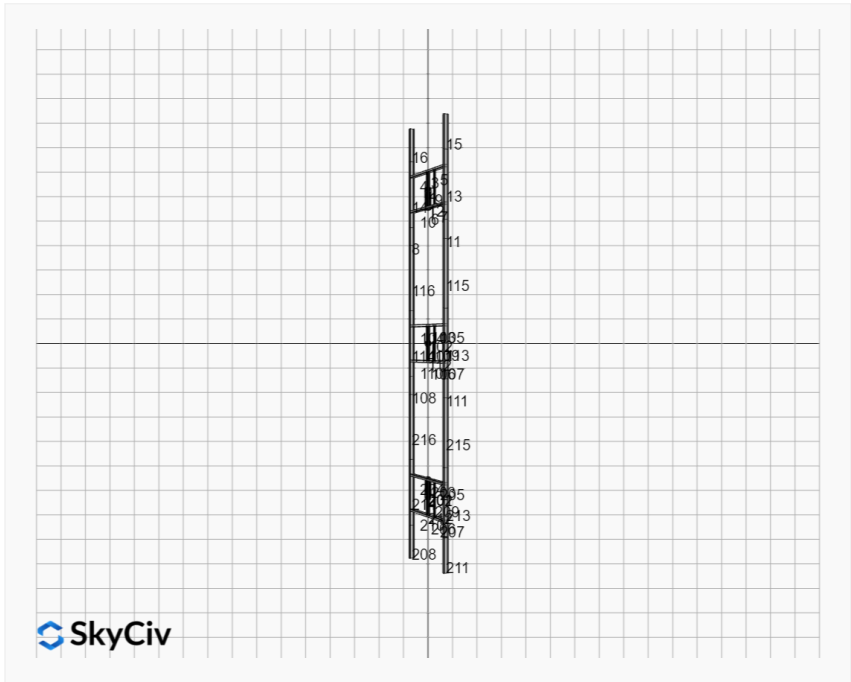



SkyCiv

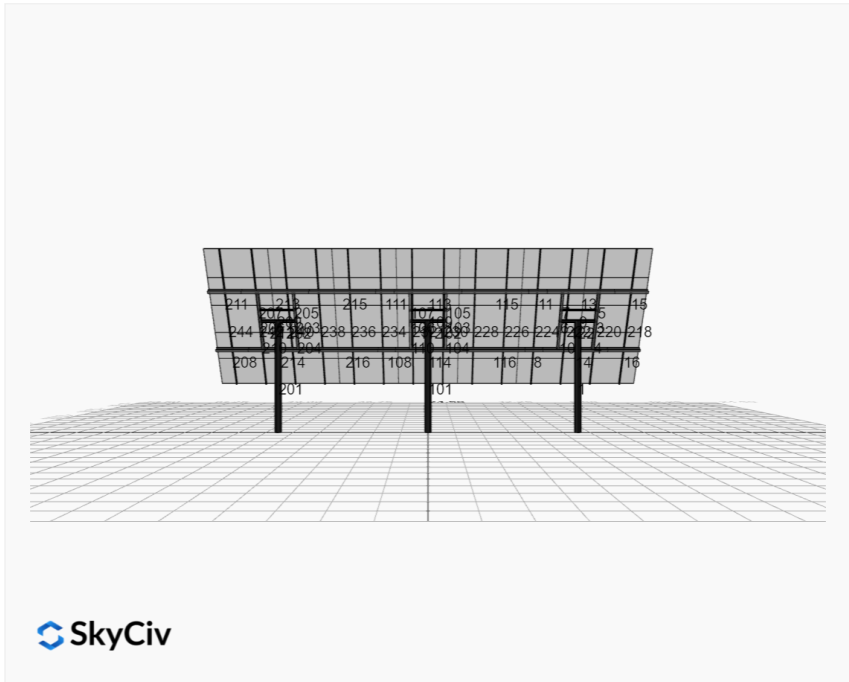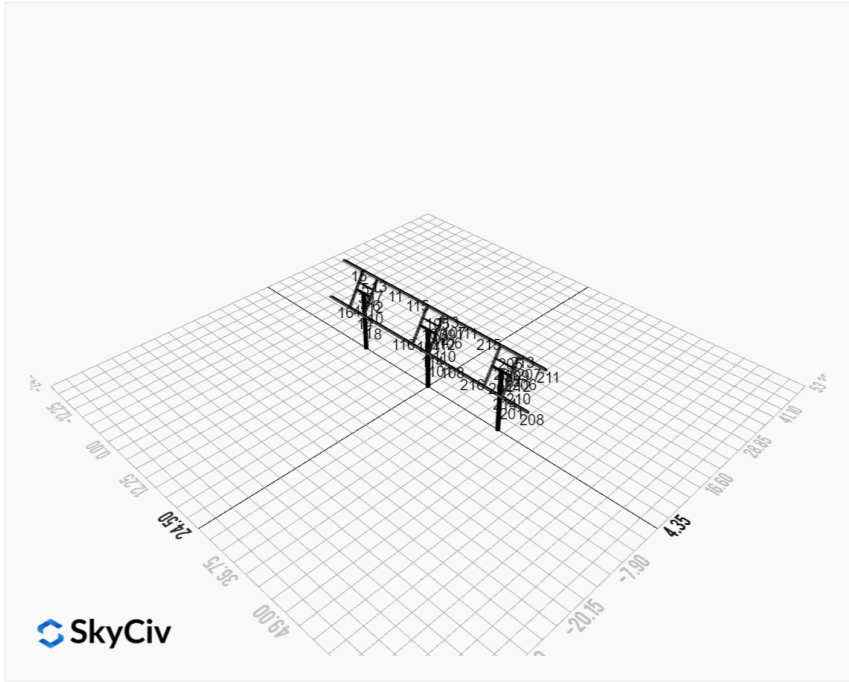

FEM Results (Envelope Worst Case for each member)

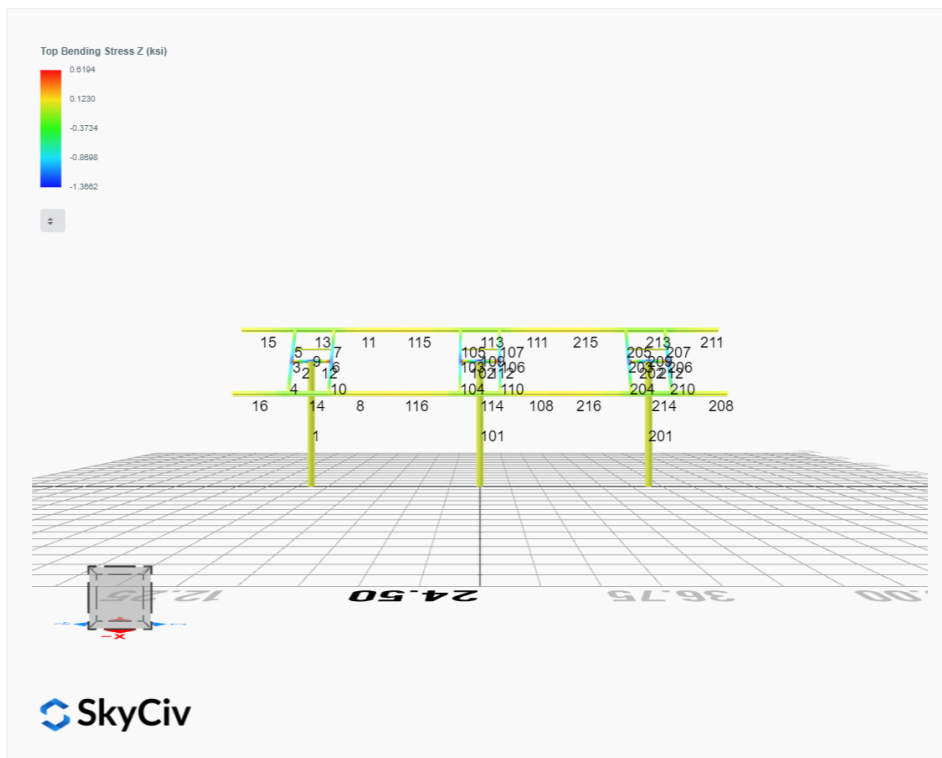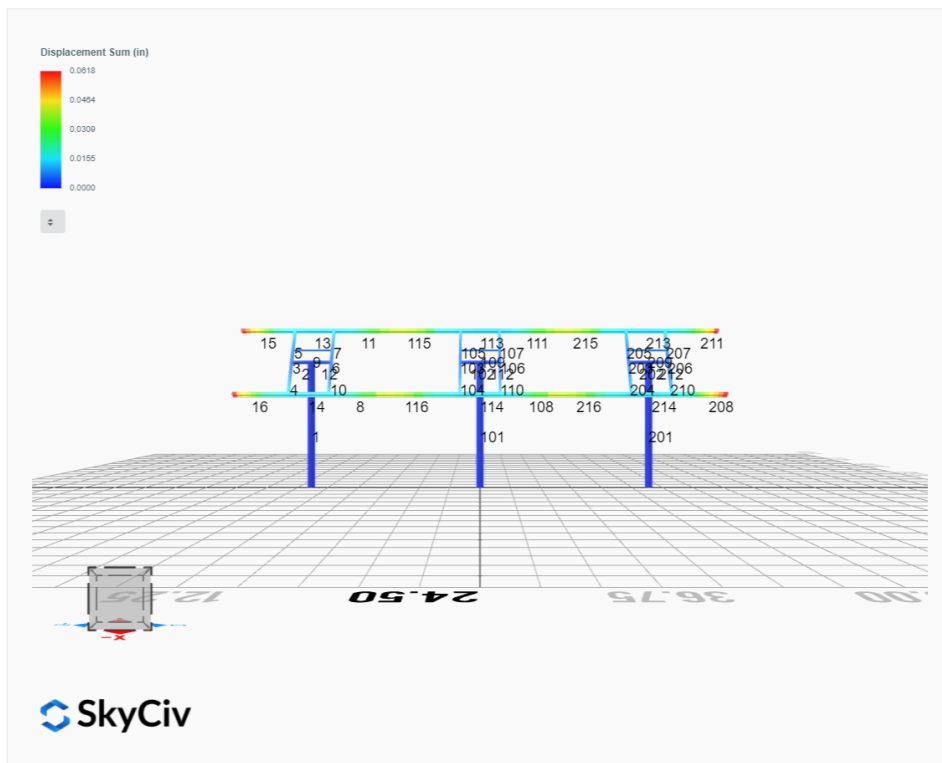

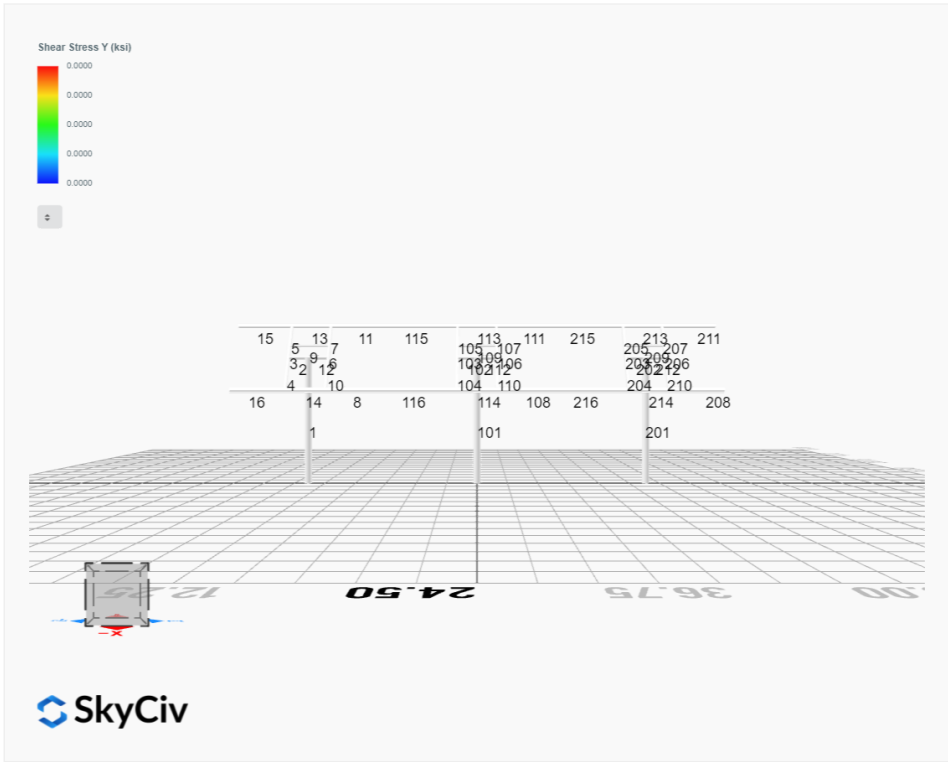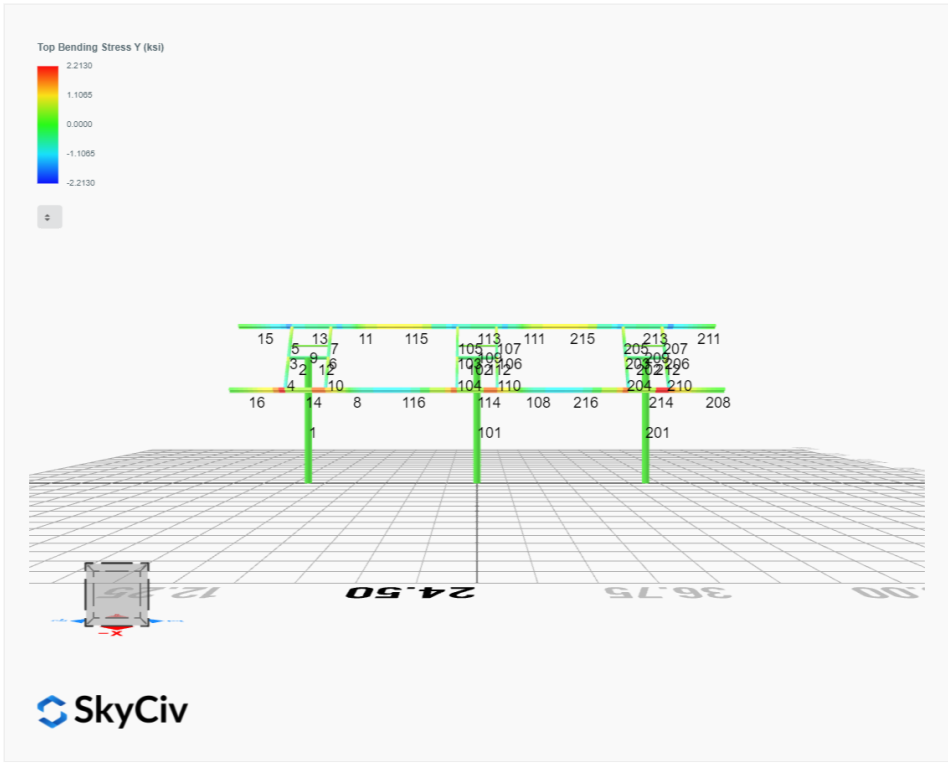

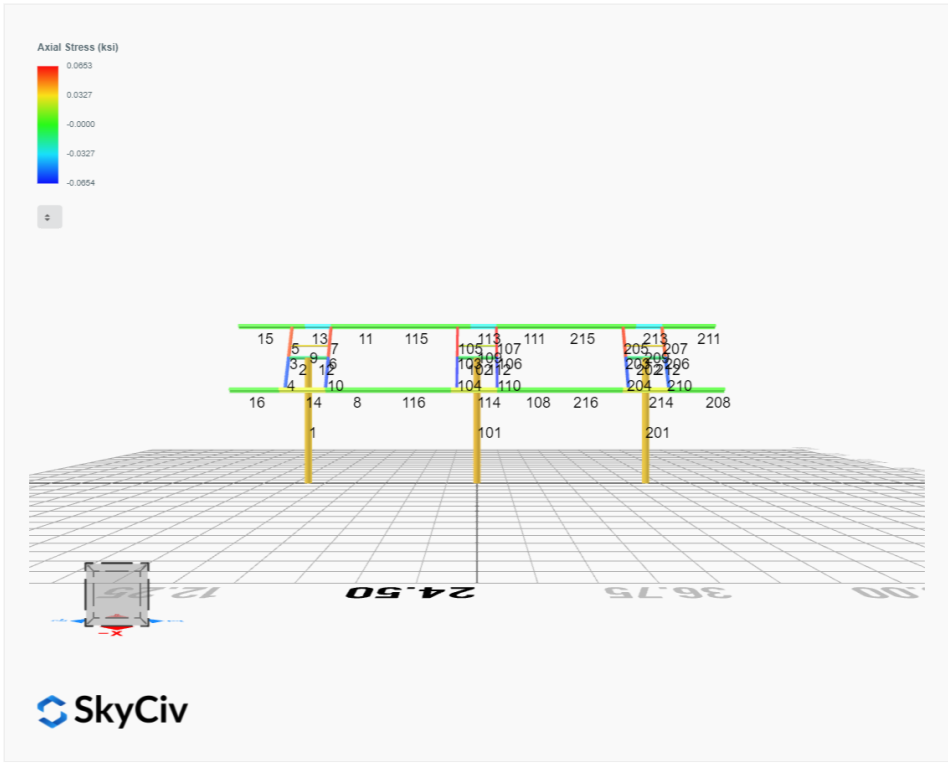

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

| Name | Fx | Fy | Fz | Mx | My | Mz |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 1. D | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 2. D + L | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 3. D + (S or Lr or R) | -0.0063 | 2.7731 | -0.0004 | 0.0014 | 0.0651 | 0.0879 |
| ULS: 3. D + (S or Lr or R) | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0060 | 2.6471 | -0.0004 | 0.0013 | 0.0611 | 0.0833 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 5b. D + 0.7E | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S | -0.0060 | 2.6471 | -0.0004 | 0.0013 | 0.0611 | 0.0833 |
| ULS: 8. 0.6D + 0.7E | -0.0029 | 1.3614 | -0.0002 | 0.0006 | 0.0296 | 0.0418 |
| ULS: 5a. D + 0.6W_Wind downforce Case A only | -4.0467 | 4.5970 | -0.0100 | -0.0322 | 0.1298 | 51.6498 |
| ULS: 5a. D + 0.6W_Wind downforce Case B only | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 5a. D + 0.6W_Wind uplift Case A only | 4.0365 | -0.0589 | 0.0096 | 0.0348 | -0.0336 | -50.5123 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.0374 | 4.3931 | -0.0077 | -0.0236 | 0.1215 | 38.7685 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0060 | 2.6471 | -0.0004 | 0.0013 | 0.0611 | 0.0833 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only | 3.0251 | 0.9012 | 0.0071 | 0.0267 | -0.0011 | -37.8531 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only | -0.0060 | 2.6471 | -0.0004 | 0.0013 | 0.0611 | 0.0833 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.0363 | 4.0150 | -0.0076 | -0.0239 | 0.1097 | 38.7547 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only | 3.0262 | 0.5231 | 0.0071 | 0.0263 | -0.0128 | -37.8668 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only | -0.0048 | 2.2690 | -0.0003 | 0.0010 | 0.0494 | 0.0696 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only | -4.0448 | 3.6894 | -0.0099 | -0.0326 | 0.1101 | 51.6219 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only | -0.0029 | 1.3614 | -0.0002 | 0.0006 | 0.0296 | 0.0418 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only | 4.0385 | -0.9665 | 0.0097 | 0.0344 | -0.0533 | -50.5401 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only | -0.0029 | 1.3614 | -0.0002 | 0.0006 | 0.0296 | 0.0418 |

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

| Result | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial | 6.8551 |
| Shear X | -6.7436 |
| Shear Z | 0.0165 |
| Moment X | 0.0573 |
| Moment Y (Twist) | 0.1994 |
| Moment Z | 86.7816 |

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

| Result | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial | 4.5970 |
| Shear X | -4.0467 |
| Shear Z | -0.0100 |
| Moment X | 0.0348 |
| Moment Y (Twist) | 0.1298 |
| Moment Z | 51.6498 |

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

ASD Load Combination Results

| Name | Fx | Fy | Fz | Mx | My | Mz |
|--|--------|--------|---------|--------|--------|---------|
| ULS: 1. D | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 2. D + L | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 3. D + (S or Lr or R) | 0.0127 | 2.8901 | -0.0000 | 0.0000 | 0.0000 | -0.1348 |
| ULS: 3. D + (S or Lr or R) | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | 0.0119 | 2.7570 | -0.0000 | 0.0000 | 0.0000 | -0.1260 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 5b. D + 0.7E | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |

| Name | Fx | Fy | Fz | Mx | My | Mz |
|---|---------|---------|---------|--------|--------|----------|
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S | 0.0119 | 2.7570 | -0.0000 | 0.0000 | 0.0000 | -0.1260 |
| ULS: 8. 0.6D + 0.7E | 0.0058 | 1.4145 | -0.0000 | 0.0000 | 0.0000 | -0.0597 |
| ULS: 5a. D + 0.6W_Wind downforce Case A only | -4.1123 | 4.7484 | -0.0000 | 0.0000 | 0.0000 | 52.4478 |
| ULS: 5a. D + 0.6W_Wind downforce Case B only | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 5a. D + 0.6W_Wind uplift Case A only | 4.1327 | -0.0337 | -0.0000 | 0.0000 | 0.0000 | -51.6265 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.0795 | 4.5501 | -0.0000 | 0.0000 | 0.0000 | 39.2844 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0119 | 2.7570 | -0.0000 | 0.0000 | 0.0000 | -0.1260 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only | 3.1042 | 0.9636 | -0.0000 | 0.0000 | 0.0000 | -38.7713 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only | 0.0119 | 2.7570 | -0.0000 | 0.0000 | 0.0000 | -0.1260 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.0818 | 4.1507 | -0.0000 | 0.0000 | 0.0000 | 39.3110 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only | 3.1019 | 0.5641 | -0.0000 | 0.0000 | 0.0000 | -38.7447 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only | 0.0096 | 2.3575 | -0.0000 | 0.0000 | 0.0000 | -0.0995 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only | -4.1161 | 3.8054 | -0.0000 | 0.0000 | 0.0000 | 52.4875 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only | 0.0058 | 1.4145 | -0.0000 | 0.0000 | 0.0000 | -0.0597 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only | 4.1288 | -0.9767 | -0.0000 | 0.0000 | 0.0000 | -51.5867 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only | 0.0058 | 1.4145 | -0.0000 | 0.0000 | 0.0000 | -0.0597 |

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

| Result | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial | 7.0799 |
| Shear X | -6.8839 |
| Shear Z | -0.0000 |
| Moment X | 0.0000 |
| Moment Y (Twist) | 0.0000 |
| Moment Z | 88.1826 |

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

| Result | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial | 4.7484 |
| Shear X | -4.1327 |
| Shear Z | -0.0000 |
| Moment X | 0.0000 |
| Moment Y (Twist) | 0.0000 |
| Moment Z | 52.4875 |

Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

ASD Load Combination Results

| Name | Fx | Fy | Fz | Mx | My | Mz |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 1. D | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 2. D + L | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 3. D + (S or Lr or R) | -0.0063 | 2.7731 | 0.0004 | -0.0014 | -0.0651 | 0.0879 |
| ULS: 3. D + (S or Lr or R) | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0060 | 2.6471 | 0.0004 | -0.0013 | -0.0611 | 0.0833 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 5b. D + 0.7E | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S | -0.0060 | 2.6471 | 0.0004 | -0.0013 | -0.0611 | 0.0833 |
| ULS: 8. 0.6D + 0.7E | -0.0029 | 1.3614 | 0.0002 | -0.0006 | -0.0296 | 0.0418 |
| ULS: 5a. D + 0.6W_Wind downforce Case A only | -4.0467 | 4.5970 | 0.0100 | 0.0322 | -0.1298 | 51.6498 |
| ULS: 5a. D + 0.6W_Wind downforce Case B only | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 5a. D + 0.6W_Wind uplift Case A only | 4.0365 | -0.0589 | -0.0096 | -0.0348 | 0.0336 | -50.5123 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.0374 | 4.3931 | 0.0077 | 0.0236 | -0.1215 | 38.7685 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0060 | 2.6471 | 0.0004 | -0.0013 | -0.0611 | 0.0833 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only | 3.0251 | 0.9012 | -0.0071 | -0.0267 | 0.0011 | -37.8531 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only | -0.0060 | 2.6471 | 0.0004 | -0.0013 | -0.0611 | 0.0833 |

| Name | Fx | Fy | Fz | Mx | My | Mz |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.0363 | 4.0150 | 0.0076 | 0.0239 | -0.1097 | 38.7547 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only | 3.0262 | 0.5231 | -0.0071 | -0.0263 | 0.0128 | -37.8668 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only | -0.0048 | 2.2690 | 0.0003 | -0.0010 | -0.0494 | 0.0696 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only | -4.0448 | 3.6894 | 0.0099 | 0.0326 | -0.1101 | 51.6219 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only | -0.0029 | 1.3614 | 0.0002 | -0.0006 | -0.0296 | 0.0418 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only | 4.0385 | -0.9665 | -0.0097 | -0.0344 | 0.0533 | -50.5401 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only | -0.0029 | 1.3614 | 0.0002 | -0.0006 | -0.0296 | 0.0418 |

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

| Result | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial | 6.8551 |
| Shear X | -6.7436 |
| Shear Z | -0.0165 |
| Moment X | -0.0573 |
| Moment Y (Twist) | 0.1993 |
| Moment Z | 86.7825 |

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

| Result | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial | 4.5970 |
| Shear X | -4.0467 |
| Shear Z | 0.0100 |
| Moment X | -0.0348 |
| Moment Y (Twist) | 0.1298 |
| Moment Z | 51.6498 |

Project Details

Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States

User Name: sales@mtsolar.us
 Project Name: MTSOLAR_B09E6I79F9HB
 Unit System: imperial



Design Input Information

| Design Factors | | | |
|----------------|----------|----------|----------|
| Φ_t | Φ_c | Φ_b | Φ_v |
| 0.9 | 0.9 | 0.9 | 0.9 |

| Design Materials | | | |
|------------------|---------|----------------------|----------------------|
| ID | E (ksi) | F _y (ksi) | F _u (ksi) |
| 1 | 29000 | 50 | 65 |

Section Dimensions

| ID | Name | d (in) | t _w (in) | | | | |
|----|-----------------|--------|---------------------|--|--|--|--|
| 1 | 2in Pipe Sch 40 | 2.38 | 0.15 | | | | |
| 4 | 4in Pipe Sch 40 | 4.50 | 0.24 | | | | |
| 10 | 8in Pipe Sch 80 | 8.63 | 0.50 | | | | |

| ID | Name | d (in) | b (in) | t _w (in) | t _b (in) | r (in) | |
|----|------------|--------|--------|---------------------|---------------------|--------|--|
| 15 | HSS5x3x1/8 | 5.00 | 3.00 | 0.12 | 0.12 | 0.12 | |

| ID | Name | d (in) | t _w (in) | b _t (in) | b _b (in) | t _t (in) | t _b (in) | r (in) |
|----|------|--------|---------------------|---------------------|---------------------|---------------------|---------------------|--------|
| 18 | W6x9 | 5.90 | 0.17 | 3.94 | 3.94 | 0.21 | 0.21 | 0.25 |

| Section Properties | | | | | | | | |
|--------------------|-----------------|----------------------|----------------------|------------------------------------|------------------------------------|-----------------------------------|------------------------------------|------------------------------------|
| ID | Name | A (in ²) | J (in ⁴) | I _{yp} (in ⁴) | I _{zp} (in ⁴) | I _w (in ⁶) | S _{yp} (in ³) | S _{zp} (in ³) |
| 1 | 2in Pipe Sch 40 | 1.07 | 1.33 | 0.67 | 0.67 | 0.00 | 0.76 | 0.76 |
| 4 | 4in Pipe Sch 40 | 3.17 | 14.47 | 7.23 | 7.23 | 0.00 | 4.31 | 4.31 |

Member Design Capacity


| Member ID | $\Phi_t P_n$ (kip) | $\Phi_c P_n$ (kip) | $\Phi_b M_{zn}$ (k-ft) | $\Phi_b M_{yn}$ (k-ft) | $\Phi_v V_{yn}$ (kip) | $\Phi_v V_{zn}$ (kip) |
|-----------|--------------------|--------------------|------------------------|------------------------|-----------------------|-----------------------|
| 1 | 574.32 | 234.80 | 123.94 | 123.94 | 172.30 | 172.30 |
| 2 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 3 | 79.65 | 74.02 | 10.99 | 4.60 | 29.14 | 16.61 |
| 4 | 79.65 | 72.01 | 10.99 | 4.60 | 29.14 | 16.61 |
| 5 | 79.65 | 73.44 | 10.99 | 4.60 | 29.14 | 16.61 |
| 6 | 79.65 | 74.02 | 10.99 | 4.60 | 29.14 | 16.61 |
| 7 | 79.65 | 73.44 | 10.99 | 4.60 | 29.14 | 16.61 |
| 8 | 120.60 | 117.88 | 23.36 | 6.45 | 30.09 | 45.74 |
| 9 | 48.35 | 43.11 | 2.85 | 2.85 | 14.51 | 14.51 |
| 10 | 79.65 | 72.01 | 10.99 | 4.60 | 29.14 | 16.61 |
| 11 | 120.60 | 117.88 | 23.36 | 6.45 | 30.09 | 45.74 |
| 12 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 13 | 120.60 | 98.23 | 19.72 | 6.45 | 30.09 | 45.74 |
| 14 | 120.60 | 98.23 | 19.72 | 6.45 | 30.09 | 45.74 |
| 15 | 120.60 | 54.44 | 23.36 | 6.45 | 30.09 | 45.74 |
| 16 | 120.60 | 54.44 | 23.36 | 6.45 | 30.09 | 45.74 |
| 101 | 574.32 | 234.80 | 123.94 | 123.94 | 172.30 | 172.30 |
| 102 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 103 | 79.65 | 74.02 | 10.99 | 4.60 | 29.14 | 16.61 |
| 104 | 79.65 | 72.01 | 10.99 | 4.60 | 29.14 | 16.61 |
| 105 | 79.65 | 73.44 | 10.99 | 4.60 | 29.14 | 16.61 |
| 106 | 79.65 | 74.02 | 10.99 | 4.60 | 29.14 | 16.61 |
| 107 | 79.65 | 73.44 | 10.99 | 4.60 | 29.14 | 16.61 |
| 108 | 120.60 | 117.88 | 23.36 | 6.45 | 30.09 | 45.74 |
| 109 | 48.35 | 43.11 | 2.85 | 2.85 | 14.51 | 14.51 |
| 110 | 79.65 | 72.01 | 10.99 | 4.60 | 29.14 | 16.61 |
| 111 | 120.60 | 117.88 | 23.36 | 6.45 | 30.09 | 45.74 |
| 112 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 113 | 120.60 | 98.23 | 18.66 | 6.45 | 30.09 | 45.74 |
| 114 | 120.60 | 98.23 | 18.66 | 6.45 | 30.09 | 45.74 |
| 115 | 120.60 | 89.27 | 19.62 | 6.45 | 30.09 | 45.74 |
| 116 | 120.60 | 89.27 | 19.79 | 6.45 | 30.09 | 45.74 |
| 201 | 574.32 | 234.80 | 123.94 | 123.94 | 172.30 | 172.30 |
| 202 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 203 | 79.65 | 74.02 | 10.99 | 4.60 | 29.14 | 16.61 |
| 204 | 79.65 | 72.01 | 10.99 | 4.60 | 29.14 | 16.61 |
| 205 | 79.65 | 73.44 | 10.99 | 4.60 | 29.14 | 16.61 |
| 206 | 79.65 | 74.02 | 10.99 | 4.60 | 29.14 | 16.61 |
| 207 | 79.65 | 73.44 | 10.99 | 4.60 | 29.14 | 16.61 |
| 208 | 120.60 | 54.44 | 23.36 | 6.45 | 30.09 | 45.74 |
| 209 | 48.35 | 43.11 | 2.85 | 2.85 | 14.51 | 14.51 |
| 210 | 79.65 | 72.01 | 10.99 | 4.60 | 29.14 | 16.61 |
| 211 | 120.60 | 54.44 | 23.36 | 6.45 | 30.09 | 45.74 |
| 212 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 213 | 120.60 | 98.23 | 19.72 | 6.45 | 30.09 | 45.74 |
| 214 | 120.60 | 98.23 | 19.72 | 6.45 | 30.09 | 45.74 |
| 215 | 120.60 | 89.27 | 20.50 | 6.45 | 30.09 | 45.74 |
| 216 | 120.60 | 89.27 | 20.50 | 6.45 | 30.09 | 45.74 |

Design Ratio

| Member ID | P | M _z | M _y | V _y | V _z | (P,M _z ,M _y) | Worst LC | KL/r | δ | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|--------------|--------------|--------|
| 1 | 0.029 | 0.700 | 0.001 | 0.039 | 0.000 | 0.715 | #13 | 0.553 | Not Required | Pass |
| 2 | 0.001 | 0.320 | 0.401 | 0.073 | 0.080 | 0.722 | #13 | 0.034 | Not Required | Pass |
| 3 | 0.008 | 0.770 | 0.089 | 0.077 | 0.012 | 0.846 | #13 | 0.044 | Not Required | Pass |
| 4 | 0.008 | 0.767 | 0.159 | 0.077 | 0.020 | 0.857 | #13 | 0.078 | Not Required | Pass |
| 5 | 0.008 | 0.478 | 0.162 | 0.077 | 0.023 | 0.504 | #13 | 0.073 | Not Required | Pass |
| 6 | 0.008 | 0.758 | 0.091 | 0.076 | 0.012 | 0.833 | #13 | 0.044 | Not Required | Pass |
| 7 | 0.008 | 0.472 | 0.158 | 0.076 | 0.023 | 0.501 | #13 | 0.073 | Not Required | Pass |
| 8 | 0.000 | 0.070 | 0.049 | 0.045 | 0.008 | 0.110 | #13 | 0.088 | Not Required | Pass |
| 9 | 0.004 | 0.041 | 0.077 | 0.001 | 0.000 | 0.119 | #13 | 0.198 | Not Required | Pass |
| 10 | 0.008 | 0.752 | 0.152 | 0.076 | 0.020 | 0.849 | #13 | 0.078 | Not Required | Pass |
| 11 | 0.000 | 0.070 | 0.048 | 0.045 | 0.008 | 0.109 | #13 | 0.088 | Not Required | Pass |
| 12 | 0.001 | 0.311 | 0.389 | 0.072 | 0.078 | 0.700 | #13 | 0.034 | Not Required | Pass |
| 13 | 0.003 | 0.220 | 0.171 | 0.061 | 0.010 | 0.345 | #13 | 0.265 | Not Required | Pass |
| 14 | 0.003 | 0.225 | 0.171 | 0.061 | 0.010 | 0.345 | #13 | 0.177 | Not Required | Pass |
| 15 | 0.000 | 0.082 | 0.079 | 0.034 | 0.006 | 0.145 | #13 | Not Required | Not Required | Pass |
| 16 | 0.000 | 0.082 | 0.079 | 0.034 | 0.006 | 0.145 | #13 | Not Required | Not Required | Pass |
| 101 | 0.030 | 0.712 | 0.000 | 0.040 | 0.000 | 0.727 | #13 | 0.553 | Not Required | Pass |
| 102 | 0.001 | 0.322 | 0.396 | 0.075 | 0.080 | 0.719 | #13 | 0.034 | Not Required | Pass |
| 103 | 0.009 | 0.780 | 0.100 | 0.078 | 0.015 | 0.865 | #13 | 0.044 | Not Required | Pass |
| 104 | 0.008 | 0.780 | 0.146 | 0.078 | 0.019 | 0.876 | #13 | 0.078 | Not Required | Pass |
| 105 | 0.009 | 0.485 | 0.148 | 0.078 | 0.021 | 0.511 | #13 | 0.073 | Not Required | Pass |
| 106 | 0.009 | 0.780 | 0.100 | 0.078 | 0.015 | 0.865 | #13 | 0.044 | Not Required | Pass |
| 107 | 0.009 | 0.485 | 0.148 | 0.078 | 0.021 | 0.511 | #13 | 0.073 | Not Required | Pass |
| 108 | 0.000 | 0.082 | 0.049 | 0.041 | 0.008 | 0.119 | #13 | 0.088 | Not Required | Pass |
| 109 | 0.002 | 0.035 | 0.069 | 0.001 | 0.000 | 0.105 | #13 | 0.198 | Not Required | Pass |
| 110 | 0.008 | 0.780 | 0.146 | 0.078 | 0.019 | 0.876 | #13 | 0.078 | Not Required | Pass |
| 111 | 0.000 | 0.084 | 0.049 | 0.041 | 0.008 | 0.120 | #13 | 0.088 | Not Required | Pass |
| 112 | 0.001 | 0.322 | 0.396 | 0.075 | 0.080 | 0.719 | #13 | 0.034 | Not Required | Pass |
| 113 | 0.003 | 0.157 | 0.151 | 0.057 | 0.010 | 0.261 | #13 | 0.265 | Not Required | Pass |
| 114 | 0.003 | 0.164 | 0.151 | 0.057 | 0.010 | 0.264 | #13 | 0.265 | Not Required | Pass |
| 115 | 0.000 | 0.139 | 0.089 | 0.041 | 0.008 | 0.212 | #13 | 0.321 | Not Required | Pass |
| 116 | 0.000 | 0.139 | 0.089 | 0.041 | 0.008 | 0.211 | #13 | 0.321 | Not Required | Pass |
| 201 | 0.029 | 0.700 | 0.001 | 0.039 | 0.000 | 0.715 | #13 | 0.553 | Not Required | Pass |
| 202 | 0.001 | 0.311 | 0.389 | 0.072 | 0.078 | 0.700 | #13 | 0.034 | Not Required | Pass |
| 203 | 0.008 | 0.758 | 0.091 | 0.076 | 0.012 | 0.833 | #13 | 0.044 | Not Required | Pass |
| 204 | 0.008 | 0.752 | 0.152 | 0.076 | 0.020 | 0.849 | #13 | 0.078 | Not Required | Pass |
| 205 | 0.008 | 0.472 | 0.158 | 0.076 | 0.023 | 0.501 | #13 | 0.073 | Not Required | Pass |
| 206 | 0.008 | 0.770 | 0.089 | 0.077 | 0.012 | 0.846 | #13 | 0.044 | Not Required | Pass |
| 207 | 0.008 | 0.478 | 0.162 | 0.077 | 0.023 | 0.504 | #13 | 0.073 | Not Required | Pass |
| 208 | 0.000 | 0.082 | 0.079 | 0.034 | 0.006 | 0.145 | #13 | Not Required | Not Required | Pass |
| 209 | 0.004 | 0.041 | 0.077 | 0.001 | 0.000 | 0.119 | #13 | 0.198 | Not Required | Pass |
| 210 | 0.008 | 0.767 | 0.159 | 0.077 | 0.020 | 0.857 | #13 | 0.078 | Not Required | Pass |
| 211 | 0.000 | 0.082 | 0.079 | 0.034 | 0.006 | 0.145 | #13 | Not Required | Not Required | Pass |
| 212 | 0.001 | 0.320 | 0.401 | 0.073 | 0.080 | 0.722 | #13 | 0.034 | Not Required | Pass |
| 213 | 0.003 | 0.220 | 0.171 | 0.061 | 0.010 | 0.345 | #13 | 0.177 | Not Required | Pass |
| 214 | 0.003 | 0.225 | 0.171 | 0.061 | 0.010 | 0.345 | #13 | 0.265 | Not Required | Pass |
| 215 | 0.000 | 0.136 | 0.089 | 0.045 | 0.008 | 0.206 | #13 | 0.321 | Not Required | Pass |
| 216 | 0.000 | 0.135 | 0.089 | 0.045 | 0.008 | 0.206 | #13 | 0.321 | Not Required | Pass |

Definitions

| | |
|---------------------|---|
| Φ_t | Safety factor for tensile |
| Φ_c | Safety factor for compression |
| Φ_b | Safety factor for flexure |
| Φ_v | Safety factor for shear |
| E | Modulus of elasticity |
| F_y | Specified minimum yield stress |
| F_u | Specified minimum tensile strength |
| A | Cross-sectional area |
| J | Torsional constant |
| I_{yp} | Moment of inertia about the Y axes |
| I_{zp} | Moment of inertia about the Z axes |
| I_w | Warping constant |
| S_{yp} | Plastic section modulus about the Y axis |
| S_{zp} | Plastic section modulus about the Z axis |
| KL | Effective length |
| C_b | Buckling modification factor (from all load combinations) |
| L_b | Length between braced points |
| LST | Limited slenderness for tension |
| LSC | Limited slenderness for compression |
| LD | Limited deflection |
| P_n | Nominal axial strength (tension/compression) |
| M_n | Nominal flexural strength (about Z/Y axis) |
| V_n | Nominal shear strength (along Z/Y axis) |
| P | Design ratio in case of axial force |
| M_z | Design ratio in case of bending about Z axis |
| M_y | Design ratio in case of bending about Y axis |
| V_y | Design ratio in case of shear along Y axis |
| V_z | Design ratio in case of shear along Z axis |
| (P, M_z , M_y) | Design ratio in case of axial force and bending action |
| KL/r | Design ratio in case of section slenderness |
| δ | Design ratio in case of member deflection |
| OK | Capacity is provided |
| NG | Capacity is not provided |
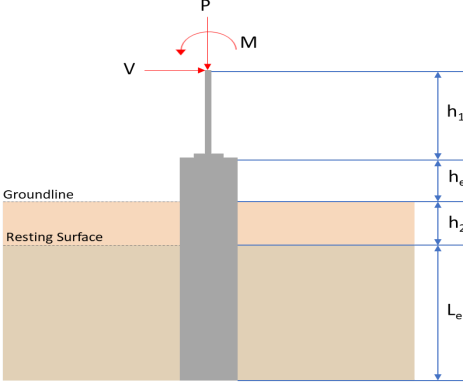
| REFERENCES | CALCULATIONS | RESULTS | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------|---|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|-------|-------------|--------|--------|-------------|--------|-------|---------------|-------|-------|---------------|--------|--------|--|
| | <p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.75$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1288 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>4.597</td> <td>6.855</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.047</td> <td>-6.744</td> </tr> <tr> <td>V_z (kip)</td> <td>-0.010</td> <td>0.017</td> </tr> <tr> <td>M_x (kipft)</td> <td>0.035</td> <td>0.057</td> </tr> <tr> <td>M_z (kipft)</td> <td>51.650</td> <td>86.782</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 3$ ksi - Concrete strength,</p> | Layer | Label | Allowable Bearing Pressure (q_a) (psf) | Allowable Lateral Pressure (R) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | P (kip) | 4.597 | 6.855 | V_x (kip) | -4.047 | -6.744 | V_z (kip) | -0.010 | 0.017 | M_x (kipft) | 0.035 | 0.057 | M_z (kipft) | 51.650 | 86.782 | |
| Layer | Label | Allowable Bearing Pressure (q_a) (psf) | Allowable Lateral Pressure (R) (psf/ft) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Load Component | ASD | LRFD | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P (kip) | 4.597 | 6.855 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V_x (kip) | -4.047 | -6.744 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V_z (kip) | -0.010 | 0.017 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M_x (kipft) | 0.035 | 0.057 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M_z (kipft) | 51.650 | 86.782 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.047 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.64443 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$ | | | | | | | | | | | | | | | | | | | | | | | | | | | |

$$M_o = \frac{(51.65 \text{ kipft}) + ((-4.047 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 8.2245 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 7.2324 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.01 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0015924 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.035 \text{ kipft}) + ((-0.01 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0055732 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.72221 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(7.2324 \text{ ft}), (0.72221 \text{ ft})]$$

$$L_{e,req} = 7.232 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.75 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(7.232 \text{ ft})}{(7.75 \text{ ft})}$$

$$\text{Ratio} = 0.93316$$

Status: **PASS**
Ratio: **0.930**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(4.597 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.28731 \text{ kip/ft}^2$$

$$q = 0.28731 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.28731 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.14366$$

Status: **PASS**
Ratio: **0.140**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.9375$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.64443 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 8.2245 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (8.2245 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (8.2245 \text{ kipft/ft})) + (4 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3528 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (8.2245 \text{ kipft/ft})) + (3 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (8.2245 \text{ kipft/ft})) + (2 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = 0.27291 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (8.2245 \text{ kipft/ft})) + ((-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 1.1443 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.3528 \text{ ft})}{2}$$

$$p_a = 0.40146 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.27291 \text{ kip/ft}^2)}{(0.40146 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.67981$$

p_a - Allowable lateral soil pressure at depth L_e ,

Status: **PASS**
Ratio: **0.680**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(1.1443 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.98433$$

Status: **PASS**
Ratio: **0.980**

Considering z-direction:

$H_o = -0.0015924 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 0.0055732 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0055732 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.0055732 \text{ kipft/ft})) + (4 \times (-0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.5517 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.0055732 \text{ kipft/ft})) + (3 \times (-0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (0.0055732 \text{ kipft/ft})) + (2 \times (-0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = -0.00034026 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0055732 \text{ kipft/ft})) + ((-0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = -0.0001193 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.5517 \text{ ft})}{2}$$

$$p_a = 0.41638 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(-0.00034026 \text{ kip/ft}^2)}{(0.41638 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.0008172$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**
Ratio: **0.000**

$$Ratio = \frac{(-0.0001193 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$Ratio = -0.00010263$$

Status: **PASS**
Ratio: **0.000**

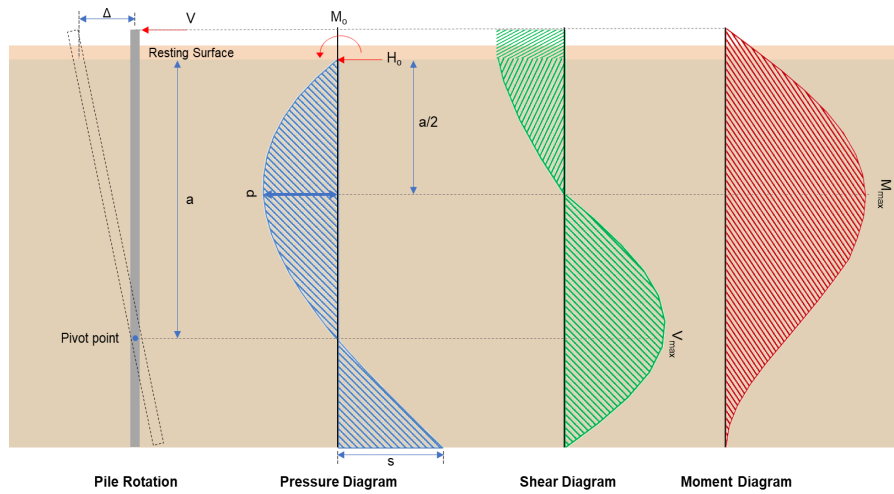

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-6.744 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.0739 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(86.782 \text{ kipft}) + ((-6.744 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 13.819 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(13.819 \text{ kipft/ft})}{(-1.0739 \text{ kip/ft})}$$

$$E = 12.868 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (13.819 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-1.0739 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (13.819 \text{ kipft/ft})) + (4 \times (-1.0739 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3517 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{L_c} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-1.0739 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3517 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3517 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 15.453 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.0739 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[\left(\frac{(12.868 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.3517 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[\left(\frac{4 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3517 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3517 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 56.861 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.017 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.002707 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.057 \text{ kipft}) + ((0.017 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0090764 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0090764 \text{ kipft/ft})}{(0.002707 \text{ kip/ft})}$$

$$E = 3.3529 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0090764 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (0.002707 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.0090764 \text{ kipft/ft})) + (4 \times (0.002707 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.5583 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.002707 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.5583 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.5583 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.01552 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.002707 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[\left(\frac{(3.3529 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.5583 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[\left(\frac{4 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.5583 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.5583 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.052669 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(6.855 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102.04 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102.04 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(6.855 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0021533$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 6.855 \text{ kip} \rightarrow 6855 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(6855 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.71 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

V_c - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.71 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.71 \text{ kip}$$

| | | |
|-----------------|--|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yties} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.71 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.04 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 15.453 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(15.453 \text{ kip})}{(118.04 \text{ kip})}$ $\text{Ratio} = 0.13092$ <p>Considering z-direction:</p> <p>$V_{max} = 0.01552 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.01552 \text{ kip})}{(118.04 \text{ kip})}$ $\text{Ratio} = 0.00013148$ | <p>Status: PASS Ratio: 0.130</p> <p>Status: PASS Ratio: 0.000</p> |
| | <p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ | |

| | | |
|------------------|---|---|
| <p>14.5.2.1b</p> | <p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p>Considering x-direction: $M_{max} = 56.861\text{kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(56.861\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.20796$ | <p>Status: PASS Ratio: 0.210</p> |
| | <p>Considering z-direction: $M_{max} = 0.052669\text{kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.052669\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.00019263$ | <p>Status: PASS Ratio: 0.000</p> |
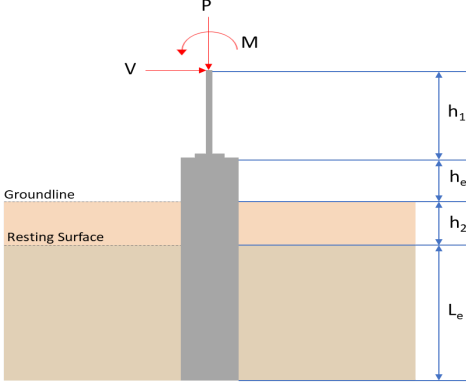
| REFERENCES | CALCULATIONS | RESULTS | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------|--|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|-------|-------------|--------|--------|-------------|-------|-------|---------------|-------|-------|---------------|--------|--------|--|
| | <p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.75$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1285 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>4.748</td> <td>7.080</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.133</td> <td>-6.884</td> </tr> <tr> <td>V_z (kip)</td> <td>0.000</td> <td>0.000</td> </tr> <tr> <td>M_x (kipft)</td> <td>0.000</td> <td>0.000</td> </tr> <tr> <td>M_z (kipft)</td> <td>52.488</td> <td>88.183</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 3$ ksi - Concrete strength,</p> | Layer | Label | Allowable Bearing Pressure (q_a) (psf) | Allowable Lateral Pressure (R) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | P (kip) | 4.748 | 7.080 | V_x (kip) | -4.133 | -6.884 | V_z (kip) | 0.000 | 0.000 | M_x (kipft) | 0.000 | 0.000 | M_z (kipft) | 52.488 | 88.183 | |
| Layer | Label | Allowable Bearing Pressure (q_a) (psf) | Allowable Lateral Pressure (R) (psf/ft) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Load Component | ASD | LRFD | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P (kip) | 4.748 | 7.080 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V_x (kip) | -4.133 | -6.884 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V_z (kip) | 0.000 | 0.000 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M_x (kipft) | 0.000 | 0.000 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M_z (kipft) | 52.488 | 88.183 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.133 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.65812 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$ | | | | | | | | | | | | | | | | | | | | | | | | | | | |

$$M_o = \frac{(52.488 \text{ kipft}) + ((-4.133 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 8.358 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$$L_{e,x} = 7.2565 \text{ ft} - \text{Required depth in x-direction,}$$

Considering z-direction:

$$L_{e,z} = 0 \text{ ft} - \text{Required depth in z-direction,}$$

Minimum embedded depth required:

$$L_{e,req} - \text{Depth of pile required,}$$

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(7.2565 \text{ ft}), (0 \text{ ft})]$$

$$L_{e,req} = 7.256 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.75 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(7.256 \text{ ft})}{(7.75 \text{ ft})}$$

$$\text{Ratio} = 0.93626$$

Status: **PASS**
Ratio: **0.940**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(4.748 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.29675 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_o}$$

$$\text{Ratio} = \frac{(0.29675 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.14838$$

Status: **PASS**
Ratio: **0.150**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.9375$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.65812$ kip/ft - Lateral force per length of pile,

$M_o = 8.358$ kipft/ft - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (8.358 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.65812 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (8.358 \text{ kipft/ft})) + (4 \times (-0.65812 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3534 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (8.358 \text{ kipft/ft})) + (3 \times (-0.65812 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (8.358 \text{ kipft/ft})) + (2 \times (-0.65812 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = 0.27598 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (8.358 \text{ kipft/ft})) + ((-0.65812 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 1.1603 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.3534 \text{ ft})}{2}$$

$$p_a = 0.40151 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.27598 \text{ kip/ft}^2)}{(0.40151 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.68736$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$


$$\text{Ratio} = \frac{(1.1603 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.99814$$

Status: **PASS**
Ratio: **0.690**

Status: **PASS**
Ratio: **1.000**

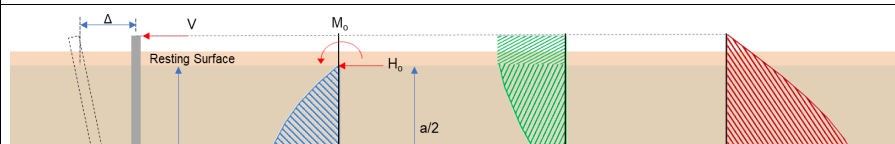

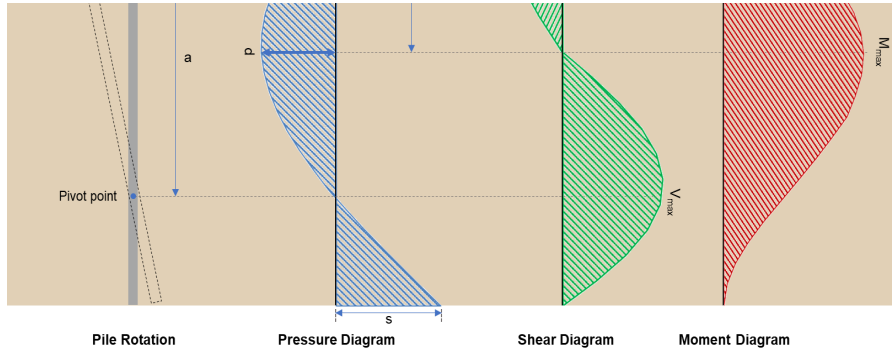

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-6.884 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.0962 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(88.183 \text{ kipft}) + ((-6.884 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 14.042 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(14.042 \text{ kipft/ft})}{(-1.0962 \text{ kip/ft})}$$

$$E = 12.81 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (14.042 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-1.0962 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (14.042 \text{ kipft/ft})) + (4 \times (-1.0962 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3523 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{L_c} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-1.0962 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (12.81 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3523 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (12.81 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3523 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 15.716 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_c) \left[\left(\frac{E}{L_c} + \frac{a}{2 L_c} \right) - \left[\left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{2 L_c} \right)^3 \right] + \left[\left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{2 L_c} \right)^4 \right] \right]$$

$$M_{max} = ((-1.0962 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[\left(\frac{(12.81 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.3523 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[\left(\frac{4 \times (12.81 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3523 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (12.81 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3523 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 57.816 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(7.08 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102.03 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102.03 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10 \emptyset : Use #3(0.375 in)

25.7.2.1

s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Axial Compression Strength (ACI 318-19, LRFD)22.4.2.2 ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}] + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.08 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.002224$$

Status: **PASS**
Ratio: **0.000****Shear Strength (ACI 318-19, LRFD)****Parameters:** $b_w = 48 \text{ in}$ - Effective width,22.5.2.2 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3 λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,22.5.5.1.1 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 7.08 \text{ kip} \rightarrow 7080 \text{ lbf}$,22.5.5.1.1(a) $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7080 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.74 \text{ kip}$$

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,22.5.5.1.2 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

 V_c - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.74 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.74 \text{ kip}$$

| | | |
|------------------|--|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$.</p> <p>$V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.74 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.06 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 15.716 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(15.716 \text{ kip})}{(118.06 \text{ kip})}$ $\text{Ratio} = 0.13312$ | <p>Status: PASS Ratio: 0.130</p> |
| <p>14.5.2.1b</p> | <p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ <p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of:</p> <p>$\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(3 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 273.423 \text{ kip ft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = 0.85 f'_c S_m$ | |

$\phi M_{n,z} = \phi M_{n,y}$

$$\phi M_{n,z} = (0.65) \times 0.85 \times (3 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,z} = 2545.9 \text{ kipft}$$

Therefore,

ϕM_n - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(273.42 \text{ kipft}), (2545.9 \text{ kipft})]$$

$$\phi M_n = 273.42 \text{ kipft}$$

Considering x-direction:

$M_{max} = 57.816 \text{ kipft}$ - Maximum moment in the x-direction,


Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(57.816 \text{ kipft})}{(273.42 \text{ kipft})}$$

$$\text{Ratio} = 0.21145$$

Status: **PASS**
Ratio: **0.210**
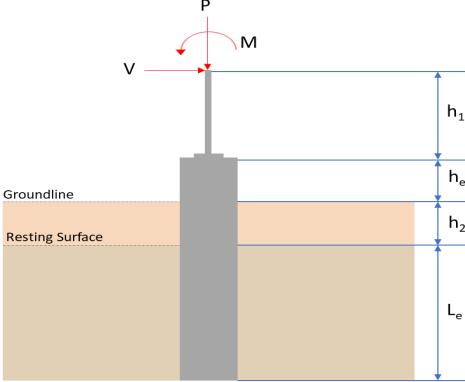
| REFERENCES | CALCULATIONS | RESULTS | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------|---|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|-------|-------------|--------|--------|-------------|-------|--------|---------------|--------|--------|---------------|--------|--------|--|
| | <p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Pile Input</p>  <p>Geometry</p> <p>Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.75$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1288 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>4.597</td> <td>6.855</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.047</td> <td>-6.744</td> </tr> <tr> <td>V_z (kip)</td> <td>0.010</td> <td>-0.017</td> </tr> <tr> <td>M_x (kipft)</td> <td>-0.035</td> <td>-0.057</td> </tr> <tr> <td>M_z (kipft)</td> <td>51.650</td> <td>86.782</td> </tr> </tbody> </table> <p>Material Properties</p> <p>$f'_{ck} = 3$ ksi - Concrete strength,</p> | Layer | Label | Allowable Bearing Pressure (q_a) (psf) | Allowable Lateral Pressure (R) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | P (kip) | 4.597 | 6.855 | V_x (kip) | -4.047 | -6.744 | V_z (kip) | 0.010 | -0.017 | M_x (kipft) | -0.035 | -0.057 | M_z (kipft) | 51.650 | 86.782 | |
| Layer | Label | Allowable Bearing Pressure (q_a) (psf) | Allowable Lateral Pressure (R) (psf/ft) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Load Component | ASD | LRFD | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P (kip) | 4.597 | 6.855 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V_x (kip) | -4.047 | -6.744 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| V_z (kip) | 0.010 | -0.017 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M_x (kipft) | -0.035 | -0.057 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| M_z (kipft) | 51.650 | 86.782 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Required depth to resist lateral loads (ASD)</p> <p>H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction:</p> <p>H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.047 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.64443 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$ | | | | | | | | | | | | | | | | | | | | | | | | | | | |

$$M_o = \frac{(51.65 \text{ kipft}) + ((-4.047 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 8.2245 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 7.2324 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.01 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0015924 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.035 \text{ kipft}) + ((0.01 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0055732 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.8054 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(7.2324 \text{ ft}), (0.8054 \text{ ft})]$$

$$L_{e,req} = 7.232 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.75 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(7.232 \text{ ft})}{(7.75 \text{ ft})}$$

$$\text{Ratio} = 0.93316$$

Status: **PASS**
Ratio: **0.930**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(4.597 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.28731 \text{ kip/ft}^2$$

$$q = 0.28731 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$Ratio = \frac{q}{q_a}$$

$$Ratio = \frac{(0.28731 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$Ratio = 0.14366$$

Status: **PASS**
Ratio: **0.140**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.9375$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.64443 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 8.2245 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (8.2245 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (8.2245 \text{ kipft/ft})) + (4 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3528 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (8.2245 \text{ kipft/ft})) + (3 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (8.2245 \text{ kipft/ft})) + (2 \times (-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = 0.27291 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (8.2245 \text{ kipft/ft})) + ((-0.64443 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 1.1443 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{q}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.3528 \text{ ft})}{2}$$

$$p_a = 0.40146 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.27291 \text{ kip/ft}^2)}{(0.40146 \text{ kip/ft}^2)}$$

$$Ratio = 0.67981$$

p_a - Allowable lateral soil pressure at depth L_e ,


Status: **PASS**
Ratio: **0.680**

| | | |
|--|---|--|
| | $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$ $p_s = 1.1625 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(1.1443 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.98433$ | Status: PASS Ratio: 0.980 |
| | <p>Considering z-direction:</p> <p>$H_o = 0.0015924 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.0055732 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.0055732 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.0055732 \text{ kipft/ft})) + (4 \times (0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))}$ $a = 5.5517 \text{ ft}$ <p>p - Earth pressure against the pile at distance $a/2$ from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.0055732 \text{ kipft/ft})) + (3 \times (0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (0.0055732 \text{ kipft/ft})) + (2 \times (0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$ $p = 0.0010612 \text{ kip/ft}^2$ <p>s - Earth pressure against the pile at distance L_e,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.0055732 \text{ kipft/ft})) + ((0.0015924 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$ $s = 0.0023463 \text{ kip/ft}^2$ <p>Check lateral soil pressure capacity:</p> <p>p_a - Allowable lateral soil pressure at depth $a/2$,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.5517 \text{ ft})}{2}$ $p_a = 0.41638 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.0010612 \text{ kip/ft}^2)}{(0.41638 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.0025485$ <p>p_s - Allowable lateral soil pressure at depth L_e,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$ $p_s = 1.1625 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ | Status: PASS Ratio: 0.000 |

$$\text{Ratio} = \frac{(0.0023463 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.0020183$$

Status: **PASS**
Ratio: **0.000**

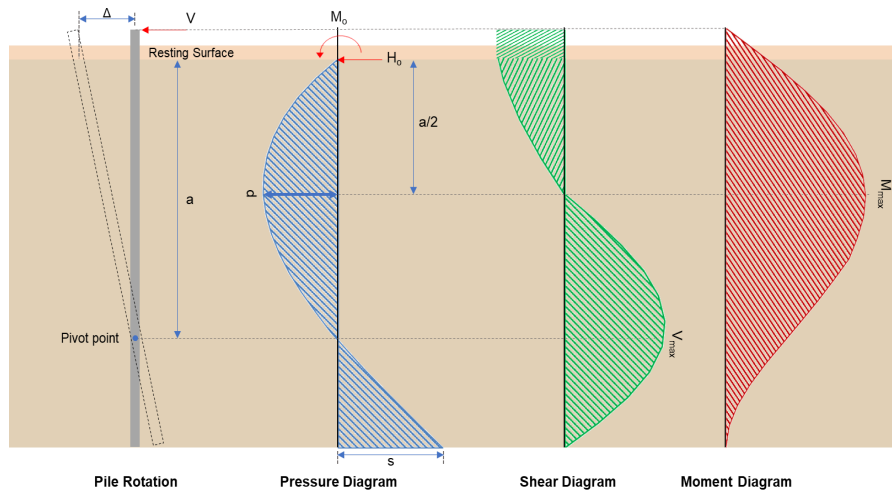

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-6.744 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.0739 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(86.782 \text{ kipft}) + ((-6.744 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 13.819 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(13.819 \text{ kipft/ft})}{(-1.0739 \text{ kip/ft})}$$

$$E = 12.868 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (13.819 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-1.0739 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (13.819 \text{ kipft/ft})) + (4 \times (-1.0739 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3517 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{L_c} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-1.0739 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3517 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3517 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 15.453 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.0739 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[\left(\frac{(12.868 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.3517 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[\left(\frac{4 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3517 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (12.868 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3517 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 56.861 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.017 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.002707 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.057 \text{ kipft}) + ((-0.017 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0090764 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0090764 \text{ kipft/ft})}{(-0.002707 \text{ kip/ft})}$$

$$E = 3.3529 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0090764 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.002707 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.0090764 \text{ kipft/ft})) + (4 \times (-0.002707 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.5583 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.002707 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.5583 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.5583 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.01552 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.002707 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[\left(\frac{(3.3529 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.5583 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[\left(\frac{4 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.5583 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.3529 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.5583 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.052669 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(6.855 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102.04 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102.04 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3 s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(6.855 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0021533$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 6.855 \text{ kip} \rightarrow 6855 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(6855 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.71 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

V_c - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.71 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.71 \text{ kip}$$

| | | |
|-----------------|---|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.71 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.04 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 15.453 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(15.453 \text{ kip})}{(118.04 \text{ kip})}$ $\text{Ratio} = 0.13092$ <p>Considering z-direction:</p> <p>$V_{max} = 0.01552 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.01552 \text{ kip})}{(118.04 \text{ kip})}$ $\text{Ratio} = 0.00013148$ | <p>Status: PASS Ratio: 0.130</p> <p>Status: PASS Ratio: 0.000</p> |
| | <p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ | |

| | | |
|------------------|---|---|
| <p>14.5.2.1b</p> | <p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p>Considering x-direction: $M_{max} = 56.861\text{kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(56.861\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.20796$ | <p>Status: PASS Ratio: 0.210</p> |
| | <p>Considering z-direction: $M_{max} = 0.052669\text{kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.052669\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.00019263$ | <p>Status: PASS Ratio: 0.000</p> |