

## Project Details



**Project Name:** MTSOLAR\_646964JL4I03C

**Date:** Tue Sep 16 2025

**Location:** George St, Orange, VT, USA

**Number of Modules:** 16


**Unique ID:** 1P-0-8TOP-HD-84-L-4Hx4W-STRUTS-L8HD

**Number of Poles:** 1

**Date Sold:**

**Dealer:** \_\_\_\_\_

\_\_\_\_\_

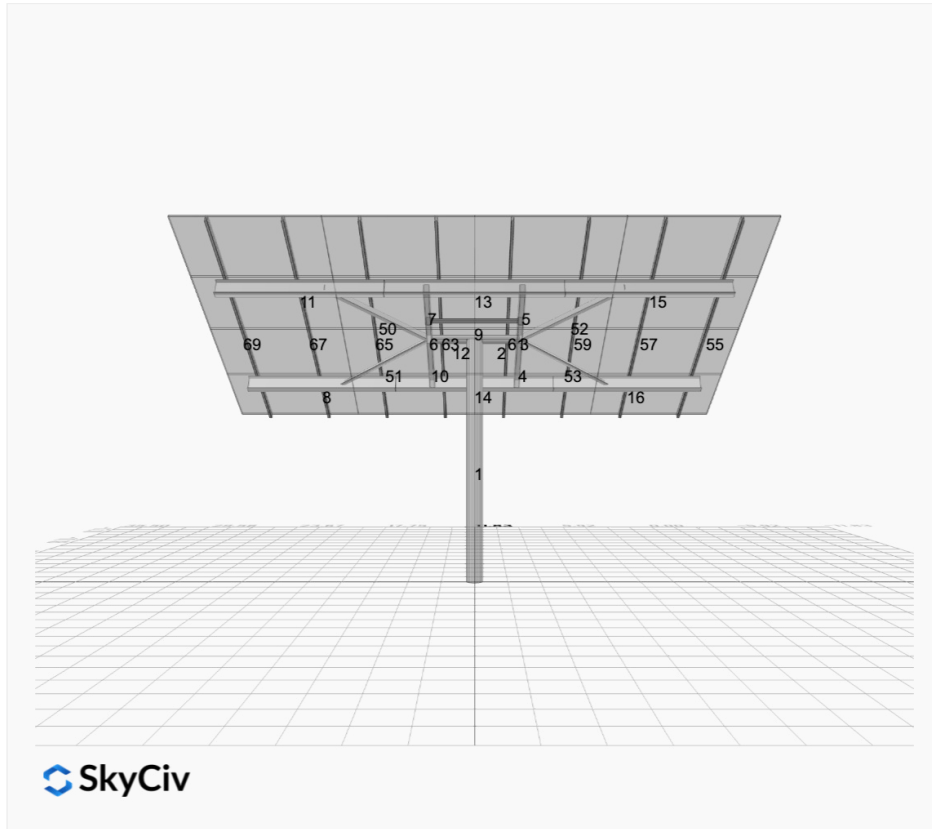

|                             |          |
|-----------------------------|----------|
| <b>Array Dimensions N/S</b> | 15.17 ft |
| <b>Array Dimensions E/W</b> | 23.67 ft |
| <b>Winter Tilt Angle</b>    | 30       |
| <b>Front Edge Clearance</b> | 7 ft     |

### MT Solar Bill of Materials (1P-0-8TOP-HD-84-L-4Hx4W-STRUTS-L8HD)

| Part               | Short Description     | BOM Qty |
|--------------------|-----------------------|---------|
| MTS-PC-8           | 8IN Pole Cap Assembly | 1       |
| MTS-HF-HD          | H-Frame Assembly-HD   | 1       |
| MTS-HD-Wing-84     | 84IN HD Wing          | 4       |
| MTS-CLAMP-HOOK-4PK | Hook Clamp            | 4       |

### Rail Bill of Materials

| Part             | Qty |
|------------------|-----|
| Rails (182in)    | 8   |
| Rail Attachment  | 16  |
| Module Mid Clamp | 24  |
| Module End Clamp | 16  |
| Ground Lug       | 4   |

## Site Details:



**Site Address:** George St, Orange, VT, USA

### Array Specification

|                                    |           |
|------------------------------------|-----------|
| <b>Duty Classification:</b>        | HD        |
| <b>Module Width:</b>               | 45.00 in  |
| <b>Module Length:</b>              | 70.00in   |
| <b>Number of Rows:</b>             | 4         |
| <b>Number of Columns:</b>          | 4         |
| <b>Total Number of Modules:</b>    | 16        |
| <b>Winter Tilt Angle:</b>          | 30        |
| <b>Front Edge Clearance:</b>       | 7         |
| <b>Total Array Height at Tilt:</b> | 14.58 ft  |
| <b>Total Frame Length:</b>         | 21.50 ft  |
| <b>Module Info/Notes:</b>          | trina     |
| <b>Array Dimensions N/S:</b>       | 15.17 ft  |
| <b>Array Dimensions E/W:</b>       | 23.67 ft  |
| <b>Rail Length:</b>                | 182.00 in |
| <b>Rail Spacing:</b>               | 2.96 ft   |

### Support Specifications

|                                 |                 |
|---------------------------------|-----------------|
| <b>Pole Size:</b>               | 8in Pipe Sch 40 |
| <b>Pole Length above Grade:</b> | 10.79 ft        |
| <b>Number of Poles:</b>         | 1               |
| <b>Pole Spacing:</b>            | 0               |

### Foundation Specifications

|                                        |                      |
|----------------------------------------|----------------------|
| <b>Foundation Type:</b>                | Square               |
| <b>Foundation Dimensions:</b>          | 48 x 48 in           |
| <b>Foundation Depth (below grade):</b> | Pile 1: 6.50 ft      |
| <b>Foundation Volume:</b>              | 3.852 y <sup>3</sup> |

### Site Info

|                             |                            |
|-----------------------------|----------------------------|
| <b>Risk Category:</b>       | I                          |
| <b>Exposure:</b>            | B                          |
| <b>Soil Classification:</b> | sand                       |
| <b>Site Location:</b>       | George St, Orange, VT, USA |
| <b>Wind Speed:</b>          | 107 mph                    |
| <b>Snow Load:</b>           | 40 psf                     |

### **Design Disclaimer**


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



## AutoDesigner Input



```
{ "product_type": "Beam", "designer_name": "Darren", "designer_email": "omearasolar@gmail.com", "designer_phone": "802-522-2381", "project_id": "MTSOLAR_646964JL4I03C", "site_address": "George St, Orange, VT, USA", "module_info": "trina", "module_width": 45, "module_length": 70, "number_rows": 4, "number_columns": 4, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": 15, "tilt_angle": 30, "ground_clearance": 7, "risk_category": "I", "exposure_category": "B", "frame_duty_override": "HD", "pole_override": "8_40", "soil_type": "sand", "customer_foundation_override": "48_Square", "foundation_type": "Square", "foundation_size": 48, "check_rails": false, "wind_speed_override": 107, "snow_load_override": 40, "direct_snow_load": false, "add_angle_brace": true }
```

## Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)


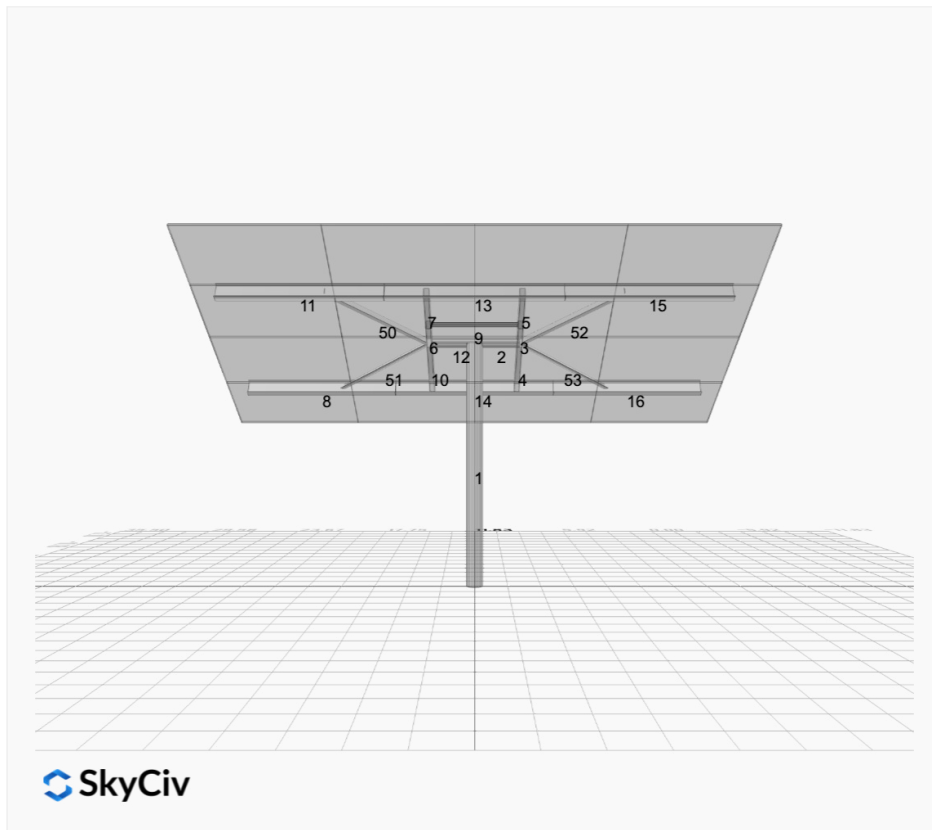


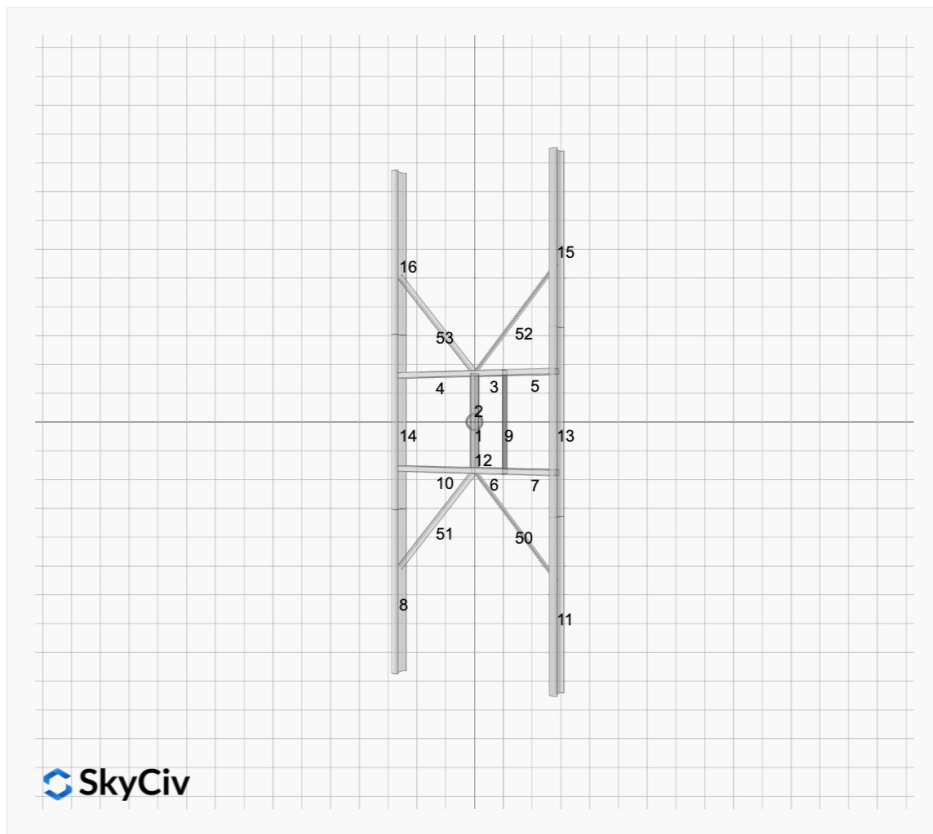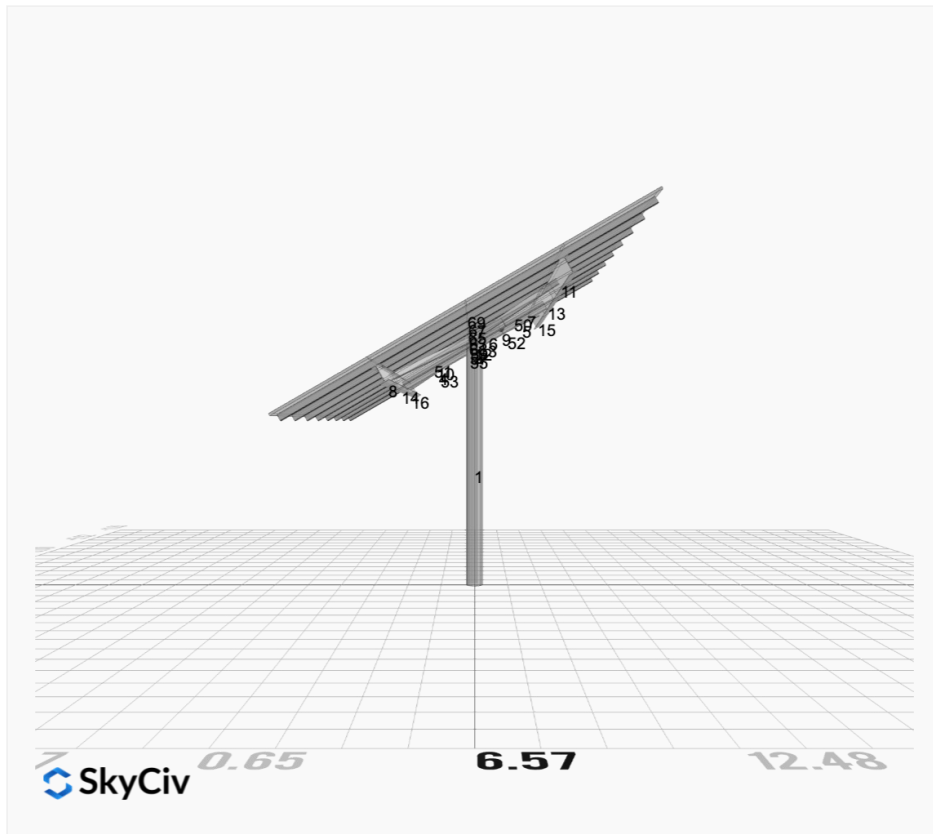


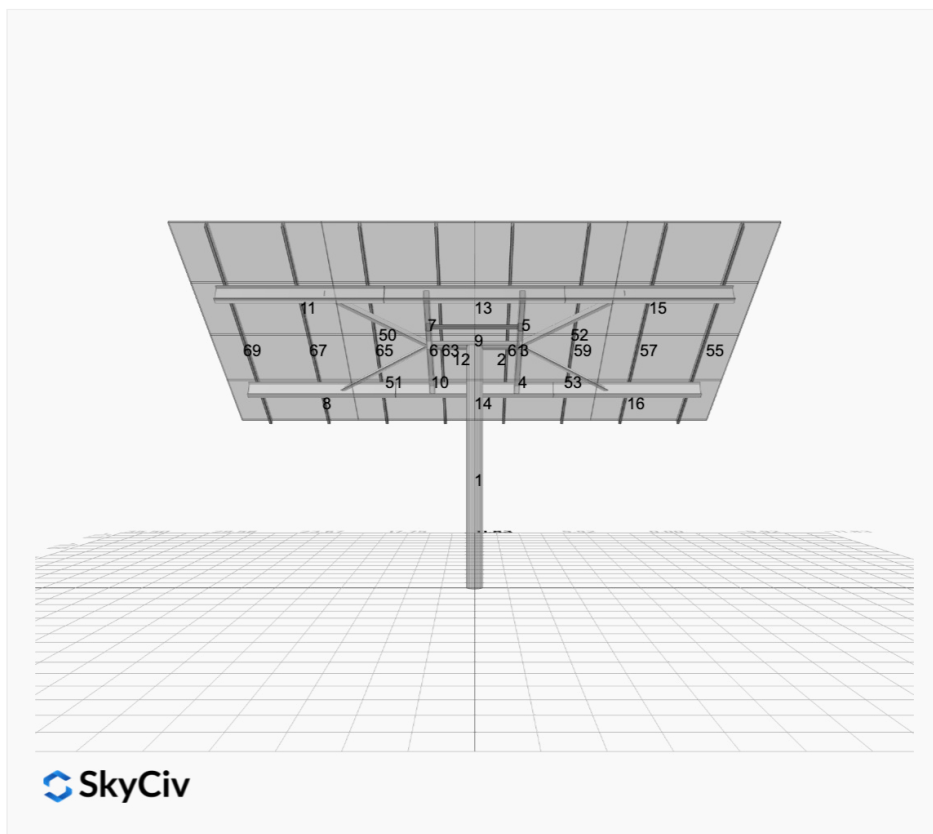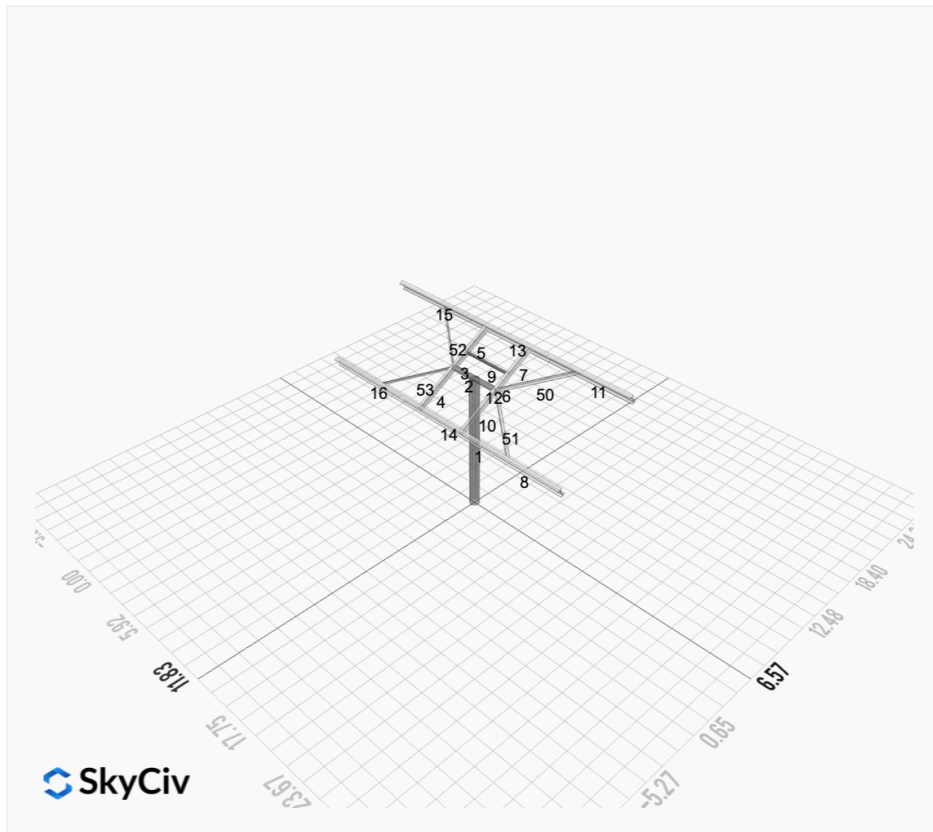

# FEM Results (Envelope Worst Case for each member)

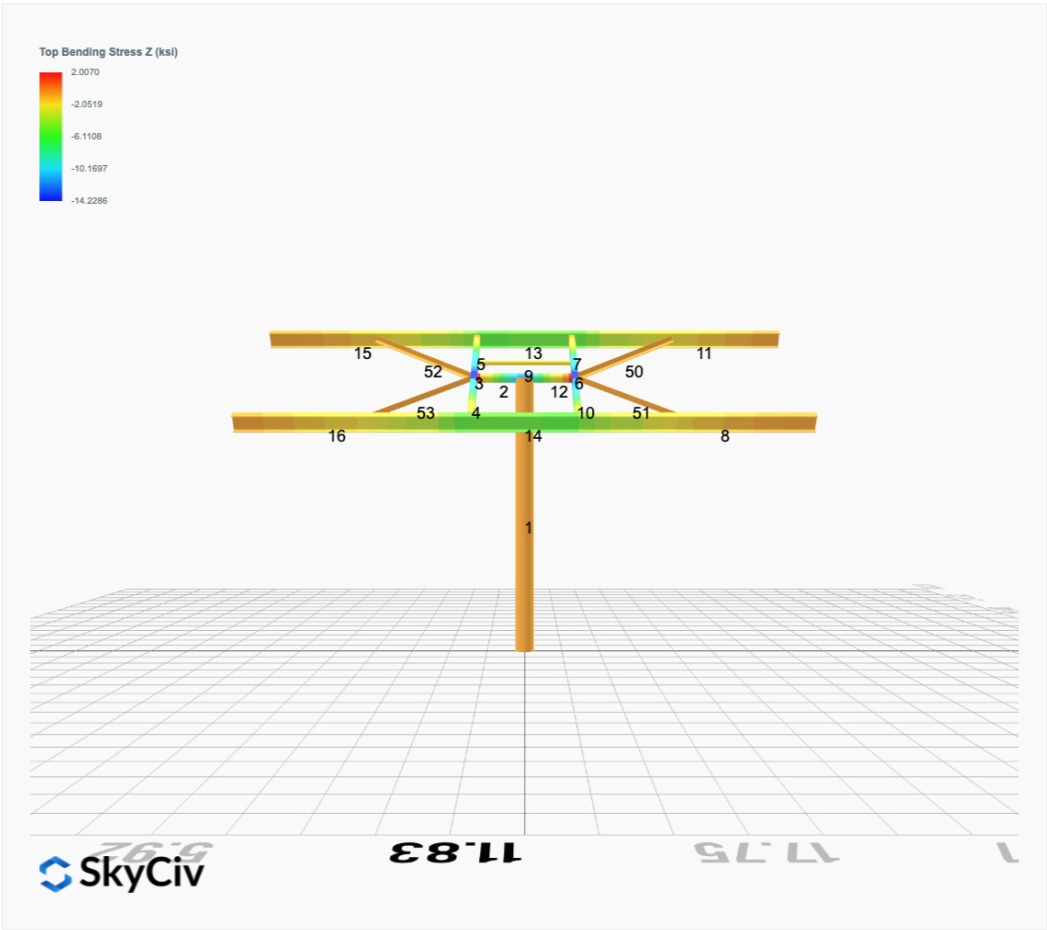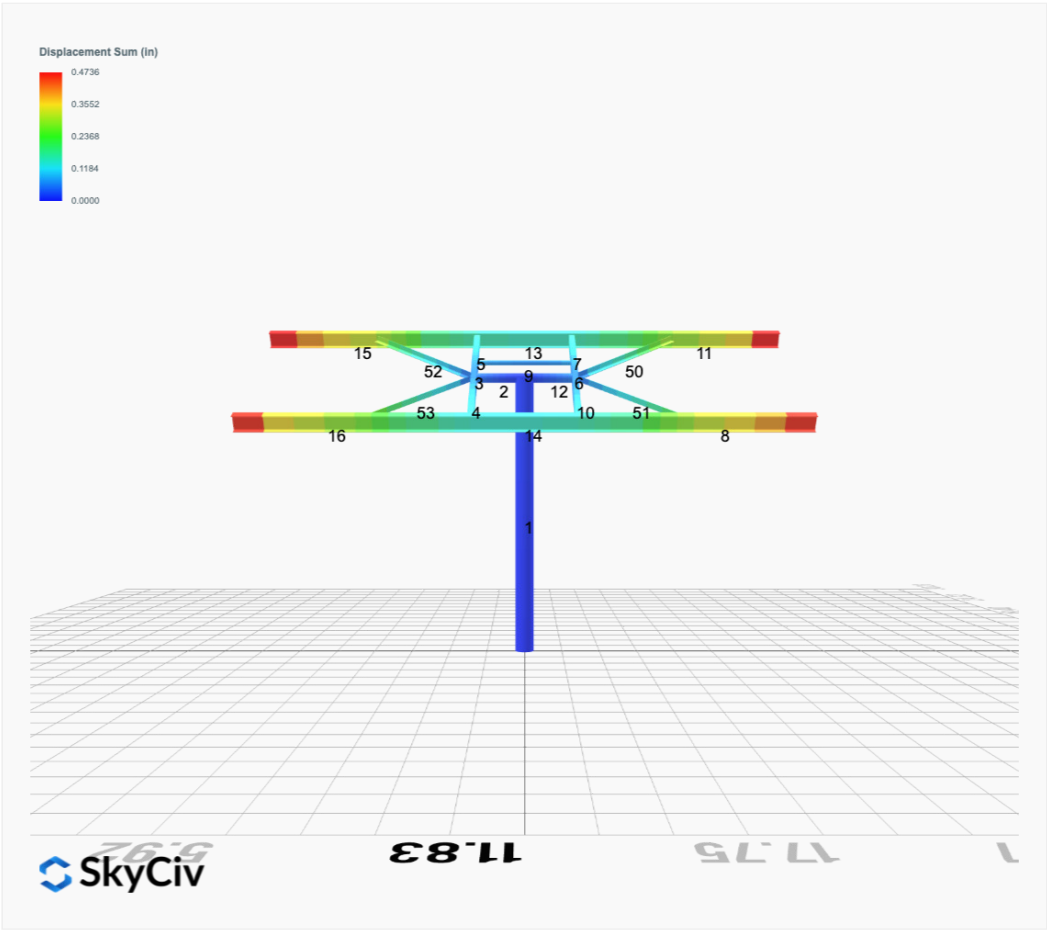

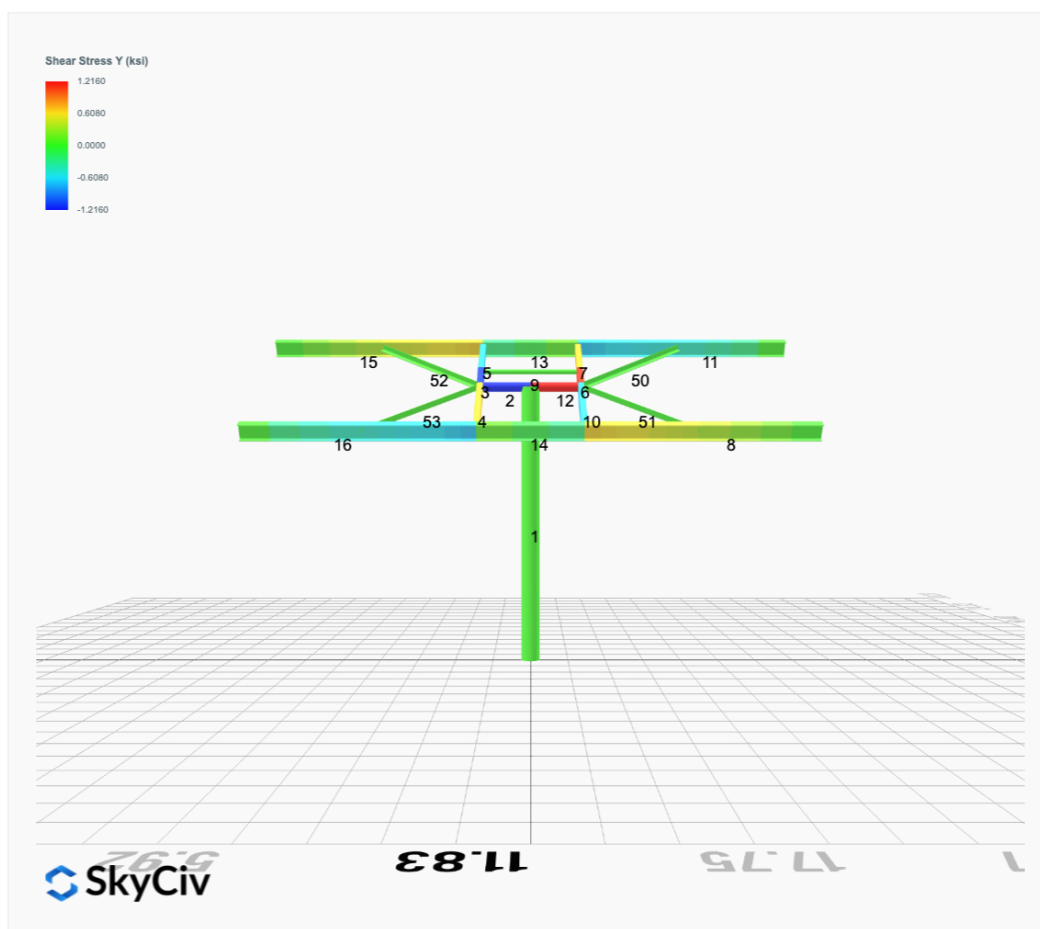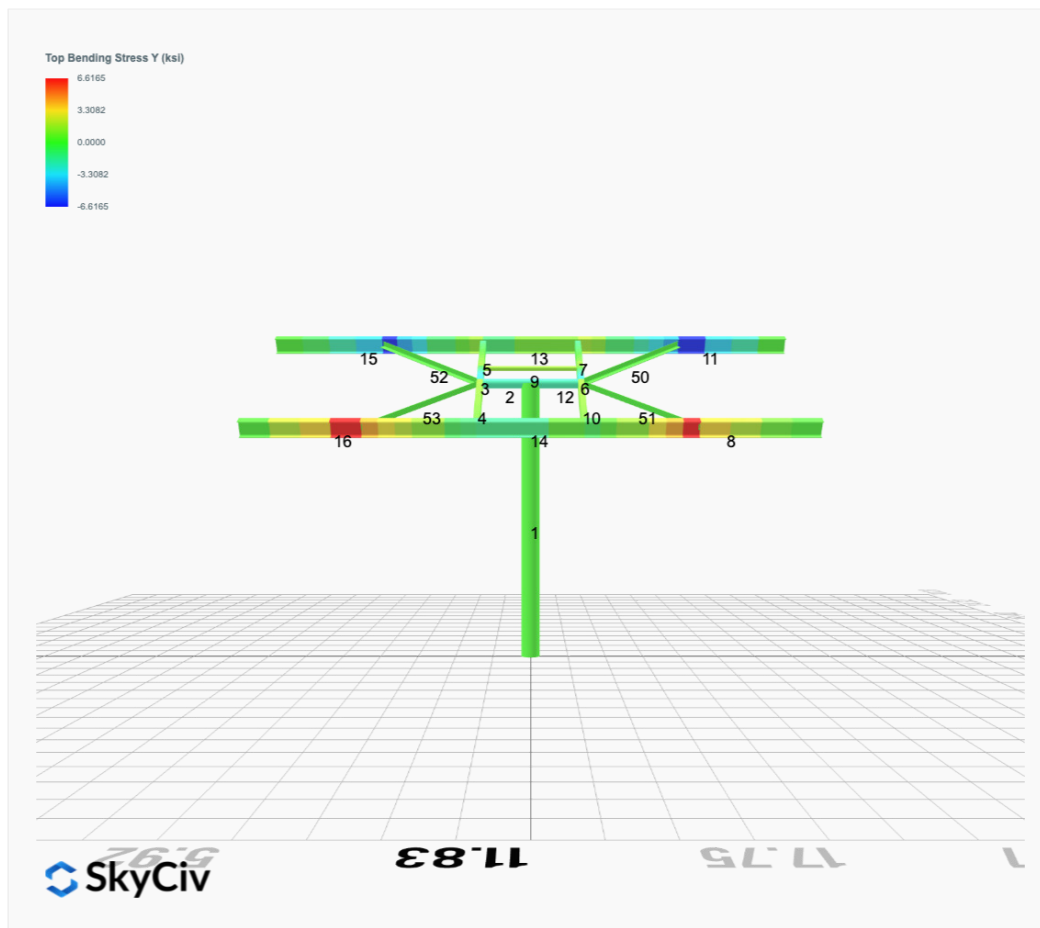

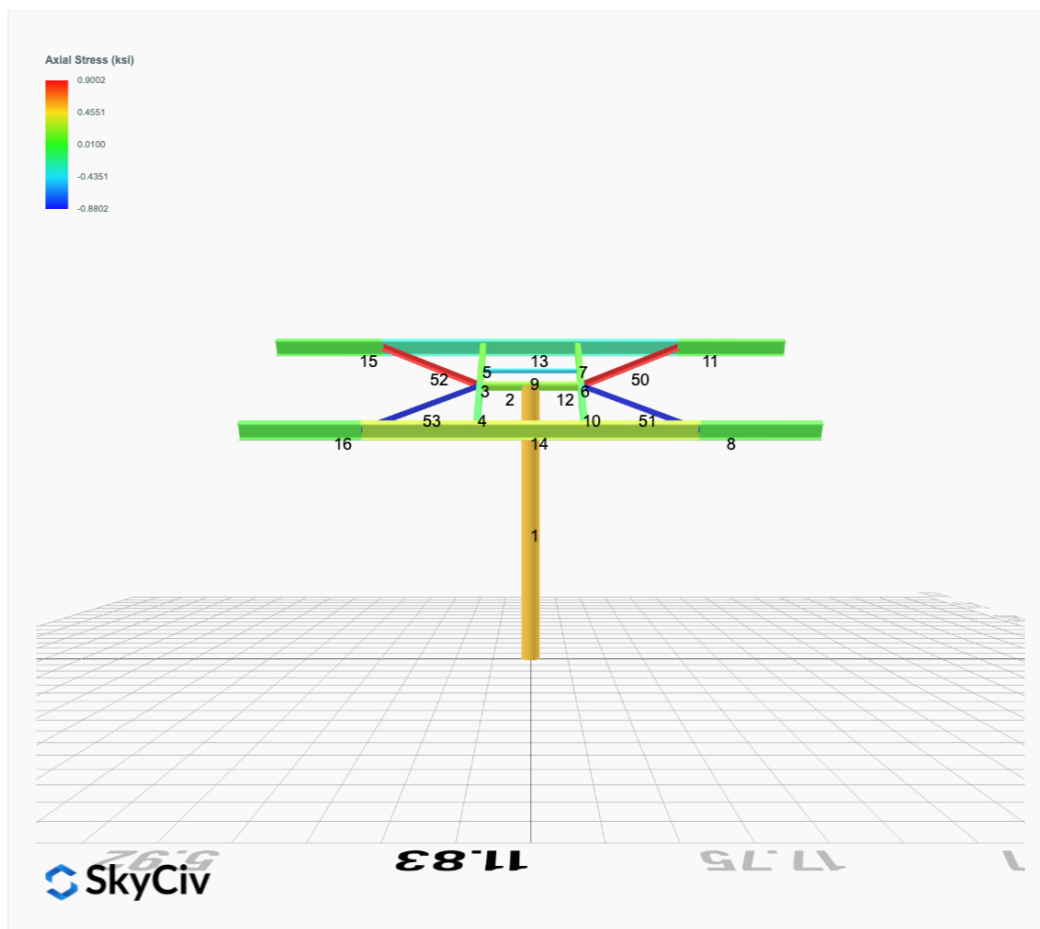

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name                                                                            | Fx      | Fy      | Fz     | Mx      | My      | Mz       |
|---------------------------------------------------------------------------------|---------|---------|--------|---------|---------|----------|
| ULS: 1. D                                                                       | 0.0000  | 2.6998  | 0.0000 | -0.0000 | -0.0000 | 0.0307   |
| ULS: 2. D + L                                                                   | 0.0000  | 2.6998  | 0.0000 | -0.0000 | -0.0000 | 0.0307   |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0000  | 7.6684  | 0.0000 | -0.0000 | -0.0000 | 0.0788   |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0000  | 2.6998  | 0.0000 | -0.0000 | -0.0000 | 0.0307   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0000  | 6.4262  | 0.0000 | -0.0000 | -0.0000 | 0.0668   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0000  | 2.6998  | 0.0000 | -0.0000 | -0.0000 | 0.0307   |
| ULS: 5b. D + 0.7E                                                               | 0.0000  | 2.6998  | 0.0000 | -0.0000 | -0.0000 | 0.0307   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | 0.0000  | 6.4262  | 0.0000 | -0.0000 | -0.0000 | 0.0668   |
| ULS: 8. 0.6D + 0.7E                                                             | 0.0000  | 1.6199  | 0.0000 | -0.0000 | -0.0000 | 0.0184   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -2.6122 | 7.2243  | 0.0000 | -0.0000 | -0.0000 | 28.7999  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -2.6122 | 7.2243  | 0.0000 | -0.0000 | -0.0000 | 28.7999  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 2.2390  | -1.1783 | 0.0000 | -0.0000 | -0.0000 | -23.7253 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 1.8659  | -0.5319 | 0.0000 | -0.0000 | -0.0000 | -28.9539 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.9592 | 9.8196  | 0.0000 | -0.0000 | -0.0000 | 21.6437  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -1.9592 | 9.8196  | 0.0000 | -0.0000 | -0.0000 | 21.6437  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.6793  | 3.5177  | 0.0000 | -0.0000 | -0.0000 | -17.7502 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.3994  | 4.0024  | 0.0000 | -0.0000 | -0.0000 | -21.6717 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.9592 | 6.0932  | 0.0000 | -0.0000 | -0.0000 | 21.6076  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -1.9592 | 6.0932  | 0.0000 | -0.0000 | -0.0000 | 21.6076  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.6793  | -0.2087 | 0.0000 | -0.0000 | -0.0000 | -17.7863 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.3994  | 0.2760  | 0.0000 | -0.0000 | -0.0000 | -21.7078 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -2.6122 | 6.1444  | 0.0000 | -0.0000 | -0.0000 | 28.7877  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -2.6122 | 6.1444  | 0.0000 | -0.0000 | -0.0000 | 28.7877  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 2.2390  | -2.2582 | 0.0000 | -0.0000 | -0.0000 | -23.7376 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 1.8659  | -1.6119 | 0.0000 | -0.0000 | -0.0000 | -28.9662 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 14.9599             |
| Shear X          | -4.3537             |
| Shear Z          | 0.0000              |
| Moment X         | 0.0009              |
| Moment Y (Twist) | 0.0013              |
| Moment Z         | 49.1521             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 9.8196              |
| Shear X          | -2.6122             |
| Shear Z          | 0.0000              |
| Moment X         | -0.0000             |
| Moment Y (Twist) | 0.0000              |
| Moment Z         | 28.9662             |

Project Details

Design Code: AISC 360-16 LRFD  
Provision: LRFD  
Country: United States  
  
User Name: sales@mtsolar.us  
Unit System: imperial




Design Input Information

| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |                      |                      |
|------------------|---------|----------------------|----------------------|
| ID               | E (ksi) | F <sub>y</sub> (ksi) | F <sub>u</sub> (ksi) |
| 1                | 29000   | 50                   | 65                   |

| Section Dimensions |                 |        |                     |                     |                     |                     |                     |        |
|--------------------|-----------------|--------|---------------------|---------------------|---------------------|---------------------|---------------------|--------|
|                    |                 |        |                     |                     |                     |                     |                     |        |
| ID                 | Name            | d (in) | t <sub>w</sub> (in) |                     |                     |                     |                     |        |
| 2                  | 2in Pipe Sch 80 | 2.38   | 0.22                |                     |                     |                     |                     |        |
| 5                  | 4in Pipe Sch 80 | 4.50   | 0.34                |                     |                     |                     |                     |        |
| 9                  | 8in Pipe Sch 40 | 8.63   | 0.32                |                     |                     |                     |                     |        |
|                    |                 |        |                     |                     |                     |                     |                     |        |
| ID                 | Name            | d (in) | b (in)              | t <sub>w</sub> (in) | t <sub>b</sub> (in) | r (in)              |                     |        |
| 16                 | HSS5x3x16       | 5.00   | 3.00                | 0.17                | 0.17                | 0.17                |                     |        |
|                    |                 |        |                     |                     |                     |                     |                     |        |
| ID                 | Name            | d (in) | t <sub>w</sub> (in) | b <sub>t</sub> (in) | b <sub>b</sub> (in) | t <sub>t</sub> (in) | t <sub>b</sub> (in) | r (in) |
| 19                 | W8x10           | 7.89   | 0.17                | 3.94                | 3.94                | 0.20                | 0.20                | 0.30   |
|                    |                 |        |                     |                     |                     |                     |                     |        |

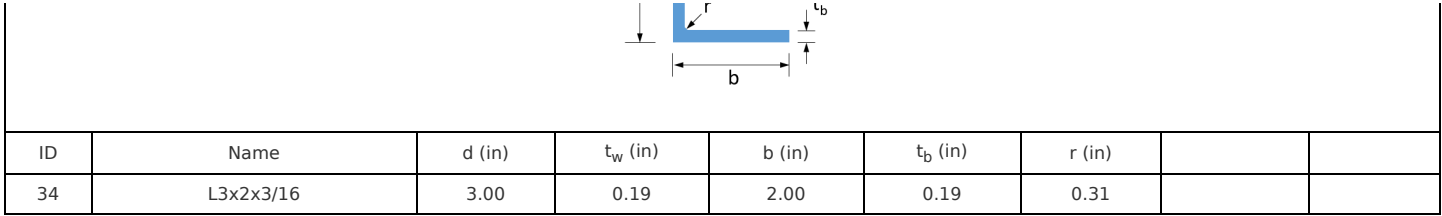

| Member Properties |            |                       |                       |                      |                                                                                                                                        |  |  |  |  |      |      |     |
|-------------------|------------|-----------------------|-----------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|------|------|-----|
| Member ID         | Section ID | K <sub>z</sub> L (ft) | K <sub>y</sub> L (ft) | L <sub>b</sub> (f t) | C <sub>b</sub>                                                                                                                         |  |  |  |  | LS T | LS C | LD  |
| 1                 | 9          | 22.66                 | 22.66                 | 10.79                | -                                                                                                                                      |  |  |  |  | 300  | 200  | 1   |
| 2                 | 5          | 1.30                  | 1.30                  | 2.00                 | -                                                                                                                                      |  |  |  |  | 300  | 200  | 1   |
| 3                 | 16         | 0.92                  | 0.92                  | 1.42                 | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18           |  |  |  |  | 300  | 200  | 1   |
| 4                 | 16         | 2.44                  | 2.44                  | 3.75                 | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.66,1.87,1.67,1.67,1.67,1.67,1.67,1.67,1.64,1.69,1.67,1.67,1.66,1.61      |  |  |  |  | 300  | 200  | 1   |
| 5                 | 16         | 1.52                  | 1.52                  | 2.33                 | 1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.67,1.67,1.67,1.65,1.66,1.67,1.67,1.66,1.67      |  |  |  |  | 300  | 200  | 1   |
| 6                 | 16         | 0.92                  | 0.92                  | 1.42                 | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18      |  |  |  |  | 300  | 200  | 1   |
| 7                 | 16         | 1.52                  | 1.52                  | 2.33                 | 1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.67,1.67,1.67,1.65,1.66,1.67,1.67,1.66,1.67      |  |  |  |  | 300  | 200  | 1   |
| 8                 | 19         | 7.00                  | 7.00                  | 7.00                 | 2.33,2.32,2.33,2.31,2.32,2.33,2.32,2.32,2.31,2.29,2.32,2.32,2.31,2.31,2.31,2.31,2.31,2.30,2.32,2.32,2.29,2.33,2.31,2.31,2.31,2.31      |  |  |  |  | 300  | 200  | 1   |
| 9                 | 2          | 2.60                  | 2.60                  | 4.00                 | -                                                                                                                                      |  |  |  |  | 300  | 200  | 1   |
| 10                | 16         | 2.44                  | 2.44                  | 3.75                 | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.66,1.87,1.67,1.67,1.67,1.67,1.67,1.67,1.64,1.69,1.67,1.67,1.66,1.61      |  |  |  |  | 300  | 200  | 1   |
| 11                | 19         | 7.00                  | 7.00                  | 7.00                 | 2.33,2.32,2.33,2.32,2.32,2.33,2.32,2.32,2.31,2.32,2.32,2.32,2.31,2.31,2.32,2.32,2.31,2.30,2.32,2.32,2.29,2.31,2.32,2.32,2.31,2.31      |  |  |  |  | 300  | 200  | 1   |
| 12                | 5          | 1.30                  | 1.30                  | 2.00                 | -                                                                                                                                      |  |  |  |  | 300  | 200  | 1   |
| 13                | 19         | 4.88                  | 4.00                  | 7.50                 | 1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.05,1.02,1.02,1.02,1.04,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.05,1.02,1.02,1.02,1.03 |  |  |  |  | 300  | 200  | 1   |
| 14                | 19         | 4.88                  | 4.00                  | 7.50                 | 1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.12,1.02,1.02,1.02,1.01,1.02,1.02,1.02,1.02,1.02,1.02,1.02,1.11,1.02,1.02,1.02,1.01 |  |  |  |  | 300  | 200  | 1   |
| 15                | 19         | 7.00                  | 7.00                  | 7.00                 | 2.33,2.32,2.33,2.32,2.32,2.33,2.32,2.32,2.31,2.32,2.32,2.32,2.31,2.31,2.32,2.32,2.31,2.30,2.32,2.32,2.29,2.31,2.32,2.32,2.31,2.31      |  |  |  |  | 300  | 200  | 1   |
| 16                | 19         | 7.00                  | 7.00                  | 7.00                 | 2.33,2.32,2.33,2.31,2.32,2.33,2.32,2.32,2.31,2.29,2.32,2.32,2.31,2.30,2.31,2.31,2.31,2.30,2.32,2.32,2.29,2.32,2.31,2.31,2.31,2.31      |  |  |  |  | 300  | 200  | 1   |
| 50                | 34         | 5.67                  | 5.67                  | 5.67                 | 1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14      |  |  |  |  | 300  | 200  | 250 |
| 51                | 34         | 5.67                  | 5.67                  | 5.67                 | 1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14      |  |  |  |  | 300  | 200  | 250 |
| 52                | 34         | 5.67                  | 5.67                  | 5.67                 | 1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14      |  |  |  |  | 300  | 200  | 250 |
| 53                | 34         | 5.67                  | 5.67                  | 5.67                 | 1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14,1.14      |  |  |  |  | 300  | 200  | 250 |

Page 12 of 23

## Member Design Capacity

| Member ID | $\Phi_t P_n$ (kip) | $\Phi_c P_n$ (kip) | $\Phi_b M_{zn}$ (k-ft) | $\Phi_b M_{yn}$ (k-ft) | $\Phi_v V_{yn}$ (kip) | $\Phi_v V_{zn}$ (kip) |
|-----------|--------------------|--------------------|------------------------|------------------------|-----------------------|-----------------------|
| 1         | 377.97             | 201.99             | 83.29                  | 83.29                  | 113.39                | 113.39                |
| 2         | 198.33             | 196.72             | 21.95                  | 21.95                  | 59.50                 | 59.50                 |
| 3         | 116.10             | 115.41             | 15.79                  | 11.10                  | 42.08                 | 23.28                 |
| 4         | 116.10             | 111.33             | 15.79                  | 11.10                  | 42.08                 | 23.28                 |
| 5         | 116.10             | 114.23             | 15.79                  | 11.10                  | 42.08                 | 23.28                 |
| 6         | 116.10             | 115.41             | 15.79                  | 11.10                  | 42.08                 | 23.28                 |
| 7         | 116.10             | 114.23             | 15.79                  | 11.10                  | 42.08                 | 23.28                 |
| 8         | 133.20             | 64.15              | 32.87                  | 6.12                   | 40.24                 | 43.62                 |
| 9         | 66.48              | 58.89              | 3.82                   | 3.82                   | 19.94                 | 19.94                 |
| 10        | 116.10             | 111.33             | 15.79                  | 11.10                  | 42.08                 | 23.28                 |
| 11        | 133.20             | 64.15              | 32.87                  | 6.12                   | 40.24                 | 43.62                 |
| 12        | 198.33             | 196.72             | 21.95                  | 21.95                  | 59.50                 | 59.50                 |
| 13        | 133.20             | 85.85              | 23.29                  | 6.12                   | 40.24                 | 43.62                 |
| 14        | 133.20             | 85.85              | 23.14                  | 6.12                   | 40.24                 | 43.62                 |
| 15        | 133.20             | 64.15              | 32.87                  | 6.12                   | 40.24                 | 43.62                 |
| 16        | 133.20             | 64.15              | 32.87                  | 6.12                   | 40.24                 | 43.62                 |
| 50        | 41.27              | 8.45               | 1.63                   | 0.76                   | 15.23                 | 10.15                 |
| 51        | 41.27              | 8.45               | 1.63                   | 0.76                   | 15.23                 | 10.15                 |
| 52        | 41.27              | 8.45               | 1.63                   | 0.76                   | 15.23                 | 10.15                 |
| 53        | 41.27              | 8.45               | 1.63                   | 0.76                   | 15.23                 | 10.15                 |


## Design Ratio

| Member ID | P     | $M_z$ | $M_y$ | $V_y$ | $V_z$ | (P, $M_z$ , $M_y$ ) | Worst LC | KL/r  | $\delta$     | Status |
|-----------|-------|-------|-------|-------|-------|---------------------|----------|-------|--------------|--------|
| 1         | 0.074 | 0.590 | 0.000 | 0.038 | 0.000 | 0.620               | #13      | 0.463 | Not Required | Pass   |
| 2         | 0.006 | 0.579 | 0.212 | 0.123 | 0.037 | 0.738               | #13      | 0.053 | Not Required | Pass   |
| 3         | 0.002 | 0.813 | 0.130 | 0.082 | 0.054 | 0.943               | #21      | 0.045 | Not Required | Pass   |
| 4         | 0.002 | 0.802 | 0.040 | 0.081 | 0.003 | 0.842               | #21      | 0.080 | Not Required | Pass   |
| 5         | 0.001 | 0.504 | 0.031 | 0.081 | 0.012 | 0.534               | #21      | 0.074 | Not Required | Pass   |
| 6         | 0.002 | 0.813 | 0.130 | 0.082 | 0.054 | 0.943               | #21      | 0.045 | Not Required | Pass   |
| 7         | 0.001 | 0.504 | 0.031 | 0.081 | 0.012 | 0.534               | #21      | 0.074 | Not Required | Pass   |
| 8         | 0.020 | 0.234 | 0.202 | 0.054 | 0.013 | 0.308               | #21      | 0.500 | Not Required | Pass   |
| 9         | 0.023 | 0.093 | 0.057 | 0.001 | 0.000 | 0.162               | #21      | 0.136 | Not Required | Pass   |
| 10        | 0.002 | 0.802 | 0.040 | 0.081 | 0.003 | 0.842               | #21      | 0.080 | Not Required | Pass   |
| 11        | 0.010 | 0.235 | 0.202 | 0.055 | 0.014 | 0.303               | #21      | 0.333 | Not Required | Pass   |
| 12        | 0.006 | 0.579 | 0.212 | 0.123 | 0.037 | 0.738               | #13      | 0.053 | Not Required | Pass   |
| 13        | 0.010 | 0.529 | 0.038 | 0.069 | 0.007 | 0.561               | #21      | 0.190 | Not Required | Pass   |
| 14        | 0.016 | 0.532 | 0.030 | 0.068 | 0.006 | 0.546               | #21      | 0.286 | Not Required | Pass   |
| 15        | 0.010 | 0.235 | 0.202 | 0.055 | 0.014 | 0.303               | #21      | 0.333 | Not Required | Pass   |
| 16        | 0.020 | 0.234 | 0.202 | 0.054 | 0.013 | 0.308               | #21      | 0.333 | Not Required | Pass   |
| 50        | 0.207 | 0.010 | 0.000 | 0.003 | 0.001 | 0.216               | #21      | 0.783 | Not Required | Pass   |
| 51        | 0.042 | 0.007 | 0.015 | 0.002 | 0.002 | 0.058               | #6       | 0.522 | Not Required | Pass   |
| 52        | 0.207 | 0.010 | 0.000 | 0.003 | 0.001 | 0.216               | #24      | 0.783 | Not Required | Pass   |
| 53        | 0.042 | 0.007 | 0.015 | 0.002 | 0.002 | 0.058               | #24      | 0.522 | Not Required | Pass   |

## Definitions

$\Phi_t$  Safety factor for tensile

|                 |                                                           |
|-----------------|-----------------------------------------------------------|
| $\Phi_c$        | Safety factor for compression                             |
| $\Phi_b$        | Safety factor for flexure                                 |
| $\Phi_v$        | Safety factor for shear                                   |
| E               | Modulus of elasticity                                     |
| $F_y$           | Specified minimum yield stress                            |
| $F_u$           | Specified minimum tensile strength                        |
| A               | Cross-sectional area                                      |
| J               | Torsional constant                                        |
| $I_{yp}$        | Moment of inertia about the Y axes                        |
| $I_{zp}$        | Moment of inertia about the Z axes                        |
| $I_w$           | Warping constant                                          |
| $S_{yp}$        | Plastic section modulus about the Y axis                  |
| $S_{zp}$        | Plastic section modulus about the Z axis                  |
| KL              | Effective length                                          |
| $C_b$           | Buckling modification factor (from all load combinations) |
| $L_b$           | Length between braced points                              |
| LST             | Limited slenderness for tension                           |
| LSC             | Limited slenderness for compression                       |
| LD              | Limited deflection                                        |
| $P_n$           | Nominal axial strength (tension/compression)              |
| $M_n$           | Nominal flexural strength (about Z/Y axis)                |
| $V_n$           | Nominal shear strength (along Z/Y axis)                   |
| P               | Design ratio in case of axial force                       |
| $M_z$           | Design ratio in case of bending about Z axis              |
| $M_y$           | Design ratio in case of bending about Y axis              |
| $V_y$           | Design ratio in case of shear along Y axis                |
| $V_z$           | Design ratio in case of shear along Z axis                |
| $(P, M_z, M_y)$ | Design ratio in case of axial force and bending action    |
| KL/r            | Design ratio in case of section slenderness               |
| $\delta$        | Design ratio in case of member deflection                 |
| OK              | Capacity is provided                                      |
| NG              | Capacity is not provided                                  |
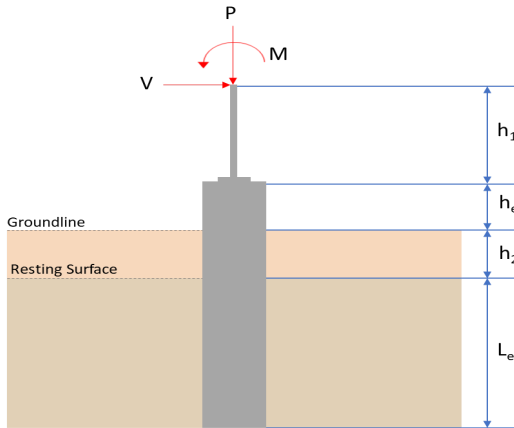
| REFERENCES     | CALCULATIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | RESULTS                                   |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------------|--------------------------------------------|---|-------------------------------------------------------------|----------|---------|----------------|-----|------|---------|-------|--------|-----------|--------|--------|-----------|-------|-------|-------------|-------|-------|-------------|--------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                | <div>SkyCiv Foundation Design</div> <div>Pile Foundation</div> <div>Design Information :</div> <div>Design code : IBC 2021 (International Building Code)</div> <div>Unit System : Imperial</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                           |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
|                | <div>Pile Input</div> <div></div> <div>Geometry</div> <div>Pile shape: rectangular</div> <div>b = 48 in - Pile width</div> <div>D = 48 in - Pile depth</div> <div>L = 6.5 ft - Total pile length</div> <div>h1 = 0 ft - Lateral load height from the top of the pile,</div> <div>h2 = 0 ft - Depth to resisting surface</div> <div>h_e = 0 ft - Length of pile above the ground</div> <div>Tabulation of Soil Parameters</div> <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (q_a)<br/>(psf)</th><th>Allowable Lateral Pressure (R)<br/>(psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> <div>Tabulation of Loads</div> <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>9.820</td><td>14.960</td></tr><tr><td>V_x (kip)</td><td>-2.612</td><td>-4.354</td></tr><tr><td>V_z (kip)</td><td>0.000</td><td>0.000</td></tr><tr><td>M_x (kipft)</td><td>0.000</td><td>0.001</td></tr><tr><td>M_z (kipft)</td><td>28.966</td><td>49.152</td></tr></table> <div>Material Properties</div> <div>f'_{ck} = 2.5 ksi - Concrete strength,</div> | Layer                                     | Label                                      | Allowable Bearing Pressure (q_a)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | P (kip) | 9.820 | 14.960 | V_x (kip) | -2.612 | -4.354 | V_z (kip) | 0.000 | 0.000 | M_x (kipft) | 0.000 | 0.001 | M_z (kipft) | 28.966 | 49.152 | <div>Required depth to resist lateral loads (ASD)</div> <div>H - Point of application of the lateral load</div> <div><math display="block">H = h_1 + h_2 + h_e</math></div> <div><math display="block">H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})</math></div> <div><math display="block">H = 0 \text{ ft}</math></div> <div>Considering x-direction:</div> <div>H_o - Lateral force per length of pile,</div> <div><math display="block">H_o = \frac{V_x}{1.57 D}</math></div> <div><math display="block">H_o = \frac{(-2.612 \text{ kip})}{1.57 \times (48 \text{ in})}</math></div> <div><math display="block">H_o = -0.41592 \text{ kip/ft}</math></div> |  |
| Layer          | Label                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Allowable Bearing Pressure (q_a)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2000.000                                  | 150.000                                    |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| Load Component | ASD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | LRFD                                      |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| P (kip)        | 9.820                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 14.960                                    |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| V_x (kip)      | -2.612                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | -4.354                                    |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| V_z (kip)      | 0.000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 0.000                                     |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| M_x (kipft)    | 0.000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 0.001                                     |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
| M_z (kipft)    | 28.966                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 49.152                                    |                                            |                                           |                                            |   |                                                             |          |         |                |     |      |         |       |        |           |        |        |           |       |       |             |       |       |             |        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                    |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
|          | <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$ $M_o = \frac{(28.966 \text{ kipft}) + ((-2.612 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 4.6124 \text{ kipft/ft}$ <p>Required depth of embedment in earth:</p> $L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$ <p>Solving the cubic equation:<br/> <math>L_{e,x} = 6.0245 \text{ ft}</math> - Required depth in x-direction,</p> <p><b>Considering z-direction:</b><br/> <math>L_{e,z} = 0 \text{ ft}</math> - Required depth in z-direction,</p> <p><b>Minimum embedded depth required:</b><br/> <math>L_{e,req}</math> - Depth of pile required,</p> $L_{e,req} = MAX[L_{e,x}, L_{e,z}]$ $L_{e,req} = MAX[(6.0245 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 6.024 \text{ ft}$ <p><math>L_e</math> - Actual embedded length of pile,</p> $L_e = L - h_e - h_2$ $L_e = (6.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 6.5 \text{ ft}$ <p>Ratio - Embedded depth</p> $Ratio = \frac{L_{e,req}}{L_e}$ $Ratio = \frac{(6.024 \text{ ft})}{(6.5 \text{ ft})}$ $Ratio = 0.92677$ | <p>Status: <b>PASS</b><br/>Ratio: <b>0.930</b></p> |
|          | <p><b>End-bearing Capacity (ASD)</b><br/> <math>A</math> - Pile cross-section area</p> $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ <p><math>q</math> - End-bearing pressure</p> $q = \frac{P_v}{A}$ $q = \frac{(9.82 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.61375 \text{ kip/ft}^2$ <p><b>Check bearing capacity ratio:</b><br/> Ratio - Capacity</p> $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.61375 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.30687$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <p>Status: <b>PASS</b><br/>Ratio: <b>0.310</b></p> |
| Czerniak | <p><b>Lateral Soil Pressure (ASD):</b><br/> <math>L/D</math> - Length to least lateral dimension ratio,</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                    |

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.625$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.41592 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 4.6124 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (4.6124 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-0.41592 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (4.6124 \text{ kipft/ft})) + (4 \times (-0.41592 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.4855 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (4.6124 \text{ kipft/ft})) + (3 \times (-0.41592 \text{ kip/ft}) \times (6.5 \text{ ft}))]^2}{(6.5 \text{ ft})^2 \times [(3 \times (4.6124 \text{ kipft/ft})) + (2 \times (-0.41592 \text{ kip/ft}) \times (6.5 \text{ ft}))]}$$

$$p = 0.22509 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (4.6124 \text{ kipft/ft})) + ((-0.41592 \text{ kip/ft}) \times (6.5 \text{ ft}))]}{(6.5 \text{ ft})^2}$$

$$s = 0.92611 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.4855 \text{ ft})}{2}$$

$$p_a = 0.33641 \text{ kip/ft}^2$$

*Ratio* - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.22509 \text{ kip/ft}^2)}{(0.33641 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.6691$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.5 \text{ ft})$$

$$p_s = 0.975 \text{ kip/ft}^2$$

*Ratio* - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.92611 \text{ kip/ft}^2)}{(0.975 \text{ kip/ft}^2)}$$

Status: **PASS**  
Ratio: **0.670**

$$Ratio = 0.94985$$

Status: **PASS**  
Ratio: **0.950**

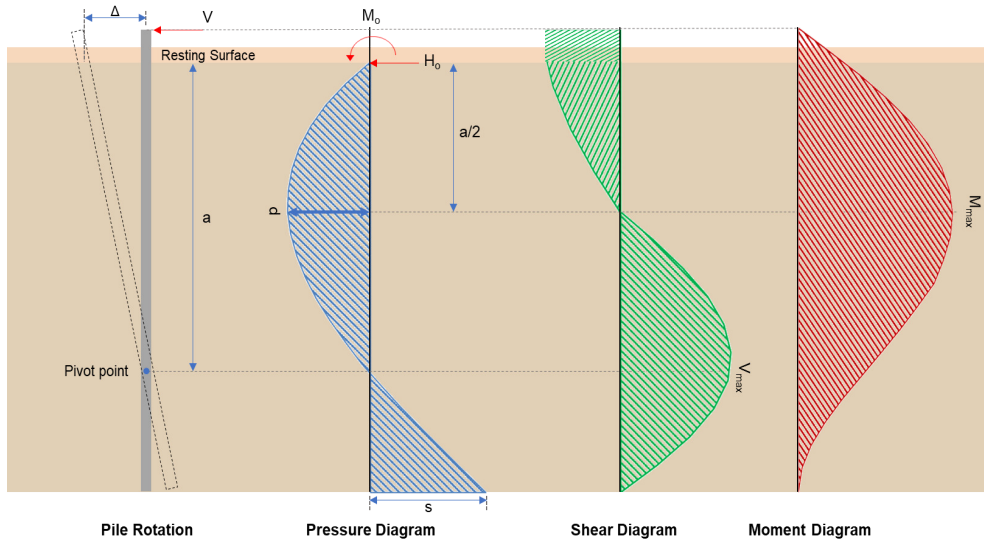

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-4.354 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.69331 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(49.152 \text{ kipft}) + ((-4.354 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 7.8268 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(7.8268 \text{ kipft/ft})}{(-0.69331 \text{ kip/ft})}$$

$$E = 11.289 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (7.8268 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-0.69331 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (7.8268 \text{ kipft/ft})) + (4 \times (-0.69331 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.4836 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.69331 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (11.289 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.4836 \text{ ft})}{(6.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (11.289 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.4836 \text{ ft})}{(6.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = -10.959 \text{ kips}$$

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                                                 | $V_{max} = 10.592 \text{ kip}$ <p><math>M_{max}</math> - Max bending moment located at depth a/2,</p> $M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$ $M_{max} = ((-0.69331 \text{ kip/ft}) \times (48 \text{ in}) \times (6.5 \text{ ft})) \times \left[ \left( \frac{(11.289 \text{ ft})}{(6.5 \text{ ft})} + \frac{(4.4836 \text{ ft})}{2 \times (6.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (11.289 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.4836 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (11.289 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.4836 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^4 \right] \right] \right]$ $M_{max} = 32.007 \text{ kipft}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |  |
|                                                 | <p><b>Shear force and Bending moment (z-direction, LRFD)</b></p> <p><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(0 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = 0 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.001 \text{ kipft}) + ((0 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.00015924 \text{ kipft/ft}$ <p><math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.00015924 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (0 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (0.00015924 \text{ kipft/ft})) + (4 \times (0 \text{ kip/ft}) \times (6.5 \text{ ft}))}$ $a = 4.3333 \text{ ft}$ <p><math>V_{max}</math> - Max shear force located at depth a,</p> $V_{max} = 12 \left( \frac{M_o b}{L_e} \right) \left( \frac{a}{L_e} - 1 \right) \left( \frac{a}{L_e} \right)^2$ $V_{max} = 12 \times \left( \frac{(0.00015924 \text{ kipft/ft}) \times (48 \text{ in})}{(6.5 \text{ ft})} \right) \times \left( \frac{(4.3333 \text{ ft})}{(6.5 \text{ ft})} - 1 \right) \times \left( \frac{(4.3333 \text{ ft})}{(6.5 \text{ ft})} \right)^2$ $V_{max} = 0.00017421 \text{ kip}$ <p><math>M_{max}</math> - Max bending moment at depth a/2,</p> $M_{max} = (M_o b) \left[ 1 - \left( 4 \frac{a}{2 L_e} \right)^3 + \left( 3 \frac{a}{2 L_e} \right)^4 \right]$ $M_{max} = ((0.00015924 \text{ kipft/ft}) \times (48 \text{ in})) \times \left[ 1 - \left( 4 \times \frac{(4.3333 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^3 + \left( 3 \times \frac{(4.3333 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^4 \right]$ $M_{max} = 0.00056617 \text{ kipft}$ |  |
| <p>Table 22.4.2.1</p> <p>22.4.2.2, 10.6.1.1</p> | <p><b>Minimum Reinforcement Check (LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>f'_{ck} = 2.5 \text{ ksi}</math> - Concrete strength,<br/> <math>f_{yk} = 60 \text{ ksi}</math> - Longitudinal reinforcement strength,<br/> <math>\phi = 0.65</math> - Reduction factor for axial strength,<br/> <math>\alpha = 0.8</math> - Alpha factor for axial strength,<br/> <math>A_g = 2304 \text{ in}^2</math> - Gross area of concrete,</p> <p><b>Longitudinal reinforcement:</b></p> <p>Required reinforcement due to axial load, <math>A_{st,required}</math></p> <p><math>A_{st,required}</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |

$$A_{st,required} = Min \left[ \frac{\frac{f'_c}{\phi} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = Min \left[ \frac{\frac{(14.96 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.099 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = Max[A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = Max[(-84.099 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$Ratio = \frac{A_{min}}{A_{st}}$$

$$Ratio = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$Ratio = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3  $s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = Max[1.5, (1.5 d_{bar})]$$

$$s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

**Ties:**

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$$

$$s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

**Summary:**

Main reinforcement: **14 - #5 (0.625 in)**

Ties: **#3(0.375 in) - 10 in**

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2  $\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|               | $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(14.96 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0055921$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Status: <b>PASS</b><br>Ratio: <b>0.010</b> |
| 22.5.2.2      | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/> <math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |
| 22.5.5.1.3    | <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                            |
| 22.5.5.1.1    | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,<br/> <math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$                                                                                                                                                                                                                                                                                              |                                            |
| 22.5.5.1.1(a) | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>, <math>P = 14.96 \text{ kip} \rightarrow 14960 \text{ lbf}</math>,<br/> <math>V_{c,a}</math> - Shear strength of concrete (a)</p> $V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(14960 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 120.48 \text{ kip}$                                                                                                                         |                                            |
| 22.5.5.1.2    | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,<br/> <math>V_{c,b}</math> - Shear strength of concrete (b)</p> $V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$ <p><math>V_c</math> - Governing shear strength of concrete</p> $V_c = MIN [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = MIN [(296.21 \text{ kip}), (120.48 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 120.48 \text{ kip}$ |                                            |
| 22.5.1.2      | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$                                                                                                                                                                                                                                                                                                                                                                   |                                            |

|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|           | <p><math>V_{s,a} = 737.28 \text{ kip}</math></p> <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((120.48 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 111.39 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 10.352 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> Ratio - Capacity</p> $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(10.352 \text{ kip})}{(111.39 \text{ kip})}$ $Ratio = 0.092932$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.090</b></p> |
| 14.5.2.1b | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$                                                                                                                                                                                                                                                                                   |                                                     |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                     |
|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|  | <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = MIN[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = MIN[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ <p><b>Considering x-direction:</b></p> <p><math>M_{max} = 32.007 \text{ kipft}</math> - Maximum moment in the x-direction,<br/> <math>Ratio</math> - Capacity</p> $Ratio = \frac{M_{max}}{\phi M_n}$ $Ratio = \frac{(32.007 \text{ kipft})}{(249.6 \text{ kipft})}$ $Ratio = 0.12823$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.130</b></p> |
|  | <p><b>Considering z-direction:</b></p> <p><math>M_{max} = 0.00056617 \text{ kipft}</math> - Maximum moment in the z-direction,<br/> <math>Ratio</math> - Capacity</p> $Ratio = \frac{M_{max}}{\phi M_n}$ $Ratio = \frac{(0.00056617 \text{ kipft})}{(249.6 \text{ kipft})}$ $Ratio = 2.2683 \times 10^{-6}$                                                                                                                                                                                                     | <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |