


# Project Details



**Project Name:** Point Tiburon Plaza A - 5x13-4 pole  
**Location:** 1701 Tiburon Blvd, Belvedere Tiburon, CA 94920, USA  
**Unique ID:** 4P-19.75-6TOP-SD-24-L-5Hx13W-D77E  
**Dealer:** \_\_\_\_\_

**Date:** Tue Mar 18 2025  
**Number of Modules:** 65  
**Number of Poles:** 4  
**Date Sold:** \_\_\_\_\_

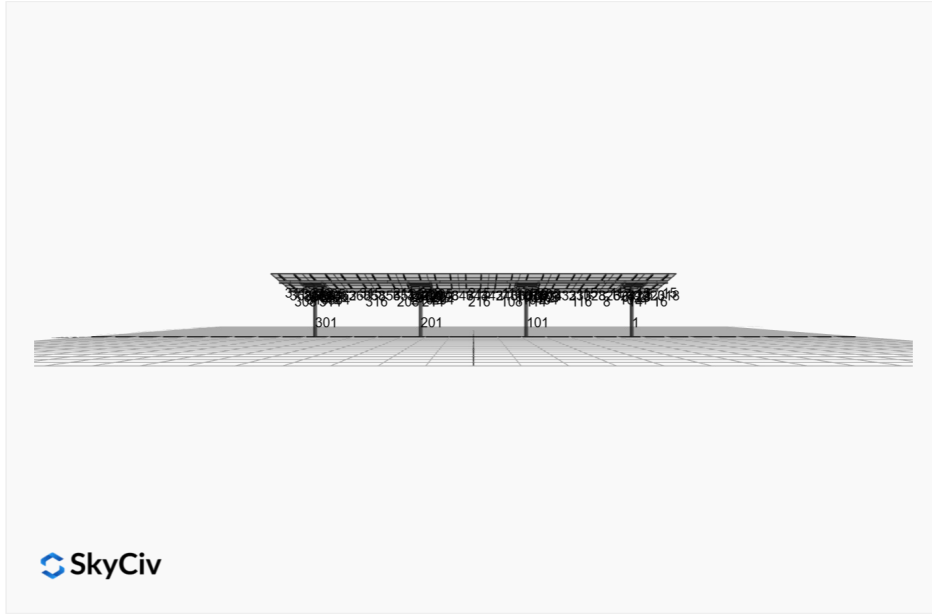

|                             |          |
|-----------------------------|----------|
| <b>Array Dimensions N/S</b> | 16.88 ft |
| <b>Array Dimensions E/W</b> | 71.50 ft |
| <b>Winter Tilt Angle</b>    | 10       |
| <b>Front Edge Clearance</b> | 8 ft     |


## MT Solar Bill of Materials (4P-19.75-6TOP-SD-24-L-5Hx13W-D77E)

| Part                | Short Description     | BOM Qty |
|---------------------|-----------------------|---------|
| MTS-PC-6            | 6IN Pole Cap Assembly | 4       |
| MTS-HF-SD           | H-Frame Assembly-SD   | 4       |
| MTS-SD-Wing-24      | 24IN SD Wing          | 4       |
| MTS-SD-Splice-90    | 90IN SD Splice        | 6       |
| MTS-SD-Splice-57    | 57IN SD Splice        | 6       |
| MTS-CLAMP-ANGLE-4PK | Angle Clamp           | 13      |

## Rail Bill of Materials

| Part             | Qty |
|------------------|-----|
| Rails (203in)    | 26  |
| Rail Attachment  | 104 |
| Module Mid Clamp | 104 |
| Module End Clamp | 52  |
| Ground Lug       | 13  |

# Site Details:

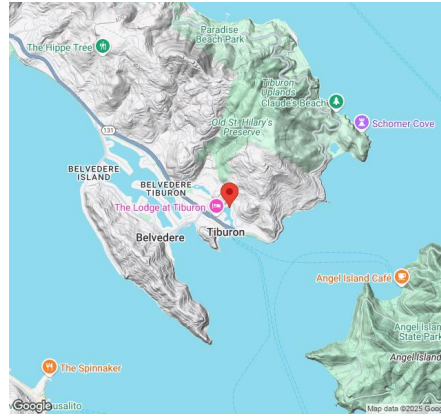

**Site Address:** 1701 Tiburon Blvd, Belvedere Tiburon, CA 94920, USA

## Array Specification

|                                    |           |
|------------------------------------|-----------|
| <b>Duty Classification:</b>        | SD        |
| <b>Module Width:</b>               | 40.00 in  |
| <b>Module Length:</b>              | 65.00in   |
| <b>Number of Rows:</b>             | 5         |
| <b>Number of Columns:</b>          | 13        |
| <b>Total Number of Modules:</b>    | 65        |
| <b>Winter Tilt Angle:</b>          | 10        |
| <b>Front Edge Clearance:</b>       | 8         |
| <b>Total Array Height at Tilt:</b> | 10.93 ft  |
| <b>Total Frame Length:</b>         | 70.75 ft  |
| <b>Frame Weight:</b>               | 3838 lbs  |
| <b>Array Dimensions N/S:</b>       | 16.88 ft  |
| <b>Array Dimensions E/W:</b>       | 71.50 ft  |
| <b>Rail Length:</b>                | 202.50 in |
| <b>Rail Spacing:</b>               | 2.75 ft   |

## Support Specifications

|                                 |                 |
|---------------------------------|-----------------|
| <b>Pole Size:</b>               | 6in Pipe Sch 40 |
| <b>Pole Length above Grade:</b> | 9.47 ft         |
| <b>Number of Poles:</b>         | 4               |
| <b>Pole Spacing:</b>            | 19.75 ft        |

## Foundation Specifications

|                                        |                                                                          |
|----------------------------------------|--------------------------------------------------------------------------|
| <b>Foundation Type:</b>                | Square                                                                   |
| <b>Foundation Dimensions:</b>          | 48 x 48 in                                                               |
| <b>Foundation Depth (below grade):</b> | Pile 1: 4.75 ft<br>Pile 2: 5.00 ft<br>Pile 3: 5.00 ft<br>Pile 4: 4.75 ft |
| <b>Foundation Volume:</b>              | 11.556 y <sup>3</sup>                                                    |

## Site Info

|                             |                                                     |
|-----------------------------|-----------------------------------------------------|
| <b>Risk Category:</b>       | I                                                   |
| <b>Exposure:</b>            | C                                                   |
| <b>Soil Classification:</b> | sand                                                |
| <b>Site Location:</b>       | 1701 Tiburon Blvd, Belvedere Tiburon, CA 94920, USA |
| <b>Wind Speed:</b>          | 87 mph                                              |

**Snow Load:**

0 psf

### **Design Disclaimer**



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



## AutoDesigner Input

```
{"wind_speed_override":null,"snow_load_override":null,"direct_snow_load":false,"add_angle_brace":false,"product_type":"Beam","designer_name":"","designer_email":"contact@JeremyClemons.com","designer_phone":"","project_id":"Point Tiburon Plaza A - 5x13-4 pole","site_address":"1701 Tiburon Blvd, Belvedere Tiburon, CA 94920, USA","module_width":40,"module_length":65,"number_rows":5,"number_columns":13,"pole_mount_section":"4_40","core_pipe_width":65,"core_pipe_section":"2_40","adjuster_section":"2_40","core_beam_height":65,"core_beam_section":"HSS3x2x1/8","main_pipe_section":"2_12GA","pole_spacing":15,"tilt_angle":10,"ground_clearance":8,"risk_category":"I","exposure_category":"C","frame_duty_override":"auto","pole_override":"auto","soil_type":"sand","customer_foundation_override":"48_Square","foundation_type":"Square","foundation_size":48,"check_rails":false}
```



## Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

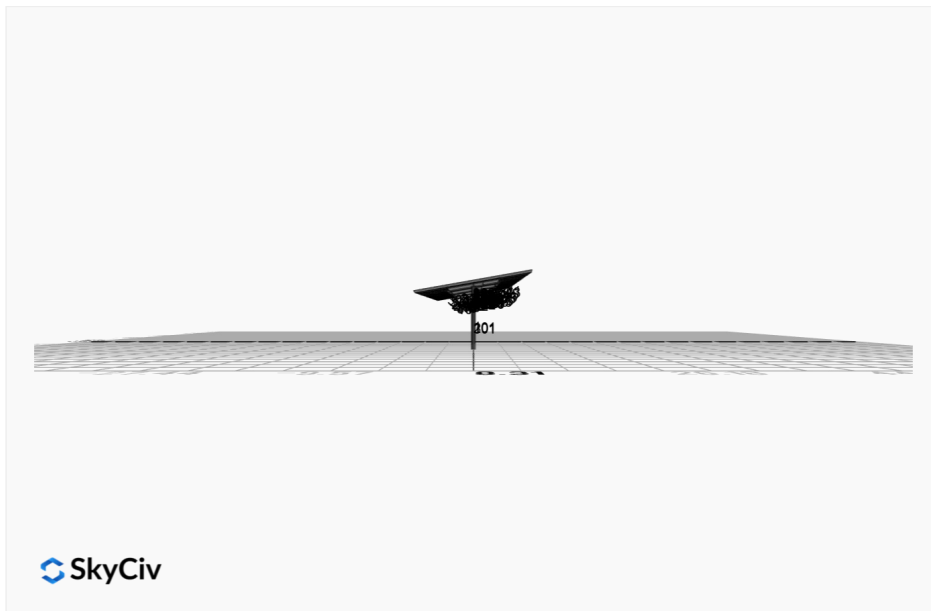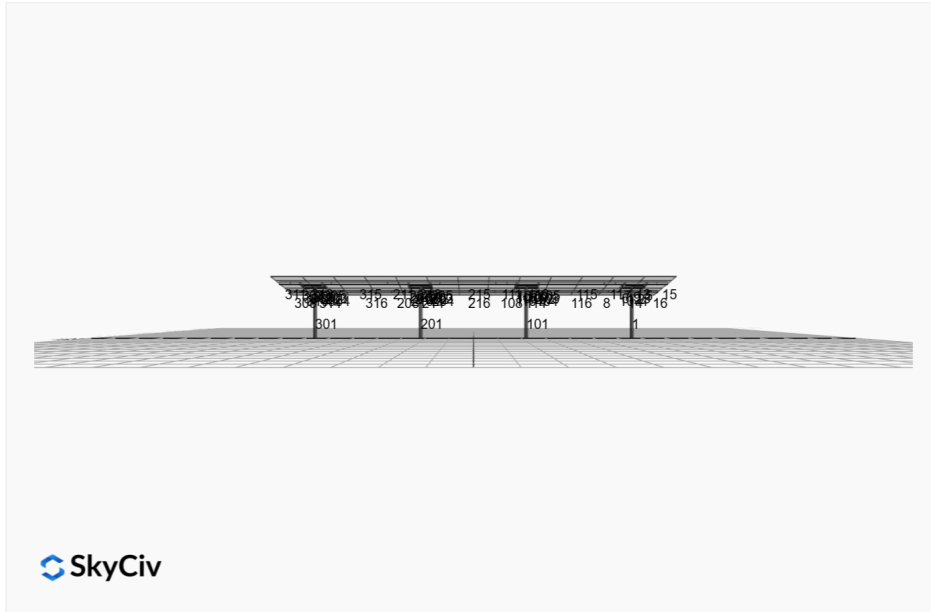


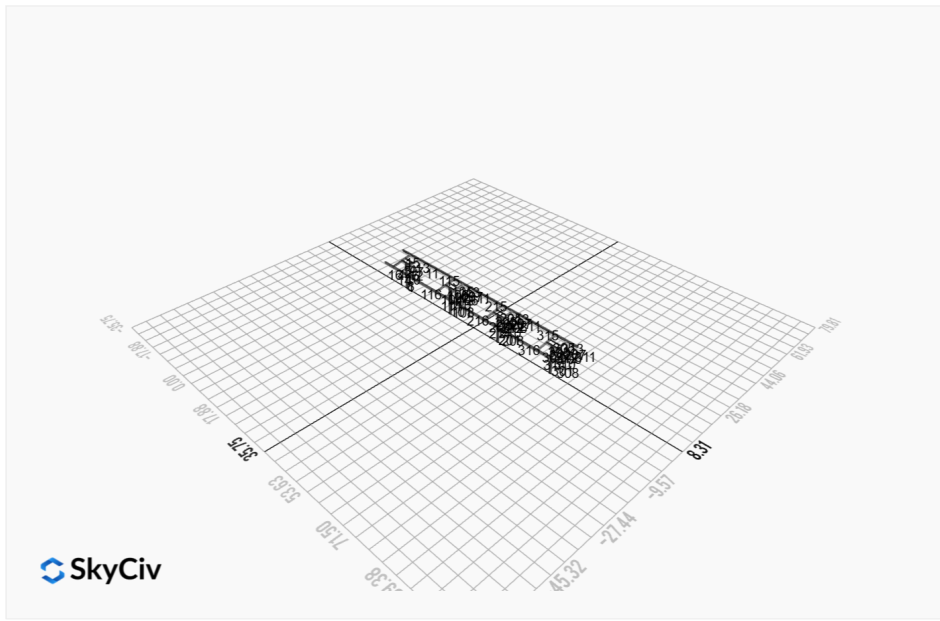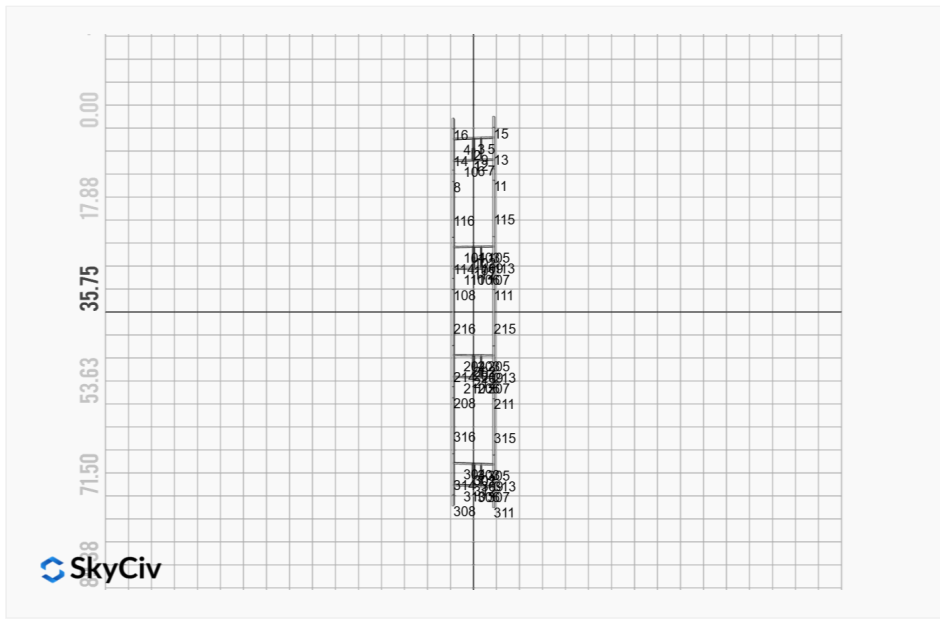

# FEM Results (Envelope Worst Case for each member)

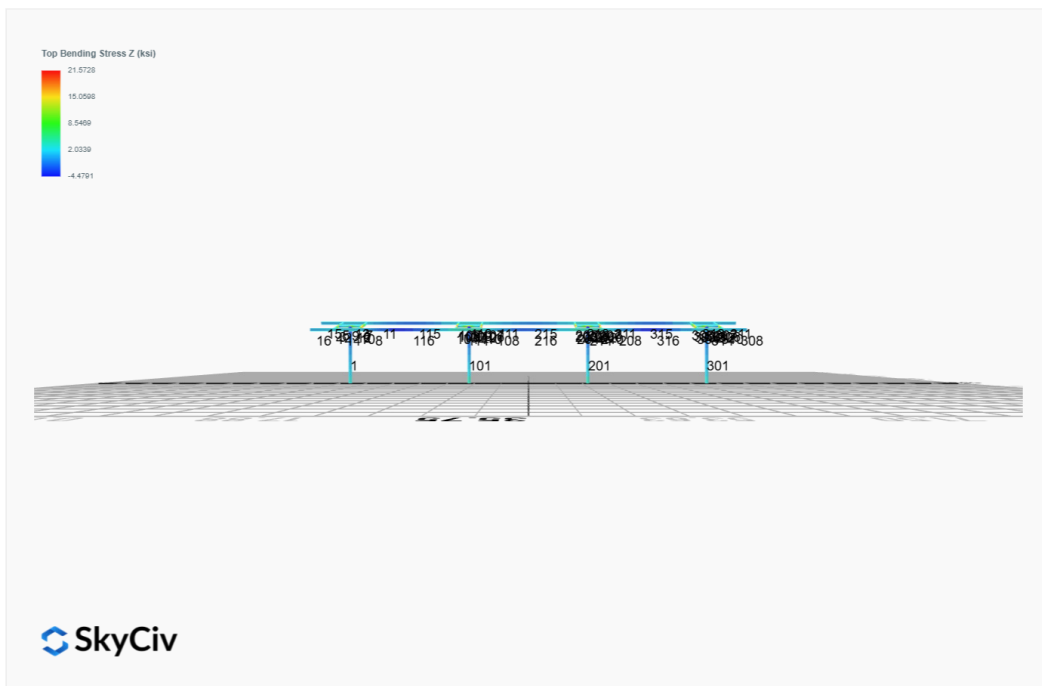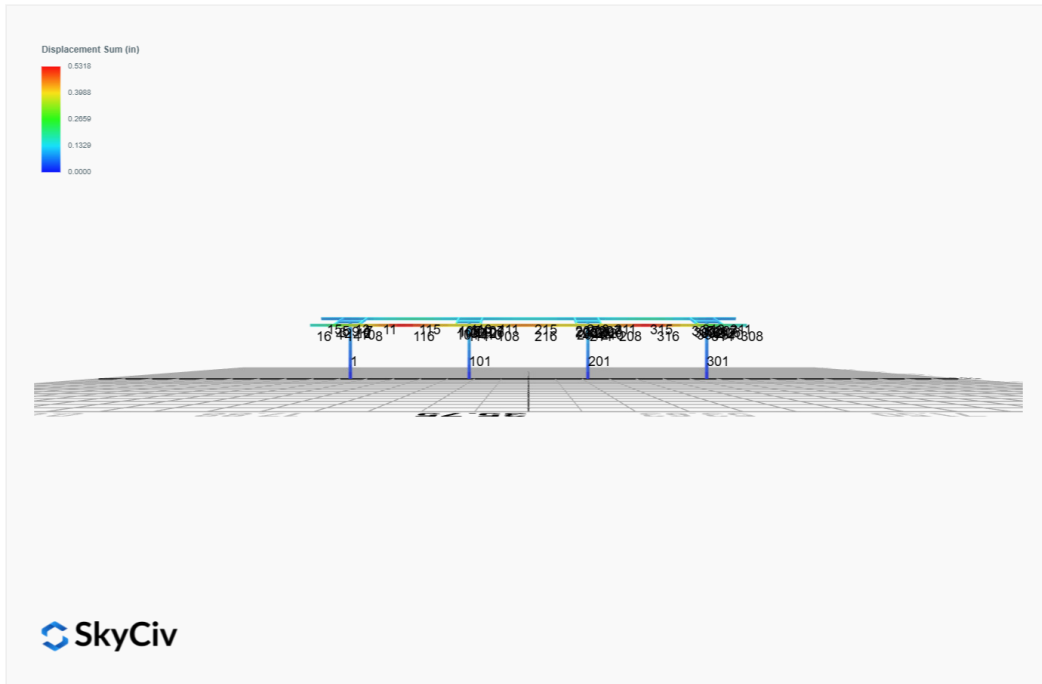

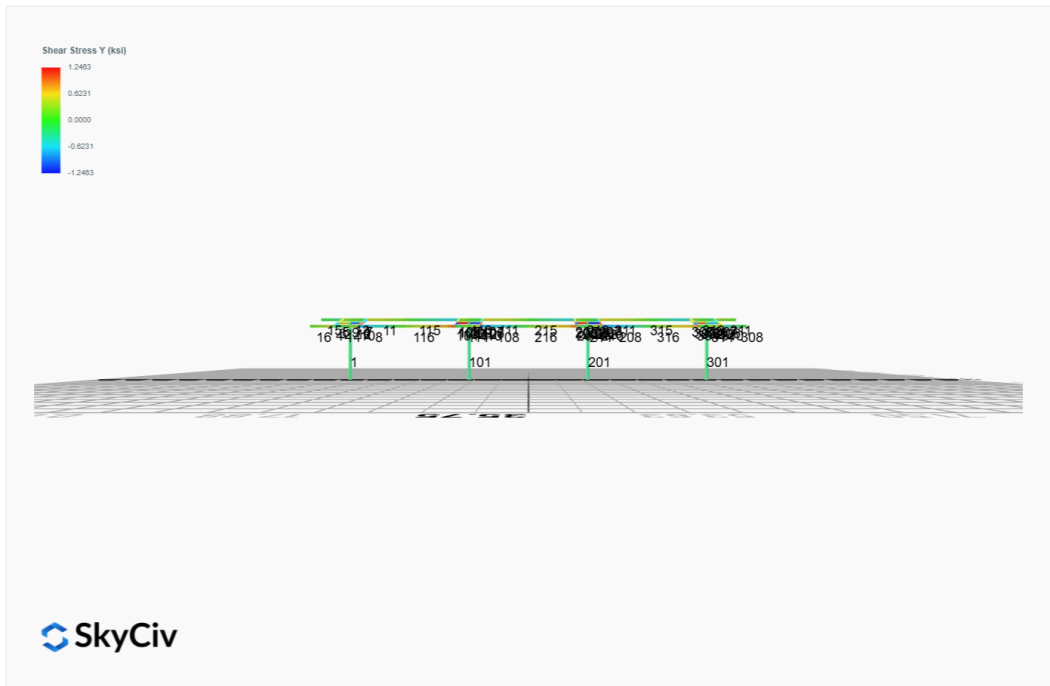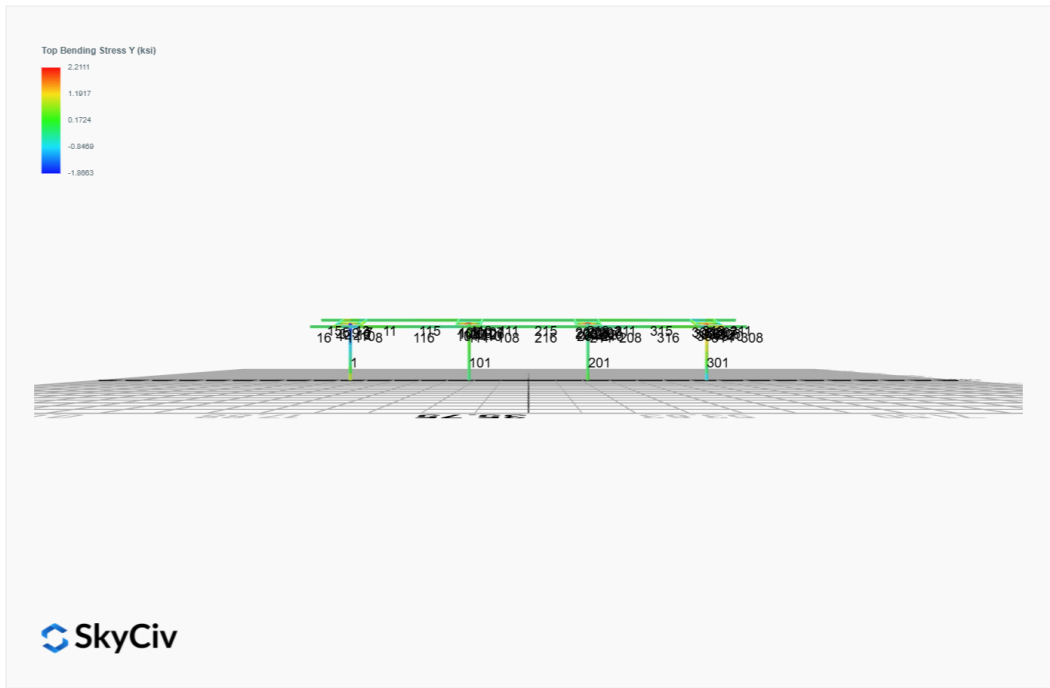

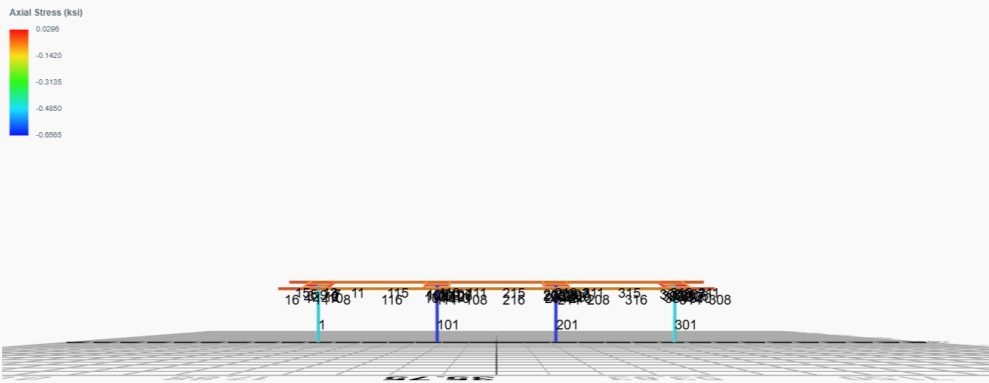

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz      |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|
| ULS: 1. D                                                                       | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 2. D + L                                                                   | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 5b. D + 0.7E                                                               | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | 0.0091  | 1.7893  | 0.1061  | 0.2970  | -0.0274 | -0.0581 |
| ULS: 8. 0.6D + 0.7E                                                             | 0.0055  | 1.0736  | 0.0636  | 0.1782  | -0.0165 | -0.0348 |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -0.4167 | 4.0907  | 0.2821  | 0.7847  | -0.1315 | 5.9235  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -0.4167 | 4.0907  | 0.2821  | 0.7847  | -0.1315 | 5.9235  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 0.2959  | 0.1767  | -0.0122 | -0.0305 | 0.0350  | -1.3803 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.2863  | 0.3828  | -0.0073 | -0.0150 | 0.0507  | -8.1034 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.3102 | 3.5153  | 0.2381  | 0.6628  | -0.1055 | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.3102 | 3.5153  | 0.2381  | 0.6628  | -0.1055 | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2242  | 0.5799  | 0.0174  | 0.0514  | 0.0194  | -1.0497 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2170  | 0.7344  | 0.0211  | 0.0630  | 0.0312  | -6.0920 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.3102 | 3.5153  | 0.2381  | 0.6628  | -0.1055 | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.3102 | 3.5153  | 0.2381  | 0.6628  | -0.1055 | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2242  | 0.5799  | 0.0174  | 0.0514  | 0.0194  | -1.0497 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2170  | 0.7344  | 0.0211  | 0.0630  | 0.0312  | -6.0920 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -0.4203 | 3.3750  | 0.2397  | 0.6659  | -0.1205 | 5.9468  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -0.4203 | 3.3750  | 0.2397  | 0.6659  | -0.1205 | 5.9468  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 0.2922  | -0.5390 | -0.0546 | -0.1493 | 0.0460  | -1.3570 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.2827  | -0.3330 | -0.0497 | -0.1338 | 0.0617  | -8.0801 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 5.9827              |
| Shear X          | -0.7096             |
| Shear Z          | 0.4219              |
| Moment X         | 1.1738              |
| Moment Y (Twist) | 0.2074              |
| Moment Z         | 13.6987             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 4.0907              |
| Shear X          | -0.4203             |
| Shear Z          | 0.2821              |
| Moment X         | 0.7847              |
| Moment Y (Twist) | 0.1315              |
| Moment Z         | 8.1034              |

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

| Name                                   | Fx      | Fy     | Fz      | Mx      | My     | Mz     |
|----------------------------------------|---------|--------|---------|---------|--------|--------|
| ULS: 1. D                              | -0.0091 | 2.3149 | -0.0184 | -0.0520 | 0.0084 | 0.1020 |
| ULS: 2. D + L                          | -0.0091 | 2.3149 | -0.0184 | -0.0520 | 0.0084 | 0.1020 |
| ULS: 3. D + (S or Lr or R)             | -0.0091 | 2.3149 | -0.0184 | -0.0520 | 0.0084 | 0.1020 |
| ULS: 3. D + (S or Lr or R)             | -0.0091 | 2.3149 | -0.0184 | -0.0520 | 0.0084 | 0.1020 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0091 | 2.3149 | -0.0184 | -0.0520 | 0.0084 | 0.1020 |

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz      |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | -0.0091 | 2.3149  | -0.0184 | -0.0520 | 0.0084  | 0.1020  |
| ULS: 5b. D + 0.7E                                                               | -0.0091 | 2.3149  | -0.0184 | -0.0520 | 0.0084  | 0.1020  |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | -0.0091 | 2.3149  | -0.0184 | -0.0520 | 0.0084  | 0.1020  |
| ULS: 8. 0.6D + 0.7E                                                             | -0.0055 | 1.3889  | -0.0110 | -0.0312 | 0.0050  | 0.0612  |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -0.5416 | 5.4481  | -0.0449 | -0.1284 | 0.0083  | 7.5997  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -0.5416 | 5.4481  | -0.0449 | -0.1284 | 0.0083  | 7.5997  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 0.3762  | 0.1162  | 0.0025  | 0.0071  | -0.0005 | -1.6859 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.2986  | 0.4042  | -0.0056 | -0.0137 | 0.0210  | -9.6652 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.4085 | 4.6648  | -0.0383 | -0.1093 | 0.0084  | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.4085 | 4.6648  | -0.0383 | -0.1093 | 0.0084  | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2799  | 0.6659  | -0.0027 | -0.0077 | 0.0017  | -1.2389 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2217  | 0.8819  | -0.0088 | -0.0233 | 0.0179  | -7.2234 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.4085 | 4.6648  | -0.0383 | -0.1093 | 0.0084  | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.4085 | 4.6648  | -0.0383 | -0.1093 | 0.0084  | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2799  | 0.6659  | -0.0027 | -0.0077 | 0.0017  | -1.2389 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2217  | 0.8819  | -0.0088 | -0.0233 | 0.0179  | -7.2234 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -0.5380 | 4.5221  | -0.0375 | -0.1076 | 0.0050  | 7.5589  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -0.5380 | 4.5221  | -0.0375 | -0.1076 | 0.0050  | 7.5589  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 0.3798  | -0.8097 | 0.0099  | 0.0279  | -0.0038 | -1.7266 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.3023  | -0.5217 | 0.0018  | 0.0071  | 0.0177  | -9.7060 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.0000              |
| Shear X          | -0.8975             |
| Shear Z          | -0.0663             |
| Moment X         | -0.1903             |
| Moment Y (Twist) | 0.0321              |
| Moment Z         | 16.4675             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 5.4481              |
| Shear X          | -0.5416             |
| Shear Z          | -0.0449             |
| Moment X         | -0.1284             |
| Moment Y (Twist) | 0.0210              |
| Moment Z         | 9.7060              |

### Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

#### ASD Load Combination Results

| Name                                         | Fx      | Fy     | Fz      | Mx      | My      | Mz      |
|----------------------------------------------|---------|--------|---------|---------|---------|---------|
| ULS: 1. D                                    | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 2. D + L                                | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 3. D + (S or Lr or R)                   | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 3. D + (S or Lr or R)                   | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)       | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)       | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 5b. D + 0.7E                            | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S      | -0.0091 | 2.3149 | 0.0184  | 0.0520  | -0.0084 | 0.1020  |
| ULS: 8. 0.6D + 0.7E                          | -0.0055 | 1.3889 | 0.0110  | 0.0312  | -0.0050 | 0.0612  |
| ULS: 5a. D + 0.6W_Wind downforce Case A only | -0.5416 | 5.4481 | 0.0449  | 0.1284  | -0.0083 | 7.5997  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only | -0.5416 | 5.4481 | 0.0449  | 0.1284  | -0.0083 | 7.5997  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only    | 0.3762  | 0.1162 | -0.0025 | -0.0071 | 0.0005  | -1.6859 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only    | 0.2986  | 0.4042 | 0.0056  | 0.0137  | -0.0210 | -9.6652 |

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz      |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.4085 | 4.6648  | 0.0383  | 0.1093  | -0.0083 | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.4085 | 4.6648  | 0.0383  | 0.1093  | -0.0083 | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2799  | 0.6659  | 0.0027  | 0.0077  | -0.0017 | -1.2389 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2217  | 0.8819  | 0.0088  | 0.0233  | -0.0179 | -7.2234 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.4085 | 4.6648  | 0.0383  | 0.1093  | -0.0083 | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.4085 | 4.6648  | 0.0383  | 0.1093  | -0.0083 | 5.7253  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2799  | 0.6659  | 0.0027  | 0.0077  | -0.0017 | -1.2389 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2217  | 0.8819  | 0.0088  | 0.0233  | -0.0179 | -7.2234 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -0.5380 | 4.5221  | 0.0375  | 0.1076  | -0.0050 | 7.5589  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -0.5380 | 4.5221  | 0.0375  | 0.1076  | -0.0050 | 7.5589  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 0.3798  | -0.8097 | -0.0099 | -0.0279 | 0.0038  | -1.7266 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.3023  | -0.5217 | -0.0018 | -0.0071 | -0.0177 | -9.7060 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.0000              |
| Shear X          | -0.8975             |
| Shear Z          | 0.0663              |
| Moment X         | 0.1903              |
| Moment Y (Twist) | 0.0321              |
| Moment Z         | 16.4675             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 5.4481              |
| Shear X          | -0.5416             |
| Shear Z          | 0.0449              |
| Moment X         | 0.1284              |
| Moment Y (Twist) | 0.0210              |
| Moment Z         | 9.7060              |

### Reaction Forces for Foundation 4 (Node ID#301), (kip, kip-ft)

#### ASD Load Combination Results

| Name                                                                            | Fx      | Fy     | Fz      | Mx      | My      | Mz      |
|---------------------------------------------------------------------------------|---------|--------|---------|---------|---------|---------|
| ULS: 1. D                                                                       | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 2. D + L                                                                   | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 5b. D + 0.7E                                                               | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | 0.0091  | 1.7893 | -0.1061 | -0.2970 | 0.0274  | -0.0581 |
| ULS: 8. 0.6D + 0.7E                                                             | 0.0055  | 1.0736 | -0.0636 | -0.1782 | 0.0165  | -0.0348 |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -0.4167 | 4.0907 | -0.2821 | -0.7847 | 0.1315  | 5.9235  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -0.4167 | 4.0907 | -0.2821 | -0.7847 | 0.1315  | 5.9235  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 0.2959  | 0.1767 | 0.0122  | 0.0305  | -0.0350 | -1.3803 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.2863  | 0.3828 | 0.0073  | 0.0150  | -0.0507 | -8.1034 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.3102 | 3.5153 | -0.2381 | -0.6628 | 0.1055  | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.3102 | 3.5153 | -0.2381 | -0.6628 | 0.1055  | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2242  | 0.5799 | -0.0174 | -0.0514 | -0.0194 | -1.0497 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2170  | 0.7344 | -0.0211 | -0.0630 | -0.0312 | -6.0920 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.3102 | 3.5153 | -0.2381 | -0.6628 | 0.1055  | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.3102 | 3.5153 | -0.2381 | -0.6628 | 0.1055  | 4.4281  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.2242  | 0.5799 | -0.0174 | -0.0514 | -0.0194 | -1.0497 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.2170  | 0.7344 | -0.0211 | -0.0630 | -0.0312 | -6.0920 |

| Name                                           | Fx      | Fy      | Fz      | Mx      | My      | Mz      |
|------------------------------------------------|---------|---------|---------|---------|---------|---------|
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only | -0.4203 | 3.3750  | -0.2397 | -0.6659 | 0.1205  | 5.9468  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only | -0.4203 | 3.3750  | -0.2397 | -0.6659 | 0.1205  | 5.9468  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only    | 0.2922  | -0.5390 | 0.0546  | 0.1493  | -0.0460 | -1.3570 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only    | 0.2827  | -0.3330 | 0.0497  | 0.1338  | -0.0617 | -8.0801 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
 Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 5.9827              |
| Shear X          | -0.7096             |
| Shear Z          | -0.4219             |
| Moment X         | -1.1738             |
| Moment Y (Twist) | 0.2074              |
| Moment Z         | 13.6988             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
 Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 4.0907              |
| Shear X          | -0.4203             |
| Shear Z          | -0.2821             |
| Moment X         | -0.7847             |
| Moment Y (Twist) | 0.1315              |
| Moment Z         | 8.1034              |

# Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States  
 User Name: sales@mtsolar.us  
 Unit System: imperial




# Design Input Information


| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |                      |                      |
|------------------|---------|----------------------|----------------------|
| ID               | E (ksi) | F <sub>y</sub> (ksi) | F <sub>u</sub> (ksi) |
| 1                | 29000   | 50                   | 65                   |


## Section Dimensions



| ID | Name            | d (in) | t <sub>w</sub> (in) |  |  |  |  |
|----|-----------------|--------|---------------------|--|--|--|--|
| 1  | 2in Pipe Sch 40 | 2.38   | 0.15                |  |  |  |  |
| 4  | 4in Pipe Sch 40 | 4.50   | 0.24                |  |  |  |  |
| 7  | 6in Pipe Sch 40 | 6.63   | 0.28                |  |  |  |  |



| ID | Name       | d (in) | b (in) | t <sub>w</sub> (in) | t <sub>b</sub> (in) | r (in) |  |
|----|------------|--------|--------|---------------------|---------------------|--------|--|
| 15 | HSS5x3x1/8 | 5.00   | 3.00   | 0.12                | 0.12                | 0.12   |  |



| ID | Name | d (in) | t <sub>w</sub> (in) | b <sub>t</sub> (in) | b <sub>b</sub> (in) | t <sub>t</sub> (in) | t <sub>b</sub> (in) | r (in) |
|----|------|--------|---------------------|---------------------|---------------------|---------------------|---------------------|--------|
| 18 | W6x9 | 5.90   | 0.17                | 3.94                | 3.94                | 0.21                | 0.21                | 0.25   |

## Section Properties

| ID | Name | A (in <sup>2</sup> ) | J (in <sup>4</sup> ) | I <sub>yp</sub> (in <sup>4</sup> ) | I <sub>zp</sub> (in <sup>4</sup> ) | I <sub>w</sub> (in <sup>6</sup> ) | S <sub>yp</sub> (in <sup>3</sup> ) | S <sub>zp</sub> (in <sup>3</sup> ) |
|----|------|----------------------|----------------------|------------------------------------|------------------------------------|-----------------------------------|------------------------------------|------------------------------------|
|----|------|----------------------|----------------------|------------------------------------|------------------------------------|-----------------------------------|------------------------------------|------------------------------------|







|     |        |        |       |       |       |       |
|-----|--------|--------|-------|-------|-------|-------|
| 212 | 142.85 | 141.72 | 10.17 | 10.17 | 42.85 | 42.85 |
| 213 | 120.60 | 84.03  | 18.18 | 6.45  | 30.09 | 45.74 |
| 214 | 120.60 | 84.03  | 18.24 | 6.45  | 30.09 | 45.74 |
| 215 | 120.60 | 68.63  | 15.31 | 6.45  | 30.09 | 45.74 |
| 216 | 120.60 | 68.63  | 15.47 | 6.45  | 30.09 | 45.74 |
| 301 | 251.16 | 110.07 | 42.30 | 42.30 | 75.35 | 75.35 |
| 302 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 303 | 79.65  | 74.89  | 10.99 | 6.26  | 29.14 | 16.61 |
| 304 | 79.65  | 72.84  | 10.99 | 6.26  | 29.14 | 16.61 |
| 305 | 79.65  | 74.30  | 10.99 | 6.26  | 29.14 | 16.61 |
| 306 | 79.65  | 74.89  | 10.99 | 6.26  | 29.14 | 16.61 |
| 307 | 79.65  | 74.30  | 10.99 | 6.26  | 29.14 | 16.61 |
| 308 | 120.60 | 96.18  | 23.36 | 6.45  | 30.09 | 45.74 |
| 309 | 48.35  | 43.11  | 2.85  | 2.85  | 14.51 | 14.51 |
| 310 | 79.65  | 72.84  | 10.99 | 6.26  | 29.14 | 16.61 |
| 311 | 120.60 | 96.18  | 23.36 | 6.45  | 30.09 | 45.74 |
| 312 | 142.83 | 141.72 | 16.17 | 16.17 | 42.85 | 42.85 |
| 313 | 120.60 | 84.03  | 19.18 | 6.45  | 30.09 | 45.74 |
| 314 | 120.60 | 84.03  | 20.11 | 6.45  | 30.09 | 45.74 |
| 315 | 120.60 | 68.63  | 14.85 | 6.45  | 30.09 | 45.74 |
| 316 | 120.60 | 68.63  | 14.89 | 6.45  | 30.09 | 45.74 |

## Design Ratio

| Member ID | P     | M <sub>z</sub> | M <sub>y</sub> | V <sub>y</sub> | V <sub>z</sub> | (P,M <sub>z</sub> ,M <sub>y</sub> ) | Worst LC | KL/r         | δ            | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|--------------|--------------|--------|
| 1         | 0.054 | 0.324          | 0.066          | 0.009          | 0.006          | 0.330                               | #32      | 0.531        | Not Required | Pass   |
| 2         | 0.001 | 0.227          | 0.037          | 0.054          | 0.007          | 0.264                               | #13      | 0.052        | Not Required | Pass   |
| 3         | 0.002 | 0.457          | 0.018          | 0.045          | 0.003          | 0.476                               | #13      | 0.044        | Not Required | Pass   |
| 4         | 0.001 | 0.340          | 0.048          | 0.035          | 0.008          | 0.388                               | #13      | 0.117        | Not Required | Pass   |
| 5         | 0.002 | 0.282          | 0.015          | 0.046          | 0.004          | 0.298                               | #13      | 0.073        | Not Required | Pass   |
| 6         | 0.002 | 0.653          | 0.039          | 0.068          | 0.008          | 0.693                               | #13      | 0.044        | Not Required | Pass   |
| 7         | 0.002 | 0.405          | 0.042          | 0.066          | 0.008          | 0.421                               | #13      | 0.073        | Not Required | Pass   |
| 8         | 0.002 | 0.094          | 0.034          | 0.029          | 0.002          | 0.113                               | #13      | 0.088        | Not Required | Pass   |
| 9         | 0.002 | 0.079          | 0.030          | 0.004          | 0.002          | 0.109                               | #13      | 0.198        | Not Required | Pass   |
| 10        | 0.002 | 0.491          | 0.050          | 0.050          | 0.009          | 0.526                               | #13      | 0.078        | Not Required | Pass   |
| 11        | 0.002 | 0.112          | 0.033          | 0.040          | 0.002          | 0.127                               | #13      | 0.088        | Not Required | Pass   |
| 12        | 0.002 | 0.401          | 0.049          | 0.080          | 0.010          | 0.451                               | #13      | 0.052        | Not Required | Pass   |
| 13        | 0.002 | 0.100          | 0.059          | 0.052          | 0.002          | 0.122                               | #13      | 0.265        | Not Required | Pass   |
| 14        | 0.003 | 0.074          | 0.060          | 0.038          | 0.002          | 0.099                               | #13      | 0.177        | Not Required | Pass   |
| 15        | 0.000 | 0.018          | 0.004          | 0.014          | 0.001          | 0.021                               | #13      | Not Required | Not Required | Pass   |
| 16        | 0.000 | 0.014          | 0.004          | 0.011          | 0.001          | 0.017                               | #13      | Not Required | Not Required | Pass   |
| 101       | 0.073 | 0.389          | 0.010          | 0.012          | 0.001          | 0.391                               | #32      | 0.531        | Not Required | Pass   |
| 102       | 0.000 | 0.447          | 0.059          | 0.093          | 0.010          | 0.506                               | #13      | 0.052        | Not Required | Pass   |
| 103       | 0.002 | 0.754          | 0.018          | 0.076          | 0.003          | 0.773                               | #13      | 0.044        | Not Required | Pass   |
| 104       | 0.002 | 0.591          | 0.034          | 0.060          | 0.005          | 0.610                               | #13      | 0.078        | Not Required | Pass   |
| 105       | 0.002 | 0.467          | 0.042          | 0.076          | 0.009          | 0.479                               | #13      | 0.073        | Not Required | Pass   |
| 106       | 0.002 | 0.732          | 0.017          | 0.074          | 0.005          | 0.734                               | #13      | 0.044        | Not Required | Pass   |
| 107       | 0.002 | 0.454          | 0.026          | 0.074          | 0.005          | 0.460                               | #13      | 0.073        | Not Required | Pass   |
| 108       | 0.002 | 0.041          | 0.013          | 0.033          | 0.002          | 0.054                               | #13      | 0.088        | Not Required | Pass   |
| 109       | 0.002 | 0.077          | 0.021          | 0.001          | 0.001          | 0.099                               | #13      | 0.198        | Not Required | Pass   |
| 110       | 0.001 | 0.557          | 0.028          | 0.056          | 0.005          | 0.578                               | #13      | 0.078        | Not Required | Pass   |

|     |       |       |       |       |       |       |     |              |              |      |
|-----|-------|-------|-------|-------|-------|-------|-----|--------------|--------------|------|
| 111 | 0.001 | 0.051 | 0.013 | 0.043 | 0.002 | 0.057 | #13 | 0.088        | Not Required | Pass |
| 112 | 0.001 | 0.420 | 0.059 | 0.089 | 0.011 | 0.479 | #13 | 0.052        | Not Required | Pass |
| 113 | 0.002 | 0.208 | 0.053 | 0.059 | 0.002 | 0.244 | #13 | 0.265        | Not Required | Pass |
| 114 | 0.004 | 0.182 | 0.054 | 0.047 | 0.002 | 0.220 | #13 | 0.265        | Not Required | Pass |
| 115 | 0.003 | 0.252 | 0.029 | 0.047 | 0.002 | 0.270 | #13 | 0.439        | Not Required | Pass |
| 116 | 0.003 | 0.190 | 0.029 | 0.037 | 0.002 | 0.212 | #13 | 0.439        | Not Required | Pass |
| 201 | 0.073 | 0.389 | 0.010 | 0.012 | 0.001 | 0.391 | #32 | 0.531        | Not Required | Pass |
| 202 | 0.001 | 0.420 | 0.059 | 0.089 | 0.011 | 0.479 | #13 | 0.052        | Not Required | Pass |
| 203 | 0.002 | 0.732 | 0.017 | 0.074 | 0.005 | 0.734 | #13 | 0.044        | Not Required | Pass |
| 204 | 0.001 | 0.557 | 0.028 | 0.056 | 0.005 | 0.578 | #13 | 0.078        | Not Required | Pass |
| 205 | 0.002 | 0.454 | 0.026 | 0.074 | 0.005 | 0.460 | #13 | 0.073        | Not Required | Pass |
| 206 | 0.002 | 0.754 | 0.018 | 0.076 | 0.003 | 0.773 | #13 | 0.044        | Not Required | Pass |
| 207 | 0.002 | 0.467 | 0.042 | 0.076 | 0.009 | 0.479 | #13 | 0.073        | Not Required | Pass |
| 208 | 0.002 | 0.049 | 0.029 | 0.037 | 0.002 | 0.065 | #13 | 0.088        | Not Required | Pass |
| 209 | 0.002 | 0.077 | 0.021 | 0.001 | 0.001 | 0.099 | #13 | 0.198        | Not Required | Pass |
| 210 | 0.002 | 0.591 | 0.034 | 0.060 | 0.005 | 0.610 | #13 | 0.078        | Not Required | Pass |
| 211 | 0.002 | 0.074 | 0.029 | 0.047 | 0.002 | 0.082 | #13 | 0.088        | Not Required | Pass |
| 212 | 0.000 | 0.447 | 0.059 | 0.093 | 0.010 | 0.506 | #13 | 0.052        | Not Required | Pass |
| 213 | 0.002 | 0.208 | 0.053 | 0.059 | 0.002 | 0.244 | #13 | 0.265        | Not Required | Pass |
| 214 | 0.004 | 0.182 | 0.054 | 0.047 | 0.002 | 0.220 | #13 | 0.265        | Not Required | Pass |
| 215 | 0.002 | 0.186 | 0.021 | 0.043 | 0.002 | 0.205 | #13 | 0.439        | Not Required | Pass |
| 216 | 0.004 | 0.129 | 0.021 | 0.033 | 0.002 | 0.149 | #13 | 0.439        | Not Required | Pass |
| 301 | 0.054 | 0.324 | 0.066 | 0.009 | 0.006 | 0.330 | #32 | 0.531        | Not Required | Pass |
| 302 | 0.002 | 0.401 | 0.049 | 0.080 | 0.010 | 0.451 | #13 | 0.052        | Not Required | Pass |
| 303 | 0.002 | 0.653 | 0.039 | 0.068 | 0.008 | 0.693 | #13 | 0.044        | Not Required | Pass |
| 304 | 0.002 | 0.491 | 0.050 | 0.050 | 0.009 | 0.526 | #13 | 0.078        | Not Required | Pass |
| 305 | 0.002 | 0.405 | 0.042 | 0.066 | 0.008 | 0.421 | #13 | 0.073        | Not Required | Pass |
| 306 | 0.002 | 0.457 | 0.018 | 0.045 | 0.003 | 0.476 | #13 | 0.044        | Not Required | Pass |
| 307 | 0.002 | 0.282 | 0.015 | 0.046 | 0.004 | 0.298 | #13 | 0.073        | Not Required | Pass |
| 308 | 0.000 | 0.014 | 0.004 | 0.011 | 0.001 | 0.017 | #13 | Not Required | Not Required | Pass |
| 309 | 0.002 | 0.079 | 0.030 | 0.004 | 0.002 | 0.109 | #13 | 0.198        | Not Required | Pass |
| 310 | 0.001 | 0.340 | 0.048 | 0.035 | 0.008 | 0.388 | #13 | 0.117        | Not Required | Pass |
| 311 | 0.000 | 0.018 | 0.004 | 0.014 | 0.001 | 0.021 | #13 | Not Required | Not Required | Pass |
| 312 | 0.001 | 0.227 | 0.037 | 0.054 | 0.007 | 0.264 | #13 | 0.052        | Not Required | Pass |
| 313 | 0.002 | 0.100 | 0.059 | 0.052 | 0.002 | 0.122 | #13 | 0.177        | Not Required | Pass |
| 314 | 0.003 | 0.074 | 0.060 | 0.038 | 0.002 | 0.099 | #13 | 0.265        | Not Required | Pass |
| 315 | 0.003 | 0.265 | 0.033 | 0.040 | 0.002 | 0.284 | #13 | 0.439        | Not Required | Pass |
| 316 | 0.003 | 0.206 | 0.034 | 0.029 | 0.002 | 0.229 | #13 | 0.439        | Not Required | Pass |

## Definitions

|          |                                          |
|----------|------------------------------------------|
| $\Phi_t$ | Safety factor for tensile                |
| $\Phi_c$ | Safety factor for compression            |
| $\Phi_b$ | Safety factor for flexure                |
| $\Phi_v$ | Safety factor for shear                  |
| E        | Modulus of elasticity                    |
| $F_y$    | Specified minimum yield stress           |
| $F_u$    | Specified minimum tensile strength       |
| A        | Cross-sectional area                     |
| J        | Torsional constant                       |
| $I_{yp}$ | Moment of inertia about the Y axes       |
| $I_{zp}$ | Moment of inertia about the Z axes       |
| $I_w$    | Warping constant                         |
| $S_{yp}$ | Plastic section modulus about the Y axis |
| $S_{zp}$ | Plastic section modulus about the Z axis |

|                     |                                                           |
|---------------------|-----------------------------------------------------------|
| KL                  | Effective length                                          |
| $C_b$               | Buckling modification factor (from all load combinations) |
| $L_b$               | Length between braced points                              |
| LST                 | Limited slenderness for tension                           |
| LSC                 | Limited slenderness for compression                       |
| LD                  | Limited deflection                                        |
| $P_n$               | Nominal axial strength (tension/compression)              |
| $M_n$               | Nominal flexural strength (about Z/Y axis)                |
| $V_n$               | Nominal shear strength (along Z/Y axis)                   |
| P                   | Design ratio in case of axial force                       |
| $M_z$               | Design ratio in case of bending about Z axis              |
| $M_y$               | Design ratio in case of bending about Y axis              |
| $V_y$               | Design ratio in case of shear along Y axis                |
| $V_z$               | Design ratio in case of shear along Z axis                |
| (P, $M_z$ , $M_y$ ) | Design ratio in case of axial force and bending action    |
| KL/r                | Design ratio in case of section slenderness               |
| $\delta$            | Design ratio in case of member deflection                 |
| OK                  | Capacity is provided                                      |
| NG                  | Capacity is not provided                                  |



| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

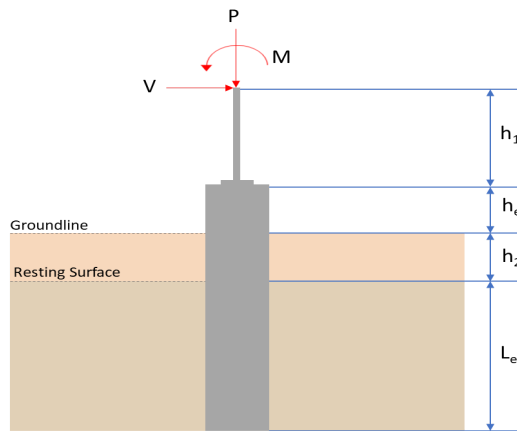

### Geometry

Pile shape: rectangular  
 $b = 48$  in - Pile width  
 $D = 48$  in - Pile depth  
 $L = 4.75$  ft - Total pile length  
 $h_1 = 0$  ft - Lateral load height from the top of the pile,  
 $h_2 = 0$  ft - Depth to resisting surface  
 $h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 4.091  | 5.983  |
| $V_x$ (kip)    | -0.420 | -0.710 |
| $V_z$ (kip)    | 0.282  | 0.422  |
| $M_x$ (kipft)  | 0.785  | 1.174  |
| $M_z$ (kipft)  | 8.103  | 13.699 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.42 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.066879 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(8.103 \text{ kipft}) + ((-0.42 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 1.2903 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.4062 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.282 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.044904 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.785 \text{ kipft}) + ((0.282 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.125 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 2.567 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.4062 \text{ ft}), (2.567 \text{ ft})]$$

$$L_{e,req} = 4.406 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (4.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 4.75 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.406 \text{ ft})}{(4.75 \text{ ft})}$$

$$\text{Ratio} = 0.92758$$

Status: **PASS**  
Ratio: **0.930**

**End-bearing Capacity (ASD)**

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(4.091 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.25569 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.25569 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.12784$$

Status: **PASS**  
Ratio: **0.130**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(4.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.1875$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.066879 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 1.2903 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (1.2903 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (1.2903 \text{ kipft/ft})) + (4 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.2225 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (1.2903 \text{ kipft/ft})) + (3 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))]^2}{(4.75 \text{ ft})^2 \times [(3 \times (1.2903 \text{ kipft/ft})) + (2 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))]}$$

$$p = 0.18193 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (1.2903 \text{ kipft/ft})) + ((-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))]}{(4.75 \text{ ft})^2}$$

$$s = 0.60177 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.2225 \text{ ft})}{2}$$

$$p_a = 0.24169 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.18193 \text{ kip/ft}^2)}{(0.24169 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.75276$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.75 \text{ ft})$$

$$p_s = 0.7125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.60177 \text{ kip/ft}^2)}{(0.7125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.84459$$

Status: **PASS**  
Ratio: **0.750**

Status: **PASS**  
Ratio: **0.840**

#### Considering z-direction:

$H_o = 0.044904 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.125 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.125 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (0.044904 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (0.125 \text{ kipft/ft})) + (4 \times (0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.3773 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.125 \text{ kipft/ft})) + (3 \times (0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))]^2}{(4.75 \text{ ft})^2 \times [(3 \times (0.125 \text{ kipft/ft})) + (2 \times (0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))]}$$

$$p = 0.053882 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.125 \text{ kipft/ft})) + ((0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))]}{(4.75 \text{ ft})^2}$$

$$s = 0.1232 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.3773 \text{ ft})}{2}$$

$$p_a = 0.2533 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.053882 \text{ kip/ft}^2)}{(0.2533 \text{ kip/ft}^2)}$$

$$Ratio = 0.21272$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.75 \text{ ft})$$

$$p_s = 0.7125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.1232 \text{ kip/ft}^2)}{(0.7125 \text{ kip/ft}^2)}$$

$$Ratio = 0.17292$$

Status: **PASS**  
Ratio: **0.210**

Status: **PASS**  
Ratio: **0.170**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.71 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.11306 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(13.699 \text{ kipft}) + ((-0.71 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.1814 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(2.1814 \text{ kipft/ft})}{(-0.11306 \text{ kip/ft})}$$

$$E = 19.294 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.1814 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (-0.11306 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (2.1814 \text{ kipft/ft})) + (4 \times (-0.11306 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = \frac{(-0.11306 \text{ kip/ft}) \times (48 \text{ in})}{(6 \times (2.1814 \text{ kip/ft})) + (4 \times (-0.11306 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.2225 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.11306 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.2225 \text{ ft})}{(4.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.2225 \text{ ft})}{(4.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 3.554 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.11306 \text{ kip/ft}) \times (48 \text{ in}) \times (4.75 \text{ ft})) \times \left[ \left( \frac{(19.294 \text{ ft})}{(4.75 \text{ ft})} + \frac{(3.2225 \text{ ft})}{2 \times (4.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.2225 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.2225 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 8.2438 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.422 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.067197 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(1.174 \text{ kipft}) + ((0.422 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.18694 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.18694 \text{ kipft/ft})}{(0.067197 \text{ kip/ft})}$$

$$E = 2.782 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.18694 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (0.067197 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (0.18694 \text{ kipft/ft})) + (4 \times (0.067197 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.3774 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.067197 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.3774 \text{ ft})}{(4.75 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.3774 \text{ ft})}{(4.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.45723 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.067197 \text{ kip/ft}) \times (48 \text{ in}) \times (4.75 \text{ ft})) \times \left[ \left( \frac{(2.782 \text{ ft})}{(4.75 \text{ ft})} + \frac{(3.3774 \text{ ft})}{2 \times (4.75 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.3774 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.3774 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.97179 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(5.983 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.397 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.397 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                    |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]</math></p> <p><math>s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(5.983 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0022365</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>Status: <b>PASS</b><br/>Ratio: <b>0.000</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p> |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 5.983 \text{ kip} \rightarrow 5983 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(5983 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.28 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.28 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.28 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.28 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.61 \text{ kip}$$

**Considering x-direction:**

$V_{max} = 3.554 \text{ kip}$  - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(3.554 \text{ kip})}{(110.61 \text{ kip})}$$

$$Ratio = 0.032129$$

**Considering z-direction:**

$V_{max} = 0.45723 \text{ kip}$  - Maximum shear force in the z-direction,

$Ratio$  - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.45723 \text{ kip})}{(110.61 \text{ kip})}$$

$$Ratio = 0.0041335$$

Status: **PASS**  
Ratio: **0.030**

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 8.2438 \text{ kipft}$  - Maximum moment in the x-direction,

$Ratio$  - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(8.2438 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.033028$$

Status: **PASS**  
Ratio: **0.030**

**Considering z-direction:**

$M_{max} = 0.97179 \text{ kipft}$  - Maximum moment in the z-direction,

$Ratio$  - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.97179 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.0038934$$

Status: **PASS**  
Ratio: **0.000**

| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

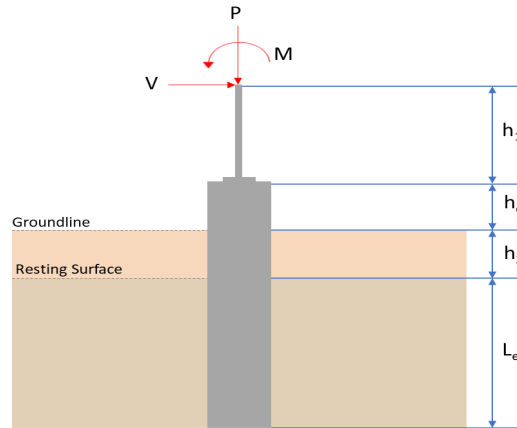

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 4.75$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 4.091  | 5.983  |
| $V_x$ (kip)    | -0.420 | -0.710 |
| $V_z$ (kip)    | -0.282 | -0.422 |
| $M_x$ (kipft)  | -0.785 | -1.174 |
| $M_z$ (kipft)  | 8.103  | 13.699 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.42 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.066879 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(8.103 \text{ kipft}) + ((-0.42 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 1.2903 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.4062 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.282 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.044904 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.785 \text{ kipft}) + ((-0.282 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.125 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.7438 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = MAX[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = MAX[(4.4062 \text{ ft}), (1.7438 \text{ ft})]$$

$$L_{e,req} = 4.406 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (4.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 4.75 \text{ ft}$$

**Ratio** - Embedded depth

$$Ratio = \frac{L_{e,req}}{L_e}$$

$$Ratio = \frac{(4.406 \text{ ft})}{(4.75 \text{ ft})}$$

$$Ratio = 0.92758$$

Status: **PASS**  
Ratio: **0.930**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(4.091 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.25569 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.25569 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.12784$$

Status: **PASS**  
Ratio: **0.130**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(4.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.1875$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.066879 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 1.2903 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (1.2903 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (1.2903 \text{ kipft/ft})) + (4 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.2225 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (1.2903 \text{ kipft/ft})) + (3 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))]^2}{(4.75 \text{ ft})^2 \times [(3 \times (1.2903 \text{ kipft/ft})) + (2 \times (-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))]}$$

$$p = 0.18193 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (1.2903 \text{ kipft/ft})) + ((-0.066879 \text{ kip/ft}) \times (4.75 \text{ ft}))]}{(4.75 \text{ ft})^2}$$

$$s = 0.60177 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.2225 \text{ ft})}{2}$$

$$p_a = 0.24169 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.18193 \text{ kip/ft}^2)}{(0.24169 \text{ kip/ft}^2)}$$

$$Ratio = 0.75276$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.75 \text{ ft})$$

$$p_s = 0.7125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.60177 \text{ kip/ft}^2)}{(0.7125 \text{ kip/ft}^2)}$$

$$Ratio = 0.84459$$

Status: **PASS**  
Ratio: **0.750**

Status: **PASS**  
Ratio: **0.840**

#### Considering z-direction:

$H_o = -0.044904 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.125 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.125 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (-0.044904 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (0.125 \text{ kipft/ft})) + (4 \times (-0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.3773 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.125 \text{ kipft/ft})) + (3 \times (-0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))]^2}{(4.75 \text{ ft})^2 \times [(3 \times (0.125 \text{ kipft/ft})) + (2 \times (-0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))]}$$

$$p = -0.012608 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.125 \text{ kipft/ft})) + ((-0.044904 \text{ kip/ft}) \times (4.75 \text{ ft}))]}{(4.75 \text{ ft})^2}$$

$$s = 0.0097606 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.3773 \text{ ft})}{2}$$

$$p_a = 0.2533 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(-0.012608 \text{ kip/ft}^2)}{(0.2533 \text{ kip/ft}^2)}$$

$$Ratio = -0.049776$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ .

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (4.75 \text{ ft})$$

$$p_s = 0.7125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0097606 \text{ kip/ft}^2)}{(0.7125 \text{ kip/ft}^2)}$$

$$Ratio = 0.013699$$

Status: **PASS**  
Ratio: **-0.050**

Status: **PASS**  
Ratio: **0.010**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.71 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.11306 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(13.699 \text{ kipft}) + ((-0.71 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.1814 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(2.1814 \text{ kipft/ft})}{(-0.11306 \text{ kip/ft})}$$

$$E = 19.294 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.1814 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (-0.11306 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (2.1814 \text{ kipft/ft})) + (4 \times (-0.11306 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = \frac{(-0.11306 \text{ kip/ft}) \times (4.75 \text{ ft})}{(6 \times (2.1814 \text{ kipft/ft})) + (4 \times (-0.11306 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.2225 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.11306 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.2225 \text{ ft})}{(4.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.2225 \text{ ft})}{(4.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 3.554 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.11306 \text{ kip/ft}) \times (48 \text{ in}) \times (4.75 \text{ ft})) \times \left[ \left( \frac{(19.294 \text{ ft})}{(4.75 \text{ ft})} + \frac{(3.2225 \text{ ft})}{2 \times (4.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.2225 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (19.294 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.2225 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 8.2438 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.422 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.067197 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(1.174 \text{ kipft}) + ((-0.422 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.18694 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.18694 \text{ kipft/ft})}{(-0.067197 \text{ kip/ft})}$$

$$E = 2.782 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.18694 \text{ kipft/ft}) \times (4.75 \text{ ft})) + (3 \times (-0.067197 \text{ kip/ft}) \times (4.75 \text{ ft})^2)}{(6 \times (0.18694 \text{ kipft/ft})) + (4 \times (-0.067197 \text{ kip/ft}) \times (4.75 \text{ ft}))}$$

$$a = 3.3774 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.067197 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.3774 \text{ ft})}{(4.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.3774 \text{ ft})}{(4.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.45723 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.067197 \text{ kip/ft}) \times (48 \text{ in}) \times (4.75 \text{ ft})) \times \left[ \left( \frac{(2.782 \text{ ft})}{(4.75 \text{ ft})} + \frac{(3.3774 \text{ ft})}{2 \times (4.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.3774 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.782 \text{ ft})}{(4.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.3774 \text{ ft})}{2 \times (4.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.97179 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(5.983 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.397 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.397 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                    |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]</math></p> <p><math>s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(5.983 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0022365</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>Status: <b>PASS</b><br/>Ratio: <b>0.000</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p> |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 5.983 \text{ kip} \rightarrow 5983 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(5983 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.28 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.28 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.28 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.28 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.61 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 3.554 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(3.554 \text{ kip})}{(110.61 \text{ kip})}$$

$$Ratio = 0.032129$$

**Considering z-direction:**

$V_{max} = 0.45723 \text{ kip}$  - Maximum shear force in the z-direction,

$Ratio$  - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.45723 \text{ kip})}{(110.61 \text{ kip})}$$

$$Ratio = 0.0041335$$

Status: **PASS**  
Ratio: **0.030**

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 8.2438 \text{ kipft}$  - Maximum moment in the x-direction,

$Ratio$  - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(8.2438 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.033028$$

Status: **PASS**  
Ratio: **0.030**

**Considering z-direction:**

$M_{max} = 0.97179 \text{ kipft}$  - Maximum moment in the z-direction,

$Ratio$  - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.97179 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.0038934$$

Status: **PASS**  
Ratio: **0.000**

| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

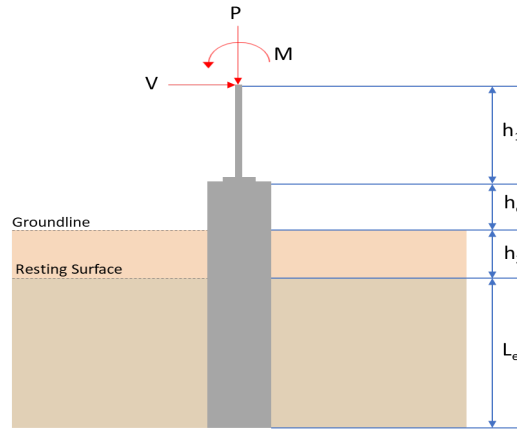

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 5$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 5.448  | 8.000  |
| $V_x$ (kip)    | -0.542 | -0.898 |
| $V_z$ (kip)    | -0.045 | -0.066 |
| $M_x$ (kipft)  | -0.128 | -0.190 |
| $M_z$ (kipft)  | 9.706  | 16.468 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.542 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.086306 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(9.706 \text{ kipft}) + ((-0.542 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 1.5455 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.6359 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.045 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0071656 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.128 \text{ kipft}) + ((-0.045 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.020382 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.0556 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = MAX[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = MAX[(4.6359 \text{ ft}), (1.0556 \text{ ft})]$$

$$L_{e,req} = 4.636 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5 \text{ ft}$$

**Ratio** - Embedded depth

$$Ratio = \frac{L_{e,req}}{L_e}$$

$$Ratio = \frac{(4.636 \text{ ft})}{(5 \text{ ft})}$$

$$Ratio = 0.9272$$

Status: **PASS**  
Ratio: **0.930**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(5.448 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.3405 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.3405 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.17025$$

Status: **PASS**  
Ratio: **0.170**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.25$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.086306 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 1.5455 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (1.5455 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (1.5455 \text{ kipft/ft})) + (4 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.3987 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (1.5455 \text{ kipft/ft})) + (3 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 \times [(3 \times (1.5455 \text{ kipft/ft})) + (2 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))]}$$

$$p = 0.18991 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (1.5455 \text{ kipft/ft})) + ((-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$$

$$s = 0.63829 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.3987 \text{ ft})}{2}$$

$$p_a = 0.2549 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.18991 \text{ kip/ft}^2)}{(0.2549 \text{ kip/ft}^2)}$$

$$Ratio = 0.74504$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$$

$$p_s = 0.75 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.63829 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$$

$$Ratio = 0.85106$$

Status: **PASS**  
Ratio: **0.750**

Status: **PASS**  
Ratio: **0.850**

#### Considering z-direction:

$H_o = -0.0071656 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.020382 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.020382 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.0071656 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.020382 \text{ kipft/ft})) + (4 \times (-0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.5582 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (0.020382 \text{ kipft/ft})) + (3 \times (-0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 [(3 \times (0.020382 \text{ kipft/ft})) + (2 \times (-0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))]}$$

$$p = -0.0019231 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 [(2 \times (0.020382 \text{ kipft/ft})) + ((-0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$$

$$s = 0.0011847 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.5582 \text{ ft})}{2}$$

$$p_a = 0.26686 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(-0.0019231 \text{ kip/ft}^2)}{(0.26686 \text{ kip/ft}^2)}$$

$$Ratio = -0.0072062$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$$

$$p_s = 0.75 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0011847 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$$

$$Ratio = 0.0015796$$

Status: **PASS**  
Ratio: **-0.010**

Status: **PASS**  
Ratio: **0.000**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.898 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.14299 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(16.468 \text{ kipft}) + ((-0.898 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.6223 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(2.6223 \text{ kipft/ft})}{(-0.14299 \text{ kip/ft})}$$

$$E = 18.339 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.6223 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.14299 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (2.6223 \text{ kipft/ft})) + (4 \times (-0.14299 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = \frac{6 \times (2.6223 \text{ kipft/ft}) + (4 \times (-0.14299 \text{ kip/ft}) \times (5 \text{ ft}))}{\dots}$$

$$a = 3.3974 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.14299 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.3974 \text{ ft})}{(5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.3974 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 4.0945 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.14299 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(18.339 \text{ ft})}{(5 \text{ ft})} + \frac{(3.3974 \text{ ft})}{2 \times (5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.3974 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.3974 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 9.9745 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.066 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.01051 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.19 \text{ kipft}) + ((-0.066 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.030255 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.030255 \text{ kipft/ft})}{(-0.01051 \text{ kip/ft})}$$

$$E = 2.8788 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.030255 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.01051 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.030255 \text{ kipft/ft})) + (4 \times (-0.01051 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.5569 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.01051 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.5569 \text{ ft})}{(5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.5569 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.070779 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \ b \ L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.01051 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(2.8788 \text{ ft})}{(5 \text{ ft})} + \frac{(3.5569 \text{ ft})}{2 \times (5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.5569 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.5569 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.15816 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(8 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.33 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.33 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                    |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = \text{Min spacing of reinforcement,}</math></p> $s_{rebar} = \text{Max}[1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max}[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties}</math> - Maximum spacing of ties,</p> $s_{ties} = \text{Min}[(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min}[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                    | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$ $\phi P_N = 2675.2 \text{ kip}$ <p><i>Ratio</i> - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(8 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0029905$                                                                                                                                                                                                                                                                                                                                           | <p>Status: <b>PASS</b><br/>Ratio: <b>0.000</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 8 \text{ kip} \rightarrow 8000 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(8000 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.55 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min} [V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min} [(296.21 \text{ kip}), (119.55 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.55 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN} [V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN} [(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.55 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.79 \text{ kip}$$

**Considering x-direction:**

$V_{max} = 4.0945 \text{ kip}$  - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(4.0945 \text{ kip})}{(110.79 \text{ kip})}$$

$$Ratio = 0.036958$$

**Considering z-direction:**

$V_{max} = 0.070779 \text{ kip}$  - Maximum shear force in the z-direction,

$Ratio$  - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.070779 \text{ kip})}{(110.79 \text{ kip})}$$

$$Ratio = 0.00063886$$

Status: **PASS**  
Ratio: **0.040**

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 9.9745 \text{ kipft}$  - Maximum moment in the x-direction,

$Ratio$  - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(9.9745 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.039962$$

Status: **PASS**  
Ratio: **0.040**

**Considering z-direction:**

$M_{max} = 0.15816 \text{ kipft}$  - Maximum moment in the z-direction,

$Ratio$  - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(0.15816 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.00063366$$

Status: **PASS**  
Ratio: **0.000**

| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

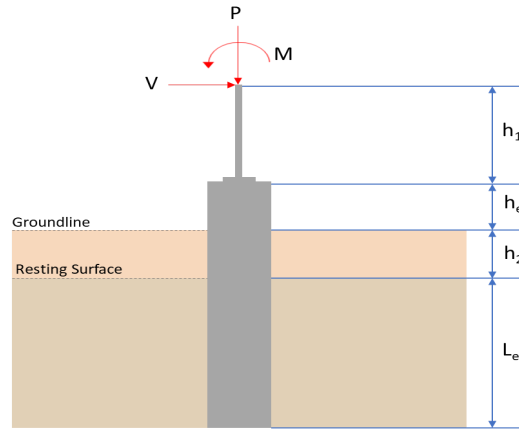

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 5$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 5.448  | 8.000  |
| $V_x$ (kip)    | -0.542 | -0.898 |
| $V_z$ (kip)    | 0.045  | 0.066  |
| $M_x$ (kipft)  | 0.128  | 0.190  |
| $M_z$ (kipft)  | 9.706  | 16.468 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.542 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.086306 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(9.706 \text{ kipft}) + ((-0.542 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 1.5455 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.6359 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.045 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0071656 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.128 \text{ kipft}) + ((0.045 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.020382 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.2984 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.6359 \text{ ft}), (1.2984 \text{ ft})]$$

$$L_{e,req} = 4.636 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.636 \text{ ft})}{(5 \text{ ft})}$$

$$\text{Ratio} = 0.9272$$

Status: **PASS**  
Ratio: **0.930**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(5.448 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.3405 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.3405 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.17025$$

Status: **PASS**  
Ratio: **0.170**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.25$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.086306 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 1.5455 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (1.5455 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (1.5455 \text{ kipft/ft})) + (4 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.3987 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (1.5455 \text{ kipft/ft})) + (3 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 \times [(3 \times (1.5455 \text{ kipft/ft})) + (2 \times (-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))]}$$

$$p = 0.18991 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (1.5455 \text{ kipft/ft})) + ((-0.086306 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$$

$$s = 0.63829 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.3987 \text{ ft})}{2}$$

$$p_a = 0.2549 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.18991 \text{ kip/ft}^2)}{(0.2549 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.74504$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$$

$$p_s = 0.75 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.63829 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.85106$$

Status: **PASS**  
Ratio: **0.750**

Status: **PASS**  
Ratio: **0.850**

#### Considering z-direction:

$H_o = 0.0071656 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.020382 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.020382 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (0.0071656 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.020382 \text{ kipft/ft})) + (4 \times (0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.5582 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.020382 \text{ kipft/ft})) + (3 \times (0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 \times [(3 \times (0.020382 \text{ kipft/ft})) + (2 \times (0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))]}$$

$$p = 0.0080704 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.020382 \text{ kipft/ft})) + ((0.0071656 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$$

$$s = 0.018382 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.5582 \text{ ft})}{2}$$

$$p_a = 0.26686 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.0080704 \text{ kip/ft}^2)}{(0.26686 \text{ kip/ft}^2)}$$

$$Ratio = 0.030242$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$$

$$p_s = 0.75 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.018382 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$$

$$Ratio = 0.02451$$

Status: **PASS**  
Ratio: **0.030**

Status: **PASS**  
Ratio: **0.020**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-0.898 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.14299 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(16.468 \text{ kipft}) + ((-0.898 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.6223 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(2.6223 \text{ kipft/ft})}{(-0.14299 \text{ kip/ft})}$$

$$E = 18.339 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.6223 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.14299 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (2.6223 \text{ kipft/ft})) + (4 \times (-0.14299 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = \frac{6 \times (2.6223 \text{ kipft/ft}) + (4 \times (-0.14299 \text{ kip/ft}) \times (5 \text{ ft}))}{\dots}$$

$$a = 3.3974 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.14299 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.3974 \text{ ft})}{(5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.3974 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 4.0945 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.14299 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(18.339 \text{ ft})}{(5 \text{ ft})} + \frac{(3.3974 \text{ ft})}{2 \times (5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.3974 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (18.339 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.3974 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 9.9745 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.066 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.01051 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.19 \text{ kipft}) + ((0.066 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.030255 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.030255 \text{ kipft/ft})}{(0.01051 \text{ kip/ft})}$$

$$E = 2.8788 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.030255 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (0.01051 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.030255 \text{ kipft/ft})) + (4 \times (0.01051 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.5569 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.01051 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.5569 \text{ ft})}{(5 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.5569 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.070779 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.01051 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(2.8788 \text{ ft})}{(5 \text{ ft})} + \frac{(3.5569 \text{ ft})}{2 \times (5 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.5569 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.8788 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.5569 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.15816 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(8 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.33 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.33 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                    |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = \text{Max}[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = \text{Max}[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties} = \text{Min}[(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]</math></p> <p><math>s_{ties} = \text{Min}[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p><i>Ratio - Capacity</i></p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(8 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0029905</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                                       | <p>Status: <b>PASS</b><br/>Ratio: <b>0.000</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p> |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 8 \text{ kip} \rightarrow 8000 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(8000 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.55 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.55 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.55 \text{ kip}$$

22.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.55 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.79 \text{ kip}$$

**Considering x-direction:**

$V_{max} = 4.0945 \text{ kip}$  - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(4.0945 \text{ kip})}{(110.79 \text{ kip})}$$

$$Ratio = 0.036958$$

**Considering z-direction:**

$V_{max} = 0.070779 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.070779 \text{ kip})}{(110.79 \text{ kip})}$$

$$Ratio = 0.00063886$$

Status: **PASS**  
Ratio: **0.040**

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 9.9745 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(9.9745 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.039962$$

Status: **PASS**  
Ratio: **0.040**

**Considering z-direction:**

$M_{max} = 0.15816 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.15816 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.00063366$$

Status: **PASS**  
Ratio: **0.000**