

# Your Project Calculations



Project Name: TOP20-87x44-105-5

S3D Model Link:

[https://platform.skyciv.com/structural?preload\\_name=TOP20-87x44-105-5&preload\\_path=Shared%20Enterprise%20Folder/MT\\_Solar\\_Projects/3\\_2024](https://platform.skyciv.com/structural?preload_name=TOP20-87x44-105-5&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/3_2024)

Public Model Link:

[https://platform.skyciv.com/structural-viewer?project\\_id=kLny4IHHAgt47cWP5oSVH5omd65cuosZilrHoXKH5pLmOEYK5XGRL7ldWECOUi2q](https://platform.skyciv.com/structural-viewer?project_id=kLny4IHHAgt47cWP5oSVH5omd65cuosZilrHoXKH5pLmOEYK5XGRL7ldWECOUi2q)

## Array Specification

|                                    |                               |
|------------------------------------|-------------------------------|
| <b>Product:</b>                    | Beam                          |
| <b>Unique ID:</b>                  | 2P-17-6TOP-SD-24-L-5Hx4W-8G4A |
| <b>Duty Classification:</b>        | SD                            |
| <b>Module Width:</b>               | 44.00 in                      |
| <b>Module Length:</b>              | 87.00in                       |
| <b>Number of Rows:</b>             | 5                             |
| <b>Number of Columns:</b>          | 4                             |
| <b>Total Number of Modules:</b>    | 20                            |
| <b>Desired Tilt Angle:</b>         | 15                            |
| <b>Front Edge Clearance:</b>       | 7.5                           |
| <b>Total Array Height at Tilt:</b> | 12.27 ft                      |
| <b>Total Frame Length:</b>         | 28.50 ft                      |
| <b>Frame Weight:</b>               | 1192 lbs                      |
| <b>Array Dimensions N/S:</b>       | 18.54 ft                      |
| <b>Array Dimensions E/W:</b>       | 29.33 ft                      |
| <b>Rail Length:</b>                | 222.50 in                     |
| <b>Rail Spacing:</b>               | 3.63 ft                       |
| <b>Rail Check:</b>                 | Not Checked                   |

## Support Specifications


|                                 |                 |
|---------------------------------|-----------------|
| <b>Pole Size:</b>               | 6in Pipe Sch 40 |
| <b>Pole Length above Grade:</b> | 9.90 ft         |
| <b>Number of Poles:</b>         | 2               |
| <b>Pole Spacing:</b>            | 17 ft           |

## Foundation Specifications

|  |                                    |
|--|------------------------------------|
| <b>Foundation Type:</b>                | Square                             |
| <b>Foundation Dimensions:</b>          | 48 x 48 in                         |
| <b>Foundation Depth (below grade):</b> | Pile 1: 5.50 ft<br>Pile 2: 5.50 ft |
| <b>Foundation Volume:</b>              | 6.519 y <sup>3</sup>               |
| <b>Foundation Result:</b>              | PASSED                             |
| <b>Mount Twist:</b>                    | 0.240273 kip                       |

## Site Info

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| <b>Risk Category:</b>             | I                                     |
| <b>Exposure:</b>                  | C                                     |
| <b>Soil Classification:</b>       | sand                                  |
| <b>Site Location:</b>             | 54179 Herak Rd, Charlo, MT 59824, USA |
| <b>Wind Speed:</b>                | 105 mph                               |
| <b>Snow Load:</b>                 | 5 psf                                 |
| <b>Design Uplift Pressure:</b>    | Multiple pressures                    |
| <b>Design Downforce Pressure:</b> | Multiple pressures                    |
| <b>Design Snow Pressure:</b>      | 0.003024 ksf                          |

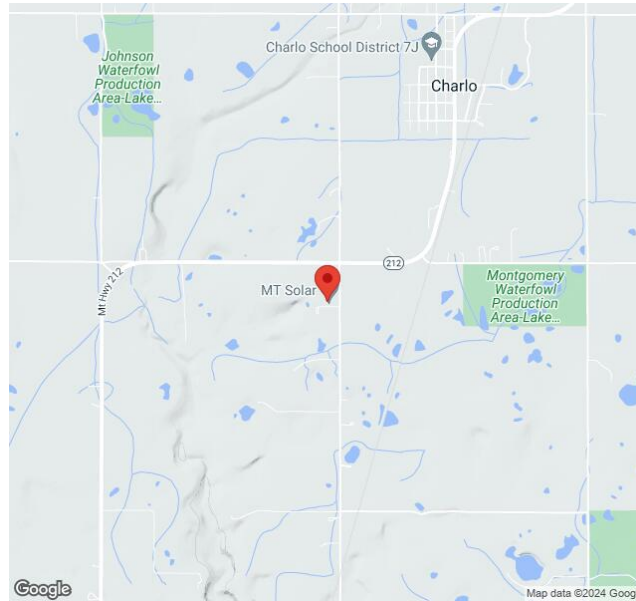

### Design Disclaimer



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



### AutoDesigner Input

```
{"wind_speed_override":105,"snow_load_override":5,"direct_snow_load":false,"add_angle_brace":false,"product_type":"Beam","project_id":"TOP20-87x44-105-5","site_address":"54179 Herak Rd, Charlo, MT 59824, USA","module_width":44,"module_length":87,"number_rows":5,"number_columns":4,"pole_mount_section":"4_40","core_pipe_width":65,"core_pipe_section":"2_40","adjuster_section":"2_40","core_beam_height":65,"core_beam_section":"HSS3x2x1/8","main_pipe_section":"2_12GA","pole_spacing":15,"tilt_angle":15,"ground_clearance":7.5,"risk_category":"I","exposure_category":"C","frame_duty_override":"auto","pole_override":"auto","soil_type":"sand","customer_foundation_override":"48_Square","foundation_type":"Square","foundation_size":48,"check_rails":false}
```

### Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

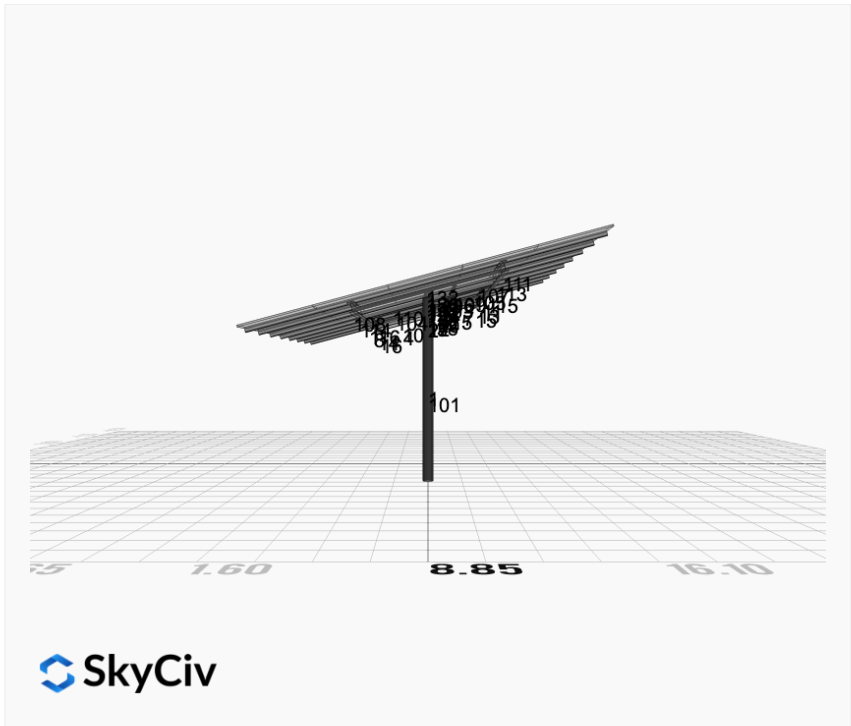
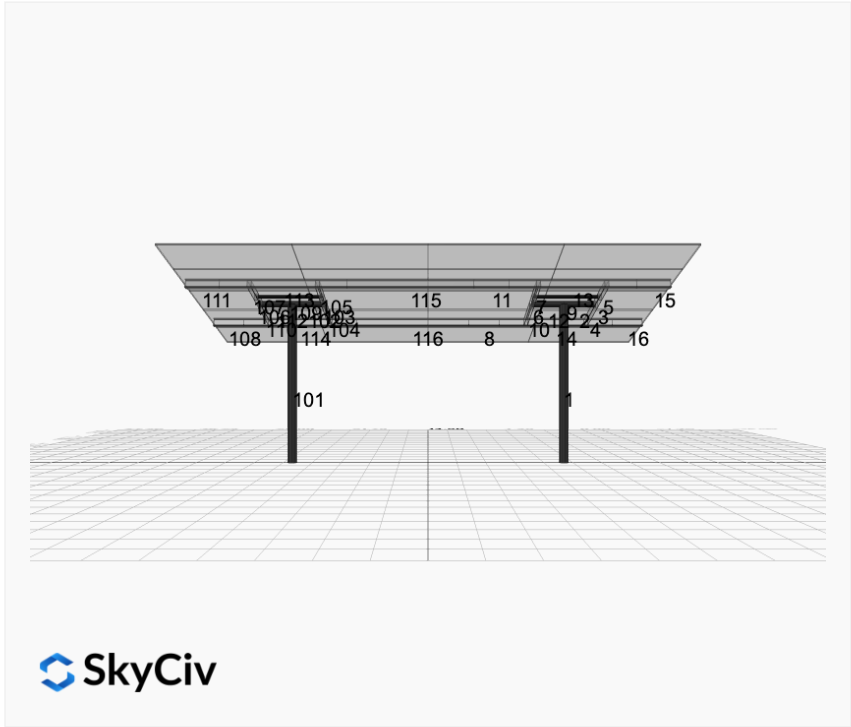


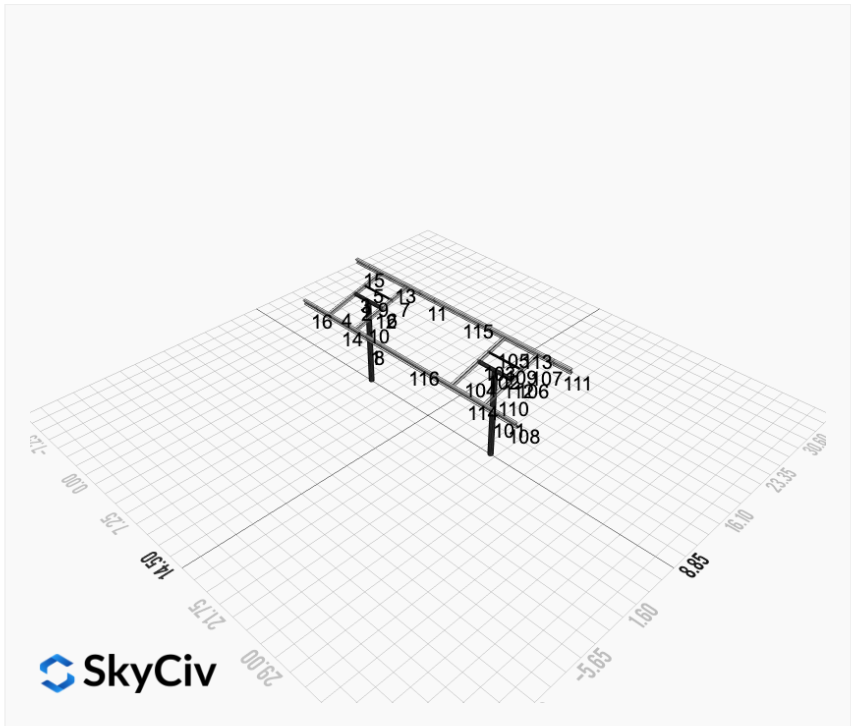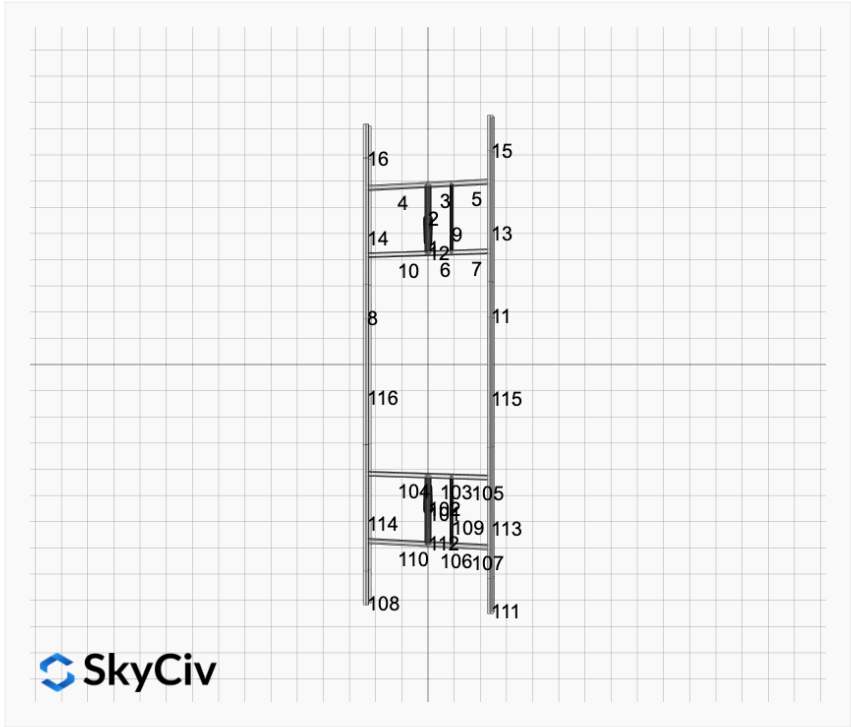




## FEM Results (Envelope Worst Case for each member)

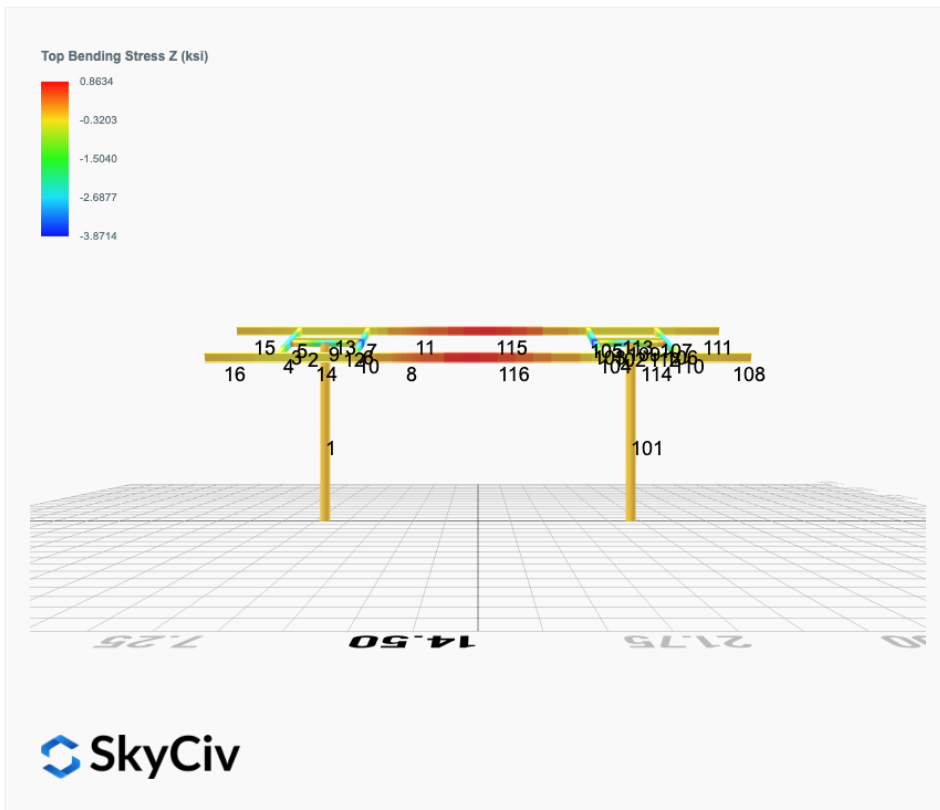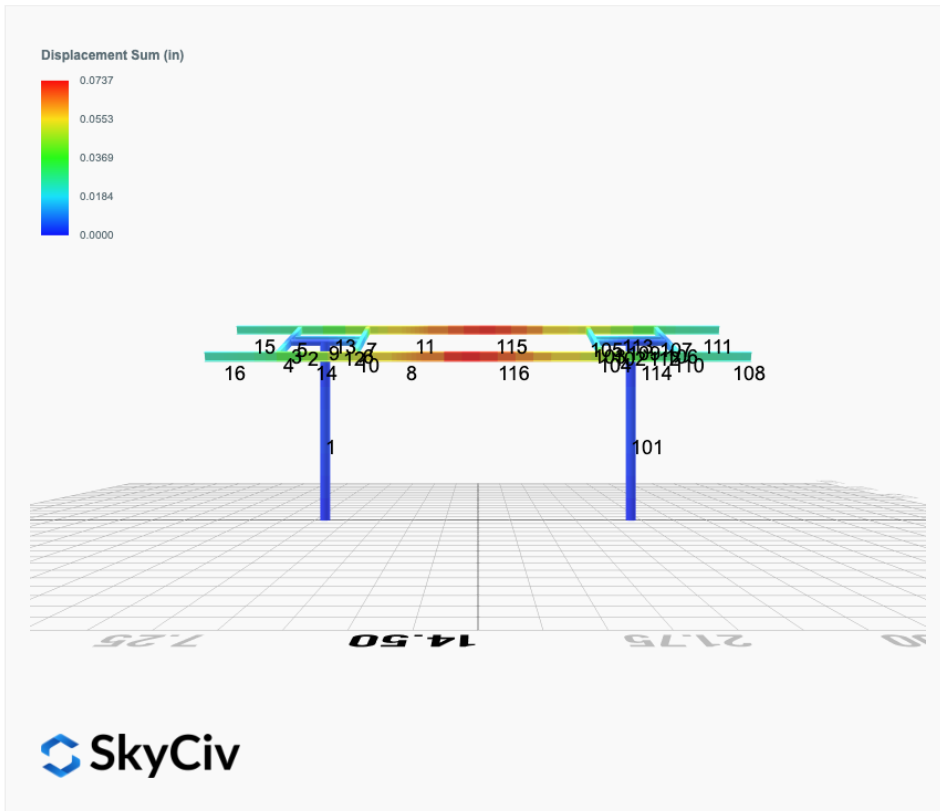

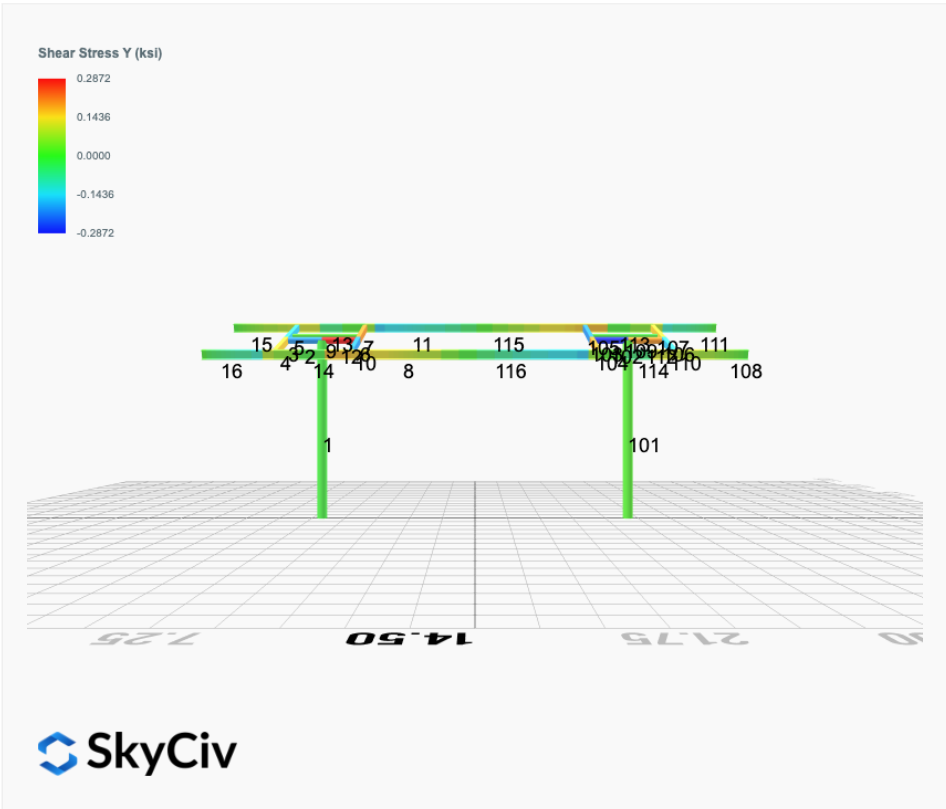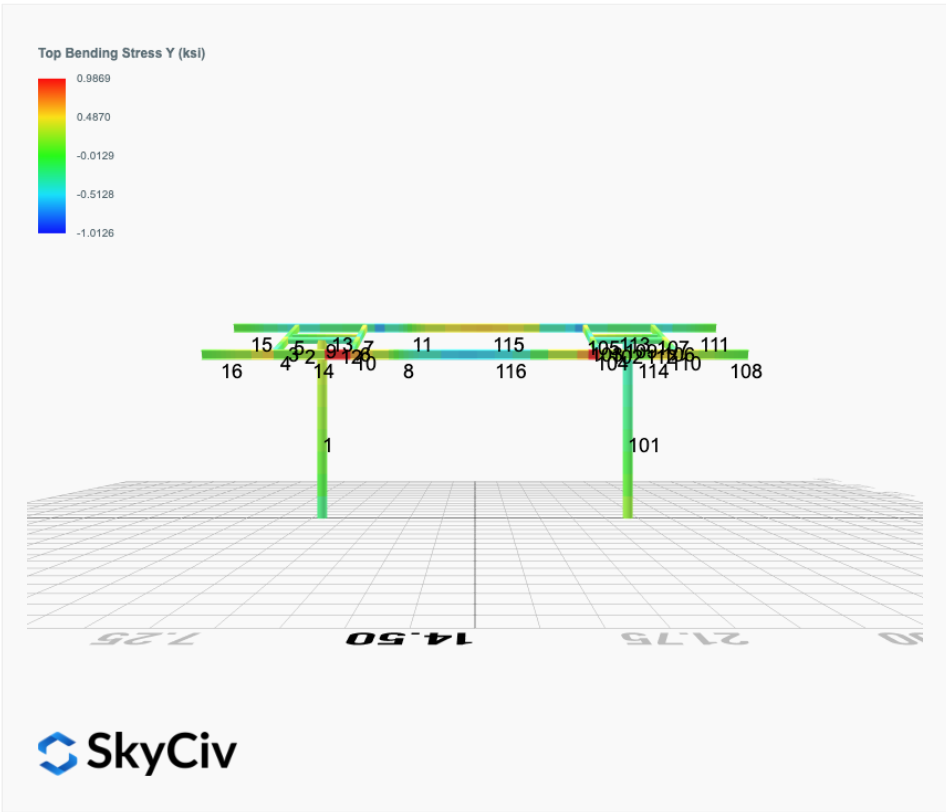

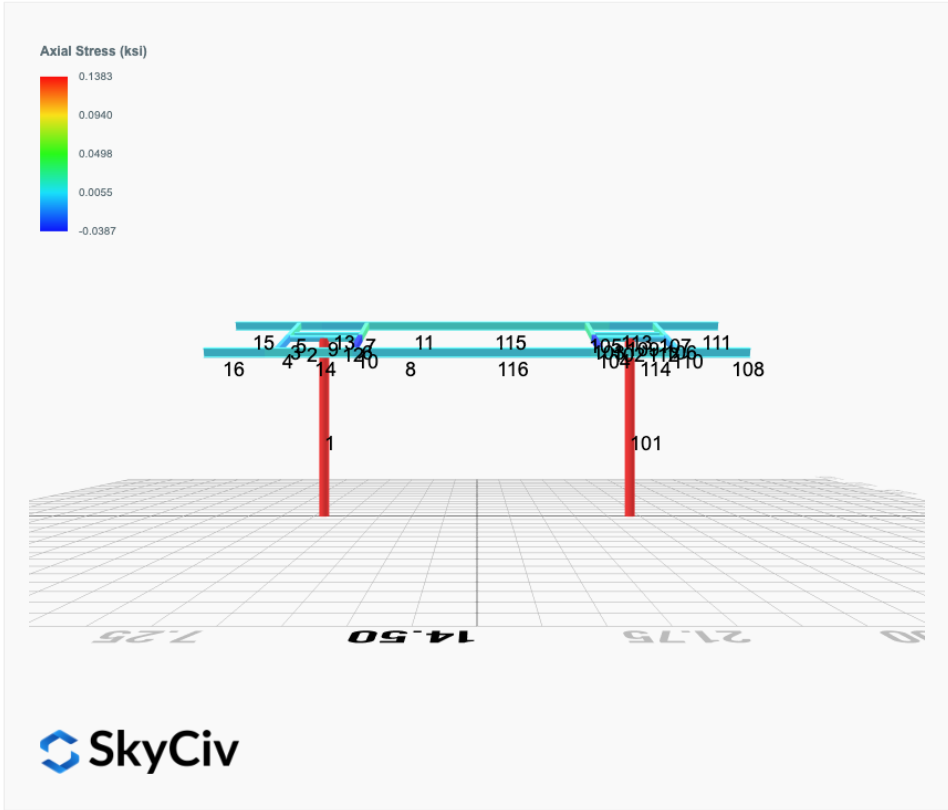

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name  | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 1. D   | 0.0000  | 1.8039  | 0.0640  | 0.1917  | -0.0233 | 0.0216   |
| ULS: 2. D + L   | 0.0000  | 1.8039  | 0.0640  | 0.1917  | -0.0233 | 0.0216   |
| ULS: 3. D + (S or Lr or R)  | 0.0000  | 2.5756  | 0.0977  | 0.2928  | -0.0357 | 0.0221   |
| ULS: 3. D + (S or Lr or R)  | 0.0000  | 1.8039  | 0.0640  | 0.1917  | -0.0233 | 0.0216   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0000  | 2.3827  | 0.0893  | 0.2675  | -0.0326 | 0.0220   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0000  | 1.8039  | 0.0640  | 0.1917  | -0.0233 | 0.0216   |
| ULS: 5b. D + 0.7E   | 0.0000  | 1.8039  | 0.0640  | 0.1917  | -0.0233 | 0.0216   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | 0.0000  | 2.3827  | 0.0893  | 0.2675  | -0.0326 | 0.0220   |
| ULS: 8. 0.6D + 0.7E   | 0.0000  | 1.0823  | 0.0384  | 0.1150  | -0.0140 | 0.0129   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -0.9536 | 5.3626  | 0.2261  | 0.6729  | -0.1469 | 11.3038  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -0.9536 | 5.3626  | 0.2261  | 0.6729  | -0.1469 | 11.3038  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 0.7234  | -0.8959 | -0.0577 | -0.1675 | 0.0697  | -5.1256  |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.6248  | -0.5277 | -0.0427 | -0.1233 | 0.0582  | -14.7846 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.7152 | 5.0518  | 0.2109  | 0.6284  | -0.1252 | 8.4837   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.7152 | 5.0518  | 0.2109  | 0.6284  | -0.1252 | 8.4837   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.5425  | 0.3579  | -0.0020 | -0.0019 | 0.0372  | -3.8384  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.4686  | 0.6340  | 0.0093  | 0.0312  | 0.0286  | -11.0826 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.7152 | 4.4729  | 0.1856  | 0.5526  | -0.1160 | 8.4832   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.7152 | 4.4729  | 0.1856  | 0.5526  | -0.1160 | 8.4832   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.5425  | -0.2210 | -0.0273 | -0.0777 | 0.0464  | -3.8388  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.4686  | 0.0552  | -0.0160 | -0.0446 | 0.0378  | -11.0831 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -0.9536 | 4.6411  | 0.2005  | 0.5962  | -0.1375 | 11.2952  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -0.9536 | 4.6411  | 0.2005  | 0.5962  | -0.1375 | 11.2952  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 0.7234  | -1.6174 | -0.0833 | -0.2442 | 0.0790  | -5.1342  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.6248  | -1.2493 | -0.0683 | -0.2000 | 0.0675  | -14.7932 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.4818              |
| Shear X          | -1.5893             |
| Shear Z          | 0.3647              |
| Moment X         | 1.0867              |
| Moment Y (Twist) | 0.2403              |
| Moment Z         | 25.1239             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 5.3626              |
| Shear X          | -0.9536             |
| Shear Z          | 0.2261              |
| Moment X         | 0.6729              |
| Moment Y (Twist) | 0.1469              |
| Moment Z         | 14.7932             |

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

| Name                                   | Fx      | Fy     | Fz      | Mx      | My     | Mz     |
|--|---------|--------|---------|---------|--------|--------|
| ULS: 1. D                              | -0.0000 | 1.8039 | -0.0640 | -0.1917 | 0.0233 | 0.0216 |
| ULS: 2. D + L                          | -0.0000 | 1.8039 | -0.0640 | -0.1917 | 0.0233 | 0.0216 |
| ULS: 3. D + (S or Lr or R)             | -0.0000 | 2.5756 | -0.0977 | -0.2928 | 0.0357 | 0.0221 |
| ULS: 3. D + (S or Lr or R)             | -0.0000 | 1.8039 | -0.0640 | -0.1917 | 0.0233 | 0.0216 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0000 | 2.3827 | -0.0893 | -0.2675 | 0.0326 | 0.0220 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0000 | 1.8039 | -0.0640 | -0.1917 | 0.0233 | 0.0216 |
| ULS: 5b. D + 0.7E                      | -0.0000 | 1.8039 | -0.0640 | -0.1917 | 0.0233 | 0.0216 |

| Name  | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | -0.0000 | 2.3827  | -0.0893 | -0.2675 | 0.0326  | 0.0220   |
| ULS: 8. 0.6D + 0.7E   | -0.0000 | 1.0823  | -0.0384 | -0.1150 | 0.0140  | 0.0129   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -0.9536 | 5.3626  | -0.2261 | -0.6729 | 0.1469  | 11.3038  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -0.9536 | 5.3626  | -0.2261 | -0.6729 | 0.1469  | 11.3038  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 0.7234  | -0.8959 | 0.0577  | 0.1675  | -0.0697 | -5.1256  |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.6248  | -0.5277 | 0.0427  | 0.1233  | -0.0582 | -14.7846 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.7152 | 5.0518  | -0.2109 | -0.6284 | 0.1252  | 8.4837   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.7152 | 5.0518  | -0.2109 | -0.6284 | 0.1252  | 8.4837   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.5425  | 0.3579  | 0.0020  | 0.0019  | -0.0372 | -3.8384  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.4686  | 0.6340  | -0.0093 | -0.0312 | -0.0286 | -11.0826 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -0.7152 | 4.4729  | -0.1856 | -0.5526 | 0.1160  | 8.4832   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.7152 | 4.4729  | -0.1856 | -0.5526 | 0.1160  | 8.4832   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 0.5425  | -0.2210 | 0.0273  | 0.0777  | -0.0464 | -3.8388  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.4686  | 0.0552  | 0.0160  | 0.0446  | -0.0378 | -11.0830 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -0.9536 | 4.6411  | -0.2005 | -0.5962 | 0.1375  | 11.2952  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -0.9536 | 4.6411  | -0.2005 | -0.5962 | 0.1375  | 11.2952  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 0.7234  | -1.6174 | 0.0833  | 0.2442  | -0.0790 | -5.1342  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.6248  | -1.2493 | 0.0683  | 0.2000  | -0.0675 | -14.7932 |

#### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.4818              |
| Shear X          | -1.5893             |
| Shear Z          | -0.3647             |
| Moment X         | -1.0867             |
| Moment Y (Twist) | 0.2403              |
| Moment Z         | 25.1243             |

#### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 5.3626              |
| Shear X          | -0.9536             |
| Shear Z          | -0.2261             |
| Moment X         | -0.6729             |
| Moment Y (Twist) | 0.1469              |
| Moment Z         | 14.7932             |

## Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States  
 User Name: sales@mtsolar.us  
 Unit System: imperial



## Design Input Information

| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |             |             |
|------------------|---------|-------------|-------------|
| ID               | E (ksi) | $F_y$ (ksi) | $F_u$ (ksi) |
| 1                | 29000   | 50          | 65          |

### Section Dimensions



| ID | Name            | d (in) | $t_w$ (in) |  |  |  |  |
|----|-----------------|--------|------------|--|--|--|--|
| 1  | 2in Pipe Sch 40 | 2.38   | 0.15       |  |  |  |  |
| 4  | 4in Pipe Sch 40 | 4.50   | 0.24       |  |  |  |  |
| 7  | 6in Pipe Sch 40 | 6.63   | 0.28       |  |  |  |  |



| ID | Name       | d (in) | b (in) | $t_w$ (in) | $t_b$ (in) | r (in) |  |
|----|------------|--------|--------|------------|------------|--------|--|
| 15 | HSS5x3x1/8 | 5.00   | 3.00   | 0.12       | 0.12       | 0.12   |  |



| ID | Name | d (in) | $t_w$ (in) | $b_t$ (in) | $b_b$ (in) | $t_t$ (in) | $t_b$ (in) | r (in) |
|----|------|--------|------------|------------|------------|------------|------------|--------|
| 18 | W6x9 | 5.90   | 0.17       | 3.94       | 3.94       | 0.21       | 0.21       | 0.25   |

### Section Properties

| ID | Name            | A (in <sup>2</sup> ) | J (in <sup>4</sup> ) | $I_{yp}$ (in <sup>4</sup> ) | $I_{zp}$ (in <sup>4</sup> ) | $I_w$ (in <sup>6</sup> ) | $S_{yp}$ (in <sup>3</sup> ) | $S_{zp}$ (in <sup>3</sup> ) |
|----|-----------------|----------------------|----------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------|-----------------------------|
| 1  | 2in Pipe Sch 40 | 1.07                 | 1.33                 | 0.67                        | 0.67                        | 0.00                     | 0.76                        | 0.76                        |
| 4  | 4in Pipe Sch 40 | 3.17                 | 14.47                | 7.23                        | 7.23                        | 0.00                     | 4.31                        | 4.31                        |
| 7  | 6in Pipe Sch 40 | 5.58                 | 56.28                | 28.14                       | 28.14                       | 0.00                     | 11.28                       | 11.28                       |

|    |            |      |      |      |       |       |      |      |
|----|------------|------|------|------|-------|-------|------|------|
| 15 | HSS5x3x1/8 | 1.77 | 6.02 | 2.75 | 6.03  | 0.51  | 2.07 | 2.93 |
| 18 | W6x9       | 2.68 | 0.04 | 2.20 | 16.40 | 17.70 | 1.72 | 6.23 |

| Member Properties |            |                       |                       |                     |   |   |   |   |   |   |   |
|-------------------|------------|-----------------------|-----------------------|---------------------|---|---|---|---|---|---|---|
| Member ID         | Section ID | K <sub>z</sub> L (ft) | K <sub>y</sub> L (ft) | L <sub>b</sub> (ft) | C <sub>b</sub>  | L | S | T | L | S | L |
| 1                 | 7          | 20.79                 | 20.79                 | 9.90                | -   | 3 | 0 | 0 | 2 | 0 | 0 |
| 2                 | 4          | 1.30                  | 1.30                  | 2.00                | -   | 3 | 0 | 0 | 2 | 0 | 0 |
| 3                 | 15         | 0.92                  | 0.92                  | 1.42                | 1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.16,1.17,1.18,1.18,1.17,1.17,1.18,1.18,1.19,1.16,1.18,1.18,1.05,1.17,1.18,1.18,1.17,1.17 | 3 | 0 | 0 | 2 | 0 | 0 |
| 4                 | 15         | 2.44                  | 2.44                  | 3.75                | 1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.85,1.68,1.67,1.67,1.64,1.68,1.67,1.67,1.66,1.68 | 3 | 0 | 0 | 2 | 0 | 0 |
| 5                 | 15         | 1.52                  | 1.52                  | 2.33                | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.65,1.67,1.67,1.56,1.66,1.67,1.67,1.66,1.66 | 3 | 0 | 0 | 2 | 0 | 0 |
| 6                 | 15         | 0.92                  | 0.92                  | 1.42                | 1.19,1.19,1.19,1.19,1.19,1.19,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.19,1.17,1.18,1.18,1.12,1.18,1.18,1.18,1.18,1.18      | 3 | 0 | 0 | 2 | 0 | 0 |
| 7                 | 15         | 1.52                  | 1.52                  | 2.33                | 1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.65,1.67,1.67,1.60,1.66,1.67,1.67,1.66,1.67 | 3 | 0 | 0 | 2 | 0 | 0 |
| 8                 | 18         | 1.33                  | 1.33                  | 2.05                | 1.30,1.30,1.30,1.30,1.30,1.30,1.30,1.30,1.30,1.34,1.30,1.30,1.30,1.35,1.30,1.30,1.28,1.32,1.30,1.30,1.31,1.33,1.30,1.30,1.30,1.37 | 3 | 0 | 0 | 2 | 0 | 0 |
| 9                 | 1          | 2.60                  | 2.60                  | 4.00                | -   | 3 | 0 | 0 | 2 | 0 | 0 |
| 10                | 15         | 2.44                  | 2.44                  | 3.75                | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.78,1.68,1.67,1.67,1.64,1.68,1.67,1.67,1.66,1.68 | 3 | 0 | 0 | 2 | 0 | 0 |
| 11                | 18         | 1.33                  | 1.33                  | 2.05                | 1.30,1.31,1.30,1.31,1.31,1.31,1.31,1.31,1.29,1.32,1.31,1.31,1.30,1.31,1.31,1.31,1.32,1.33,1.31,1.31,1.26,1.32,1.31,1.31,1.30,1.31 | 3 | 0 | 0 | 2 | 0 | 0 |
| 12                | 4          | 1.30                  | 1.30                  | 2.00                | -   | 3 | 0 | 0 | 2 | 0 | 0 |
| 13                | 18         | 4.88                  | 4.00                  | 7.50                | 1.22,1.22,1.21,1.22,1.22,1.21,1.23,1.23,1.17,1.31,1.23,1.23,1.18,1.30,1.22,1.22,1.26,1.53,1.22,1.22,1.08,1.34,1.23,1.23,1.19,1.29 | 3 | 0 | 0 | 2 | 0 | 0 |
| 14                | 18         | 4.88                  | 4.00                  | 7.50                | 1.21,1.21,1.21,1.21,1.21,1.21,1.20,1.20,1.25,1.56,1.20,1.20,1.24,1.70,1.20,1.20,1.13,1.30,1.20,1.20,1.28,1.38,1.20,1.20,1.24,2.12 | 3 | 0 | 0 | 2 | 0 | 0 |
| 15                | 18         | 4.20                  | 4.20                  | 2.00                | 2.33,2.33           | 3 | 0 | 0 | 2 | 0 | 0 |
| 16                | 18         | 4.20                  | 4.20                  | 2.00                | 2.33,2.33           | 3 | 0 | 0 | 2 | 0 | 0 |
| 101               | 7          | 20.79                 | 20.79                 | 9.90                | -   | 3 | 0 | 0 | 2 | 0 | 0 |
| 102               | 4          | 1.30                  | 1.30                  | 2.00                | -   | 3 | 0 | 0 | 2 | 0 | 0 |
| 103               | 15         | 0.92                  | 0.92                  | 1.42                | 1.19,1.19,1.19,1.19,1.19,1.19,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.19,1.17,1.18,1.18,1.12,1.18,1.18,1.18,1.18,1.18      | 3 | 0 | 0 | 2 | 0 | 0 |
| 104               | 15         | 2.44                  | 2.44                  | 3.75                | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.66,1.68,1.67,1.67,1.78,1.68,1.67,1.67,1.64,1.68,1.67,1.67,1.66,1.68 | 3 | 0 | 0 | 2 | 0 | 0 |
| 105               | 15         | 1.52                  | 1.52                  | 2.33                | 1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.65,1.67,1.67,1.60,1.66,1.67,1.67,1.66,1.67 | 3 | 0 | 0 | 2 | 0 | 0 |
| 106               | 15         | 0.92                  | 0.92                  | 1.42                | 1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.16,1.17,1.18,1.18,1.17,1.17,1.18,1.18,1.19,1.16,1.18,1.18,1.05,1.17,1.18,1.18,1.17,1.17 | 3 | 0 | 0 | 2 | 0 | 0 |
| 107               | 15         | 1.52                  | 1.52                  | 2.33                | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.65,1.67,1.67,1.56,1.66,1.67,1.67,1.66,1.66 | 3 | 0 | 0 | 2 | 0 | 0 |



|     |        |       |       |      |       |       |
|-----|--------|-------|-------|------|-------|-------|
| 115 | 120.00 | 89.27 | 19.15 | 6.45 | 30.09 | 45.74 |
| 116 | 120.60 | 89.27 | 19.15 | 6.45 | 30.09 | 45.74 |


## Design Ratio

| Member ID | P     | M <sub>z</sub> | M <sub>y</sub> | V <sub>y</sub> | V <sub>z</sub> | (P,M <sub>z</sub> ,M <sub>y</sub> ) | Worst LC | KL/r         | $\delta$     | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|--------------|--------------|--------|
| 1         | 0.083 | 0.594          | 0.059          | 0.021          | 0.005          | 0.603                               | #32      | 0.555        | Not Required | Pass   |
| 2         | 0.001 | 0.370          | 0.089          | 0.085          | 0.018          | 0.460                               | #13      | 0.052        | Not Required | Pass   |
| 3         | 0.003 | 0.681          | 0.025          | 0.068          | 0.003          | 0.695                               | #13      | 0.044        | Not Required | Pass   |
| 4         | 0.002 | 0.576          | 0.067          | 0.058          | 0.009          | 0.644                               | #13      | 0.117        | Not Required | Pass   |
| 5         | 0.002 | 0.422          | 0.023          | 0.068          | 0.003          | 0.436                               | #13      | 0.073        | Not Required | Pass   |
| 6         | 0.003 | 0.844          | 0.066          | 0.087          | 0.010          | 0.906                               | #13      | 0.044        | Not Required | Pass   |
| 7         | 0.003 | 0.523          | 0.071          | 0.085          | 0.011          | 0.547                               | #13      | 0.073        | Not Required | Pass   |
| 8         | 0.001 | 0.134          | 0.019          | 0.042          | 0.003          | 0.149                               | #13      | 0.088        | Not Required | Pass   |
| 9         | 0.000 | 0.089          | 0.040          | 0.003          | 0.002          | 0.129                               | #13      | 0.198        | Not Required | Pass   |
| 10        | 0.004 | 0.727          | 0.055          | 0.073          | 0.008          | 0.748                               | #13      | 0.078        | Not Required | Pass   |
| 11        | 0.002 | 0.153          | 0.018          | 0.049          | 0.003          | 0.164                               | #13      | 0.088        | Not Required | Pass   |
| 12        | 0.001 | 0.526          | 0.104          | 0.108          | 0.020          | 0.630                               | #13      | 0.052        | Not Required | Pass   |
| 13        | 0.002 | 0.128          | 0.058          | 0.067          | 0.004          | 0.147                               | #13      | 0.265        | Not Required | Pass   |
| 14        | 0.002 | 0.114          | 0.056          | 0.057          | 0.004          | 0.134                               | #13      | 0.177        | Not Required | Pass   |
| 15        | 0.000 | 0.027          | 0.008          | 0.021          | 0.001          | 0.033                               | #13      | Not Required | Not Required | Pass   |
| 16        | 0.000 | 0.023          | 0.008          | 0.018          | 0.001          | 0.029                               | #13      | Not Required | Not Required | Pass   |
| 101       | 0.083 | 0.594          | 0.059          | 0.021          | 0.005          | 0.603                               | #32      | 0.555        | Not Required | Pass   |
| 102       | 0.001 | 0.526          | 0.104          | 0.108          | 0.020          | 0.630                               | #13      | 0.052        | Not Required | Pass   |
| 103       | 0.003 | 0.844          | 0.066          | 0.087          | 0.010          | 0.906                               | #13      | 0.044        | Not Required | Pass   |
| 104       | 0.004 | 0.727          | 0.055          | 0.073          | 0.008          | 0.748                               | #13      | 0.078        | Not Required | Pass   |
| 105       | 0.003 | 0.523          | 0.071          | 0.085          | 0.011          | 0.547                               | #13      | 0.073        | Not Required | Pass   |
| 106       | 0.003 | 0.681          | 0.025          | 0.068          | 0.003          | 0.695                               | #13      | 0.044        | Not Required | Pass   |
| 107       | 0.002 | 0.422          | 0.023          | 0.068          | 0.003          | 0.436                               | #13      | 0.073        | Not Required | Pass   |
| 108       | 0.000 | 0.023          | 0.008          | 0.018          | 0.001          | 0.029                               | #13      | Not Required | Not Required | Pass   |
| 109       | 0.000 | 0.089          | 0.040          | 0.003          | 0.002          | 0.129                               | #13      | 0.198        | Not Required | Pass   |
| 110       | 0.002 | 0.576          | 0.067          | 0.058          | 0.009          | 0.644                               | #13      | 0.117        | Not Required | Pass   |
| 111       | 0.000 | 0.027          | 0.008          | 0.021          | 0.001          | 0.033                               | #13      | Not Required | Not Required | Pass   |
| 112       | 0.001 | 0.370          | 0.089          | 0.085          | 0.018          | 0.460                               | #13      | 0.052        | Not Required | Pass   |
| 113       | 0.002 | 0.128          | 0.058          | 0.067          | 0.004          | 0.147                               | #13      | 0.177        | Not Required | Pass   |
| 114       | 0.002 | 0.114          | 0.056          | 0.057          | 0.004          | 0.134                               | #13      | 0.265        | Not Required | Pass   |
| 115       | 0.002 | 0.245          | 0.033          | 0.049          | 0.003          | 0.267                               | #13      | 0.321        | Not Required | Pass   |
| 116       | 0.002 | 0.213          | 0.034          | 0.042          | 0.003          | 0.239                               | #13      | 0.321        | Not Required | Pass   |

## Definitions

|                 |   |
|-----------------|---|
| $\Phi_t$        | Safety factor for tensile                                 |
| $\Phi_c$        | Safety factor for compression                             |
| $\Phi_b$        | Safety factor for flexure                                 |
| $\Phi_v$        | Safety factor for shear                                   |
| E               | Modulus of elasticity                                     |
| F <sub>y</sub>  | Specified minimum yield stress                            |
| F <sub>u</sub>  | Specified minimum tensile strength                        |
| A               | Cross-sectional area                                      |
| J               | Torsional constant  |
| I <sub>yp</sub> | Moment of inertia about the Y axes                        |
| I <sub>zp</sub> | Moment of inertia about the Z axes                        |
| I <sub>w</sub>  | Warping constant  |
| S <sub>yp</sub> | Plastic section modulus about the Y axis                  |
| S <sub>zp</sub> | Plastic section modulus about the Z axis                  |
| KL              | Effective length  |
| C <sub>b</sub>  | Buckling modification factor (from all load combinations) |
| L <sub>b</sub>  | Length between braced points                              |

|                     |  |
|---------------------|--|
| $L$                 | Length between brace points                            |
| LST                 | Limited slenderness for tension                        |
| LSC                 | Limited slenderness for compression                    |
| LD                  | Limited deflection                                     |
| $P_n$               | Nominal axial strength (tension/compression)           |
| $M_n$               | Nominal flexural strength (about Z/Y axis)             |
| $V_n$               | Nominal shear strength (along Z/Y axis)                |
| P                   | Design ratio in case of axial force                    |
| $M_z$               | Design ratio in case of bending about Z axis           |
| $M_y$               | Design ratio in case of bending about Y axis           |
| $V_y$               | Design ratio in case of shear along Y axis             |
| $V_z$               | Design ratio in case of shear along Z axis             |
| (P, $M_z$ , $M_y$ ) | Design ratio in case of axial force and bending action |
| $KL/r$              | Design ratio in case of section slenderness            |
| $\delta$            | Design ratio in case of member deflection              |
| OK                  | Capacity is provided                                   |
| NG                  | Capacity is not provided                               |
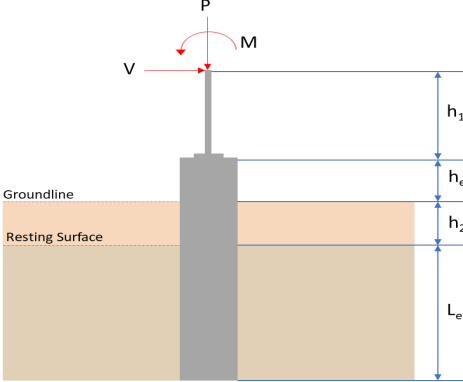
| REFERENCES     | CALCULATIONS  | RESULTS                                    |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
|----------------|---|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|-------|-------------|--------|--------|-------------|-------|-------|---------------|-------|-------|---------------|--------|--------|--|
|                | <p><b>SkyCiv Foundation Design</b><br/>Pile Foundation</p> <p><b>Design Information :</b><br/>Design code : IBC 2021 (International Building Code)<br/>Unit System : Imperial</p>   |  |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
|                | <p><b>Pile Input</b></p>  <p><b>Geometry</b><br/>Pile shape: rectangular<br/><math>b = 48</math> in - Pile width<br/><math>D = 48</math> in - Pile depth<br/><math>L = 5.5</math> ft - Total pile length<br/><math>h_1 = 0</math> ft - Lateral load height from the top of the pile,<br/><math>h_2 = 0</math> ft - Depth to resting surface<br/><math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1285 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>5.363</td> <td>8.482</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-0.954</td> <td>-1.589</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>0.226</td> <td>0.365</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>0.673</td> <td>1.087</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>14.793</td> <td>25.124</td> </tr> </tbody> </table> <p><b>Material Properties</b><br/><math>f'_{ck} = 2.5</math> ksi - Concrete strength,</p> | Layer                                      | Label                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | $P$ (kip) | 5.363 | 8.482 | $V_x$ (kip) | -0.954 | -1.589 | $V_z$ (kip) | 0.226 | 0.365 | $M_x$ (kipft) | 0.673 | 1.087 | $M_z$ (kipft) | 14.793 | 25.124 |  |
| Layer          | Label   | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel   | 2000.000                                   | 150.000                                     |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
| Load Component | ASD   | LRFD                                       |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $P$ (kip)      | 5.363   | 8.482                                      |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $V_x$ (kip)    | -0.954  | -1.589                                     |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $V_z$ (kip)    | 0.226   | 0.365                                      |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $M_x$ (kipft)  | 0.673   | 1.087                                      |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $M_z$ (kipft)  | 14.793  | 25.124                                     |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |
|                | <p><b>Required depth to resist lateral loads (ASD)</b><br/><math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b><br/><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-0.954 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.15191 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$  |  |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |       |       |               |       |       |               |        |        |  |

$$M_o = \frac{(14.793 \text{ kipft}) + ((-0.954 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.3556 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 5.2049 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.226 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.035987 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.673 \text{ kipft}) + ((0.226 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.10717 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 2.3955 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(5.2049 \text{ ft}), (2.3955 \text{ ft})]$$

$$L_{e,req} = 5.205 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_c - h_2$$

$$L_e = (5.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5.5 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(5.205 \text{ ft})}{(5.5 \text{ ft})}$$

$$\text{Ratio} = 0.94636$$

Status: **PASS**  
Ratio: **0.950**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(5.363 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.33519 \text{ kip/ft}^2$$

$$q = 0.33519 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.33519 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.16759$$

Status: **PASS**  
Ratio: **0.170**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.375$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.15191 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 2.3556 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.3556 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (2.3556 \text{ kipft/ft})) + (4 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.7543 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (2.3556 \text{ kipft/ft})) + (3 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))]^2}{(5.5 \text{ ft})^2 [(3 \times (2.3556 \text{ kipft/ft})) + (2 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))]}$$

$$p = 0.21977 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (2.3556 \text{ kipft/ft})) + ((-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))]}{(5.5 \text{ ft})^2}$$

$$s = 0.76872 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.7543 \text{ ft})}{2}$$

$$p_a = 0.28157 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.21977 \text{ kip/ft}^2)}{(0.28157 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.78051$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,


Status: **PASS**  
Ratio: **0.780**

|  |  |  |
|--|--|--|
|  | $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.5 \text{ ft})$ $p_s = 0.825 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(0.76872 \text{ kip/ft}^2)}{(0.825 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.93178$  | <p>Status: <b>PASS</b><br/>Ratio: <b>0.930</b></p> |
|  | <p><b>Considering z-direction:</b></p> <p><math>H_o = 0.035987 \text{ kip/ft}</math> - Lateral force per length of pile,<br/> <math>M_o = 0.10717 \text{ kipft/ft}</math> - Overturning moment per length of pile,<br/> <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.10717 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (0.035987 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (0.10717 \text{ kipft/ft})) + (4 \times (0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))}$ $a = 3.9196 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.10717 \text{ kipft/ft})) + (3 \times (0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))]^2}{(5.5 \text{ ft})^2 \times [(3 \times (0.10717 \text{ kipft/ft})) + (2 \times (0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))]}$ $p = 0.036132 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.10717 \text{ kipft/ft})) + ((0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))]}{(5.5 \text{ ft})^2}$ $s = 0.081771 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(3.9196 \text{ ft})}{2}$ $p_a = 0.29397 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.036132 \text{ kip/ft}^2)}{(0.29397 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.12291$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.5 \text{ ft})$ $p_s = 0.825 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ | <p>Status: <b>PASS</b><br/>Ratio: <b>0.120</b></p> |

$$Ratio = \frac{(0.081771 \text{ kip/ft}^2)}{(0.825 \text{ kip/ft}^2)}$$

$$Ratio = 0.099116$$

Status: **PASS**  
Ratio: **0.100**

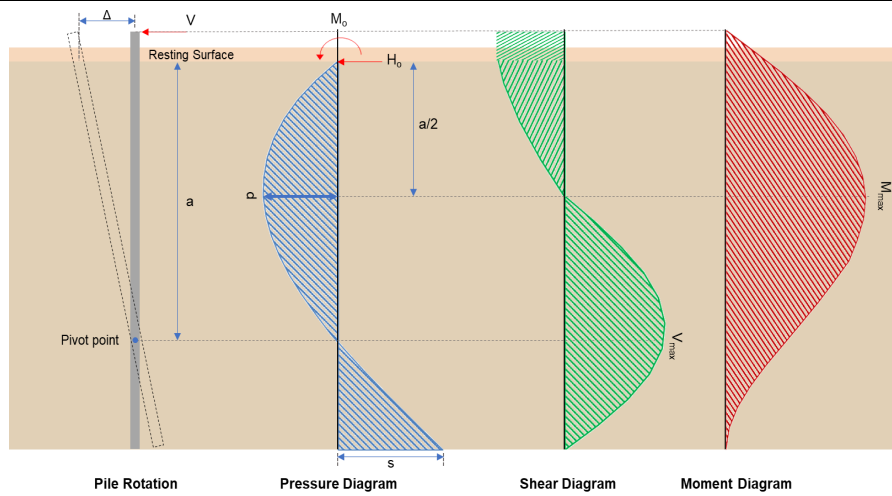

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-1.589 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.25303 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(25.124 \text{ kipft}) + ((-1.589 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 4.0006 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(4.0006 \text{ kipft/ft})}{(-0.25303 \text{ kip/ft})}$$

$$E = 15.811 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (4.0006 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.25303 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (4.0006 \text{ kipft/ft})) + (4 \times (-0.25303 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.7529 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_c} + 3 \right) \left( \frac{a}{L_c} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_c} + 2 \right) \left( \frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-0.25303 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.7529 \text{ ft})}{(5.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.7529 \text{ ft})}{(5.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 5.8205 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-0.25303 \text{ kip/ft}) \times (48 \text{ in}) \times (5.5 \text{ ft})) \times \left[ \left( \frac{(15.811 \text{ ft})}{(5.5 \text{ ft})} + \frac{(3.7529 \text{ ft})}{2 \times (5.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.7529 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.7529 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 15.498 \text{ kipft}$$

**Shear force and Bending moment (z-direction, LRFD)**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.365 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.058121 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(1.087 \text{ kipft}) + ((0.365 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.17309 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.17309 \text{ kipft/ft})}{(0.058121 \text{ kip/ft})}$$

$$E = 2.9781 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.17309 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (0.058121 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (0.17309 \text{ kipft/ft})) + (4 \times (0.058121 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.9196 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 + 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.058121 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.9196 \text{ ft})}{(5.5 \text{ ft})} \right)^2 + 4 \times \left( \frac{3 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.9196 \text{ ft})}{(5.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.37746 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((0.058121 \text{ kip/ft}) \times (48 \text{ in}) \times (5.5 \text{ ft})) \times \left[ \left( \frac{(2.9781 \text{ ft})}{(5.5 \text{ ft})} + \frac{(3.9196 \text{ ft})}{2 \times (5.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.9196 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.9196 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 0.92385 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(8482 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.314 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.314 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(8.482 \text{ kip})}{(2675.2 \text{ kip})}$$

$$\text{Ratio} = 0.0031706$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 8.482 \text{ kip} \rightarrow 8482 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(8482 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.62 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.62 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.62 \text{ kip}$$

|                 |   |   |
|-----------------|---|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>.</p> <p><math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.62 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.83 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 5.8205 \text{ kip}</math> - Maximum shear force in the x-direction,<br/>Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(5.8205 \text{ kip})}{(110.83 \text{ kip})}$ $\text{Ratio} = 0.052516$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.37746 \text{ kip}</math> - Maximum shear force in the z-direction,<br/>Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.37746 \text{ kip})}{(110.83 \text{ kip})}$ $\text{Ratio} = 0.0034057$ | <p>Status: <b>PASS</b><br/>Ratio: <b>0.050</b></p> <p>Status: <b>PASS</b><br/>Ratio: <b>0.000</b></p> |
|                 | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$  |   |

|                  |  |   |
|------------------|--|---|
| <p>14.5.2.1b</p> | <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ksi}} \times 18432.001 \text{in}^3$ $\phi M_{n,1} = 249.600 \text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ksi}) \times (18432 \text{in}^3)$ $\phi M_{n,2} = 2121.6 \text{kipft}$ <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{kipft}), (2121.6 \text{kipft})]$ $\phi M_n = 249.6 \text{kipft}$ <p><b>Considering x-direction:</b><br/> <math>M_{max} = 15.498 \text{kipft}</math> - Maximum moment in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(15.498 \text{kipft})}{(249.6 \text{kipft})}$ $\text{Ratio} = 0.06209$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.060</b></p> |
|                  | <p><b>Considering z-direction:</b><br/> <math>M_{max} = 0.92385 \text{kipft}</math> - Maximum moment in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.92385 \text{kipft})}{(249.6 \text{kipft})}$ $\text{Ratio} = 0.0037013$   | <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
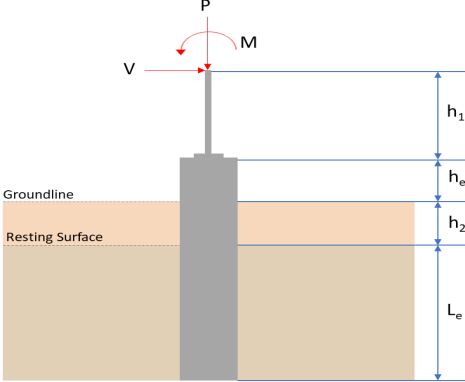
| REFERENCES     | CALCULATIONS  | RESULTS                                    |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
|----------------|---|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|-------|-------------|--------|--------|-------------|--------|--------|---------------|--------|--------|---------------|--------|--------|--|
|                | <p><b>SkyCiv Foundation Design</b><br/>Pile Foundation</p> <p><b>Design Information :</b><br/>Design code : IBC 2021 (International Building Code)<br/>Unit System : Imperial</p>   |  |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
|                | <p><b>Pile Input</b></p>  <p><b>Geometry</b></p> <p>Pile shape: rectangular<br/> <math>b = 48</math> in - Pile width<br/> <math>D = 48</math> in - Pile depth<br/> <math>L = 5.5</math> ft - Total pile length<br/> <math>h_1 = 0</math> ft - Lateral load height from the top of the pile,<br/> <math>h_2 = 0</math> ft - Depth to resting surface<br/> <math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>5.363</td> <td>8.482</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-0.954</td> <td>-1.589</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>-0.226</td> <td>-0.365</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>-0.673</td> <td>-1.087</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>14.793</td> <td>25.124</td> </tr> </tbody> </table> <p><b>Material Properties</b></p> <p><math>f'_{ck} = 2.5</math> ksi - Concrete strength,</p> | Layer                                      | Label                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | $P$ (kip) | 5.363 | 8.482 | $V_x$ (kip) | -0.954 | -1.589 | $V_z$ (kip) | -0.226 | -0.365 | $M_x$ (kipft) | -0.673 | -1.087 | $M_z$ (kipft) | 14.793 | 25.124 |  |
| Layer          | Label   | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel   | 2000.000                                   | 150.000                                     |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
| Load Component | ASD   | LRFD                                       |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $P$ (kip)      | 5.363   | 8.482                                      |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $V_x$ (kip)    | -0.954  | -1.589                                     |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $V_z$ (kip)    | -0.226  | -0.365                                     |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $M_x$ (kipft)  | -0.673  | -1.087                                     |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $M_z$ (kipft)  | 14.793  | 25.124                                     |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |
|                | <p><b>Required depth to resist lateral loads (ASD)</b></p> <p><math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b></p> <p><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-0.954 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.15191 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$  |  |   |  |   |   |   |          |         |                |     |      |           |       |       |             |        |        |             |        |        |               |        |        |               |        |        |  |

$$M_o = \frac{(14.793 \text{ kipft}) + ((-0.954 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.3556 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 5.2049 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.226 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.035987 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.673 \text{ kipft}) + ((-0.226 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.10717 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.699 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(5.2049 \text{ ft}), (1.699 \text{ ft})]$$

$$L_{e,req} = 5.205 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_c - h_2$$

$$L_e = (5.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5.5 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(5.205 \text{ ft})}{(5.5 \text{ ft})}$$

$$\text{Ratio} = 0.94636$$

Status: **PASS**  
Ratio: **0.950**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(5.363 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.33519 \text{ kip/ft}^2$$

$$q = 0.33519 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.33519 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.16759$$

Status: **PASS**  
Ratio: **0.170**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.375$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.15191 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 2.3556 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.3556 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (2.3556 \text{ kipft/ft})) + (4 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.7543 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (2.3556 \text{ kipft/ft})) + (3 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))]^2}{(5.5 \text{ ft})^2 \times [(3 \times (2.3556 \text{ kipft/ft})) + (2 \times (-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))]}$$

$$p = 0.21977 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (2.3556 \text{ kipft/ft})) + ((-0.15191 \text{ kip/ft}) \times (5.5 \text{ ft}))]}{(5.5 \text{ ft})^2}$$

$$s = 0.76872 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.7543 \text{ ft})}{2}$$

$$p_a = 0.28157 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.21977 \text{ kip/ft}^2)}{(0.28157 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.78051$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,


Status: **PASS**  
Ratio: **0.780**

|  |   |   |
|--|---|---|
|  | $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.5 \text{ ft})$ $p_s = 0.825 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(0.76872 \text{ kip/ft}^2)}{(0.825 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.93178$   | Status: <b>PASS</b><br>Ratio: <b>0.930</b>  |
|  | <p><b>Considering z-direction:</b></p> <p><math>H_o = -0.035987 \text{ kip/ft}</math> - Lateral force per length of pile,<br/> <math>M_o = 0.10717 \text{ kipft/ft}</math> - Overturning moment per length of pile,<br/> <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.10717 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.035987 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (0.10717 \text{ kipft/ft})) + (4 \times (-0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))}$ $a = 3.9196 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.10717 \text{ kipft/ft})) + (3 \times (-0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))]^2}{(5.5 \text{ ft})^2 \times [(3 \times (0.10717 \text{ kipft/ft})) + (2 \times (-0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))]}$ $p = -0.0090911 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.10717 \text{ kipft/ft})) + ((-0.035987 \text{ kip/ft}) \times (5.5 \text{ ft}))]}{(5.5 \text{ ft})^2}$ $s = 0.0032531 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(3.9196 \text{ ft})}{2}$ $p_a = 0.29397 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(-0.0090911 \text{ kip/ft}^2)}{(0.29397 \text{ kip/ft}^2)}$ $\text{Ratio} = -0.030925$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.5 \text{ ft})$ $p_s = 0.825 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ | Status: <b>PASS</b><br>Ratio: <b>-0.030</b> |

$$Ratio = \frac{(0.0032531 \text{ kip/ft}^2)}{(0.825 \text{ kip/ft}^2)}$$

$$Ratio = 0.0039432$$

Status: **PASS**  
Ratio: **0.000**

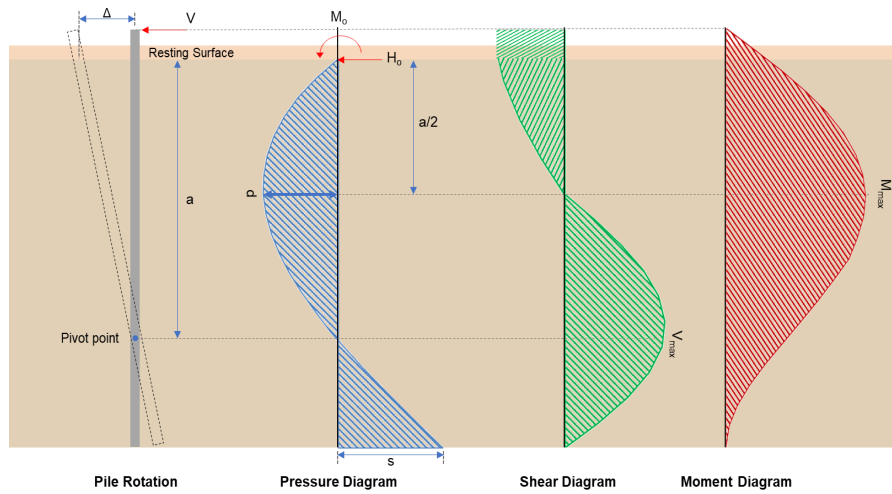

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-1.589 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.25303 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(25.124 \text{ kipft}) + ((-1.589 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 4.0006 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(4.0006 \text{ kipft/ft})}{(-0.25303 \text{ kip/ft})}$$

$$E = 15.811 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (4.0006 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.25303 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (4.0006 \text{ kipft/ft})) + (4 \times (-0.25303 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.7529 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.25303 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.7529 \text{ ft})}{(5.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.7529 \text{ ft})}{(5.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 5.8205 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.25303 \text{ kip/ft}) \times (48 \text{ in}) \times (5.5 \text{ ft})) \times \left[ \left( \frac{(15.811 \text{ ft})}{(5.5 \text{ ft})} + \frac{(3.7529 \text{ ft})}{2 \times (5.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.7529 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (15.811 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.7529 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 15.498 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.365 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.058121 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(1.087 \text{ kipft}) + ((-0.365 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.17309 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.17309 \text{ kipft/ft})}{(-0.058121 \text{ kip/ft})}$$

$$E = 2.9781 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.17309 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.058121 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (0.17309 \text{ kipft/ft})) + (4 \times (-0.058121 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.9196 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.058121 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.9196 \text{ ft})}{(5.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.9196 \text{ ft})}{(5.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.37746 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.058121 \text{ kip/ft}) \times (48 \text{ in}) \times (5.5 \text{ ft})) \times \left[ \left( \frac{(2.9781 \text{ ft})}{(5.5 \text{ ft})} + \frac{(3.9196 \text{ ft})}{2 \times (5.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.9196 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.9781 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.9196 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.92385 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(8.482 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.314 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.314 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(8.482 \text{ kip})}{(2675.2 \text{ kip})}$$

$$\text{Ratio} = 0.0031706$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 8.482 \text{ kip} \rightarrow 8482 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(8482 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.62 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.62 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.62 \text{ kip}$$

|                 |   |   |
|-----------------|---|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>.</p> <p><math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.62 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.83 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 5.8205 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(5.8205 \text{ kip})}{(110.83 \text{ kip})}$ $\text{Ratio} = 0.052516$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.37746 \text{ kip}</math> - Maximum shear force in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.37746 \text{ kip})}{(110.83 \text{ kip})}$ $\text{Ratio} = 0.0034057$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.050</b></p> <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
|                 | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$  |   |

|                  |  |   |
|------------------|--|---|
| <p>14.5.2.1b</p> | <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ <p><b>Considering x-direction:</b><br/> <math>M_{max} = 15.498 \text{ kipft}</math> - Maximum moment in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(15.498 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.06209$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.060</b></p> |
|                  | <p><b>Considering z-direction:</b><br/> <math>M_{max} = 0.92385 \text{ kipft}</math> - Maximum moment in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.92385 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.0037013$  | <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |