

# Your Project Calculations



Project Name: Lester Mignerey

S3D Model Link:

[https://platform.skyciv.com/structural?preload\\_name=Lester%20Mignerey&preload\\_path=Shared%20Enterprise%20Folder/MT\\_Solar\\_Projects/2\\_2024](https://platform.skyciv.com/structural?preload_name=Lester%20Mignerey&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/2_2024)

Public Model Link:

[https://platform.skyciv.com/structural-viewer?project\\_id=J5e0Ur0kuSEyDj5CWmdeBJXBh2ov2o4rd6rnmVO56vCUTZJggAieYqkHeKMRROHr](https://platform.skyciv.com/structural-viewer?project_id=J5e0Ur0kuSEyDj5CWmdeBJXBh2ov2o4rd6rnmVO56vCUTZJggAieYqkHeKMRROHr)

## Array Specification

|                             |                                  |
|-----------------------------|----------------------------------|
| Product:                    | Beam                             |
| Unique ID:                  | 3P-19.75-6TOP-SD-57-L-4Hx9W-IBCA |
| Duty Classification:        | SD                               |
| Module Width:               | 40.80 in                         |
| Module Length:              | 75.30in                          |
| Number of Rows:             | 4                                |
| Number of Columns:          | 9                                |
| Total Number of Modules:    | 36                               |
| Desired Tilt Angle:         | 55                               |
| Front Edge Clearance:       | 5                                |
| Total Array Height at Tilt: | 16.21 ft                         |
| Total Frame Length:         | 56.50 ft                         |
| Frame Weight:               | 2081 lbs                         |
| Array Dimensions N/S:       | 13.77 ft                         |
| Array Dimensions E/W:       | 57.22 ft                         |
| Rail Length:                | 165.20 in                        |
| Rail Spacing:               | 3.14 ft                          |
| Rail Check:                 | Not Checked                      |

## Support Specifications


|                          |                 |
|--------------------------|-----------------|
| Pole Size:               | 6in Pipe Sch 40 |
| Pole Length above Grade: | 10.64 ft        |
| Number of Poles:         | 3               |
| Pole Spacing:            | 19.75 ft        |

## Foundation Specifications

|                                 |                                                       |
|---------------------------------|-------------------------------------------------------|
| Foundation Type:                | Square                                                |
| Foundation Dimensions:          | 48 x 48 in                                            |
| Foundation Depth (below grade): | Pile 1: 5.75 ft<br>Pile 2: 5.75 ft<br>Pile 3: 5.75 ft |
| Foundation Volume:              | 10.222 y <sup>3</sup>                                 |
| Foundation Result:              | PASSED                                                |
| Mount Twist:                    | 0.107799 kip                                          |

## Site Info

|                            |                                        |
|----------------------------|----------------------------------------|
| Risk Category:             | I                                      |
| Exposure:                  | C                                      |
| Soil Classification:       | sand                                   |
| Site Location:             | 4870 Co Rd 243, Durango, CO 81301, USA |
| Wind Speed:                | 90 mph                                 |
| Snow Load:                 | 90 psf                                 |
| Design Uplift Pressure:    | 0.013360 ksf                           |
| Design Downforce Pressure: | -0.013360 ksf                          |
| Design Snow Pressure:      | 0.014845 ksf                           |

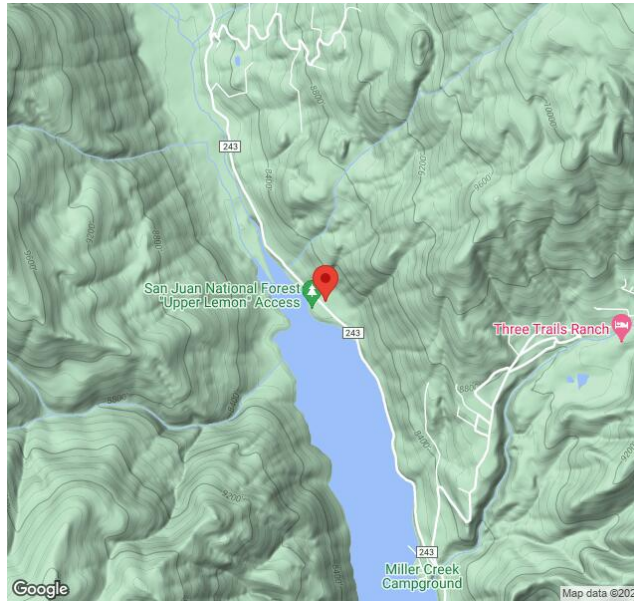

### Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.

### AutoDesigner Input


```
{"product_type":"Beam","project_id":"Lester Mignerey","site_address":"4870 Co Rd 243, Durango, CO 81301, USA","module_width":40.8,"module_length":75.3,"number_rows":4,"number_columns":9,"pole_mount_section":"4_40","core_pipe_width":65,"core_pipe_section":"2_40","adjuster_section":"2_40","core_beam_height":65,"core_beam_section":"HSS3x2x1/8","main_pipe_section":"2_12GA","pole_spacing":15,"tilt_angle":55,"ground_clearance":5,"risk_category":"I","exposure_category":"C","frame_duty_override":"auto","pole_override":"auto","soil_type":"sand","customer_foundation_override":"48_Square","foundation_type":"Square","foundation_size":48,"check_rails":false,"wind_speed_override":90,"snow_load_override":90,"direct_snow_load":false,"add_angle_brace":false}
```

### Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

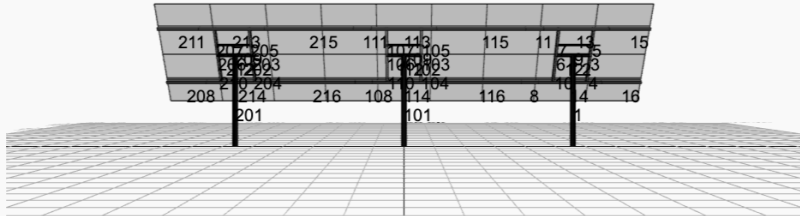


 SkyCiv


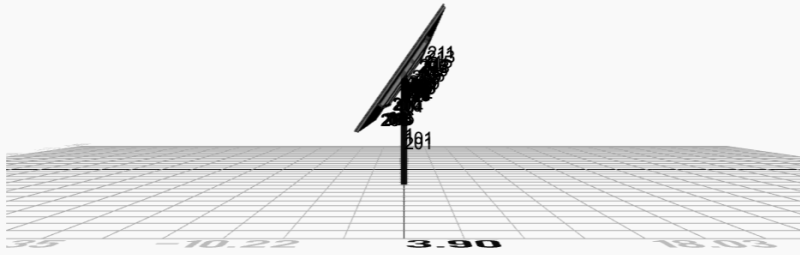


 SkyCiv

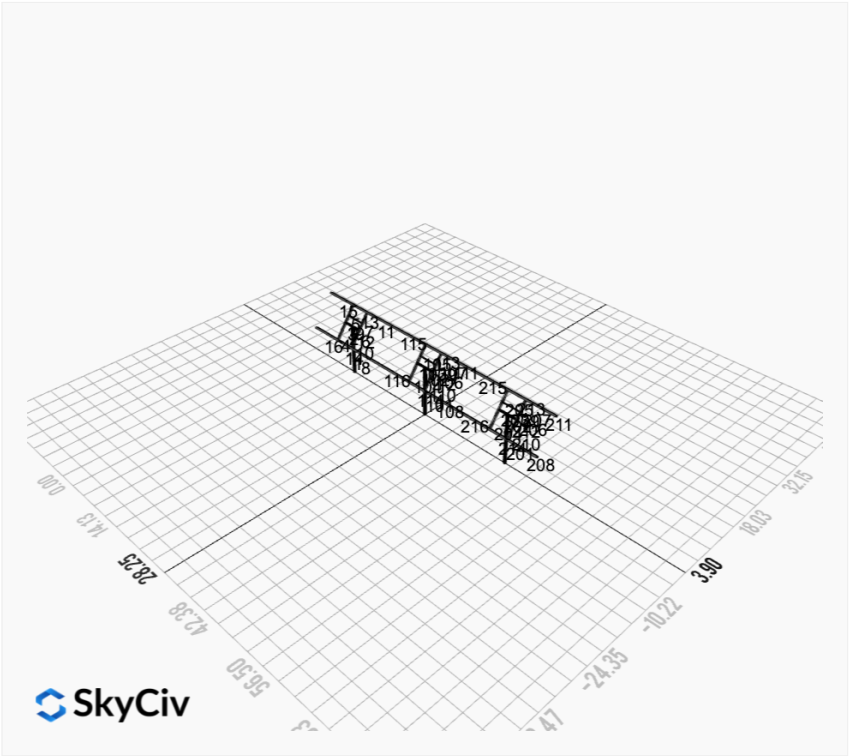
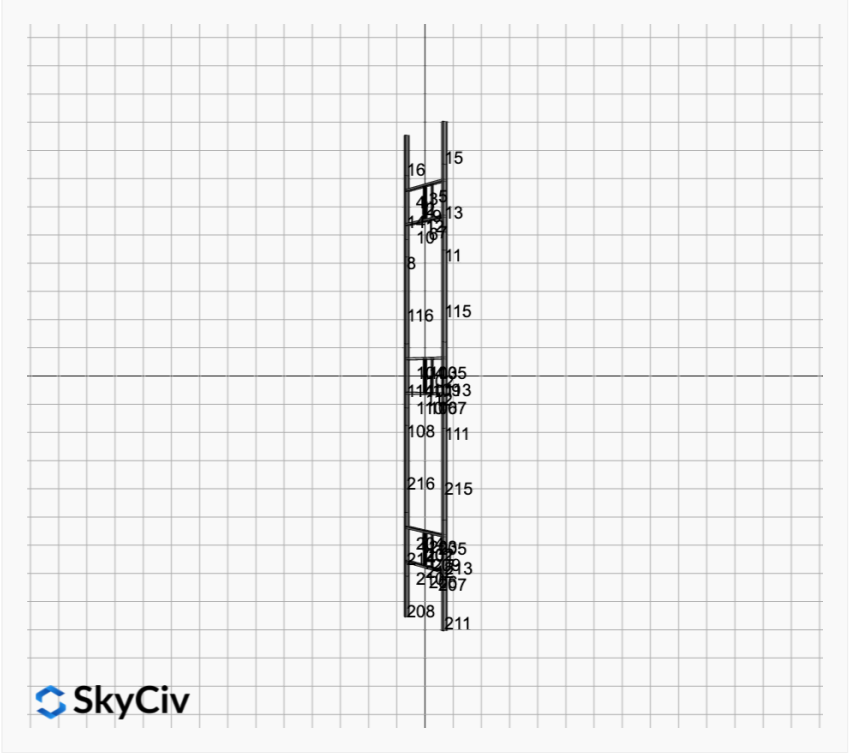


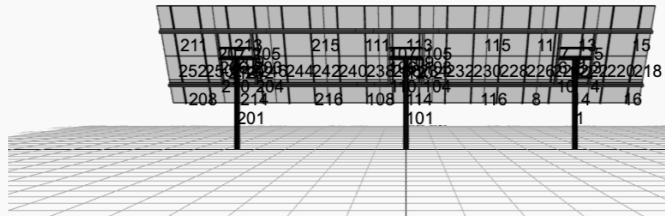


FEM Results (Envelope Worst Case for each member)

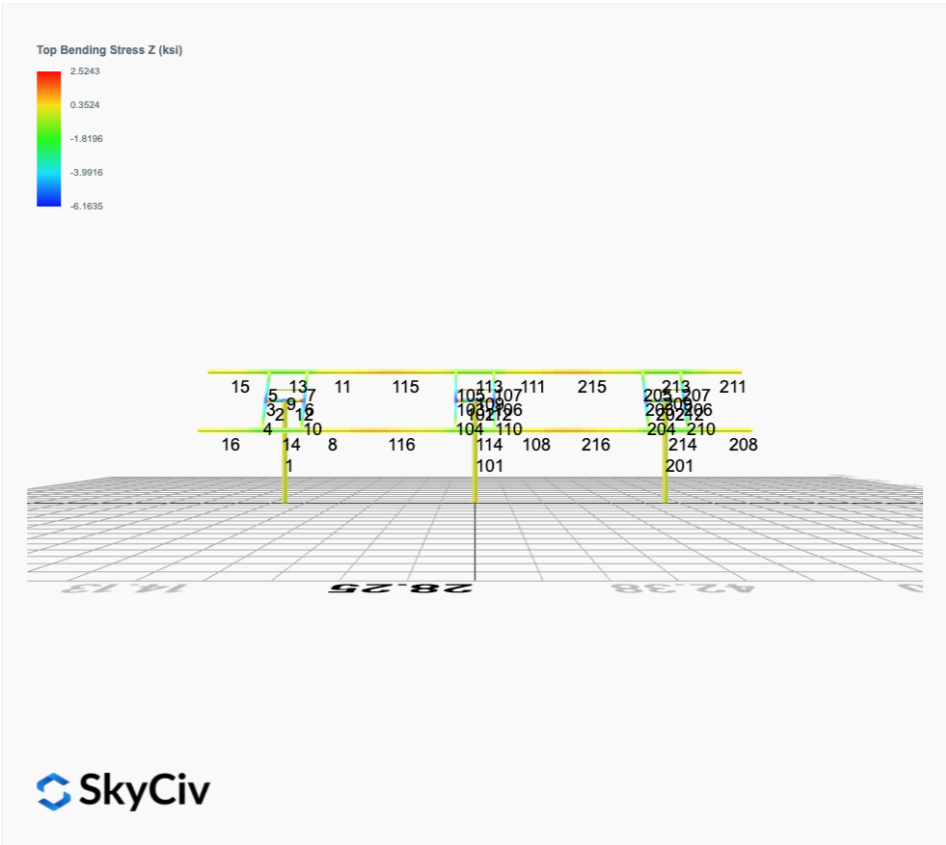
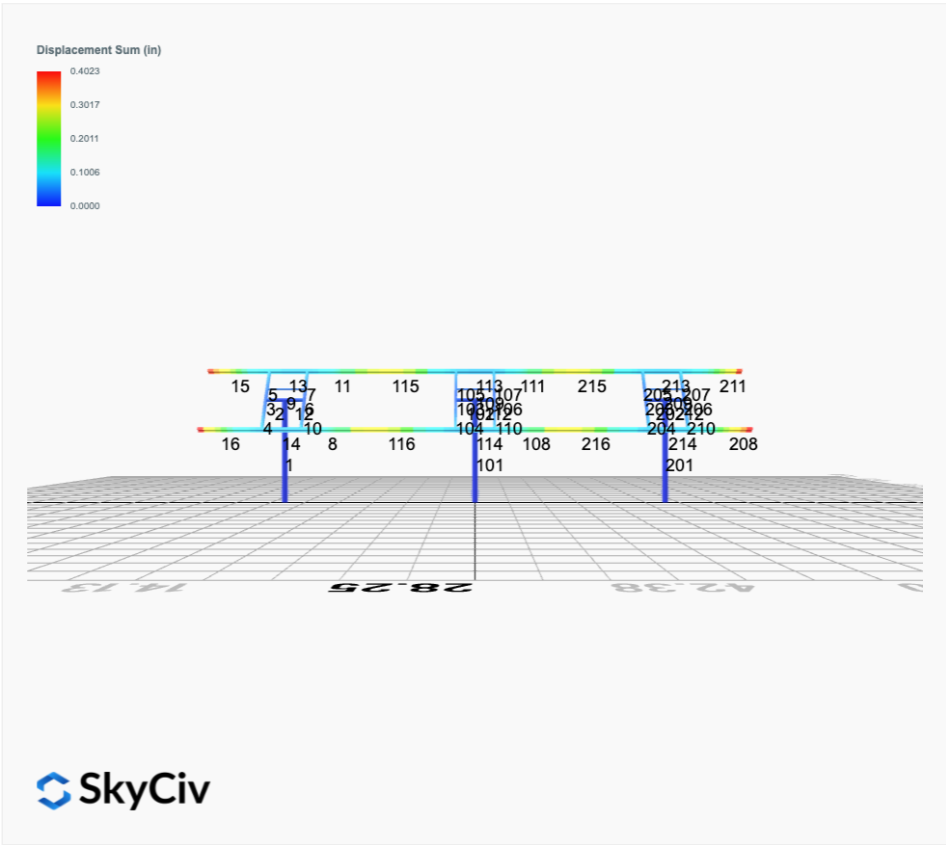


Top Bending Stress Y (ksi)

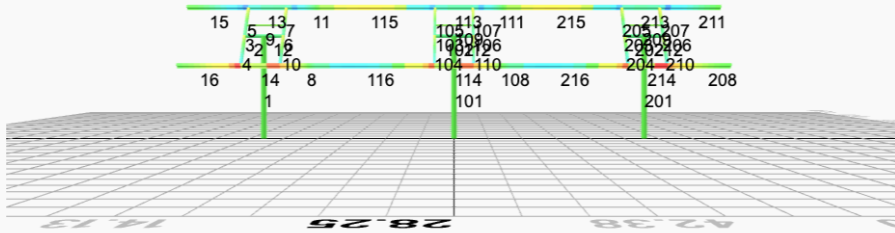

Shear Stress Y (ksi)

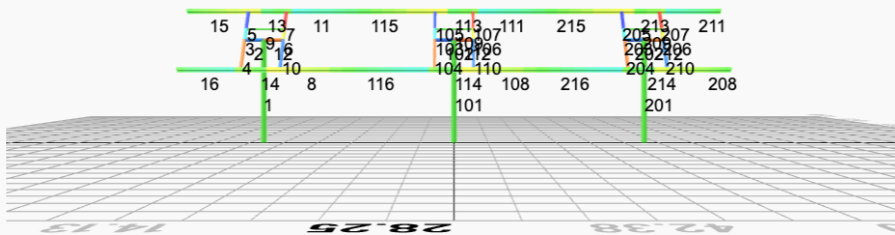

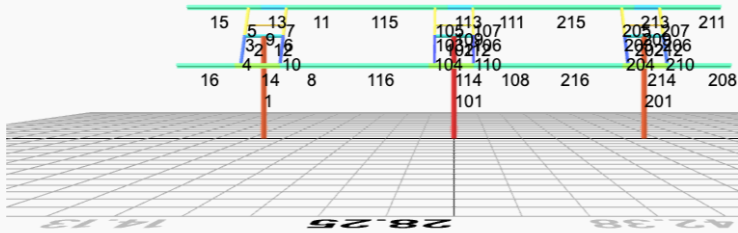



## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My     | Mz       |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|--------|----------|
| ULS: 1. D                                                                       | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 2. D + L                                                                   | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 3. D + (S or Lr or R)                                                      | -0.0084 | 4.0467  | -0.0007 | 0.0013  | 0.0668 | 0.1006   |
| ULS: 3. D + (S or Lr or R)                                                      | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | -0.0072 | 3.5072  | -0.0006 | 0.0011  | 0.0570 | 0.0872   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 5b. D + 0.7E                                                               | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | -0.0072 | 3.5072  | -0.0006 | 0.0011  | 0.0570 | 0.0872   |
| ULS: 8. 0.6D + 0.7E                                                             | -0.0021 | 1.1332  | -0.0002 | 0.0002  | 0.0168 | 0.0283   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -1.7096 | 3.0782  | 0.0017  | 0.0068  | 0.0150 | 18.4674  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 1.7020  | 0.6994  | -0.0020 | -0.0048 | 0.0392 | -17.8864 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.2867 | 4.3993  | 0.0009  | 0.0059  | 0.0473 | 13.9024  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0072 | 3.5072  | -0.0006 | 0.0011  | 0.0570 | 0.0872   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.2719  | 2.6152  | -0.0019 | -0.0028 | 0.0655 | -13.3630 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | -0.0072 | 3.5072  | -0.0006 | 0.0011  | 0.0570 | 0.0872   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.2830 | 2.7809  | 0.0012  | 0.0052  | 0.0182 | 13.8624  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.2756  | 0.9968  | -0.0016 | -0.0035 | 0.0364 | -13.4030 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | -0.0035 | 1.8887  | -0.0003 | 0.0004  | 0.0279 | 0.0471   |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -1.7081 | 2.3227  | 0.0019  | 0.0066  | 0.0038 | 18.4486  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -0.0021 | 1.1332  | -0.0002 | 0.0002  | 0.0168 | 0.0283   |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 1.7034  | -0.0561 | -0.0019 | -0.0049 | 0.0280 | -17.9053 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | -0.0021 | 1.1332  | -0.0002 | 0.0002  | 0.0168 | 0.0283   |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 6.7107              |
| Shear X          | -2.8510             |
| Shear Z          | -0.0039             |
| Moment X         | 0.0134              |
| Moment Y (Twist) | 0.1080              |
| Moment Z         | 31.5574             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 4.3993              |
| Shear X          | -1.7096             |
| Shear Z          | -0.0020             |
| Moment X         | 0.0068              |
| Moment Y (Twist) | 0.0668              |
| Moment Z         | 18.4674             |

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

| Name                                   | Fx     | Fy     | Fz      | Mx     | My     | Mz      |
|----------------------------------------|--------|--------|---------|--------|--------|---------|
| ULS: 1. D                              | 0.0071 | 1.9949 | -0.0000 | 0.0000 | 0.0000 | -0.0498 |
| ULS: 2. D + L                          | 0.0071 | 1.9949 | -0.0000 | 0.0000 | 0.0000 | -0.0498 |
| ULS: 3. D + (S or Lr or R)             | 0.0169 | 4.3018 | 0.0000  | 0.0000 | 0.0000 | -0.1313 |
| ULS: 3. D + (S or Lr or R)             | 0.0071 | 1.9949 | -0.0000 | 0.0000 | 0.0000 | -0.0498 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | 0.0144 | 3.7251 | 0.0000  | 0.0000 | 0.0000 | -0.1110 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | 0.0071 | 1.9949 | -0.0000 | 0.0000 | 0.0000 | -0.0498 |
| ULS: 5b. D + 0.7E                      | 0.0071 | 1.9949 | -0.0000 | 0.0000 | 0.0000 | -0.0498 |

| Name                                                                            | Fx      | Fy      | Fz      | Mx     | My     | Mz       |
|---------------------------------------------------------------------------------|---------|---------|---------|--------|--------|----------|
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | 0.0144  | 3.7251  | 0.0000  | 0.0000 | 0.0000 | -0.1110  |
| ULS: 8. 0.6D + 0.7E                                                             | 0.0042  | 1.1969  | -0.0000 | 0.0000 | 0.0000 | -0.0299  |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -1.7538 | 3.2380  | -0.0000 | 0.0000 | 0.0000 | 18.8908  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | 0.0071  | 1.9949  | -0.0000 | 0.0000 | 0.0000 | -0.0498  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 1.7689  | 0.7514  | -0.0000 | 0.0000 | 0.0000 | -18.4889 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.0071  | 1.9949  | -0.0000 | 0.0000 | 0.0000 | -0.0498  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.3062 | 4.6574  | 0.0000  | 0.0000 | 0.0000 | 14.0945  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0144  | 3.7251  | 0.0000  | 0.0000 | 0.0000 | -0.1110  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.3358  | 2.7925  | 0.0000  | 0.0000 | 0.0000 | -13.9402 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.0144  | 3.7251  | 0.0000  | 0.0000 | 0.0000 | -0.1110  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.3136 | 2.9272  | -0.0000 | 0.0000 | 0.0000 | 14.1556  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0071  | 1.9949  | -0.0000 | 0.0000 | 0.0000 | -0.0498  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.3285  | 1.0623  | -0.0000 | 0.0000 | 0.0000 | -13.8791 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.0071  | 1.9949  | -0.0000 | 0.0000 | 0.0000 | -0.0498  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -1.7566 | 2.4401  | -0.0000 | 0.0000 | 0.0000 | 18.9107  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | 0.0042  | 1.1969  | -0.0000 | 0.0000 | 0.0000 | -0.0299  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 1.7661  | -0.0466 | -0.0000 | 0.0000 | 0.0000 | -18.4690 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.0042  | 1.1969  | -0.0000 | 0.0000 | 0.0000 | -0.0299  |

#### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 7.1205              |
| Shear X          | -2.9480             |
| Shear Z          | -0.0000             |
| Moment X         | 0.0000              |
| Moment Y (Twist) | 0.0001              |
| Moment Z         | 32.2671             |

#### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 4.6574              |
| Shear X          | -1.7689             |
| Shear Z          | 0.0000              |
| Moment X         | 0.0000              |
| Moment Y (Twist) | 0.0000              |
| Moment Z         | 18.9107             |

#### Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

##### ASD Load Combination Results

| Name                                                                            | Fx      | Fy     | Fz      | Mx      | My      | Mz       |
|---------------------------------------------------------------------------------|---------|--------|---------|---------|---------|----------|
| ULS: 1. D                                                                       | -0.0035 | 1.8887 | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 2. D + L                                                                   | -0.0035 | 1.8887 | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 3. D + (S or Lr or R)                                                      | -0.0084 | 4.0467 | 0.0007  | -0.0013 | -0.0668 | 0.1006   |
| ULS: 3. D + (S or Lr or R)                                                      | -0.0035 | 1.8887 | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | -0.0072 | 3.5072 | 0.0006  | -0.0011 | -0.0570 | 0.0872   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | -0.0035 | 1.8887 | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 5b. D + 0.7E                                                               | -0.0035 | 1.8887 | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | -0.0072 | 3.5072 | 0.0006  | -0.0011 | -0.0570 | 0.0872   |
| ULS: 8. 0.6D + 0.7E                                                             | -0.0021 | 1.1332 | 0.0002  | -0.0002 | -0.0168 | 0.0283   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -1.7096 | 3.0782 | -0.0017 | -0.0068 | -0.0149 | 18.4675  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -0.0035 | 1.8887 | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 1.7020  | 0.6994 | 0.0020  | 0.0048  | -0.0392 | -17.8864 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | -0.0035 | 1.8887 | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.2867 | 4.3993 | -0.0009 | -0.0059 | -0.0473 | 13.9024  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0072 | 3.5072 | 0.0006  | -0.0011 | -0.0570 | 0.0872   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.2719  | 2.6152 | 0.0019  | 0.0028  | -0.0655 | -13.3630 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | -0.0072 | 3.5072 | 0.0006  | -0.0011 | -0.0570 | 0.0872   |

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|----------|
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.2830 | 2.7809  | -0.0012 | -0.0052 | -0.0182 | 13.8624  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -0.0035 | 1.8887  | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.2756  | 0.9968  | 0.0016  | 0.0035  | -0.0364 | -13.4030 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | -0.0035 | 1.8887  | 0.0003  | -0.0004 | -0.0279 | 0.0471   |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -1.7081 | 2.3227  | -0.0019 | -0.0066 | -0.0038 | 18.4486  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -0.0021 | 1.1332  | 0.0002  | -0.0002 | -0.0168 | 0.0283   |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 1.7034  | -0.0561 | 0.0019  | 0.0049  | -0.0280 | -17.9053 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | -0.0021 | 1.1332  | 0.0002  | -0.0002 | -0.0168 | 0.0283   |

#### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 6.7107              |
| Shear X          | -2.8510             |
| Shear Z          | 0.0040              |
| Moment X         | -0.0135             |
| Moment Y (Twist) | 0.1078              |
| Moment Z         | 31.5581             |

#### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 4.3993              |
| Shear X          | -1.7096             |
| Shear Z          | 0.0020              |
| Moment X         | -0.0068             |
| Moment Y (Twist) | 0.0668              |
| Moment Z         | 18.4675             |

## Project Details

Design Code: AISC 360-16 LRFD  
Provision: LRFD  
Country: United States

User Name: sales@mtsolar.us  
Unit System: imperial



## Design Input Information

| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |             |             |
|------------------|---------|-------------|-------------|
| ID               | E (ksi) | $F_y$ (ksi) | $F_u$ (ksi) |
| 1                | 29000   | 50          | 65          |

| Section Dimensions |  |  |  |  |  |  |  |  |
|--------------------|--|--|--|--|--|--|--|--|
|                    |  |  |  |  |  |  |  |  |

| ID | Name            | d (in) | $t_w$ (in) |  |  |  |  |  |
|----|-----------------|--------|------------|--|--|--|--|--|
| 1  | 2in Pipe Sch 40 | 2.38   | 0.15       |  |  |  |  |  |
| 4  | 4in Pipe Sch 40 | 4.50   | 0.24       |  |  |  |  |  |
| 7  | 6in Pipe Sch 40 | 6.63   | 0.28       |  |  |  |  |  |

| ID | Name       | d (in) | b (in) | $t_w$ (in) | $t_b$ (in) | r (in) |  |  |
|----|------------|--------|--------|------------|------------|--------|--|--|
| 15 | HSS5x3x1/8 | 5.00   | 3.00   | 0.12       | 0.12       | 0.12   |  |  |

| ID | Name | d (in) | $t_w$ (in) | $b_t$ (in) | $b_b$ (in) | $t_t$ (in) | $t_b$ (in) | r (in) |
|----|------|--------|------------|------------|------------|------------|------------|--------|
| 18 | W6x9 | 5.90   | 0.17       | 3.94       | 3.94       | 0.21       | 0.21       | 0.25   |

| Section Properties |                 |                      |                      |                             |                             |                          |                             |                             |
|--------------------|-----------------|----------------------|----------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------|-----------------------------|
| ID                 | Name            | A (in <sup>2</sup> ) | J (in <sup>4</sup> ) | $I_{yp}$ (in <sup>4</sup> ) | $I_{zp}$ (in <sup>4</sup> ) | $I_w$ (in <sup>6</sup> ) | $S_{yp}$ (in <sup>3</sup> ) | $S_{zp}$ (in <sup>3</sup> ) |
| 1                  | 2in Pipe Sch 40 | 1.07                 | 1.33                 | 0.67                        | 0.67                        | 0.00                     | 0.76                        | 0.76                        |
| 4                  | 4in Pipe Sch 40 | 3.17                 | 14.47                | 7.23                        | 7.23                        | 0.00                     | 4.31                        | 4.31                        |
| 7                  | 6in Pipe Sch 40 | 5.58                 | 56.28                | 28.14                       | 28.14                       | 0.00                     | 11.28                       | 11.28                       |

|    |            |      |      |      |       |       |      |      |
|----|------------|------|------|------|-------|-------|------|------|
| 15 | HSS5x3x1/8 | 1.77 | 6.02 | 2.75 | 6.03  | 0.51  | 2.07 | 2.93 |
| 18 | W6x9       | 2.68 | 0.04 | 2.20 | 16.40 | 17.70 | 1.72 | 6.23 |

| Member Properties |            |                       |                       |                     |                                                                                                                                        |             |             |        |  |
|-------------------|------------|-----------------------|-----------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|--------|--|
| Member ID         | Section ID | K <sub>z</sub> L (ft) | K <sub>y</sub> L (ft) | L <sub>b</sub> (ft) | C <sub>b</sub>                                                                                                                         | L<br>S<br>T | L<br>S<br>C | L<br>D |  |
| 1                 | 7          | 22.34                 | 22.34                 | 10.64               | -                                                                                                                                      | 300         | 200         | 1      |  |
| 2                 | 4          | 1.30                  | 1.30                  | 2.00                | -                                                                                                                                      | 300         | 200         | 1      |  |
| 3                 | 15         | 0.92                  | 0.92                  | 1.42                | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.18,1.18,1.18,1.18,1.19,1.16,1.19,1.18,1.19,1.18,1.19      | 300         | 200         | 1      |  |
| 4                 | 15         | 2.44                  | 2.44                  | 3.75                | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.68,1.67,1.67,1.68,1.64,1.68,1.67,1.68,1.66,1.68      | 300         | 200         | 1      |  |
| 5                 | 15         | 1.52                  | 1.52                  | 2.33                | 1.67,1.67,1.67,1.67,1.67,1.68,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.65,1.67,1.67,1.68,1.66,1.68 | 300         | 200         | 1      |  |
| 6                 | 15         | 0.92                  | 0.92                  | 1.42                | 1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18      | 300         | 200         | 1      |  |
| 7                 | 15         | 1.52                  | 1.52                  | 2.33                | 1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,1.67 | 300         | 200         | 1      |  |
| 8                 | 18         | 1.33                  | 1.33                  | 2.05                | 2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.11,2.12,2.12,2.12,2.11,2.12,2.12,2.12,2.23,2.12,2.12,2.12,2.11,2.12,2.12,2.12,2.12           | 300         | 200         | 1      |  |
| 9                 | 1          | 2.60                  | 2.60                  | 4.00                | -                                                                                                                                      | 300         | 200         | 1      |  |
| 10                | 15         | 2.44                  | 2.44                  | 3.75                | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.68,1.67,1.67,1.68,1.65,1.68,1.67,1.68,1.66,1.68      | 300         | 200         | 1      |  |
| 11                | 18         | 1.33                  | 1.33                  | 2.05                | 2.11,2.11,2.11,2.12,2.11,2.11,2.15,2.11,2.31,2.11,2.16,2.11,2.24,2.11,2.12,2.12,2.09,2.12,2.14,2.11,2.38,2.11,2.17,2.11,2.22,2.11      | 300         | 200         | 1      |  |
| 12                | 4          | 1.30                  | 1.30                  | 2.00                | -                                                                                                                                      | 300         | 200         | 1      |  |
| 13                | 18         | 4.88                  | 4.00                  | 7.50                | 1.10,1.10,1.10,1.10,1.10,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.10,1.10,1.11,1.10,1.09,1.10,1.08,1.10,1.09,1.10,1.09,1.10      | 300         | 200         | 1      |  |
| 14                | 18         | 4.88                  | 4.00                  | 7.50                | 1.10,1.10,1.10,1.10,1.10,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.10,1.10,1.10,1.09,1.10,1.09,1.10,1.09,1.10           | 300         | 200         | 1      |  |
| 15                | 18         | 9.97                  | 9.97                  | 4.75                | 2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33                | 300         | 200         | 1      |  |
| 16                | 18         | 9.97                  | 9.97                  | 4.75                | 2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33                | 300         | 200         | 1      |  |
| 101               | 7          | 22.34                 | 22.34                 | 10.64               | -                                                                                                                                      | 300         | 200         | 1      |  |
| 102               | 4          | 1.30                  | 1.30                  | 2.00                | -                                                                                                                                      | 300         | 200         | 1      |  |
| 103               | 15         | 0.92                  | 0.92                  | 1.42                | 1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18      | 300         | 200         | 1      |  |
| 104               | 15         | 2.44                  | 2.44                  | 3.75                | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.68,1.67,1.67,1.68,1.65,1.68,1.67,1.68,1.66,1.68      | 300         | 200         | 1      |  |
| 105               | 15         | 1.52                  | 1.52                  | 2.33                | 1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,1.67 | 300         | 200         | 1      |  |
| 106               | 15         | 0.92                  | 0.92                  | 1.42                | 1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18      | 300         | 200         | 1      |  |
| 107               | 15         | 1.52                  | 1.52                  | 2.33                | 1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,1.67 | 300         | 200         | 1      |  |

|     |    |           |           |           |                                                                                                                                       |             |             |   |
|-----|----|-----------|-----------|-----------|---------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|---|
| 108 | 18 | 1.33      | 1.33      | 2.0<br>5  | 2.07,2.07,2.07,2.07,2.07,2.07,2.06,2.07,1.94,2.07,2.06,2.07,2.03,2.07,2.07,2.07,2.10,2.07,2.0<br>6,2.07,1.85,2.07,2.06,2.07,2.05,2.07 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 109 | 1  | 2.60      | 2.60      | 4.0<br>0  | -                                                                                                                                     | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 110 | 15 | 2.44      | 2.44      | 3.7<br>5  | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.68,1.67,1.6<br>7,1.68,1.65,1.68,1.67,1.68,1.66,1.68 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 111 | 18 | 1.33      | 1.33      | 2.0<br>5  | 2.09,2.09,2.09,2.09,2.09,2.09,2.01,2.09,1.55,2.09,1.96,2.09,1.68,2.09,2.06,2.09,2.28,2.09,2.0<br>5,2.09,1.43,2.09,1.93,2.09,1.73,2.09 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 112 | 4  | 1.30      | 1.30      | 2.0<br>0  | -                                                                                                                                     | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 113 | 18 | 4.88      | 4.00      | 7.5<br>0  | 1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.06,1.04,1.04,1.04,1.05,1.04,1.04,1.04,1.03,1.04,1.0<br>4,1.04,1.07,1.04,1.04,1.04,1.05,1.04 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 114 | 18 | 4.88      | 4.00      | 7.5<br>0  | 1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.0<br>4,1.04,1.05,1.04,1.04,1.04,1.04,1.04      | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 115 | 18 | 6.63      | 6.63      | 10.<br>20 | 1.16,1.16,1.16,1.16,1.16,1.16,1.13,1.16,1.11,1.16,1.13,1.16,1.11,1.16,1.14,1.16,1.21,1.16,1.1<br>4,1.16,1.10,1.16,1.13,1.16,1.12,1.16 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 116 | 18 | 6.63      | 6.63      | 10.<br>20 | 1.15,1.15,1.15,1.15,1.15,1.15,1.14,1.15,1.13,1.15,1.14,1.15,1.14,1.15,1.15,1.15,1.16,1.15,1.1<br>4,1.15,1.13,1.15,1.14,1.15,1.14,1.15 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 201 | 7  | 22.3<br>4 | 22.3<br>4 | 10.<br>64 | -                                                                                                                                     | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 202 | 4  | 1.30      | 1.30      | 2.0<br>0  | -                                                                                                                                     | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 203 | 15 | 0.92      | 0.92      | 1.4<br>2  | 1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.1<br>8,1.18,1.17,1.18,1.18,1.18,1.18,1.18      | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 204 | 15 | 2.44      | 2.44      | 3.7<br>5  | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.68,1.67,1.6<br>7,1.68,1.65,1.68,1.67,1.68,1.66,1.68 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 205 | 15 | 1.52      | 1.52      | 2.3<br>3  | 1.67,1.67,1.67,1.67,1.67,1.68,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.6<br>7,1.67,1.65,1.67,1.67,1.68,1.66,1.68      | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 206 | 15 | 0.92      | 0.92      | 1.4<br>2  | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.18,1.18,1.1<br>8,1.19,1.16,1.19,1.18,1.19,1.18,1.19      | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 207 | 15 | 1.52      | 1.52      | 2.3<br>3  | 1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.6<br>7,1.67,1.65,1.67,1.67,1.67,1.66,1.67           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 208 | 18 | 9.97      | 9.97      | 4.7<br>5  | 2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.3<br>3,2.33,2.33,2.33,2.33,2.33,2.33,2.33      | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 209 | 1  | 2.60      | 2.60      | 4.0<br>0  | -                                                                                                                                     | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 210 | 15 | 2.44      | 2.44      | 3.7<br>5  | 1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.68,1.67,1.6<br>7,1.68,1.64,1.68,1.67,1.68,1.66,1.68 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 211 | 18 | 9.97      | 9.97      | 4.7<br>5  | 2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.3<br>3,2.33,2.33,2.33,2.33,2.33,2.33,2.33      | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 212 | 4  | 1.30      | 1.30      | 2.0<br>0  | -                                                                                                                                     | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 213 | 18 | 4.88      | 4.00      | 7.5<br>0  | 1.10,1.10,1.10,1.10,1.10,1.10,1.09,1.10,1.08,1.10,1.09,1.10,1.09,1.10,1.10,1.10,1.11,1.10,1.0<br>9,1.10,1.08,1.10,1.09,1.10,1.09,1.10 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 214 | 18 | 4.88      | 4.00      | 7.5<br>0  | 1.10,1.10,1.10,1.10,1.10,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.10,1.10,1.0<br>9,1.10,1.09,1.10,1.09,1.10,1.09,1.10 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 215 | 18 | 6.63      | 6.63      | 10.<br>20 | 1.17,1.17,1.17,1.17,1.17,1.17,1.18,1.17,1.19,1.17,1.18,1.17,1.18,1.17,1.17,1.17,1.16,1.17,1.1<br>7,1.17,1.19,1.17,1.18,1.17,1.18,1.17 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 216 | 18 | 6.63      | 6.63      | 10.<br>20 | 1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.1<br>7,1.17,1.17,1.17,1.17,1.17,1.17,1.17      | 3<br>0<br>0 | 2<br>0<br>0 | 1 |

## Member Design Capacity

| Member ID | $\Phi_t P_n$ (kip) | $\Phi_c P_n$ (kip) | $\Phi_b M_{zn}$ (k-ft) | $\Phi_b M_{yn}$ (k-ft) | $\Phi_v V_{yn}$ (kip) | $\Phi_v V_{zn}$ (kip) |
|-----------|--------------------|--------------------|------------------------|------------------------|-----------------------|-----------------------|
| 1         | 251.16             | 88.46              | 42.30                  | 42.30                  | 75.35                 | 75.35                 |
| 2         | 142.83             | 141.72             | 16.17                  | 16.17                  | 42.85                 | 42.85                 |
| 3         | 79.65              | 74.02              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 4         | 79.65              | 72.01              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 5         | 79.65              | 73.44              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 6         | 79.65              | 74.02              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 7         | 79.65              | 73.44              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 8         | 120.60             | 117.88             | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 9         | 48.35              | 43.11              | 2.85                   | 2.85                   | 14.51                 | 14.51                 |
| 10        | 79.65              | 72.01              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 11        | 120.60             | 117.88             | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 12        | 142.83             | 141.72             | 16.17                  | 16.17                  | 42.85                 | 42.85                 |
| 13        | 120.60             | 98.23              | 19.04                  | 6.45                   | 30.09                 | 45.74                 |
| 14        | 120.60             | 98.23              | 19.14                  | 6.45                   | 30.09                 | 45.74                 |
| 15        | 120.60             | 34.69              | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 16        | 120.60             | 34.69              | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 101       | 251.16             | 88.46              | 42.30                  | 42.30                  | 75.35                 | 75.35                 |
| 102       | 142.83             | 141.72             | 16.17                  | 16.17                  | 42.85                 | 42.85                 |
| 103       | 79.65              | 74.02              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 104       | 79.65              | 72.01              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 105       | 79.65              | 73.44              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 106       | 79.65              | 74.02              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 107       | 79.65              | 73.44              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 108       | 120.60             | 117.88             | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 109       | 48.35              | 43.11              | 2.85                   | 2.85                   | 14.51                 | 14.51                 |
| 110       | 79.65              | 72.01              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 111       | 120.60             | 117.88             | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 112       | 142.83             | 141.72             | 16.17                  | 16.17                  | 42.85                 | 42.85                 |
| 113       | 120.60             | 98.23              | 18.17                  | 6.45                   | 30.09                 | 45.74                 |
| 114       | 120.60             | 98.23              | 18.25                  | 6.45                   | 30.09                 | 45.74                 |
| 115       | 120.60             | 68.63              | 15.08                  | 6.45                   | 30.09                 | 45.74                 |
| 116       | 120.60             | 68.63              | 15.40                  | 6.45                   | 30.09                 | 45.74                 |
| 201       | 251.16             | 88.46              | 42.30                  | 42.30                  | 75.35                 | 75.35                 |
| 202       | 142.83             | 141.72             | 16.17                  | 16.17                  | 42.85                 | 42.85                 |
| 203       | 79.65              | 74.02              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 204       | 79.65              | 72.01              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 205       | 79.65              | 73.44              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 206       | 79.65              | 74.02              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 207       | 79.65              | 73.44              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 208       | 120.60             | 34.69              | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 209       | 48.35              | 43.11              | 2.85                   | 2.85                   | 14.51                 | 14.51                 |
| 210       | 79.65              | 72.01              | 10.99                  | 4.60                   | 29.14                 | 16.61                 |
| 211       | 120.60             | 34.69              | 23.36                  | 6.45                   | 30.09                 | 45.74                 |
| 212       | 142.83             | 141.72             | 16.17                  | 16.17                  | 42.85                 | 42.85                 |
| 213       | 120.60             | 98.23              | 19.02                  | 6.45                   | 30.09                 | 45.74                 |
| 214       | 120.60             | 98.23              | 19.16                  | 6.45                   | 30.09                 | 45.74                 |
| 215       | 120.60             | 68.63              | 15.79                  | 6.45                   | 30.09                 | 45.74                 |
| 216       | 120.60             | 68.63              | 15.96                  | 6.45                   | 30.09                 | 45.74                 |

## Design Ratio


| Member ID | P     | M <sub>z</sub> | M <sub>y</sub> | V <sub>y</sub> | V <sub>z</sub> | (P,M <sub>z</sub> ,M <sub>y</sub> ) | Worst LC | KL/r         | δ            | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|--------------|--------------|--------|
| 1         | 0.076 | 0.746          | 0.001          | 0.038          | 0.000          | 0.776                               | #13      | 0.597        | Not Required | Pass   |
| 2         | 0.004 | 0.295          | 0.190          | 0.075          | 0.034          | 0.437                               | #13      | 0.034        | Not Required | Pass   |
| 3         | 0.015 | 0.450          | 0.129          | 0.045          | 0.010          | 0.557                               | #21      | 0.044        | Not Required | Pass   |
| 4         | 0.014 | 0.447          | 0.363          | 0.045          | 0.044          | 0.657                               | #21      | 0.078        | Not Required | Pass   |
| 5         | 0.014 | 0.279          | 0.380          | 0.044          | 0.055          | 0.388                               | #23      | 0.073        | Not Required | Pass   |
| 6         | 0.015 | 0.452          | 0.144          | 0.045          | 0.012          | 0.569                               | #21      | 0.044        | Not Required | Pass   |
| 7         | 0.015 | 0.281          | 0.386          | 0.045          | 0.057          | 0.394                               | #23      | 0.073        | Not Required | Pass   |
| 8         | 0.000 | 0.033          | 0.135          | 0.029          | 0.016          | 0.161                               | #21      | 0.088        | Not Required | Pass   |
| 9         | 0.018 | 0.027          | 0.050          | 0.001          | 0.000          | 0.078                               | #13      | 0.198        | Not Required | Pass   |
| 10        | 0.014 | 0.446          | 0.371          | 0.045          | 0.046          | 0.674                               | #21      | 0.078        | Not Required | Pass   |
| 11        | 0.000 | 0.033          | 0.138          | 0.029          | 0.016          | 0.164                               | #21      | 0.088        | Not Required | Pass   |
| 12        | 0.004 | 0.295          | 0.188          | 0.076          | 0.034          | 0.437                               | #13      | 0.034        | Not Required | Pass   |
| 13        | 0.008 | 0.158          | 0.386          | 0.037          | 0.020          | 0.528                               | #21      | 0.265        | Not Required | Pass   |
| 14        | 0.007 | 0.160          | 0.386          | 0.037          | 0.020          | 0.528                               | #21      | 0.177        | Not Required | Pass   |
| 15        | 0.000 | 0.067          | 0.206          | 0.022          | 0.012          | 0.269                               | #21      | Not Required | Not Required | Pass   |
| 16        | 0.000 | 0.067          | 0.206          | 0.022          | 0.012          | 0.269                               | #21      | Not Required | Not Required | Pass   |
| 101       | 0.080 | 0.763          | 0.000          | 0.039          | 0.000          | 0.795                               | #13      | 0.597        | Not Required | Pass   |
| 102       | 0.003 | 0.312          | 0.191          | 0.080          | 0.034          | 0.450                               | #13      | 0.034        | Not Required | Pass   |
| 103       | 0.016 | 0.468          | 0.158          | 0.047          | 0.017          | 0.606                               | #21      | 0.044        | Not Required | Pass   |
| 104       | 0.015 | 0.468          | 0.353          | 0.047          | 0.044          | 0.689                               | #21      | 0.078        | Not Required | Pass   |
| 105       | 0.016 | 0.290          | 0.368          | 0.046          | 0.053          | 0.376                               | #21      | 0.073        | Not Required | Pass   |
| 106       | 0.016 | 0.468          | 0.158          | 0.047          | 0.017          | 0.606                               | #21      | 0.044        | Not Required | Pass   |
| 107       | 0.016 | 0.290          | 0.368          | 0.046          | 0.053          | 0.376                               | #21      | 0.073        | Not Required | Pass   |
| 108       | 0.000 | 0.040          | 0.134          | 0.028          | 0.016          | 0.154                               | #21      | 0.088        | Not Required | Pass   |
| 109       | 0.014 | 0.023          | 0.046          | 0.001          | 0.000          | 0.072                               | #13      | 0.198        | Not Required | Pass   |
| 110       | 0.015 | 0.468          | 0.353          | 0.047          | 0.044          | 0.689                               | #21      | 0.078        | Not Required | Pass   |
| 111       | 0.000 | 0.043          | 0.136          | 0.027          | 0.016          | 0.156                               | #21      | 0.088        | Not Required | Pass   |
| 112       | 0.003 | 0.312          | 0.191          | 0.080          | 0.034          | 0.450                               | #13      | 0.034        | Not Required | Pass   |
| 113       | 0.007 | 0.120          | 0.361          | 0.035          | 0.020          | 0.470                               | #21      | 0.265        | Not Required | Pass   |
| 114       | 0.007 | 0.128          | 0.358          | 0.036          | 0.020          | 0.468                               | #21      | 0.265        | Not Required | Pass   |
| 115       | 0.001 | 0.128          | 0.207          | 0.027          | 0.016          | 0.325                               | #21      | 0.439        | Not Required | Pass   |
| 116       | 0.000 | 0.127          | 0.210          | 0.028          | 0.016          | 0.328                               | #21      | 0.439        | Not Required | Pass   |
| 201       | 0.076 | 0.746          | 0.001          | 0.038          | 0.000          | 0.777                               | #13      | 0.597        | Not Required | Pass   |
| 202       | 0.004 | 0.295          | 0.188          | 0.076          | 0.034          | 0.437                               | #13      | 0.034        | Not Required | Pass   |
| 203       | 0.015 | 0.452          | 0.144          | 0.045          | 0.012          | 0.569                               | #21      | 0.044        | Not Required | Pass   |
| 204       | 0.014 | 0.446          | 0.371          | 0.045          | 0.046          | 0.674                               | #21      | 0.078        | Not Required | Pass   |
| 205       | 0.015 | 0.281          | 0.386          | 0.045          | 0.057          | 0.394                               | #23      | 0.073        | Not Required | Pass   |
| 206       | 0.015 | 0.450          | 0.129          | 0.045          | 0.010          | 0.557                               | #21      | 0.044        | Not Required | Pass   |
| 207       | 0.014 | 0.279          | 0.380          | 0.044          | 0.055          | 0.388                               | #23      | 0.073        | Not Required | Pass   |
| 208       | 0.000 | 0.067          | 0.206          | 0.022          | 0.012          | 0.269                               | #21      | Not Required | Not Required | Pass   |
| 209       | 0.018 | 0.027          | 0.050          | 0.001          | 0.000          | 0.078                               | #13      | 0.198        | Not Required | Pass   |
| 210       | 0.014 | 0.447          | 0.363          | 0.045          | 0.044          | 0.657                               | #21      | 0.078        | Not Required | Pass   |
| 211       | 0.000 | 0.067          | 0.206          | 0.022          | 0.012          | 0.269                               | #21      | Not Required | Not Required | Pass   |
| 212       | 0.004 | 0.295          | 0.190          | 0.075          | 0.034          | 0.437                               | #13      | 0.034        | Not Required | Pass   |
| 213       | 0.008 | 0.158          | 0.386          | 0.037          | 0.020          | 0.528                               | #21      | 0.177        | Not Required | Pass   |
| 214       | 0.007 | 0.160          | 0.386          | 0.037          | 0.020          | 0.528                               | #21      | 0.265        | Not Required | Pass   |
| 215       | 0.001 | 0.127          | 0.208          | 0.029          | 0.016          | 0.323                               | #21      | 0.439        | Not Required | Pass   |
| 216       | 0.000 | 0.126          | 0.210          | 0.029          | 0.016          | 0.325                               | #21      | 0.439        | Not Required | Pass   |

## Definitions

$\Phi_t$  Safety factor for tensile



|                 |                                                           |
|-----------------|-----------------------------------------------------------|
| $\Phi_c$        | Safety factor for compression                             |
| $\Phi_b$        | Safety factor for flexure                                 |
| $\Phi_v$        | Safety factor for shear                                   |
| E               | Modulus of elasticity                                     |
| $F_y$           | Specified minimum yield stress                            |
| $F_u$           | Specified minimum tensile strength                        |
| A               | Cross-sectional area                                      |
| J               | Torsional constant                                        |
| $I_{yp}$        | Moment of inertia about the Y axes                        |
| $I_{zp}$        | Moment of inertia about the Z axes                        |
| $I_w$           | Warping constant                                          |
| $S_{yp}$        | Plastic section modulus about the Y axis                  |
| $S_{zp}$        | Plastic section modulus about the Z axis                  |
| KL              | Effective length                                          |
| $C_b$           | Buckling modification factor (from all load combinations) |
| $L_b$           | Length between braced points                              |
| LST             | Limited slenderness for tension                           |
| LSC             | Limited slenderness for compression                       |
| LD              | Limited deflection                                        |
| $P_n$           | Nominal axial strength (tension/compression)              |
| $M_n$           | Nominal flexural strength (about Z/Y axis)                |
| $V_n$           | Nominal shear strength (along Z/Y axis)                   |
| P               | Design ratio in case of axial force                       |
| $M_z$           | Design ratio in case of bending about Z axis              |
| $M_y$           | Design ratio in case of bending about Y axis              |
| $V_y$           | Design ratio in case of shear along Y axis                |
| $V_z$           | Design ratio in case of shear along Z axis                |
| $(P, M_z, M_y)$ | Design ratio in case of axial force and bending action    |
| $KL/r$          | Design ratio in case of section slenderness               |
| $\delta$        | Design ratio in case of member deflection                 |
| OK              | Capacity is provided                                      |
| NG              | Capacity is not provided                                  |
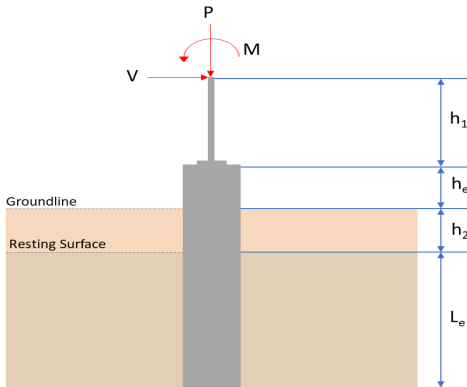
| REFERENCES     | CALCULATIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | RESULTS                                  |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------|------------------------------------------|--------------------------------------------|---|-------------------------------------------------------------|----------|---------|----------------|-----|------|---------|-------|-------|----------|--------|--------|----------|--------|--------|------------|-------|-------|------------|--------|--------|--|
|                | <div><div>SkyCiv Foundation Design</div><div>Pile Foundation</div><div>Design Information :</div><div>Design code : IBC 2021 (International Building Code)</div><div>Unit System : Imperial</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
|                | <div><div>Pile Input</div><div></div><div><div>Geometry</div><div>Pile shape: rectangular</div><div>b = 48 in - Pile width</div><div>D = 48 in - Pile depth</div><div>L = 5.75 ft - Total pile length</div><div>h1 = 0 ft - Lateral load height from the top of the pile,</div><div>h2 = 0 ft - Depth to resisting surface</div><div>he = 0 ft - Length of pile above the ground</div></div><div><div>Tabulation of Soil Parameters</div><table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa)<br/>(psf)</th><th>Allowable Lateral Pressure (R)<br/>(psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table></div><div><div>Tabulation of Loads</div><table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>4.399</td><td>6.711</td></tr><tr><td>Vx (kip)</td><td>-1.710</td><td>-2.851</td></tr><tr><td>Vz (kip)</td><td>-0.002</td><td>-0.004</td></tr><tr><td>Mx (kipft)</td><td>0.007</td><td>0.013</td></tr><tr><td>Mz (kipft)</td><td>18.467</td><td>31.557</td></tr></table></div><div><div>Material Properties</div><div>f'ck = 2.5 ksi - Concrete strength,</div></div></div> | Layer                                    | Label                                      | Allowable Bearing Pressure (qa)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | P (kip) | 4.399 | 6.711 | Vx (kip) | -1.710 | -2.851 | Vz (kip) | -0.002 | -0.004 | Mx (kipft) | 0.007 | 0.013 | Mz (kipft) | 18.467 | 31.557 |  |
| Layer          | Label                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Allowable Bearing Pressure (qa)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2000.000                                 | 150.000                                    |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
| Load Component | ASD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | LRFD                                     |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
| P (kip)        | 4.399                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 6.711                                    |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
| Vx (kip)       | -1.710                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -2.851                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
| Vz (kip)       | -0.002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -0.004                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
| Mx (kipft)     | 0.007                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0.013                                    |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
| Mz (kipft)     | 18.467                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 31.557                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |
|                | <div><div>Required depth to resist lateral loads (ASD)</div><div>H - Point of application of the lateral load</div><div><div><div><div><math>H = h_1 + h_2 + h_e</math></div><div><math>H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})</math></div><div><math>H = 0 \text{ ft}</math></div></div></div></div><div><div>Considering x-direction:</div><div>Ho - Lateral force per length of pile,</div><div><div><div><math>H_o = \frac{V_x}{1.57 D}</math></div><div><math>H_o = \frac{(-1.71 \text{ kip})}{1.57 \times (48 \text{ in})}</math></div><div><math>H_o = -0.27229 \text{ kip/ft}</math></div></div></div></div><div><div>Mo - Moment per length of pile,</div><div><div><math>M_o = \frac{M_z + (V_x H)}{1.57 D}</math></div></div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                          |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |        |        |            |       |       |            |        |        |  |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                     |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|  | $M_o = \frac{(18.467 \text{ kipft}) + ((-1.71 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 2.9406 \text{ kipft/ft}$ <p>Required depth of embedment in earth:</p> $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ <p>Solving the cubic equation:<br/> <math>L_{e,x} = 5.2978 \text{ ft}</math> - Required depth in x-direction,</p> <p><b>Considering z-direction:</b></p> <p><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(-0.002 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.00031847 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.007 \text{ kipft}) + ((-0.002 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.0011146 \text{ kipft/ft}$ <p>Required depth of embedment in earth:</p> $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ <p>Solving the cubic equation:<br/> <math>L_{e,z} = 0.4318 \text{ ft}</math> - Required depth in z-direction,</p> <p><b>Minimum embedded depth required:</b></p> <p><math>L_{e,req}</math> - Depth of pile required,</p> $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(5.2978 \text{ ft}), (0.4318 \text{ ft})]$ $L_{e,req} = 5.298 \text{ ft}$ <p><math>L_e</math> - Actual embedded length of pile,</p> $L_e = L - h_e - h_2$ $L_e = (5.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 5.75 \text{ ft}$ <p><b>Ratio</b> - Embedded depth</p> $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(5.298 \text{ ft})}{(5.75 \text{ ft})}$ $\text{Ratio} = 0.92139$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.920</b></p> |
|  | <p><b>End-bearing Capacity (ASD)</b></p> <p><math>A</math> - Pile cross-section area</p> $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ <p><math>q</math> - End-bearing pressure</p> $q = \frac{P_o}{A}$ $q = \frac{(4.399 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.27494 \text{ kips/ft}^2$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                     |


|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|          | $q = 0.27494 \text{ kip/ft}$ <p><b>Check bearing capacity ratio:</b></p> <p>Ratio - Capacity</p> $\text{Ratio} = \frac{q}{q_a}$ $\text{Ratio} = \frac{(0.27494 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $\text{Ratio} = 0.13747$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Status: <b>PASS</b><br>Ratio: <b>0.140</b> |
| Czerniak | <p><b>Lateral Soil Pressure (ASD):</b></p> <p><math>L/D</math> - Length to least lateral dimension ratio,</p> $L/D = \frac{L}{D}$ $L/D = \frac{(5.75 \text{ ft})}{(48 \text{ in})}$ $L/D = 1.4375$ <p>Since <math>L/D \leq 10</math>,</p> <p>Pile is short.</p> <p><b>Considering x-direction:</b></p> <p><math>H_o = -0.27229 \text{ kip/ft}</math> - Lateral force per length of pile,<br/> <math>M_o = 2.9406 \text{ kipft/ft}</math> - Overturning moment per length of pile,<br/> <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (2.9406 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (2.9406 \text{ kipft/ft})) + (4 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))}$ $a = 3.9589 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (2.9406 \text{ kipft/ft})) + (3 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))]^2}{(5.75 \text{ ft})^3 \times [(3 \times (2.9406 \text{ kipft/ft})) + (2 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))]}$ $p = 0.199 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (2.9406 \text{ kipft/ft})) + ((-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))]}{(5.75 \text{ ft})^2}$ $s = 0.78316 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(3.9589 \text{ ft})}{2}$ $p_a = 0.29691 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.199 \text{ kip/ft}^2)}{(0.29691 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.67022$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> | Status: <b>PASS</b><br>Ratio: <b>0.670</b> |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                            |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|  | $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.75 \text{ ft})$ $p_s = 0.8625 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $Ratio = \frac{s}{p_s}$ $Ratio = \frac{(0.78316 \text{ kip/ft}^2)}{(0.8625 \text{ kip/ft}^2)}$ $Ratio = 0.90801$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Status: <b>PASS</b><br>Ratio: <b>0.910</b> |
|  | <p><b>Considering z-direction:</b></p> <p><math>H_o = -0.00031847 \text{ kip/ft}</math> - Lateral force per length of pile,<br/> <math>M_o = 0.0011146 \text{ kipft/ft}</math> - Overturning moment per length of pile,<br/> <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.0011146 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (0.0011146 \text{ kipft/ft})) + (4 \times (-0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))}$ $a = 4.0838 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.0011146 \text{ kipft/ft})) + (3 \times (-0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))]^2}{(5.75 \text{ ft})^3 \times [(3 \times (0.0011146 \text{ kipft/ft})) + (2 \times (-0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))]}$ $p = -0.000076307 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.0011146 \text{ kipft/ft})) + ((-0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))]}{(5.75 \text{ ft})^2}$ $s = 0.000072243 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(4.0838 \text{ ft})}{2}$ $p_a = 0.30629 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(-0.000076307 \text{ kip/ft}^2)}{(0.30629 \text{ kip/ft}^2)}$ $Ratio = -0.00024914$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.75 \text{ ft})$ $p_s = 0.8625 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $Ratio = \frac{s}{p_s}$ | Status: <b>PASS</b><br>Ratio: <b>0.000</b> |

$$Ratio = \frac{(0.000072243 \text{ kip/ft}^2)}{(0.8625 \text{ kip/ft}^2)}$$

$$Ratio = 0.00008376$$

Status: **PASS**  
Ratio: **0.000**

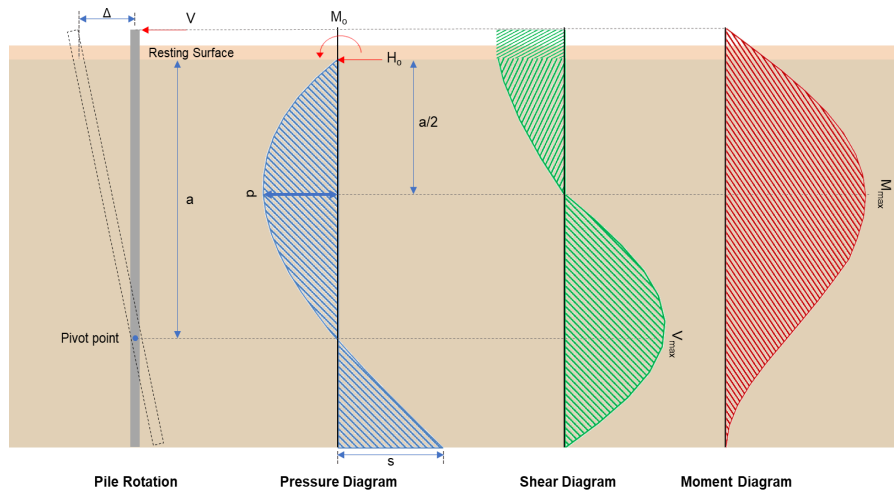

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-2.851 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.45398 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(31.557 \text{ kipft}) + ((-2.851 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.025 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(5.025 \text{ kipft/ft})}{(-0.45398 \text{ kip/ft})}$$

$$E = 11.069 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.025 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.45398 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (5.025 \text{ kipft/ft})) + (4 \times (-0.45398 \text{ kip/ft}) \times (5.75 \text{ ft}))}$$

$$a = 3.9566 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.45398 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.9566 \text{ ft})}{(5.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.9566 \text{ ft})}{(5.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 7.3841 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.45398 \text{ kip/ft}) \times (48 \text{ in}) \times (5.75 \text{ ft})) \times \left[ \left( \frac{(11.069 \text{ ft})}{(5.75 \text{ ft})} + \frac{(3.9566 \text{ ft})}{2 \times (5.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.9566 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.9566 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 20.28 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.004 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.00063694 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.013 \text{ kipft}) + ((-0.004 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0020701 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0020701 \text{ kipft/ft})}{(-0.00063694 \text{ kip/ft})}$$

$$E = 3.25 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0020701 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.00063694 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (0.0020701 \text{ kipft/ft})) + (4 \times (-0.00063694 \text{ kip/ft}) \times (5.75 \text{ ft}))}$$

$$a = 4.0926 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.00063694 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.0926 \text{ ft})}{(5.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.0926 \text{ ft})}{(5.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.0042426 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.00063694 \text{ kip/ft}) \times (48 \text{ in}) \times (5.75 \text{ ft})) \times \left[ \left( \frac{(3.25 \text{ ft})}{(5.75 \text{ ft})} + \frac{(4.0926 \text{ ft})}{2 \times (5.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.0926 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.0926 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^4 \right] \right]$$


|  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                     |
|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|  |  | $M_{max} = 0.010888 \text{ kipft}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                     |
|  |  | <p><b>Minimum Reinforcement Check (LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>f'_{ck} = 2.5 \text{ ksi}</math> - Concrete strength,<br/> <math>f_{yk} = 60 \text{ ksi}</math> - Longitudinal reinforcement strength,<br/> <math>\phi = 0.65</math> - Reduction factor for axial strength,<br/> <math>\alpha = 0.8</math> - Alpha factor for axial strength,<br/> <math>A_g = 2304 \text{ in}^2</math> - Gross area of concrete,</p> <p><b>Longitudinal reinforcement:</b></p> <p>Required reinforcement due to axial load, <math>A_{st,required}</math></p> <p><math>A_{st,required}</math></p> $A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[ \frac{\frac{(6.711 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$ $A_{st,required} = -84.373 \text{ in}^2$ <p><math>A_{min}</math> - Governing minimum reinforcement area,</p> $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-84.373 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$ $A_{min} = 4.1472 \text{ in}^2$ <p><math>n_{rebar}</math> - Required number of reinforcement,</p> $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 14$ <p><math>A_{st}</math> - Actual total reinforcement area,</p> $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 4.2951 \text{ in}^2$ <p><b>Ratio - Capacity</b></p> $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$ $\text{Ratio} = 0.96556$ <p>25.2.3 <math>s_{rebar}</math> - Minimum spacing of reinforcement,</p> $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b></p> <p>25.7.2.2 Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p>25.7.2.1 <math>s_{ties}</math> - Maximum spacing of ties,</p> $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p>Main reinforcement: <b>14 - #5 (0.625 in)</b></p> | <p>Status: <b>PASS</b><br/> Ratio: <b>0.970</b></p> |



|               |                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|               |                                                                                                                                                                                                                                                | Ties: #3(0.375 in) - 10 in                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |
|               |                                                                                                                                                                                                                                                | <b>Axial Compression Strength (ACI 318-19, LRFD)</b>                                                                                                                                                                                                                                                                                                                                                                                                   |                                            |
| 22.4.2.2      | $\phi P_N$ - Allowable axial compressive strength                                                                                                                                                                                              | $\phi P_N = \phi 0.80 \left[ (0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.80 \times \left[ (0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2)) \right]$ $\phi P_N = 2675.2 \text{ kip}$ <p>Ratio - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(6.711 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0025086$ | Status: <b>PASS</b><br>Ratio: <b>0.000</b> |
|               |                                                                                                                                                                                                                                                | <b>Shear Strength (ACI 318-19, LRFD)</b>                                                                                                                                                                                                                                                                                                                                                                                                               |                                            |
|               |                                                                                                                                                                                                                                                | <b>Parameters:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                            |
| 22.5.2.2      | $b_w = 48 \text{ in}$ - Effective width,<br>$d$ - Effective depth                                                                                                                                                                              | $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$                                                                                                                                                                                                                                                                                                                                                                                   |                                            |
| 22.5.5.1.3    | $\lambda_s$ - size effect modification factor                                                                                                                                                                                                  | $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$                                                                                                                                                                                                                                                                      |                                            |
| 22.5.5.1.1    | The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,<br>$V_{c,max}$ - Max shear strength of concrete                                                      | $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$                                                                                                                                                                                                                                                      |                                            |
| 22.5.5.1.1(a) | The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ , $P = 6.711 \text{ kip} \rightarrow 6711 \text{ lbf}$ ,<br>$V_{c,a}$ - Shear strength of concrete (a) | $V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(6711 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.38 \text{ kip}$                                                                                                                                                  |                                            |
| 22.5.5.1.2    | The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,<br>$V_{c,b}$ - Shear strength of concrete (b)                                                        | $V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$                                                                                                                                                                          |                                            |
|               | $V_c$ - Governing shear strength of concrete                                                                                                                                                                                                   | $V_c = Min [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = Min [(296.21 \text{ kip}), (119.38 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.38 \text{ kip}$                                                                                                                                                                                                                                                                                                    |                                            |

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                         |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <p>22.5.1.2</p> <p>22.5.8.5.3</p> <p>22.5.1.1</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{tes}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p><math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{ysk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p><math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.38 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.68 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 7.3841 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> <i>Ratio</i> - Capacity</p> $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(7.3841 \text{ kip})}{(110.68 \text{ kip})}$ $Ratio = 0.066717$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.0042426 \text{ kip}</math> - Maximum shear force in the z-direction,<br/> <i>Ratio</i> - Capacity</p> $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.0042426 \text{ kip})}{(110.68 \text{ kip})}$ $Ratio = 0.000038332$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.070</b></p> <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
|                                                   | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^3}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |

|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| 14.5.2.1b | <p> <math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math> </p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ <p> <math>\phi M_{n,2}</math> </p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ <p> Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength, </p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ <p> <b>Considering x-direction:</b><br/> <math>M_{max} = 20.28 \text{ kipft}</math> - Maximum moment in the x-direction,<br/> Ratio - Capacity </p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(20.28 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.081249$ | Status: <b>PASS</b><br>Ratio: <b>0.080</b> |
|           | <p> <b>Considering z-direction:</b><br/> <math>M_{max} = 0.010888 \text{ kipft}</math> - Maximum moment in the z-direction,<br/> Ratio - Capacity </p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.010888 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.000043624$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Status: <b>PASS</b><br>Ratio: <b>0.000</b> |
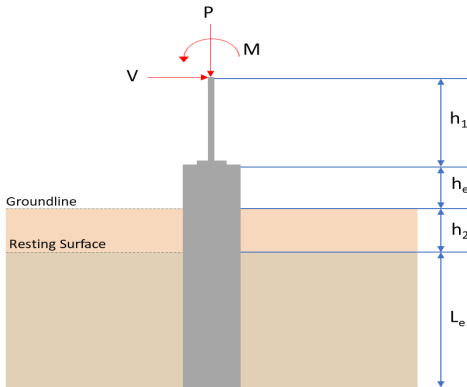
| REFERENCES     | CALCULATIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | RESULTS                                  |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------|------------------------------------------|--------------------------------------------|---|-------------------------------------------------------------|----------|---------|----------------|-----|------|---------|-------|-------|----------|--------|--------|----------|-------|-------|------------|-------|-------|------------|--------|--------|--|
|                | <div><div>SkyCiv Foundation Design</div><div>Pile Foundation</div><div>Design Information :</div><div>Design code : IBC 2021 (International Building Code)</div><div>Unit System : Imperial</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                          |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
|                | <div><div>Pile Input</div><div></div><div>Geometry</div><div>Pile shape: rectangular<br/>b = 48 in - Pile width<br/>D = 48 in - Pile depth<br/>L = 5.75 ft - Total pile length<br/>h1 = 0 ft - Lateral load height from the top of the pile,<br/>h2 = 0 ft - Depth to resisting surface<br/>he = 0 ft - Length of pile above the ground</div><div>Tabulation of Soil Parameters</div><table><thead><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa)<br/>(psf)</th><th>Allowable Lateral Pressure (R)<br/>(psf/ft)</th></tr></thead><tbody><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td><td>2000.000</td><td>150.000</td></tr></tbody></table><div>Tabulation of Loads</div><table><thead><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr></thead><tbody><tr><td>P (kip)</td><td>4.657</td><td>7.121</td></tr><tr><td>Vx (kip)</td><td>-1.769</td><td>-2.948</td></tr><tr><td>Vz (kip)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mx (kipft)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mz (kipft)</td><td>18.911</td><td>32.267</td></tr></tbody></table><div>Material Properties</div><div>f'ck = 2.5 ksi - Concrete strength,</div></div> | Layer                                    | Label                                      | Allowable Bearing Pressure (qa)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | P (kip) | 4.657 | 7.121 | Vx (kip) | -1.769 | -2.948 | Vz (kip) | 0.000 | 0.000 | Mx (kipft) | 0.000 | 0.000 | Mz (kipft) | 18.911 | 32.267 |  |
| Layer          | Label                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Allowable Bearing Pressure (qa)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2000.000                                 | 150.000                                    |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
| Load Component | ASD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | LRFD                                     |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
| P (kip)        | 4.657                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 7.121                                    |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
| Vx (kip)       | -1.769                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -2.948                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
| Vz (kip)       | 0.000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.000                                    |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
| Mx (kipft)     | 0.000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.000                                    |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
| Mz (kipft)     | 18.911                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 32.267                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |
|                | <div><div>Required depth to resist lateral loads (ASD)</div><div>H - Point of application of the lateral load</div><div><div><div><div><div><math>H = h_1 + h_2 + h_e</math></div><div><math>H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})</math></div><div><math>H = 0 \text{ ft}</math></div></div></div></div></div><div>Considering x-direction:</div><div>Ho - Lateral force per length of pile,</div><div><div><div><div><math>H_o = \frac{V_x}{1.57 D}</math></div><div><math>H_o = \frac{(-1.769 \text{ kip})}{1.57 \times (48 \text{ in})}</math></div><div><math>H_o = -0.28169 \text{ kip/ft}</math></div></div></div></div><div>Mo - Moment per length of pile,</div><div><div><div><div><math>M_o = \frac{M_z + (V_x H)}{1.57 D}</math></div></div></div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                          |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |       |       |            |        |        |  |

|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                    |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
|          | $M_o = \frac{(18.911 \text{ kipft}) + ((-1.769 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 3.0113 \text{ kipft/ft}$ <p>Required depth of embedment in earth:</p> $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ <p>Solving the cubic equation:<br/> <math>L_{e,x} = 5.3241 \text{ ft}</math> - Required depth in x-direction,</p> <p><b>Considering z-direction:</b></p> $L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction, <p><b>Minimum embedded depth required:</b></p> $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(5.3241 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 5.324 \text{ ft}$ <p><math>L_e</math> - Actual embedded length of pile,</p> $L_e = L - h_e - h_2$ $L_e = (5.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 5.75 \text{ ft}$ <p><i>Ratio</i> - Embedded depth</p> $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(5.324 \text{ ft})}{(5.75 \text{ ft})}$ $\text{Ratio} = 0.92591$ | <p>Status: <b>PASS</b><br/>Ratio: <b>0.930</b></p> |
|          | <p><b>End-bearing Capacity (ASD)</b></p> <p><math>A</math> - Pile cross-section area</p> $A = b \ D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ <p><math>q</math> - End-bearing pressure</p> $q = \frac{P_v}{A}$ $q = \frac{(4.657 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.29106 \text{ kip/ft}^2$ <p><b>Check bearing capacity ratio:</b></p> <p><i>Ratio</i> - Capacity</p> $\text{Ratio} = \frac{q}{q_a}$ $\text{Ratio} = \frac{(0.29106 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $\text{Ratio} = 0.14553$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>Status: <b>PASS</b><br/>Ratio: <b>0.150</b></p> |
| Czerniak | <p><b>Lateral Soil Pressure (ASD):</b></p> <p><math>L/D</math> - Length to least lateral dimension ratio,</p> $L/D = \frac{L}{D}$ $L/D = \frac{(5.75 \text{ ft})}{(48 \text{ in})}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |

$$L/D = 1.4375$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.28169$  kip/ft - Lateral force per length of pile,

$M_o = 3.0113$  kipft/ft - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (3.0113 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.28169 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (3.0113 \text{ kipft/ft})) + (4 \times (-0.28169 \text{ kip/ft}) \times (5.75 \text{ ft}))}$$

$$a = 3.9598 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (3.0113 \text{ kipft/ft})) + (3 \times (-0.28169 \text{ kip/ft}) \times (5.75 \text{ ft}))]^2}{(5.75 \text{ ft})^3 \times [(3 \times (3.0113 \text{ kipft/ft})) + (2 \times (-0.28169 \text{ kip/ft}) \times (5.75 \text{ ft}))]}$$

$$p = 0.20216 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (3.0113 \text{ kipft/ft})) + ((-0.28169 \text{ kip/ft}) \times (5.75 \text{ ft}))]}{(5.75 \text{ ft})^2}$$

$$s = 0.79902 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.9598 \text{ ft})}{2}$$

$$p_a = 0.297 \text{ kip/ft}^2$$

*Ratio* - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.20216 \text{ kip/ft}^2)}{(0.297 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.68071$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5.75 \text{ ft})$$

$$p_s = 0.8625 \text{ kip/ft}^2$$

*Ratio* - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$


$$\text{Ratio} = \frac{(0.79902 \text{ kip/ft}^2)}{(0.8625 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.92639$$

Status: **PASS**  
Ratio: **0.680**

Status: **PASS**  
Ratio: **0.930**



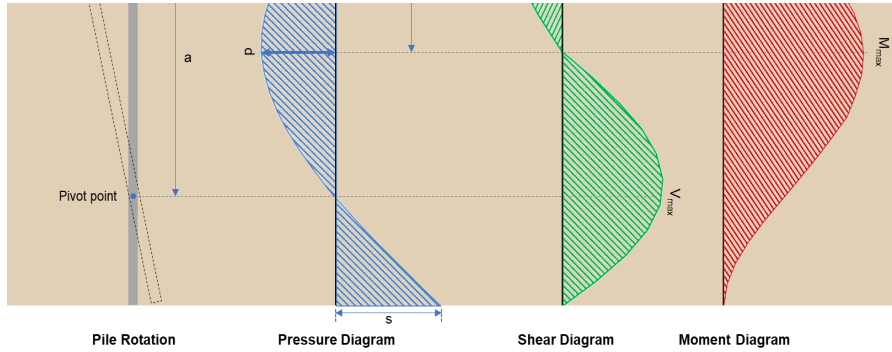

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-2.948 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.46943 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_e + (V_e H)}{1.57 D}$$

$$M_o = \frac{(32.267 \text{ kipft}) + ((-2.948 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.1381 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(5.1381 \text{ kipft/ft})}{(-0.46943 \text{ kip/ft})}$$

$$E = 10.945 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.1381 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.46943 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (5.1381 \text{ kipft/ft})) + (4 \times (-0.46943 \text{ kip/ft}) \times (5.75 \text{ ft}))}$$

$$a = 3.9576 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.46943 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (10.945 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.9576 \text{ ft})}{(5.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (10.945 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.9576 \text{ ft})}{(5.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 7.5639 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.46943 \text{ kip/ft}) \times (48 \text{ in}) \times (5.75 \text{ ft})) \times \left[ \left( \frac{(10.945 \text{ ft})}{(5.75 \text{ ft})} + \frac{(3.9576 \text{ ft})}{2 \times (5.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (10.945 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.9576 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (10.945 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.9576 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^4 \right] \right]$$






|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|               | Ties: #3(0.375 in) - 10 in                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |
| 22.4.2.2      | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 \left[ (0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.80 \times \left[ (0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2)) \right]$ $\phi P_N = 2675.2 \text{ kip}$ <p>Ratio - Capacity</p> $\text{Ratio} = \frac{P}{\phi P_N}$ $\text{Ratio} = \frac{(7.121 \text{ kip})}{(2675.2 \text{ kip})}$ $\text{Ratio} = 0.0026619$                                                                                                                            | Status: <b>PASS</b><br>Ratio: <b>0.000</b> |
| 22.5.2.2      | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/> <math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |
| 22.5.5.1.3    | <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |
| 22.5.5.1.1    | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$                                                                                                                                                                                                                                                                                                            |                                            |
| 22.5.5.1.1(a) | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>, <math>P = 7.121 \text{ kip} \rightarrow 7121 \text{ lbf}</math>,</p> <p><math>V_{c,a}</math> - Shear strength of concrete (a)</p> $V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(7121 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.43 \text{ kip}$                                                                                                                                         |                                            |
| 22.5.5.1.2    | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,b}</math> - Shear strength of concrete (b)</p> $V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$ <p><math>V_c</math> - Governing shear strength of concrete</p> $V_c = \text{Min} [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = \text{Min} [(296.21 \text{ kip}), (119.43 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.43 \text{ kip}$ |                                            |

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                     |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| <p>22.5.1.2</p>  | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.43 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.71 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 7.5639 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> <math>Ratio</math> - Capacity</p> $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(7.5639 \text{ kip})}{(110.71 \text{ kip})}$ $Ratio = 0.06832$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.070</b></p> |
| <p>14.5.2.1b</p> | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:</p> <p><math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kip ft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = 0.85 f'_t S_m$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                     |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                            |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|  | $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ <p><b>Considering x-direction:</b></p> <p><math>M_{max} = 20.765 \text{ kipft}</math> - Maximum moment in the x-direction,<br/> <i>Ratio</i> - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(20.765 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.083192$ |                                            |
|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Status: <b>PASS</b><br>Ratio: <b>0.080</b> |
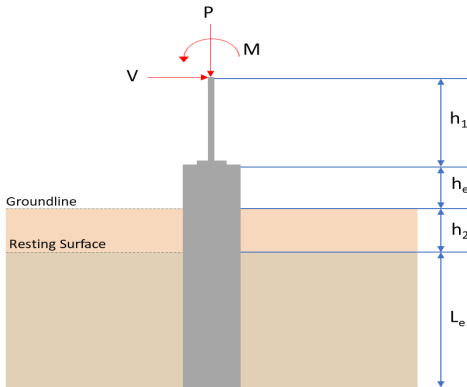
| REFERENCES     | CALCULATIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | RESULTS                                  |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------|------------------------------------------|--------------------------------------------|---|-------------------------------------------------------------|----------|---------|----------------|-----|------|---------|-------|-------|----------|--------|--------|----------|-------|-------|------------|--------|--------|------------|--------|--------|--|
|                | <div><div>SkyCiv Foundation Design</div><div>Pile Foundation</div><div>Design Information :</div><div>Design code : IBC 2021 (International Building Code)</div><div>Unit System : Imperial</div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
|                | <div><div>Pile Input</div><div></div><div><div>Geometry</div><div>Pile shape: rectangular</div><div>b = 48 in - Pile width</div><div>D = 48 in - Pile depth</div><div>L = 5.75 ft - Total pile length</div><div>h1 = 0 ft - Lateral load height from the top of the pile,</div><div>h2 = 0 ft - Depth to resisting surface</div><div>he = 0 ft - Length of pile above the ground</div></div><div><div>Tabulation of Soil Parameters</div><table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa)<br/>(psf)</th><th>Allowable Lateral Pressure (R)<br/>(psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table></div><div><div>Tabulation of Loads</div><table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>4.399</td><td>6.711</td></tr><tr><td>Vx (kip)</td><td>-1.710</td><td>-2.851</td></tr><tr><td>Vz (kip)</td><td>0.002</td><td>0.004</td></tr><tr><td>Mx (kipft)</td><td>-0.007</td><td>-0.013</td></tr><tr><td>Mz (kipft)</td><td>18.467</td><td>31.558</td></tr></table></div><div><div>Material Properties</div><div>f'ck = 2.5 ksi - Concrete strength,</div></div></div> | Layer                                    | Label                                      | Allowable Bearing Pressure (qa)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | P (kip) | 4.399 | 6.711 | Vx (kip) | -1.710 | -2.851 | Vz (kip) | 0.002 | 0.004 | Mx (kipft) | -0.007 | -0.013 | Mz (kipft) | 18.467 | 31.558 |  |
| Layer          | Label                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Allowable Bearing Pressure (qa)<br>(psf) | Allowable Lateral Pressure (R)<br>(psf/ft) |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2000.000                                 | 150.000                                    |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
| Load Component | ASD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | LRFD                                     |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
| P (kip)        | 4.399                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 6.711                                    |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
| Vx (kip)       | -1.710                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -2.851                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
| Vz (kip)       | 0.002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0.004                                    |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
| Mx (kipft)     | -0.007                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -0.013                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
| Mz (kipft)     | 18.467                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 31.558                                   |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |
|                | <div><div>Required depth to resist lateral loads (ASD)</div><div>H - Point of application of the lateral load</div><div><div><div><div><div><math>H = h_1 + h_2 + h_e</math></div><div><math>H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})</math></div><div><math>H = 0 \text{ ft}</math></div></div></div><div>Considering x-direction:</div><div>Ho - Lateral force per length of pile,</div><div><div><div><math>H_o = \frac{V_x}{1.57 D}</math></div><div><math>H_o = \frac{(-1.71 \text{ kip})}{1.57 \times (48 \text{ in})}</math></div><div><math>H_o = -0.27229 \text{ kip/ft}</math></div></div></div><div>Mo - Moment per length of pile,</div><div><div><math>M_o = \frac{M_z + (V_x H)}{1.57 D}</math></div></div></div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                          |                                            |                                          |                                            |   |                                                             |          |         |                |     |      |         |       |       |          |        |        |          |       |       |            |        |        |            |        |        |  |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                     |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|  | $M_o = \frac{(18.467 \text{ kipft}) + ((-1.71 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 2.9406 \text{ kipft/ft}$ <p>Required depth of embedment in earth:</p> $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ <p>Solving the cubic equation:<br/> <math>L_{e,x} = 5.2978 \text{ ft}</math> - Required depth in x-direction,</p> <p><b>Considering z-direction:</b></p> <p><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(0.002 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = 0.00031847 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.007 \text{ kipft}) + ((0.002 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.0011146 \text{ kipft/ft}$ <p>Required depth of embedment in earth:</p> $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ <p>Solving the cubic equation:<br/> <math>L_{e,z} = 0.46048 \text{ ft}</math> - Required depth in z-direction,</p> <p><b>Minimum embedded depth required:</b></p> <p><math>L_{e,req}</math> - Depth of pile required,</p> $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(5.2978 \text{ ft}), (0.46048 \text{ ft})]$ $L_{e,req} = 5.298 \text{ ft}$ <p><math>L_e</math> - Actual embedded length of pile,</p> $L_e = L - h_e - h_2$ $L_e = (5.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 5.75 \text{ ft}$ <p><b>Ratio</b> - Embedded depth</p> $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(5.298 \text{ ft})}{(5.75 \text{ ft})}$ $\text{Ratio} = 0.92139$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.920</b></p> |
|  | <p><b>End-bearing Capacity (ASD)</b></p> <p><math>A</math> - Pile cross-section area</p> $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ <p><math>q</math> - End-bearing pressure</p> $q = \frac{P_o}{A}$ $q = \frac{(4.399 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.27494 \text{ kips/ft}^2$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                     |


|          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                            |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|          | $q = 0.27494 \text{ kip/ft}$ <p><b>Check bearing capacity ratio:</b></p> <p>Ratio - Capacity</p> $\text{Ratio} = \frac{q}{q_a}$ $\text{Ratio} = \frac{(0.27494 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $\text{Ratio} = 0.13747$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Status: <b>PASS</b><br>Ratio: <b>0.140</b> |
| Czerniak | <p><b>Lateral Soil Pressure (ASD):</b></p> <p><math>L/D</math> - Length to least lateral dimension ratio,</p> $L/D = \frac{L}{D}$ $L/D = \frac{(5.75 \text{ ft})}{(48 \text{ in})}$ $L/D = 1.4375$ <p>Since <math>L/D \leq 10</math>,</p> <p>Pile is short.</p> <p><b>Considering x-direction:</b></p> <p><math>H_o = -0.27229 \text{ kip/ft}</math> - Lateral force per length of pile,<br/> <math>M_o = 2.9406 \text{ kipft/ft}</math> - Overturning moment per length of pile,<br/> <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (2.9406 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (2.9406 \text{ kipft/ft})) + (4 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))}$ $a = 3.9589 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (2.9406 \text{ kipft/ft})) + (3 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))]^2}{(5.75 \text{ ft})^3 \times [(3 \times (2.9406 \text{ kipft/ft})) + (2 \times (-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))]}$ $p = 0.199 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (2.9406 \text{ kipft/ft})) + ((-0.27229 \text{ kip/ft}) \times (5.75 \text{ ft}))]}{(5.75 \text{ ft})^2}$ $s = 0.78316 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(3.9589 \text{ ft})}{2}$ $p_a = 0.29691 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.199 \text{ kip/ft}^2)}{(0.29691 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.67022$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> | Status: <b>PASS</b><br>Ratio: <b>0.670</b> |

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |
|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|  | $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.75 \text{ ft})$ $p_s = 0.8625 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(0.78316 \text{ kip/ft}^2)}{(0.8625 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.90801$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Status: <b>PASS</b><br>Ratio: <b>0.910</b> |
|  | <p><b>Considering z-direction:</b></p> <p><math>H_o = 0.00031847 \text{ kip/ft}</math> - Lateral force per length of pile,<br/> <math>M_o = 0.0011146 \text{ kipft/ft}</math> - Overturning moment per length of pile,<br/> <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.0011146 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (0.0011146 \text{ kipft/ft})) + (4 \times (0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))}$ $a = 4.0838 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.0011146 \text{ kipft/ft})) + (3 \times (0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))]^2}{(5.75 \text{ ft})^3 \times [(3 \times (0.0011146 \text{ kipft/ft})) + (2 \times (0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))]}$ $p = 0.00032068 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.0011146 \text{ kipft/ft})) + ((0.00031847 \text{ kip/ft}) \times (5.75 \text{ ft}))]}{(5.75 \text{ ft})^2}$ $s = 0.00073688 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(4.0838 \text{ ft})}{2}$ $p_a = 0.30629 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.00032068 \text{ kip/ft}^2)}{(0.30629 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.001047$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.75 \text{ ft})$ $p_s = 0.8625 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ | Status: <b>PASS</b><br>Ratio: <b>0.000</b> |

$$Ratio = \frac{(0.00073688 \text{ kip/ft}^2)}{(0.8625 \text{ kip/ft}^2)}$$

$$Ratio = 0.00085435$$

Status: **PASS**  
Ratio: **0.000**

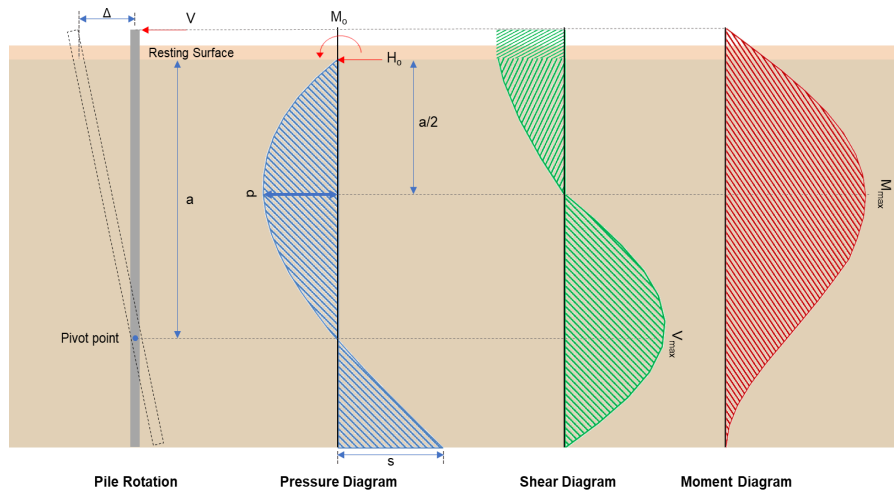

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-2.851 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.45398 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_e + (V_e H)}{1.57 D}$$

$$M_o = \frac{(31.558 \text{ kipft}) + ((-2.851 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.0252 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(5.0252 \text{ kipft/ft})}{(-0.45398 \text{ kip/ft})}$$

$$E = 11.069 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.0252 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (-0.45398 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (5.0252 \text{ kipft/ft})) + (4 \times (-0.45398 \text{ kip/ft}) \times (5.75 \text{ ft}))}$$

$$a = 3.9566 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.45398 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.9566 \text{ ft})}{(5.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.9566 \text{ ft})}{(5.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 7.3843 \text{ kip}$$



$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.45398 \text{ kip/ft}) \times (48 \text{ in}) \times (5.75 \text{ ft})) \times \left[ \left( \frac{(11.069 \text{ ft})}{(5.75 \text{ ft})} + \frac{(3.9566 \text{ ft})}{2 \times (5.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(3.9566 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (11.069 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(3.9566 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 20.28 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.004 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.00063694 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.013 \text{ kipft}) + ((0.004 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0020701 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0020701 \text{ kipft/ft})}{(0.00063694 \text{ kip/ft})}$$

$$E = 3.25 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0020701 \text{ kipft/ft}) \times (5.75 \text{ ft})) + (3 \times (0.00063694 \text{ kip/ft}) \times (5.75 \text{ ft})^2)}{(6 \times (0.0020701 \text{ kipft/ft})) + (4 \times (0.00063694 \text{ kip/ft}) \times (5.75 \text{ ft}))}$$

$$a = 4.0926 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.00063694 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.0926 \text{ ft})}{(5.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.0926 \text{ ft})}{(5.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.0042426 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.00063694 \text{ kip/ft}) \times (48 \text{ in}) \times (5.75 \text{ ft})) \times \left[ \left( \frac{(3.25 \text{ ft})}{(5.75 \text{ ft})} + \frac{(4.0926 \text{ ft})}{2 \times (5.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.0926 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (3.25 \text{ ft})}{(5.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.0926 \text{ ft})}{2 \times (5.75 \text{ ft})} \right)^4 \right] \right]$$

|  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                     |
|--|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|  |  | $M_{max} = 0.010888 \text{ kipft}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                     |
|  |  | <p><b>Minimum Reinforcement Check (LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>f'_{ck} = 2.5 \text{ ksi}</math> - Concrete strength,<br/> <math>f_{yk} = 60 \text{ ksi}</math> - Longitudinal reinforcement strength,<br/> <math>\phi = 0.65</math> - Reduction factor for axial strength,<br/> <math>\alpha = 0.8</math> - Alpha factor for axial strength,<br/> <math>A_g = 2304 \text{ in}^2</math> - Gross area of concrete,</p> <p><b>Longitudinal reinforcement:</b></p> <p>Required reinforcement due to axial load, <math>A_{st,required}</math></p> <p><math>A_{st,required}</math></p> $A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[ \frac{\frac{(6.711 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$ $A_{st,required} = -84.373 \text{ in}^2$ <p><math>A_{min}</math> - Governing minimum reinforcement area,</p> $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-84.373 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$ $A_{min} = 4.1472 \text{ in}^2$ <p><math>n_{rebar}</math> - Required number of reinforcement,</p> $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 14$ <p><math>A_{st}</math> - Actual total reinforcement area,</p> $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 4.2951 \text{ in}^2$ <p><b>Ratio - Capacity</b></p> $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$ $\text{Ratio} = 0.96556$ <p>25.2.3 <math>s_{rebar}</math> - Minimum spacing of reinforcement,</p> $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b></p> <p>25.7.2.2 Since longitudinal reinforcement is <math>\leq \text{No. } 10\phi</math>: Use #3(0.375 in)</p> <p>25.7.2.1 <math>s_{ties}</math> - Maximum spacing of ties,</p> $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p>Main reinforcement: <b>14 - #5 (0.625 in)</b></p> | <p>Status: <b>PASS</b><br/> Ratio: <b>0.970</b></p> |

|               |                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|               |                                                                                                                                                                                                                                                | Ties: #3(0.375 in) - 10 in                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |
|               |                                                                                                                                                                                                                                                | <b>Axial Compression Strength (ACI 318-19, LRFD)</b>                                                                                                                                                                                                                                                                                                                                                                                                   |                                            |
| 22.4.2.2      | $\phi P_N$ - Allowable axial compressive strength                                                                                                                                                                                              | $\phi P_N = \phi 0.80 \left[ (0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.80 \times \left[ (0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2)) \right]$ $\phi P_N = 2675.2 \text{ kip}$ <p>Ratio - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(6.711 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0025086$ | Status: <b>PASS</b><br>Ratio: <b>0.000</b> |
|               |                                                                                                                                                                                                                                                | <b>Shear Strength (ACI 318-19, LRFD)</b>                                                                                                                                                                                                                                                                                                                                                                                                               |                                            |
|               |                                                                                                                                                                                                                                                | <b>Parameters:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                            |
| 22.5.2.2      | $b_w = 48 \text{ in}$ - Effective width,<br>$d$ - Effective depth                                                                                                                                                                              | $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$                                                                                                                                                                                                                                                                                                                                                                                   |                                            |
| 22.5.5.1.3    | $\lambda_s$ - size effect modification factor                                                                                                                                                                                                  | $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$                                                                                                                                                                                                                                                                      |                                            |
| 22.5.5.1.1    | The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,<br>$V_{c,max}$ - Max shear strength of concrete                                                      | $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$                                                                                                                                                                                                                                                      |                                            |
| 22.5.5.1.1(a) | The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ , $P = 6.711 \text{ kip} \rightarrow 6711 \text{ lbf}$ ,<br>$V_{c,a}$ - Shear strength of concrete (a) | $V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(6711 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.38 \text{ kip}$                                                                                                                                                  |                                            |
| 22.5.5.1.2    | The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,<br>$V_{c,b}$ - Shear strength of concrete (b)                                                        | $V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$                                                                                                                                                                          |                                            |
|               | $V_c$ - Governing shear strength of concrete                                                                                                                                                                                                   | $V_c = Min [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = Min [(296.21 \text{ kip}), (119.38 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.38 \text{ kip}$                                                                                                                                                                                                                                                                                                    |                                            |

|                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                         |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <p>22.5.1.2</p> <p>22.5.8.5.3</p> <p>22.5.1.1</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{tes}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p><math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{ysk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p><math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.38 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.68 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 7.3843 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> <i>Ratio</i> - Capacity</p> $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(7.3843 \text{ kip})}{(110.68 \text{ kip})}$ $Ratio = 0.066719$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.0042426 \text{ kip}</math> - Maximum shear force in the z-direction,<br/> <i>Ratio</i> - Capacity</p> $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.0042426 \text{ kip})}{(110.68 \text{ kip})}$ $Ratio = 0.000038332$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.070</b></p> <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
|                                                   | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^3}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                         |

|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| 14.5.2.1b | <p> <math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math> </p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ <p> <math>\phi M_{n,2}</math> </p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ <p> Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength, </p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ <p> <b>Considering x-direction:</b><br/> <math>M_{max} = 20.28 \text{ kipft}</math> - Maximum moment in the x-direction,<br/> Ratio - Capacity </p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(20.28 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.081252$ | Status: <b>PASS</b><br>Ratio: <b>0.080</b> |
|           | <p> <b>Considering z-direction:</b><br/> <math>M_{max} = 0.010888 \text{ kipft}</math> - Maximum moment in the z-direction,<br/> Ratio - Capacity </p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.010888 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.000043624$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Status: <b>PASS</b><br>Ratio: <b>0.000</b> |