

Your Project Calculations

Project Name: MTSOLAR_LF1BGB9B4163

S3D Model Link:

https://platform.skyciv.com/structural?preload_name=MTSOLAR_LF1BGB9B4163&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/8_2023

Public Model Link:

https://platform.skyciv.com/structural-viewer?project_id=7V7xbTs5xV4cStfNPxmcQZo6T8MspkoitwY5sq7PJzbpdzBGDxwKttBZdmRwUdhU



Array Specification

Product:	Beam
Unique ID:	1P-0-6TOP-SD-45-L-4Hx2W-LBHA
Duty Classification:	SD
Module Width:	40.00 in
Module Length:	91.15in
Number of Rows:	4
Number of Columns:	2
Total Number of Modules:	8
Desired Tilt Angle:	60
Front Edge Clearance:	5
Total Array Height at Tilt:	16.62 ft
Total Frame Length:	15.00 ft
Frame Weight:	628 lbs
Array Dimensions N/S:	13.50 ft
Array Dimensions E/W:	15.36 ft
Rail Length:	162.00 in
Rail Spacing:	3.80 ft
Rail Check:	Not Checked

Support Specifications


Pole Size:	6in Pipe Sch 40
Pole Length above Grade:	10.85 ft
Number of Poles:	1
Pole Spacing:	0

Foundation Specifications

Foundation Type:	Round
Foundation Dimensions:	Ø36 in
Foundation Depth (below grade):	Pile 1: 7.75 ft
Foundation Volume:	2.029 y ³
Foundation Result:	PASSED
Mount Twist:	0.000004 kip

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	Iron River, WI 54847, USA
Wind Speed:	99 mph
Snow Load:	60 psf
Design Uplift Pressure:	0.014382 ksf
Design Downforce Pressure:	-0.014382 ksf
Design Snow Pressure:	0.006598 ksf

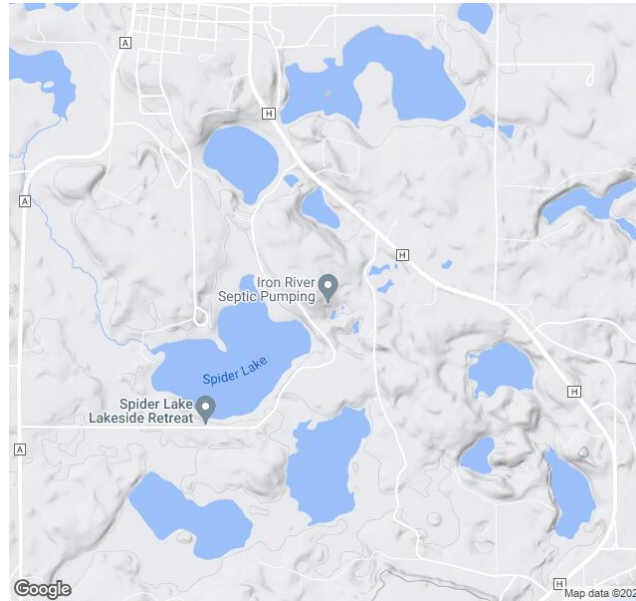

Design Disclaimer



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.


AutoDesigner Input

```
{"wind_speed_override":null,"snow_load_override":null,"direct_snow_load":false,"product_type":"Beam","project_id":"MTSOLAR_LF1BG  
B9B4163","site_address":"Iron River, WI 54847,  
USA","module_width":40,"module_length":91.15,"number_rows":4,"number_columns":2,"pole_mount_section":"4_40","core_pipe_width":  
65,"core_pipe_section":"2_40","adjuster_section":"2_40","core_beam_height":65,"core_beam_section":"HSS3x2x1/8","main_pipe_sectio  
n":"2_12GA","pole_spacing":15,"tilt_angle":60,"ground_clearance":5,"risk_category":"I","exposure_category":"B","frame_duty_ove  
rride":"auto","pole_override":"auto","soil_type":"sand","customer_foundation_override":"36_Round","foundation_type":"Round","fou  
ndation_size":36,"check_rails":false}
```



Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Design and Sizing is approximate only

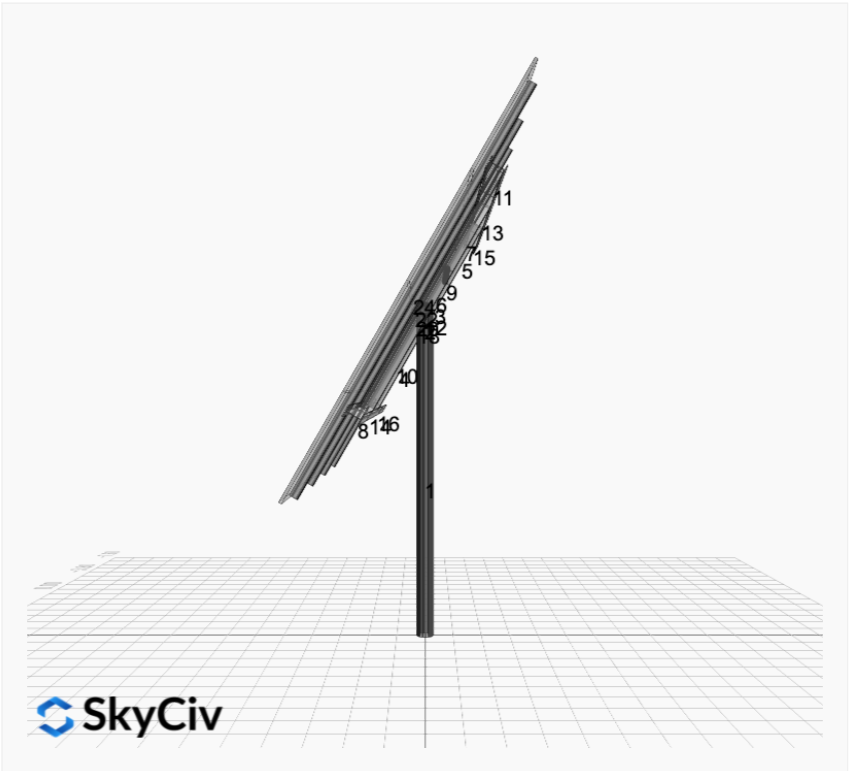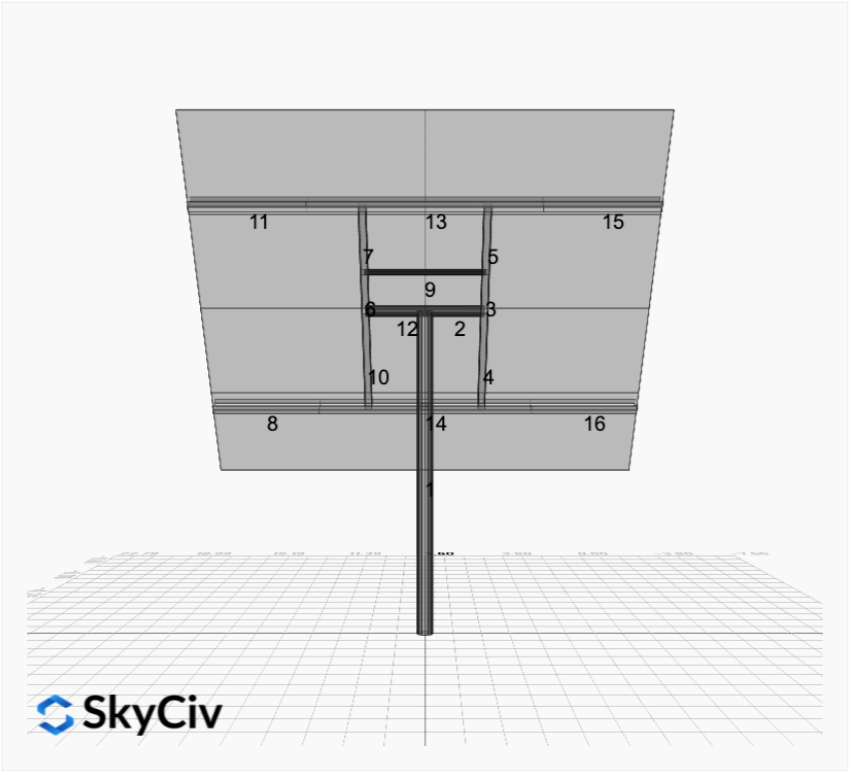


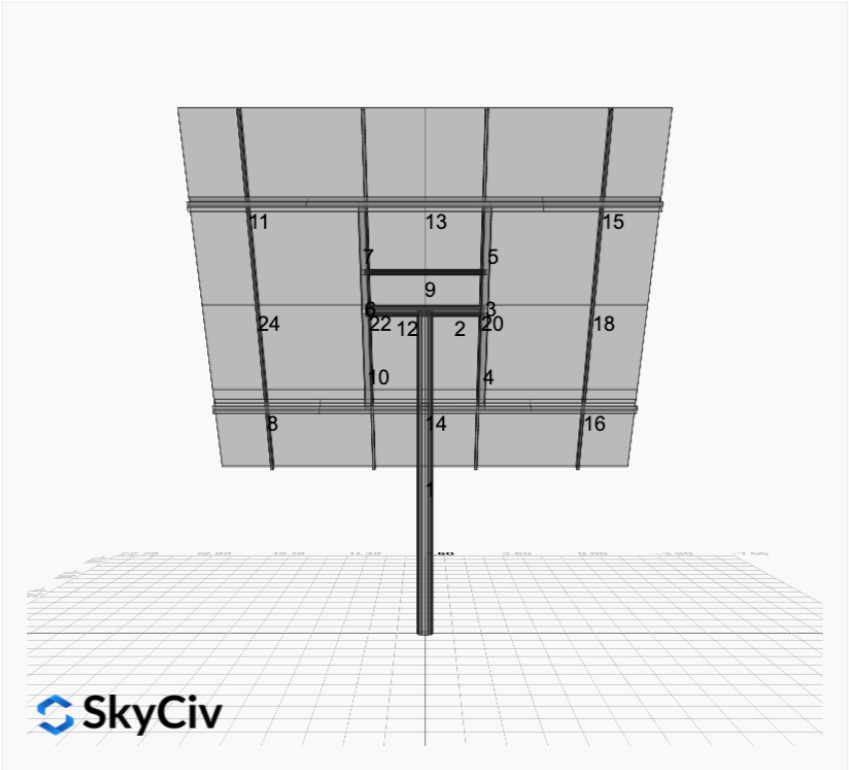

FEM Results (Envelope Worst Case for each member)

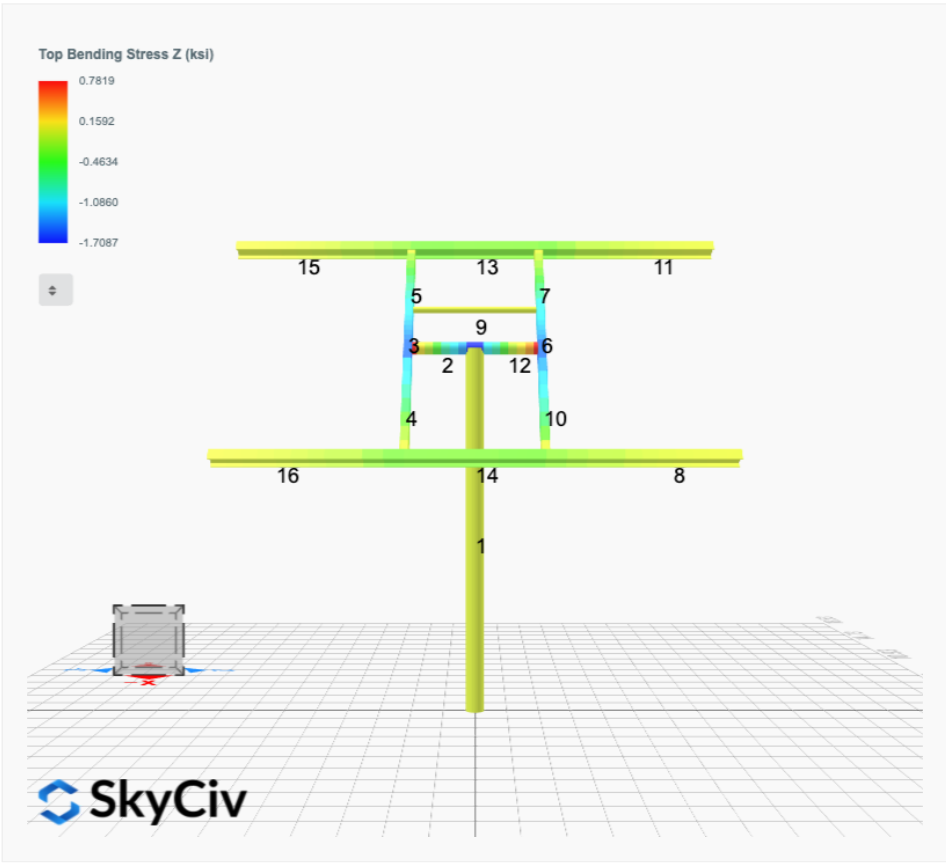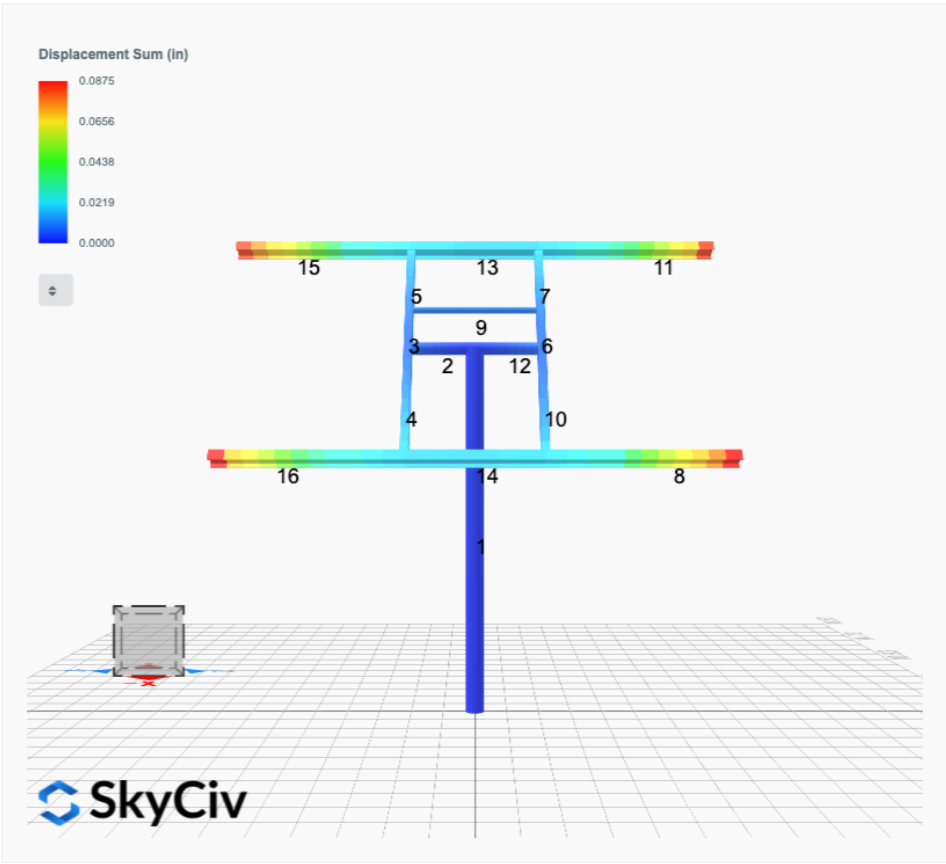

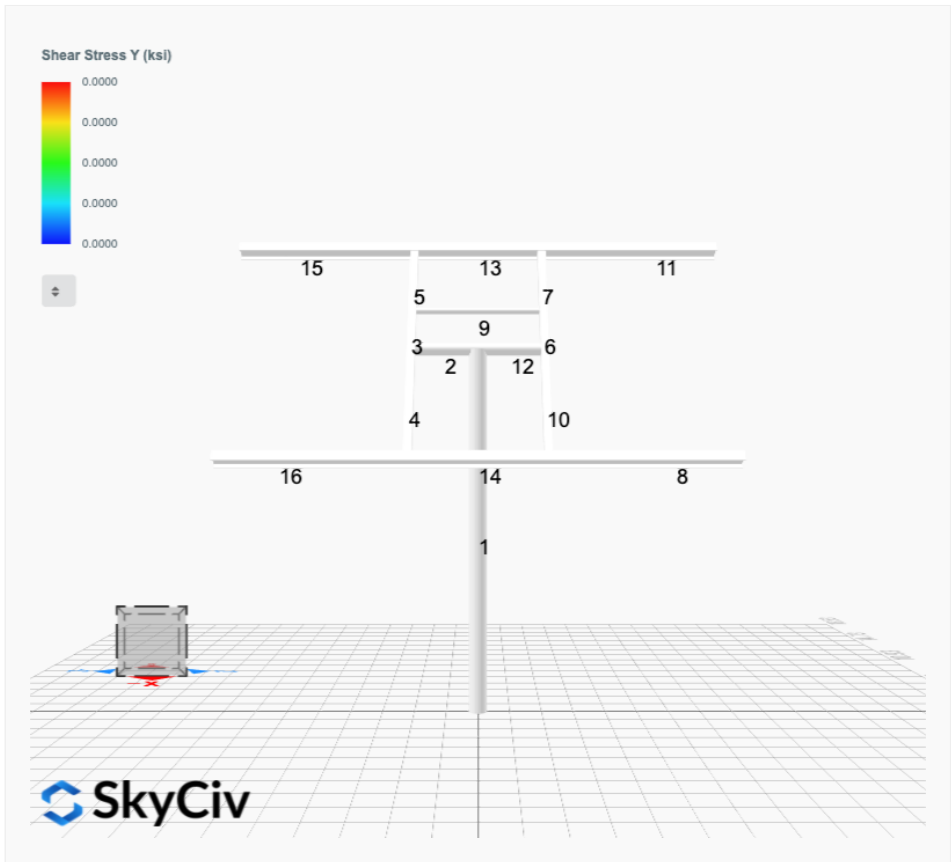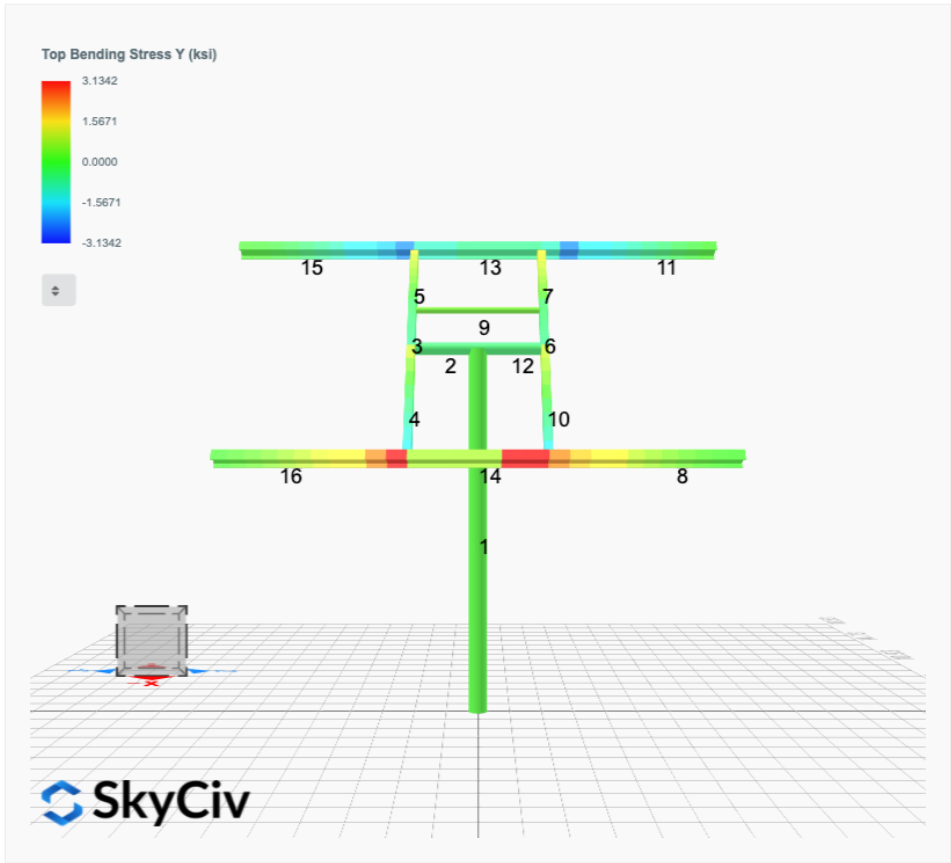

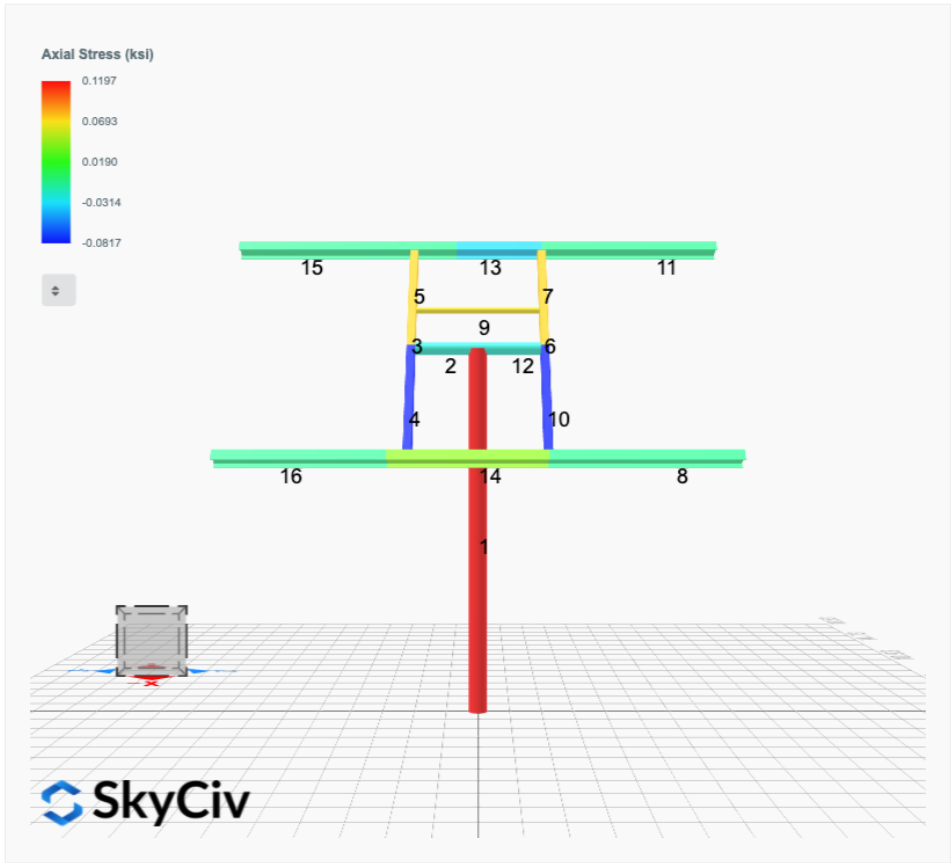

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 2. D + L	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 3. D + (S or Lr or R)	0.0000	2.2451	0.0000	0.0000	-0.0000	0.0127
ULS: 3. D + (S or Lr or R)	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	2.0781	0.0000	0.0000	-0.0000	0.0125
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 5b. D + 0.7E	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	2.0781	0.0000	0.0000	-0.0000	0.0125
ULS: 8. 0.6D + 0.7E	0.0000	0.9463	0.0000	0.0000	-0.0000	0.0072
ULS: 5a. D + 0.6W_Wind downforce Case A only	-1.5495	2.4717	0.0000	0.0000	-0.0000	16.9929
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.5495	0.6825	0.0000	0.0000	-0.0000	-16.6221
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.1621	2.7491	0.0000	0.0000	-0.0000	12.7482
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	2.0781	0.0000	0.0000	-0.0000	0.0125
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.1621	1.4072	0.0000	0.0000	-0.0000	-12.4631
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	2.0781	0.0000	0.0000	-0.0000	0.0125
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.1621	2.2480	0.0000	0.0000	-0.0000	12.7477
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.1621	0.9061	0.0000	0.0000	-0.0000	-12.4636
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	1.5771	0.0000	0.0000	-0.0000	0.0120
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-1.5495	1.8409	0.0000	0.0000	-0.0000	16.9881
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0000	0.9463	0.0000	0.0000	-0.0000	0.0072
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.5495	0.0516	0.0000	0.0000	-0.0000	-16.6269
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0000	0.9463	0.0000	0.0000	-0.0000	0.0072

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	3.7175
Shear X	-2.5825
Shear Z	-0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	28.7897

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	2.7491
Shear X	-1.5495
Shear Z	0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	16.9929

Project Details

Design Code: AISC 360-16 LRFD
Provision: LRFD
Country: United States


User Name: sales@mtsolar.us
Unit System: imperial




Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9


Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65

Section Dimensions							
							

ID	Name	d (in)	t_w (in)				
1	2in Pipe Sch 40	2.38	0.15				
4	4in Pipe Sch 40	4.50	0.24				
7	6in Pipe Sch 40	6.63	0.28				

							
---	--	--	--	--	--	--	--

ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)	
15	HSS5x3x1/8	5.00	3.00	0.12	0.12	0.12	

							
---	--	--	--	--	--	--	--

ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
18	W6x9	5.90	0.17	3.94	3.94	0.21	0.21	0.25

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I_{yp} (in ⁴)	I_{zp} (in ⁴)	I_w (in ⁶)	S_{yp} (in ³)	S_{zp} (in ³)
1	2in Pipe Sch 40	1.07	1.33	0.67	0.67	0.00	0.76	0.76
4	4in Pipe Sch 40	3.17	14.47	7.23	7.23	0.00	4.31	4.31
7	6in Pipe Sch 40	5.58	56.28	28.14	28.14	0.00	11.28	11.28

15	HSS5x3x1/8	1.77	6.02	2.75	6.03	152.35	2.07	2.93
18	W6x9	2.68	0.04	2.20	16.40	17.70	1.72	6.23

Member Properties									
Member ID	Section ID	K _z L (ft)	K _y L (ft)	L _b (ft)	C _b	L S T	L S C	L D	
1	7	22.78	22.78	10.85	-	300	200	1	
2	4	1.30	1.30	2.00	-	300	200	1	
3	15	0.92	0.92	1.42	1.19,1.19,1.19,1.18,1.19,1.19,1.18,1.19,1.17,1.19,1.18,1.19,1.17,1.19,1.18,1.15,1.18,1.18,1.19,1.17,1.19,1.18,1.19,1.18,1.19	300	200	1	
4	15	2.44	2.44	3.75	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.61,1.68,1.67,1.68,1.65,1.68,1.67,1.68,1.66,1.68	300	200	1	
5	15	1.52	1.52	2.33	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.63,1.67,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68	300	200	1	
6	15	0.92	0.92	1.42	1.19,1.19,1.19,1.18,1.19,1.19,1.18,1.19,1.17,1.19,1.18,1.19,1.17,1.19,1.18,1.15,1.18,1.18,1.19,1.17,1.19,1.18,1.19,1.18,1.19	300	200	1	
7	15	1.52	1.52	2.33	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.63,1.67,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68	300	200	1	
8	18	7.88	7.88	3.75	2.33,2.33	300	200	1	
9	1	2.60	2.60	4.00	-	300	200	1	
10	15	2.44	2.44	3.75	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.61,1.68,1.67,1.68,1.65,1.68,1.67,1.68,1.66,1.68	300	200	1	
11	18	7.88	7.88	3.75	2.33,2.33	300	200	1	
12	4	1.30	1.30	2.00	-	300	200	1	
13	18	4.88	4.00	7.50	1.04,1.04	300	200	1	
14	18	4.88	4.00	7.50	1.04,1.04	300	200	1	
15	18	7.88	7.88	3.75	2.33,2.33	300	200	1	
16	18	7.88	7.88	3.75	2.33,2.33	300	200	1	

Member Design Capacity

Member ID	$\Phi_c P_n$ (kip)	$\Phi_c P_n$ (kip)	$\Phi_b M_{zn}$ (k-ft)	$\Phi_b M_{yn}$ (k-ft)	$\Phi_v V_{yn}$ (kip)	$\Phi_v V_{zn}$ (kip)
1	251.16	85.11	42.30	42.30	75.35	75.35
2	142.83	141.72	16.17	16.17	42.85	42.85
3	79.65	74.02	10.99	4.60	29.14	16.61
4	79.65	72.01	10.99	4.60	29.14	16.61
5	79.65	73.44	10.99	4.60	29.14	16.61
6	79.65	74.02	10.99	4.60	29.14	16.61
7	79.65	73.44	10.99	4.60	29.14	16.61
8	120.60	54.44	23.36	6.45	30.09	45.74
9	48.35	43.11	2.85	2.85	14.51	14.51
10	79.65	72.01	10.99	4.60	29.14	16.61

11	120.60	54.44	23.36	6.45	30.09	45.74
12	142.83	141.72	16.17	16.17	42.85	42.85
13	120.60	98.23	18.31	6.45	30.09	45.74
14	120.60	98.23	18.31	6.45	30.09	45.74
15	120.60	54.44	23.36	6.45	30.09	45.74
16	120.60	54.44	23.36	6.45	30.09	45.74

Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.044	0.681	0.000	0.034	0.000	0.702	#13	0.609	Not Required	Pass
2	0.001	0.167	0.161	0.040	0.030	0.329	#13	0.034	Not Required	Pass
3	0.008	0.339	0.078	0.034	0.009	0.399	#13	0.044	Not Required	Pass
4	0.007	0.337	0.166	0.034	0.021	0.423	#13	0.078	Not Required	Pass
5	0.008	0.210	0.171	0.034	0.025	0.239	#13	0.073	Not Required	Pass
6	0.008	0.339	0.078	0.034	0.009	0.399	#13	0.044	Not Required	Pass
7	0.008	0.210	0.171	0.034	0.025	0.239	#13	0.073	Not Required	Pass
8	0.000	0.039	0.080	0.016	0.006	0.108	#21	Not Required	Not Required	Pass
9	0.006	0.017	0.036	0.001	0.000	0.054	#13	0.198	Not Required	Pass
10	0.007	0.337	0.166	0.034	0.021	0.423	#13	0.078	Not Required	Pass
11	0.000	0.039	0.080	0.016	0.006	0.108	#21	Not Required	Not Required	Pass
12	0.001	0.167	0.161	0.040	0.030	0.329	#13	0.034	Not Required	Pass
13	0.003	0.112	0.172	0.024	0.009	0.248	#21	0.177	Not Required	Pass
14	0.004	0.114	0.172	0.024	0.009	0.248	#21	0.177	Not Required	Pass
15	0.000	0.039	0.080	0.016	0.006	0.108	#21	Not Required	Not Required	Pass
16	0.000	0.039	0.080	0.016	0.006	0.108	#21	Not Required	Not Required	Pass

Definitions

Φ _t	Safety factor for tensile
Φ _c	Safety factor for compression
Φ _b	Safety factor for flexure
Φ _v	Safety factor for shear
E	Modulus of elasticity
F _y	Specified minimum yield stress
F _u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I _{yp}	Moment of inertia about the Y axes
I _{zp}	Moment of inertia about the Z axes
I _w	Warping constant
S _{yp}	Plastic section modulus about the Y axis
S _{zp}	Plastic section modulus about the Z axis
KL	Effective length
C _b	Buckling modification factor (from all load combinations)
L _b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P _n	Nominal axial strength (tension/compression)
M _n	Nominal flexural strength (about Z/Y axis)
V _n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M _z	Design ratio in case of bending about Z axis
M _y	Design ratio in case of bending about Y axis
V _y	Design ratio in case of shear along Y axis
V _z	Design ratio in case of shear along Z axis
(P,M _z ,M _y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

no capacity is not provided

	$M_o = \frac{(16.993 \text{ kipft}) + ((-1.549 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 5.6643 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 7.1415 \text{ ft}$ - Required depth in x-direction, Considering z-direction: $L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = MAX[L_{e,x}, L_{e,z}]$ $L_{e,req} = MAX[(7.1415 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 7.141 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (7.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 7.75 \text{ ft}$ Ratio - Embedded depth $Ratio = \frac{L_{e,req}}{L_e}$ $Ratio = \frac{(7.141 \text{ ft})}{(7.75 \text{ ft})}$ $Ratio = 0.92142$	Status: PASS Ratio: 0.920
	End-bearing Capacity (ASD) A - Pile cross-section area $A = \pi \left(\frac{D}{2}\right)^2$ $A = \pi \times \left(\frac{(36 \text{ in})}{2}\right)^2$ $A = 7.0686 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_o}{A}$ $q = \frac{(2.749 \text{ kip})}{(7.0686 \text{ ft}^2)}$ $q = 0.3889 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.3889 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.19445$	Status: PASS Ratio: 0.190
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(7.75 \text{ ft})}{(36 \text{ in})}$	

$$L/D = 2.5833$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.51633$ kip/ft - Lateral force per length of pile,

$M_o = 5.6643$ kipft/ft - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.6643 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.51633 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (5.6643 \text{ kipft/ft})) + (4 \times (-0.51633 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3734 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{1.178 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{1.178 \times [(4 \times (5.6643 \text{ kipft/ft})) + (3 \times (-0.51633 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^3 \times [(3 \times (5.6643 \text{ kipft/ft})) + (2 \times (-0.51633 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = 0.24757 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{9.425 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{9.425 \times [(2 \times (5.6643 \text{ kipft/ft})) + ((-0.51633 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 1.1498 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.3734 \text{ ft})}{2}$$

$$p_a = 0.40301 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.24757 \text{ kip/ft}^2)}{(0.40301 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.61431$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$


$$\text{Ratio} = \frac{(1.1498 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.98905$$

Status: **PASS**
Ratio: **0.610**

Status: **PASS**
Ratio: **0.990**



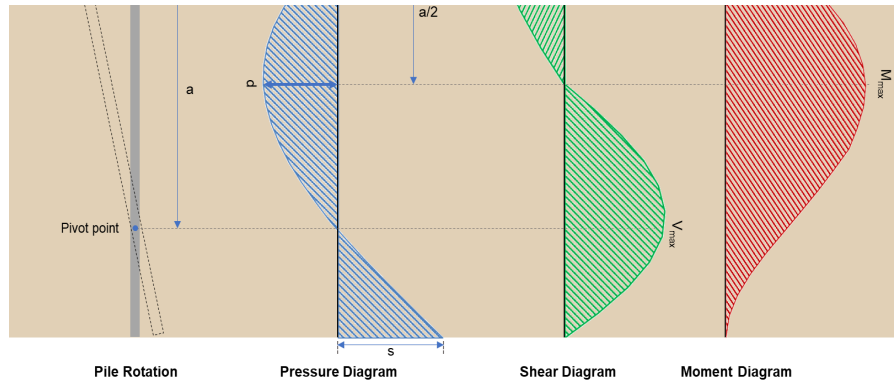

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{D}$$

$$H_o = \frac{(-2.582 \text{ kip})}{(36 \text{ in})}$$

$$H_o = -0.86067 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{D}$$

$$M_o = \frac{(28.79 \text{ kipft}) + ((-2.582 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$$

$$M_o = 9.5967 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(9.5967 \text{ kipft/ft})}{(-0.86067 \text{ kip/ft})}$$

$$E = 11.15 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (9.5967 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.86067 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (9.5967 \text{ kipft/ft})) + (4 \times (-0.86067 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3712 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.86067 \text{ kip/ft}) \times (36 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (11.15 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3712 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (11.15 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3712 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 8.2759 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.86067 \text{ kip/ft}) \times (36 \text{ in}) \times (7.75 \text{ ft})) \times \left[\left(\frac{(11.15 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.3712 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[\left(\frac{4 \times (11.15 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left(\frac{(5.3712 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (11.15 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left(\frac{(5.3712 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

		$M_{max} = 30.257 \text{ kipft}$	
		Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.85$ - Alpha factor for axial strength, $A_g = 1017.9 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required}$ $A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[\frac{\frac{(3.718 \text{ kip})}{(0.65) \times (0.85)} - (0.85 \times (2.5 \text{ ksi}) \times (1017.9 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (1017.9 \text{ in}^2)) \right]$ $A_{st,required} = -37.257 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-37.257 \text{ in}^2), (0.0018 \times (1017.9 \text{ in}^2))]$ $A_{min} = 1.8322 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(1.8322 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 6$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (6) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 1.8408 \text{ in}^2$ Ratio - Capacity $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(1.8322 \text{ in}^2)}{(1.8408 \text{ in}^2)}$ $\text{Ratio} = 0.99533$ 25.2.3 s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq \text{No. } 10\emptyset$: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum center-to-center spacing of ties, $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), D]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), (36 \text{ in})]$ $s_{ties} = 10 \text{ in}$ Summary:	Status: PASS Ratio: 1.000

	Main reinforcement: 6 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.85 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.85 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(1017.9 \text{ in}^2) - (1.8408 \text{ in}^2)]) + ((60 \text{ ksi}) \times (1.8408 \text{ in}^2)) \right]$ $\phi P_N = 1253.9 \text{ kip}$ Ratio - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(3.718 \text{ kip})}{(1253.9 \text{ kip})}$ $Ratio = 0.0029651$	Status: PASS Ratio: 0.000
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 36 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (36 \text{ in})$ $d = 28.8 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(28.8 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.71796$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.71796) \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,max} = 186.09 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 3.718 \text{ kip} \rightarrow 3718 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + \frac{(3718 \text{ lbf})}{6 \times (1017.9 \text{ in}^2)} \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,a} = 75.069 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,b} = 204.04 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = Min [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = Min [(186.09 \text{ kip}), (75.069 \text{ kip}), (204.04 \text{ kip})]$	

22.5.1.2	$V_c = 75.069 \text{ kip}$ The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{s,a} = 414.72 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ 22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (28.8 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 38.17 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(414.72 \text{ kip}), (38.17 \text{ kip})]$ $V_s = 38.17 \text{ kip}$ 22.5.1.1 ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((75.069 \text{ kip}) + (38.17 \text{ kip}))$ $\phi V_n = 73.606 \text{ kip}$ Considering x-direction: $V_{max} = 8.2759 \text{ kip}$ - Maximum shear force in the x-direction, $Ratio$ - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(8.2759 \text{ kip})}{(73.606 \text{ kip})}$ $Ratio = 0.11244$ Status: PASS Ratio: 0.110	
14.5.2.1b	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{\pi D^3}{32}$ $S_m = \frac{\pi \times (36 \text{ in})^3}{32}$ $S_m = 4580.4 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 4580.442 \text{ in}^3$ $\phi M_{n,1} = 62.027 \text{ kipft}$ $\phi M_{n,2}$	

$$\phi M_{n,2} = \phi 0.85 f'_{ck} S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (4580.4 \text{ in}^3)$$

$$\phi M_{n,2} = 527.23 \text{ kipft}$$

Therefore,

ϕM_n - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(62.027 \text{ kipft}), (527.23 \text{ kipft})]$$

$$\phi M_n = 62.027 \text{ kipft}$$

Considering x-direction:

$M_{max} = 30.257 \text{ kipft}$ - Maximum moment in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(30.257 \text{ kipft})}{(62.027 \text{ kipft})}$$

$$\text{Ratio} = 0.4878$$

Status: **PASS**
Ratio: **0.490**