

Your Project Calculations



Project Name: Container mount Rev-B~JS

S3D Model Link:
https://platform.skyciv.com/structural?preload_name=Container%20mount%20Rev-B~JS&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/3_2024

Public Model Link:
https://platform.skyciv.com/structural-viewer?project_id=Frb0Z1ONy3SOP0ggLpDLWEKpHBd8GGvn85RVh5fPLOPQ8I8p5kEZK3CvQINd2ujw

Array Specification

Product:	Beam
Unique ID:	3P-19.75-8TOP-HD-57-L-5Hx10W-8B1L
Duty Classification:	HD
Module Width:	43.15 in
Module Length:	69.06in
Number of Rows:	5
Number of Columns:	10
Total Number of Modules:	50
Desired Tilt Angle:	60
Front Edge Clearance:	3
Total Array Height at Tilt:	18.66 ft
Total Frame Length:	56.50 ft
Frame Weight:	3190 lbs
Array Dimensions N/S:	18.19 ft
Array Dimensions E/W:	58.38 ft
Rail Length:	218.25 in
Rail Spacing:	2.88 ft
Rail Check:	Not Checked

Support Specifications

Pole Size:	8in Pipe Sch 80
Pole Length above Grade:	10.88 ft
Number of Poles:	3
Pole Spacing:	19.75 ft

Foundation Specifications

Foundation Type:	Square
Foundation Dimensions:	48 x 48 in
Foundation Depth (below grade):	Pile 1: 7.50 ft Pile 2: 7.50 ft Pile 3: 7.50 ft
Foundation Volume:	13.333 y ³
Foundation Result:	PASSED
Mount Twist:	0.112268 kip

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	Wasilla, AK 99654, USA
Wind Speed:	120 mph
Snow Load:	50 psf
Design Uplift Pressure:	0.023203 ksf
Design Downforce Pressure:	-0.023203 ksf
Design Snow Pressure:	0.005498 ksf



Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.

AutoDesigner Input


```
{"wind_speed_override":120,"snow_load_override":50,"direct_snow_load":false,"add_angle_brace":false,"product_type":"Beam","project_id":"Container mount Rev-B~JS","site_address":"Wasilla, AK 99654, USA","module_width":43.15,"module_length":69.06,"number_rows":5,"number_columns":10,"pole_mount_section":"4_40","core_pipe_width":65,"core_pipe_section":"2_40","adjuster_section":"2_40","core_beam_height":65,"core_beam_section":"HSS3x2x1/8","main_pipe_section":"2_12GA","pole_spacing":15,"tilt_angle":60,"ground_clearance":3,"risk_category":"I","exposure_category":"B","frame_duty_override":"auto","pole_override":"auto","soil_type":"sand","customer_foundation_override":"48_Square","foundation_type":"Square","foundation_size":48,"check_rails":false}
```

Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesigned are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

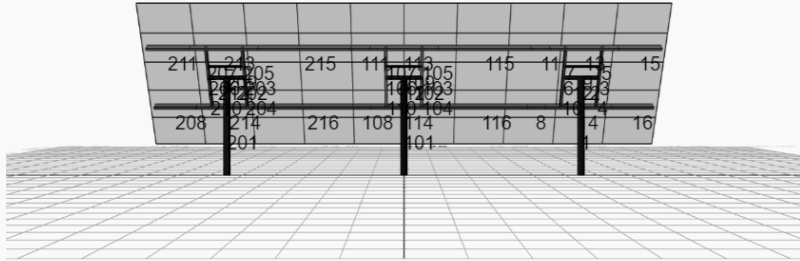


 SkyCiv

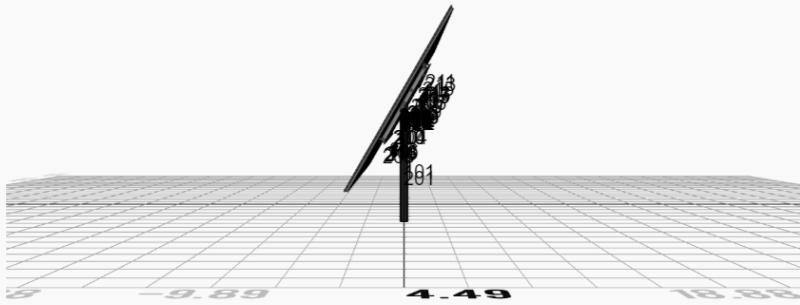


 SkyCiv

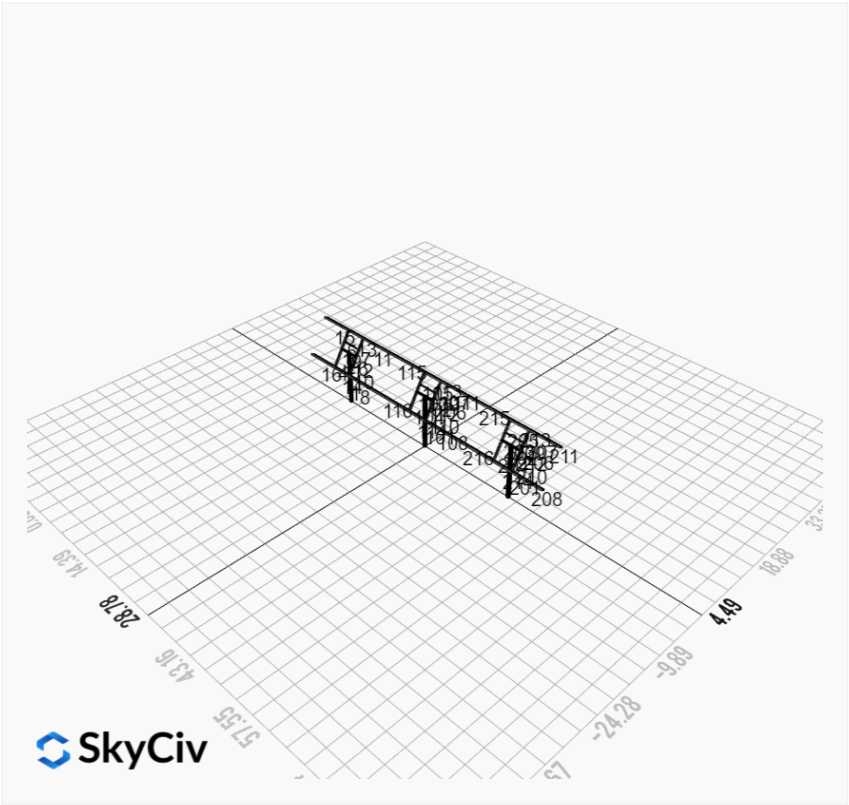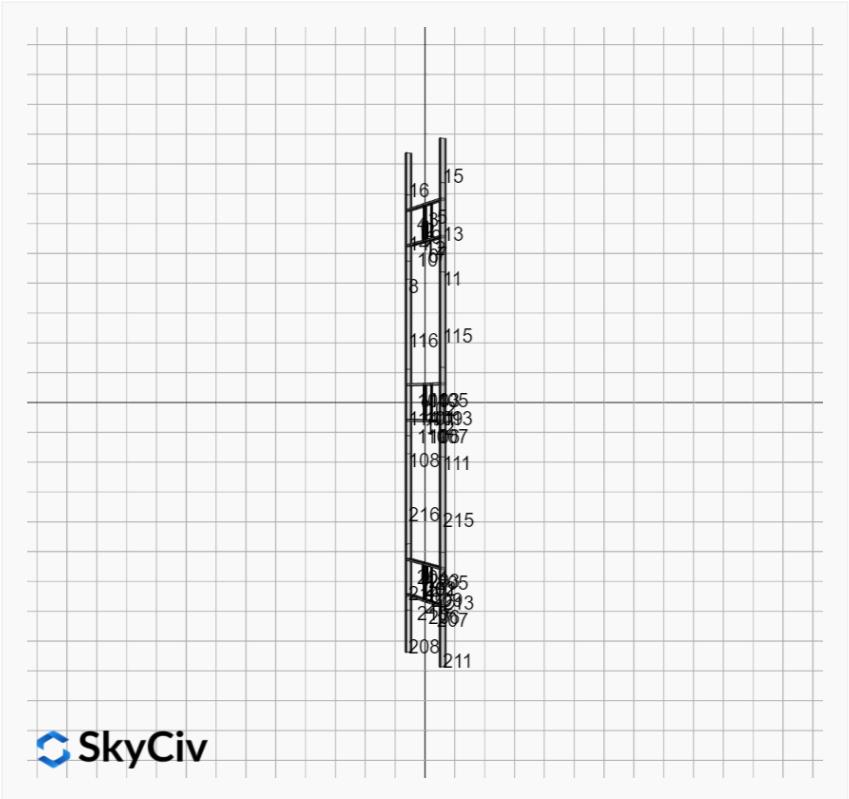


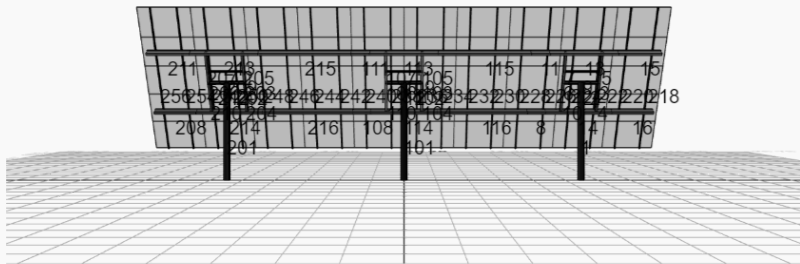


FEM Results (Envelope Worst Case for each member)

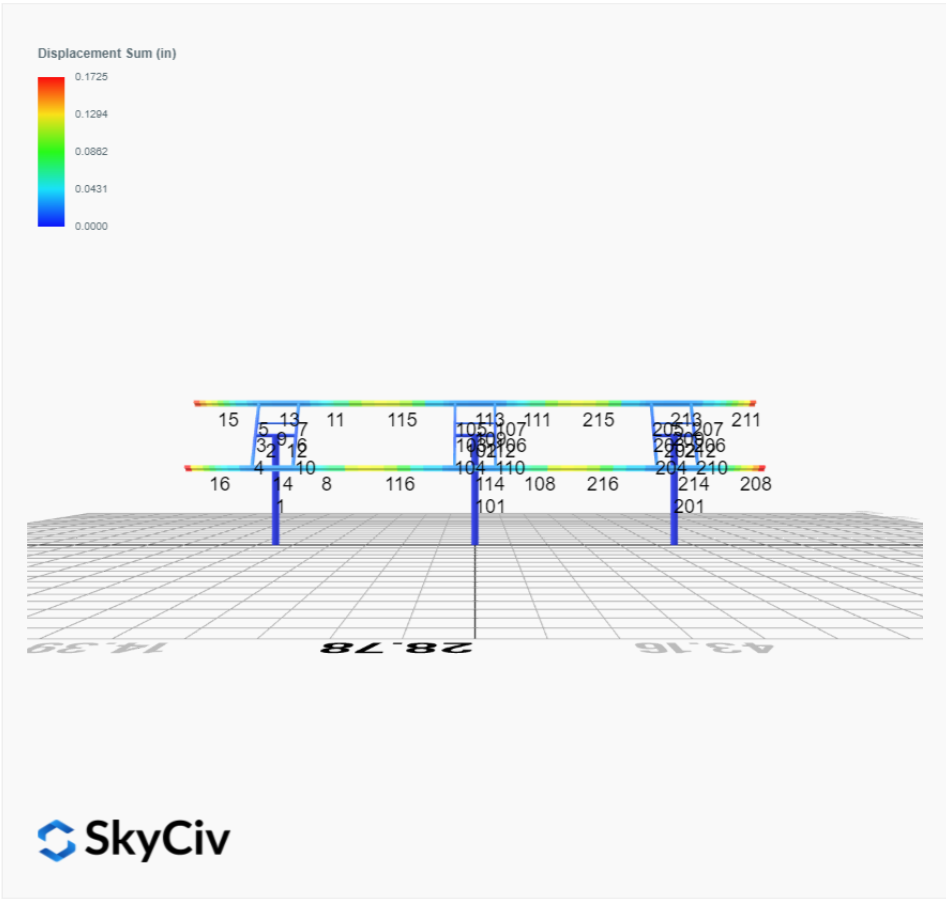


Top Bending Stress Z (ksi)

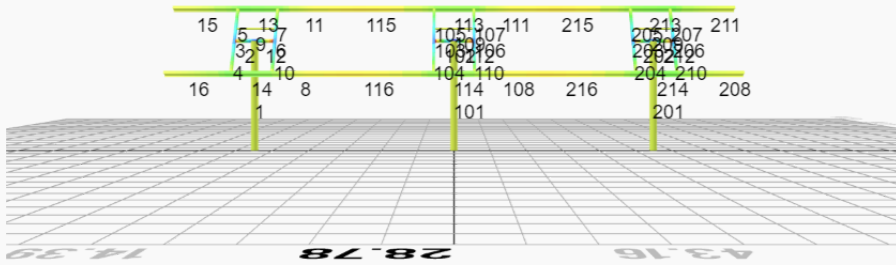

Top Bending Stress Y (ksi)

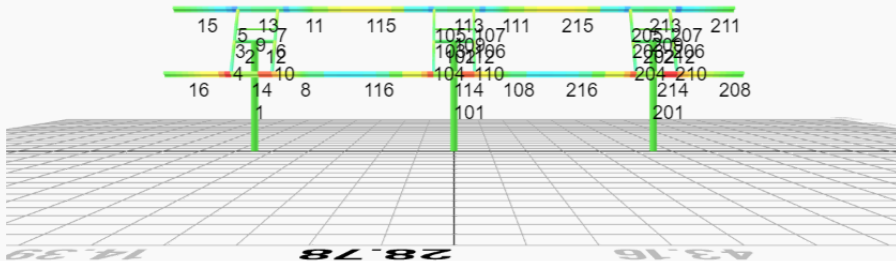


Shear Stress Y (ksi)

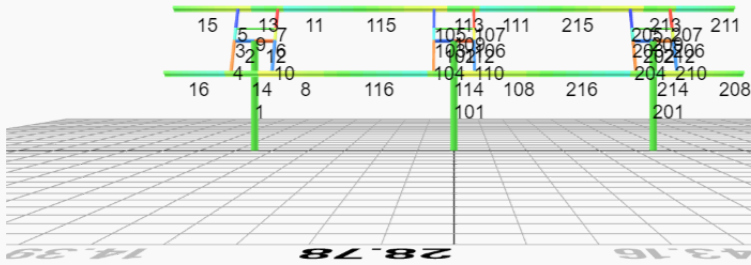

SkyCiv

Axial Stress (ksi)

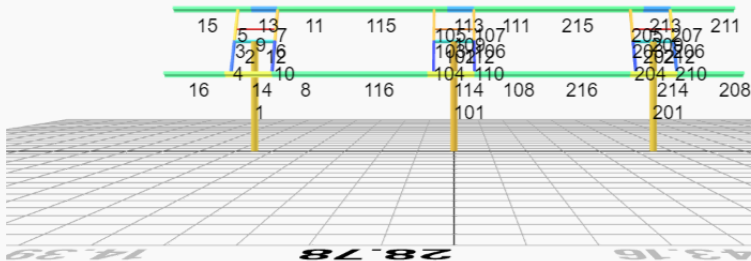

SkyCiv

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 2. D + L	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 3. D + (S or Lr or R)	-0.0076	3.5540	0.0085	0.0312	0.0775	0.0946
ULS: 3. D + (S or Lr or R)	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0070	3.3240	0.0078	0.0287	0.0713	0.0883
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 5b. D + 0.7E	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0070	3.3240	0.0078	0.0287	0.0713	0.0883
ULS: 8. 0.6D + 0.7E	-0.0031	1.5803	0.0034	0.0126	0.0317	0.0416
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.2196	5.0632	0.0063	0.0220	0.0409	46.2898
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.2087	0.2047	0.0055	0.0209	0.0620	-45.4559
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.1678	5.1460	0.0082	0.0294	0.0624	34.7536
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0070	3.3240	0.0078	0.0287	0.0713	0.0883
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.1535	1.5021	0.0077	0.0286	0.0782	-34.0556
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0070	3.3240	0.0078	0.0287	0.0713	0.0883
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.1660	4.4559	0.0061	0.0218	0.0439	34.7347
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.1553	0.8120	0.0056	0.0210	0.0597	-34.0746
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0052	2.6338	0.0057	0.0211	0.0528	0.0694
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.2175	4.0097	0.0040	0.0136	0.0198	46.2621
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0031	1.5803	0.0034	0.0126	0.0317	0.0416
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.2108	-0.8489	0.0032	0.0125	0.0409	-45.4836
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0031	1.5803	0.0034	0.0126	0.0317	0.0416

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.6699
Shear X	-7.0320
Shear Z	0.0118
Moment X	0.0426
Moment Y (Twist)	0.1124
Moment Z	77.7235

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.1460
Shear X	-4.2196
Shear Z	0.0085
Moment X	0.0312
Moment Y (Twist)	0.0782
Moment Z	46.2898

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 2. D + L	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 3. D + (S or Lr or R)	0.0151	3.7547	0.0000	0.0000	0.0000	-0.1341
ULS: 3. D + (S or Lr or R)	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0139	3.5086	0.0000	0.0000	0.0000	-0.1222
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 5b. D + 0.7E	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0139	3.5086	0.0000	0.0000	0.0000	-0.1222
ULS: 8. 0.6D + 0.7E	0.0062	1.6621	0.0000	0.0000	0.0000	-0.0519
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.3629	5.3027	0.0000	0.0000	0.0000	47.7694
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.3846	0.2372	0.0000	0.0000	0.0000	-47.2147
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.2660	5.4080	0.0000	0.0000	0.0000	35.7698
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0139	3.5086	0.0000	0.0000	0.0000	-0.1222
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.2947	1.6089	0.0000	0.0000	0.0000	-35.4683
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0139	3.5086	0.0000	0.0000	0.0000	-0.1222
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.2696	4.6695	0.0000	0.0000	0.0000	35.8054
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.2910	0.8704	0.0000	0.0000	0.0000	-35.4326
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0103	2.7701	0.0000	0.0000	0.0000	-0.0865
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.3670	4.1946	0.0000	0.0000	0.0000	47.8040
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0062	1.6621	0.0000	0.0000	0.0000	-0.0519
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.3805	-0.8709	0.0000	0.0000	0.0000	-47.1800
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0062	1.6621	0.0000	0.0000	0.0000	-0.0519

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	8.0369
Shear X	-7.3043
Shear Z	-0.0000
Moment X	0.0000
Moment Y (Twist)	0.0001
Moment Z	80.2561

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.4080
Shear X	-4.3846
Shear Z	0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	47.8040

Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 2. D + L	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 3. D + (S or Lr or R)	-0.0076	3.5540	-0.0085	-0.0312	-0.0775	0.0946
ULS: 3. D + (S or Lr or R)	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0070	3.3240	-0.0078	-0.0287	-0.0713	0.0883
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 5b. D + 0.7E	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0070	3.3240	-0.0078	-0.0287	-0.0713	0.0883
ULS: 8. 0.6D + 0.7E	-0.0031	1.5803	-0.0034	-0.0126	-0.0317	0.0416
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.2196	5.0632	-0.0063	-0.0220	-0.0409	46.2898
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.2087	0.2047	-0.0055	-0.0209	-0.0620	-45.4559
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.1678	5.1460	-0.0082	-0.0294	-0.0624	34.7536
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0070	3.3240	-0.0078	-0.0287	-0.0713	0.0883
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.1535	1.5021	-0.0077	-0.0286	-0.0782	-34.0556
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0070	3.3240	-0.0078	-0.0287	-0.0713	0.0883

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.1660	4.4559	-0.0061	-0.0218	-0.0439	34.7347
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.1553	0.8120	-0.0056	-0.0210	-0.0597	-34.0746
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0052	2.6338	-0.0057	-0.0211	-0.0528	0.0694
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.2175	4.0097	-0.0040	-0.0136	-0.0198	46.2621
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0031	1.5803	-0.0034	-0.0126	-0.0317	0.0416
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.2108	-0.8489	-0.0032	-0.0125	-0.0409	-45.4836
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0031	1.5803	-0.0034	-0.0126	-0.0317	0.0416

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.6699
Shear X	-7.0320
Shear Z	-0.0118
Moment X	-0.0426
Moment Y (Twist)	0.1123
Moment Z	77.7244

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.1460
Shear X	-4.2196
Shear Z	-0.0085
Moment X	-0.0312
Moment Y (Twist)	0.0782
Moment Z	46.2898

Project Details


Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States
 User Name: sales@mtsolar.us
 Unit System: imperial




Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9


Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65

Section Dimensions								
								

ID	Name	d (in)	t_w (in)					
2	2in Pipe Sch 80	2.38	0.22					
5	4in Pipe Sch 80	4.50	0.34					
10	8in Pipe Sch 80	8.63	0.50					

								
---	--	--	--	--	--	--	--	--

ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)		
16	HSS5x3x3/16	5.00	3.00	0.17	0.17	0.17		

								
---	--	--	--	--	--	--	--	--

ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
19	W8x10	7.89	0.17	3.94	3.94	0.20	0.20	0.30

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I_{yp} (in ⁴)	I_{zp} (in ⁴)	I_w (in ⁶)	S_{yp} (in ³)	S_{zp} (in ³)
2	2in Pipe Sch 80	1.48	1.74	0.87	0.87	0.00	1.02	1.02
5	4in Pipe Sch 80	4.41	19.22	9.61	9.61	0.00	5.85	5.85
10	8in Pipe Sch 80	12.76	211.43	105.72	105.72	0.00	33.05	33.05

16	HSS5x3x3/16	2.58	8.64	3.85	8.53	0.73	2.96	4.21
19	W8x10	2.96	0.04	2.09	30.80	30.90	1.66	8.87

Member Properties									
Member ID	Section ID	K _z L (ft)	K _y L (ft)	L _b (ft)	C _b	L S T	L S C	L D	
1	10	22.84	22.84	10.88	-	300	200	1	
2	5	1.30	1.30	2.00	-	300	200	1	
3	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.19,1.19,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.19,1.18,1.19	300	200	1	
4	16	2.44	2.44	3.75	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68	300	200	1	
5	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.68	300	200	1	
6	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.19,1.18,1.19	300	200	1	
7	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.68	300	200	1	
8	19	1.33	1.33	2.05	2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.11,2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.12	300	200	1	
9	2	2.60	2.60	4.00	-	300	200	1	
10	16	2.44	2.44	3.75	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68	300	200	1	
11	19	1.33	1.33	2.05	2.12,2.12,2.12,2.12,2.12,2.12,2.12,2.13,2.12,2.12,2.12,2.13,2.12,2.12,2.12,2.17,2.12,2.12,2.12,2.15,2.12,2.12,2.12,2.13,2.12	300	200	1	
12	5	1.30	1.30	2.00	-	300	200	1	
13	19	4.88	4.00	7.50	1.10,1.10,1.10,1.10,1.10,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10	300	200	1	
14	19	4.88	4.00	7.50	1.09,1.09	300	200	1	
15	19	9.97	9.97	4.75	2.33,2.33	300	200	1	
16	19	9.97	9.97	4.75	2.33,2.33	300	200	1	
101	10	22.84	22.84	10.88	-	300	200	1	
102	5	1.30	1.30	2.00	-	300	200	1	
103	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.19,1.18,1.19	300	200	1	
104	16	2.44	2.44	3.75	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68	300	200	1	
105	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.68	300	200	1	
106	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.17,1.18,1.18,1.19,1.17,1.19,1.18,1.19,1.18,1.19	300	200	1	
107	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.68	300	200	1	

108	19	1.33	1.33	2.0 5	2.07,2.07,2.07,2.07,2.07,2.07,2.06,2.07,2.05,2.07,2.06,2.07,2.05,2.07,2.06,2.07,1.95,2.07,2.0 6,2.07,2.03,2.07,2.06,2.07,2.05,2.07	3 0 0	2 0 0	1
109	2	2.60	2.60	4.0 0	-	3 0 0	2 0 0	1
110	16	2.44	2.44	3.7 5	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
111	19	1.33	1.33	2.0 5	2.08,2.08,2.08,2.08,2.08,2.08,1.96,2.08,1.84,2.08,1.95,2.08,1.85,2.08,2.04,2.08,1.65,2.08,2.0 0,2.08,1.77,2.08,1.94,2.08,1.87,2.08	3 0 0	2 0 0	1
112	5	1.30	1.30	2.0 0	-	3 0 0	2 0 0	1
113	19	4.88	4.00	7.5 0	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.05,1.04,1.0 4,1.04,1.05,1.04,1.04,1.04,1.04,1.04	3 0 0	2 0 0	1
114	19	4.88	4.00	7.5 0	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.0 4,1.04,1.04,1.04,1.04,1.04,1.04,1.04	3 0 0	2 0 0	1
115	19	6.63	6.63	10. 20	1.15,1.15,1.15,1.15,1.15,1.15,1.13,1.15,1.13,1.15,1.13,1.15,1.13,1.15,1.14,1.15,1.11,1.15,1.1 3,1.15,1.12,1.15,1.13,1.15,1.13,1.15	3 0 0	2 0 0	1
116	19	6.63	6.63	10. 20	1.15,1.15,1.15,1.15,1.15,1.15,1.14,1.15,1.14,1.15,1.14,1.15,1.14,1.15,1.14,1.15,1.13,1.15,1.1 4,1.15,1.14,1.15,1.14,1.15,1.14,1.15	3 0 0	2 0 0	1
201	10	22.8 4	22.8 4	10. 88	-	3 0 0	2 0 0	1
202	5	1.30	1.30	2.0 0	-	3 0 0	2 0 0	1
203	16	0.92	0.92	1.4 2	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.18,1.17,1.18,1.1 8,1.19,1.17,1.19,1.18,1.19,1.18,1.19	3 0 0	2 0 0	1
204	16	2.44	2.44	3.7 5	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
205	16	1.52	1.52	2.3 3	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
206	16	0.92	0.92	1.4 2	1.19,1.18,1.19,1.18,1.19,1.19,1.18,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.18,1.17,1.18,1.1 8,1.19,1.17,1.19,1.18,1.19,1.18,1.19	3 0 0	2 0 0	1
207	16	1.52	1.52	2.3 3	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
208	19	9.97	9.97	4.7 5	2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.3 3,2.33,2.33,2.33,2.33,2.33,2.33,2.33	3 0 0	2 0 0	1
209	2	2.60	2.60	4.0 0	-	3 0 0	2 0 0	1
210	16	2.44	2.44	3.7 5	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
211	19	9.97	9.97	4.7 5	2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.3 3,2.33,2.33,2.33,2.33,2.33,2.33,2.33	3 0 0	2 0 0	1
212	5	1.30	1.30	2.0 0	-	3 0 0	2 0 0	1
213	19	4.88	4.00	7.5 0	1.10,1.10,1.10,1.10,1.10,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.09,1.10,1.0 9,1.10,1.09,1.10,1.09,1.10,1.09,1.10	3 0 0	2 0 0	1
214	19	4.88	4.00	7.5 0	1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.0 9,1.09,1.09,1.09,1.09,1.09,1.09,1.09	3 0 0	2 0 0	1
215	19	6.63	6.63	10. 20	1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.18,1.17,1.17,1.17,1.18,1.17,1.17,1.17,1.18,1.17,1.1 7,1.17,1.18,1.17,1.17,1.17,1.17,1.18,1.17	3 0 0	2 0 0	1
216	19	6.63	6.63	10. 20	1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.1 7,1.17,1.17,1.17,1.17,1.17,1.17,1.17	3 0 0	2 0 0	1

Member Design Capacity

Member ID	$\Phi_t P_n$ (kip)	$\Phi_c P_n$ (kip)	$\Phi_b M_{zn}$ (k-ft)	$\Phi_b M_{yn}$ (k-ft)	$\Phi_v V_{yn}$ (kip)	$\Phi_v V_{zn}$ (kip)
1	574.32	295.95	123.94	123.94	172.30	172.30
2	198.33	196.72	21.95	21.95	59.50	59.50
3	116.10	115.41	15.79	11.10	42.08	23.28
4	116.10	111.33	15.79	11.10	42.08	23.28
5	116.10	114.23	15.79	11.10	42.08	23.28
6	116.10	115.41	15.79	11.10	42.08	23.28
7	116.10	114.23	15.79	11.10	42.08	23.28
8	133.20	126.01	32.87	6.12	40.24	43.62
9	66.48	58.89	3.82	3.82	19.94	19.94
10	116.10	111.33	15.79	11.10	42.08	23.28
11	133.20	126.01	32.87	6.12	40.24	43.62
12	198.33	196.72	21.95	21.95	59.50	59.50
13	133.20	104.94	24.94	6.12	40.24	43.62
14	133.20	104.94	24.96	6.12	40.24	43.62
15	133.20	32.95	32.87	6.12	40.24	43.62
16	133.20	32.95	32.87	6.12	40.24	43.62
101	574.32	295.95	123.94	123.94	172.30	172.30
102	198.33	196.72	21.95	21.95	59.50	59.50
103	116.10	115.41	15.79	11.10	42.08	23.28
104	116.10	111.33	15.79	11.10	42.08	23.28
105	116.10	114.23	15.79	11.10	42.08	23.28
106	116.10	115.41	15.79	11.10	42.08	23.28
107	116.10	114.23	15.79	11.10	42.08	23.28
108	133.20	126.01	32.87	6.12	40.24	43.62
109	66.48	58.89	3.82	3.82	19.94	19.94
110	116.10	111.33	15.79	11.10	42.08	23.28
111	133.20	126.01	32.87	6.12	40.24	43.62
112	198.33	196.72	21.95	21.95	59.50	59.50
113	133.20	104.94	23.78	6.12	40.24	43.62
114	133.20	104.94	23.79	6.12	40.24	43.62
115	133.20	69.16	17.22	6.12	40.24	43.62
116	133.20	69.16	17.53	6.12	40.24	43.62
201	574.32	295.95	123.94	123.94	172.30	172.30
202	198.33	196.72	21.95	21.95	59.50	59.50
203	116.10	115.41	15.79	11.10	42.08	23.28
204	116.10	111.33	15.79	11.10	42.08	23.28
205	116.10	114.23	15.79	11.10	42.08	23.28
206	116.10	115.41	15.79	11.10	42.08	23.28
207	116.10	114.23	15.79	11.10	42.08	23.28
208	133.20	32.95	32.87	6.12	40.24	43.62
209	66.48	58.89	3.82	3.82	19.94	19.94
210	116.10	111.33	15.79	11.10	42.08	23.28
211	133.20	32.95	32.87	6.12	40.24	43.62
212	198.33	196.72	21.95	21.95	59.50	59.50
213	133.20	104.94	24.93	6.12	40.24	43.62
214	133.20	104.94	24.96	6.12	40.24	43.62
215	133.20	69.16	18.10	6.12	40.24	43.62
216	133.20	69.16	18.12	6.12	40.24	43.62


Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.026	0.627	0.001	0.041	0.000	0.640	#13	0.476	Not Required	Pass
2	0.003	0.257	0.306	0.059	0.059	0.564	#13	0.035	Not Required	Pass
3	0.007	0.571	0.040	0.057	0.004	0.605	#13	0.045	Not Required	Pass
4	0.007	0.569	0.126	0.057	0.026	0.631	#13	0.080	Not Required	Pass
5	0.007	0.355	0.130	0.057	0.032	0.378	#13	0.074	Not Required	Pass
6	0.008	0.574	0.046	0.057	0.005	0.611	#13	0.045	Not Required	Pass
7	0.008	0.357	0.131	0.057	0.034	0.383	#13	0.074	Not Required	Pass
8	0.000	0.043	0.112	0.040	0.013	0.135	#21	0.095	Not Required	Pass
9	0.011	0.030	0.058	0.001	0.000	0.091	#13	0.204	Not Required	Pass
10	0.008	0.568	0.126	0.057	0.027	0.633	#13	0.080	Not Required	Pass
11	0.000	0.043	0.114	0.040	0.013	0.138	#21	0.095	Not Required	Pass
12	0.003	0.260	0.303	0.060	0.060	0.564	#13	0.035	Not Required	Pass
13	0.006	0.229	0.310	0.052	0.016	0.445	#21	0.286	Not Required	Pass
14	0.006	0.232	0.310	0.051	0.016	0.445	#21	0.190	Not Required	Pass
15	0.000	0.088	0.165	0.030	0.010	0.221	#21	Not Required	Not Required	Pass
16	0.000	0.088	0.165	0.030	0.010	0.221	#21	Not Required	Not Required	Pass
101	0.027	0.648	0.000	0.042	0.000	0.661	#13	0.476	Not Required	Pass
102	0.002	0.269	0.311	0.063	0.061	0.581	#13	0.035	Not Required	Pass
103	0.008	0.594	0.050	0.059	0.008	0.634	#13	0.045	Not Required	Pass
104	0.008	0.595	0.123	0.060	0.026	0.660	#13	0.080	Not Required	Pass
105	0.008	0.369	0.127	0.059	0.032	0.393	#13	0.074	Not Required	Pass
106	0.008	0.594	0.050	0.059	0.008	0.634	#13	0.045	Not Required	Pass
107	0.008	0.369	0.127	0.059	0.032	0.393	#13	0.074	Not Required	Pass
108	0.000	0.054	0.112	0.038	0.013	0.128	#21	0.095	Not Required	Pass
109	0.009	0.027	0.056	0.001	0.000	0.086	#13	0.204	Not Required	Pass
110	0.008	0.595	0.123	0.060	0.026	0.660	#13	0.080	Not Required	Pass
111	0.000	0.058	0.114	0.037	0.013	0.128	#21	0.095	Not Required	Pass
112	0.002	0.269	0.311	0.063	0.061	0.581	#13	0.035	Not Required	Pass
113	0.005	0.173	0.293	0.049	0.016	0.393	#21	0.286	Not Required	Pass
114	0.006	0.183	0.292	0.049	0.016	0.395	#21	0.286	Not Required	Pass
115	0.000	0.211	0.162	0.037	0.013	0.333	#13	0.473	Not Required	Pass
116	0.000	0.209	0.164	0.038	0.013	0.331	#13	0.473	Not Required	Pass
201	0.026	0.627	0.001	0.041	0.000	0.640	#13	0.476	Not Required	Pass
202	0.003	0.260	0.303	0.060	0.060	0.564	#13	0.035	Not Required	Pass
203	0.008	0.574	0.046	0.057	0.005	0.611	#13	0.045	Not Required	Pass
204	0.008	0.568	0.126	0.057	0.027	0.633	#13	0.080	Not Required	Pass
205	0.008	0.357	0.131	0.057	0.034	0.383	#13	0.074	Not Required	Pass
206	0.007	0.571	0.040	0.057	0.004	0.605	#13	0.045	Not Required	Pass
207	0.007	0.355	0.130	0.057	0.032	0.378	#13	0.074	Not Required	Pass
208	0.000	0.088	0.165	0.030	0.010	0.221	#21	Not Required	Not Required	Pass
209	0.011	0.030	0.058	0.001	0.000	0.091	#13	0.204	Not Required	Pass
210	0.007	0.569	0.126	0.057	0.026	0.631	#13	0.080	Not Required	Pass
211	0.000	0.088	0.165	0.030	0.010	0.221	#21	Not Required	Not Required	Pass
212	0.003	0.257	0.306	0.059	0.059	0.564	#13	0.035	Not Required	Pass
213	0.006	0.229	0.310	0.052	0.016	0.445	#21	0.190	Not Required	Pass
214	0.006	0.232	0.310	0.051	0.016	0.445	#21	0.286	Not Required	Pass
215	0.000	0.209	0.162	0.040	0.013	0.327	#13	0.473	Not Required	Pass
216	0.000	0.206	0.164	0.040	0.013	0.326	#13	0.473	Not Required	Pass

Definitions

Φ_t Safety factor for tensile

Φ_c	Safety factor for compression
Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z, M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

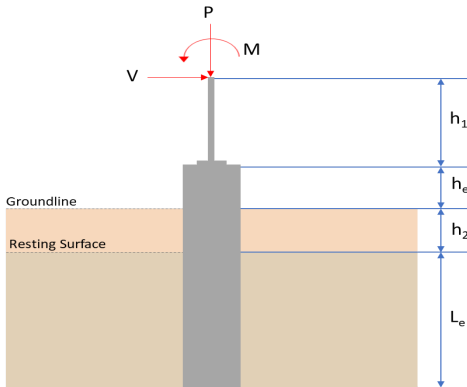REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: rectangular b = 48 in - Pile width D = 48 in - Pile depth L = 7.5 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>5.146</td><td>7.670</td></tr><tr><td>Vx (kip)</td><td>-4.220</td><td>-7.032</td></tr><tr><td>Vz (kip)</td><td>0.008</td><td>0.012</td></tr><tr><td>Mx (kipft)</td><td>0.031</td><td>0.043</td></tr><tr><td>Mz (kipft)</td><td>46.290</td><td>77.723</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	5.146	7.670	Vx (kip)	-4.220	-7.032	Vz (kip)	0.008	0.012	Mx (kipft)	0.031	0.043	Mz (kipft)	46.290	77.723	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	5.146	7.670																										
Vx (kip)	-4.220	-7.032																										
Vz (kip)	0.008	0.012																										
Mx (kipft)	0.031	0.043																										
Mz (kipft)	46.290	77.723																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ Considering x-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.22 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.67197 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

	$M_o = \frac{(46.29 \text{ kipft}) + ((-4.22 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 7.371 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 6.8061 \text{ ft}$ - Required depth in x-direction, Considering z-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(0.008 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = 0.0012739 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.031 \text{ kipft}) + ((0.008 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.0049363 \text{ kipft/ft}$ Required depth of embedment in earth: $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,z} = 0.76843 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(6.8061 \text{ ft}), (0.76843 \text{ ft})]$ $L_{e,req} = 6.806 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_c - h_2$ $L_e = (7.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 7.5 \text{ ft}$ Ratio - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(6.806 \text{ ft})}{(7.5 \text{ ft})}$ $\text{Ratio} = 0.90747$	Status: PASS Ratio: 0.910
	End-bearing Capacity (ASD) A - Pile cross-section area $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_o}{A}$ $q = \frac{(5.146 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.32163 \text{ kips/ft}^2$	


	$q = 0.32162 \text{ kip/ft}^2$	
	Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.32162 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.16081$	Status: PASS Ratio: 0.160
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(7.5 \text{ ft})}{(48 \text{ in})}$ $L/D = 1.875$ Since $L/D \leq 10$, Pile is short. Considering x-direction: $H_o = -0.67197 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 7.371 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (7.371 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (7.371 \text{ kipft/ft})) + (4 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))}$ $a = 5.1957 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (7.371 \text{ kipft/ft})) + (3 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^3 \times [(3 \times (7.371 \text{ kipft/ft})) + (2 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$ $p = 0.22863 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (7.371 \text{ kipft/ft})) + ((-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$ $s = 1.0349 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.1957 \text{ ft})}{2}$ $p_a = 0.38968 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.22863 \text{ kip/ft}^2)}{(0.38968 \text{ kip/ft}^2)}$ $Ratio = 0.58673$ p_s - Allowable lateral soil pressure at depth L_e,	Status: PASS Ratio: 0.590

	$p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$ $p_s = 1.125 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{s}{p_s}$ $Ratio = \frac{(1.0349 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$ $Ratio = 0.91992$	Status: PASS Ratio: 0.920
	Considering z-direction: $H_o = 0.0012739 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.0049363 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.0049363 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0049363 \text{ kipft/ft})) + (4 \times (0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))}$ $a = 5.3521 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.0049363 \text{ kipft/ft})) + (3 \times (0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^3 \times [(3 \times (0.0049363 \text{ kipft/ft})) + (2 \times (0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$ $p = 0.00092118 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.0049363 \text{ kipft/ft})) + ((0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$ $s = 0.0020722 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.3521 \text{ ft})}{2}$ $p_a = 0.40141 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.00092118 \text{ kip/ft}^2)}{(0.40141 \text{ kip/ft}^2)}$ $Ratio = 0.0022949$ p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$ $p_s = 1.125 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{s}{p_s}$	Status: PASS Ratio: 0.000

$$Ratio = \frac{(0.0020722 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$Ratio = 0.0018419$$

Status: **PASS**
Ratio: **0.000**

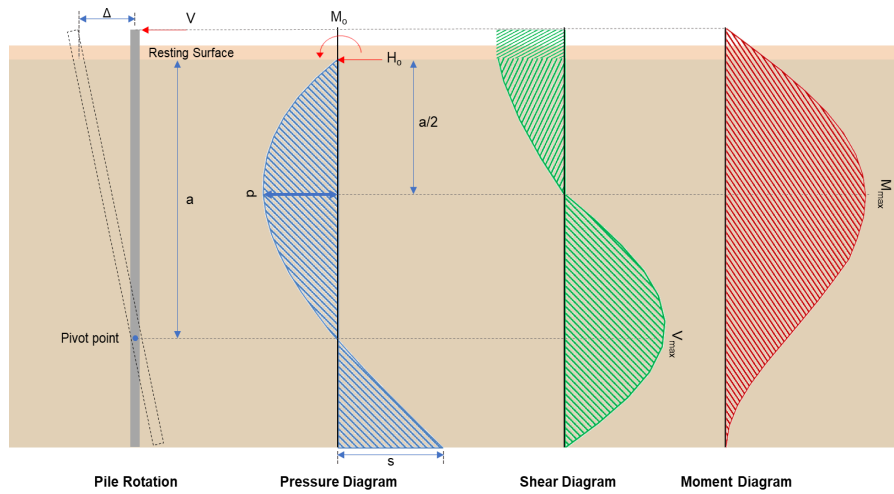

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.032 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.1197 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(77.723 \text{ kipft}) + ((-7.032 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 12.376 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(12.376 \text{ kipft/ft})}{(-1.1197 \text{ kip/ft})}$$

$$E = 11.053 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (12.376 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-1.1197 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (12.376 \text{ kipft/ft})) + (4 \times (-1.1197 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1947 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1197 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1947 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1947 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 14.633 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.1197 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(11.053 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.1947 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1947 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1947 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 51.831 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.012 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0019108 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.043 \text{ kipft}) + ((0.012 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0068471 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0068471 \text{ kipft/ft})}{(0.0019108 \text{ kip/ft})}$$

$$E = 3.5833 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0068471 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (0.0019108 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0068471 \text{ kipft/ft})) + (4 \times (0.0019108 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.3641 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0019108 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.3641 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.3641 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.011558 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$


$$M_{max} = ((0.0019108 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(3.5833 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.3641 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.3641 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.3641 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right]$$

		$M_{max} = 0.038232 \text{ kipft}$	
		Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.8$ - Alpha factor for axial strength, $A_g = 2304 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required}$ $A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[\frac{\frac{(7.67 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$ $A_{st,required} = -84.341 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-84.341 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$ $A_{min} = 4.1472 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 14$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 4.2951 \text{ in}^2$ Ratio - Capacity $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$ $\text{Ratio} = 0.96556$ 25.2.3 s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq \text{No. } 10\phi$: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum spacing of ties, $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ Summary: Main reinforcement: 14 - #5 (0.625 in)	Status: PASS Ratio: 0.970

	Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.80 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.80 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2)) \right]$ $\phi P_N = 2675.2 \text{ kip}$ Ratio - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(7.67 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0028671$	Status: PASS Ratio: 0.000
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 48 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 7.67 \text{ kip} \rightarrow 7670 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(7670 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.51 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = MIN [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = MIN [(296.21 \text{ kip}), (119.51 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.51 \text{ kip}$	

22.5.1.2 22.5.8.5.3 22.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{tes}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{ysk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.51 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.76 \text{ kip}$ Considering x-direction: $V_{max} = 14.633 \text{ kip}$ - Maximum shear force in the x-direction, $Ratio$ - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(14.633 \text{ kip})}{(110.76 \text{ kip})}$ $Ratio = 0.13211$ Considering z-direction: $V_{max} = 0.011558 \text{ kip}$ - Maximum shear force in the z-direction, $Ratio$ - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.011558 \text{ kip})}{(110.76 \text{ kip})}$ $Ratio = 0.00010435$	Status: PASS Ratio: 0.130 Status: PASS Ratio: 0.000
	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{b D^3}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

14.5.2.1b	$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ Considering x-direction: $M_{max} = 51.831 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(51.831 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.20766$	Status: PASS Ratio: 0.210
	Considering z-direction: $M_{max} = 0.038232 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.038232 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.00015317$	Status: PASS Ratio: 0.000

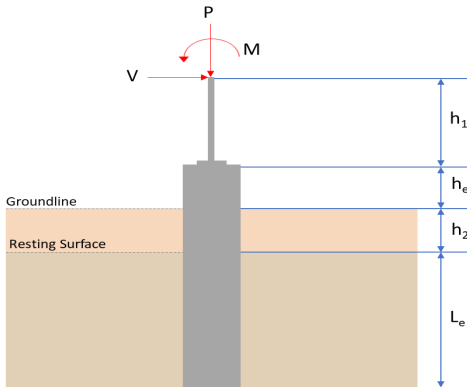REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: rectangular b = 48 in - Pile width D = 48 in - Pile depth L = 7.5 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>5.408</td><td>8.037</td></tr><tr><td>Vx (kip)</td><td>-4.385</td><td>-7.304</td></tr><tr><td>Vz (kip)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mx (kipft)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mz (kipft)</td><td>47.804</td><td>80.256</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	5.408	8.037	Vx (kip)	-4.385	-7.304	Vz (kip)	0.000	0.000	Mx (kipft)	0.000	0.000	Mz (kipft)	47.804	80.256	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	5.408	8.037																										
Vx (kip)	-4.385	-7.304																										
Vz (kip)	0.000	0.000																										
Mx (kipft)	0.000	0.000																										
Mz (kipft)	47.804	80.256																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ Considering x-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.385 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.69825 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

	$M_o = \frac{(47.804 \text{ kipft}) + ((-4.385 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 7.6121 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 6.8531 \text{ ft}$ - Required depth in x-direction, Considering z-direction: $L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(6.8531 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 6.853 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (7.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 7.5 \text{ ft}$ <i>Ratio</i> - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(6.853 \text{ ft})}{(7.5 \text{ ft})}$ $\text{Ratio} = 0.91373$	Status: PASS Ratio: 0.910
	End-bearing Capacity (ASD) A - Pile cross-section area $A = b \ D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_v}{A}$ $q = \frac{(5.408 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.338 \text{ kip/ft}^2$ Check bearing capacity ratio: <i>Ratio</i> - Capacity $\text{Ratio} = \frac{q}{q_a}$ $\text{Ratio} = \frac{(0.338 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $\text{Ratio} = 0.169$	Status: PASS Ratio: 0.170
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(7.5 \text{ ft})}{(48 \text{ in})}$	

$$L/D = 1.875$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.69825$ kip/ft - Lateral force per length of pile,

$M_o = 7.6121$ kipft/ft - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (7.6121 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.69825 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (7.6121 \text{ kipft/ft})) + (4 \times (-0.69825 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1965 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (7.6121 \text{ kipft/ft})) + (3 \times (-0.69825 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^3 [(3 \times (7.6121 \text{ kipft/ft})) + (2 \times (-0.69825 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$$

$$p = 0.23426 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (7.6121 \text{ kipft/ft})) + ((-0.69825 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$$

$$s = 1.0653 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.1965 \text{ ft})}{2}$$

$$p_a = 0.38974 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.23426 \text{ kip/ft}^2)}{(0.38974 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.60107$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$$

$$p_s = 1.125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$


$$\text{Ratio} = \frac{(1.0653 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.94695$$

Status: **PASS**
Ratio: **0.600**

Status: **PASS**
Ratio: **0.950**



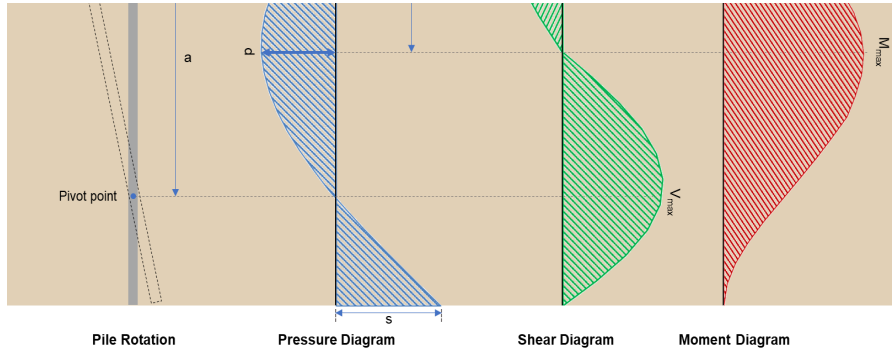

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.304 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.1631 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(80.256 \text{ kipft}) + ((-7.304 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 12.78 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(12.78 \text{ kipft/ft})}{(-1.1631 \text{ kip/ft})}$$

$$E = 10.988 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (12.78 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-1.1631 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (12.78 \text{ kipft/ft})) + (4 \times (-1.1631 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1955 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1631 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (10.988 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1955 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (10.988 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1955 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 15.128 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$


$$M_{max} = ((-1.1631 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(10.988 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.1955 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (10.988 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1955 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (10.988 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1955 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right]$$

		$M_{max} = 53.569 \text{ kipft}$	
		Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.8$ - Alpha factor for axial strength, $A_g = 2304 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required}$ $A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[\frac{\frac{(8.037 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$ $A_{st,required} = -84.329 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-84.329 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$ $A_{min} = 4.1472 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 14$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 4.2951 \text{ in}^2$ Ratio - Capacity $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$ $\text{Ratio} = 0.96556$ 25.2.3 s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq \text{No. } 10\phi$: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum spacing of ties, $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ Summary: Main reinforcement: 14 - #5 (0.625 in)	Status: PASS Ratio: 0.970

	Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.80 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.80 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2)) \right]$ $\phi P_N = 2675.2 \text{ kip}$ Ratio - Capacity $\text{Ratio} = \frac{P}{\phi P_N}$ $\text{Ratio} = \frac{(8.037 \text{ kip})}{(2675.2 \text{ kip})}$ $\text{Ratio} = 0.0030043$	Status: PASS Ratio: 0.000
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 48 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 8.037 \text{ kip} \rightarrow 8037 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(8037 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.56 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = \text{Min} [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = \text{Min} [(296.21 \text{ kip}), (119.56 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.56 \text{ kip}$	

22.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ 22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ 22.5.1.1 ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.56 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.79 \text{ kip}$ Considering x-direction: $V_{max} = 15.128 \text{ kip}$ - Maximum shear force in the x-direction, $Ratio$ - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(15.128 \text{ kip})}{(110.79 \text{ kip})}$ $Ratio = 0.13654$	Status: PASS Ratio: 0.140
14.5.2.1b	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = 0.85 f'_t S_m$	

	$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ Considering x-direction: $M_{max} = 53.569 \text{ kipft}$ - Maximum moment in the x-direction, <i>Ratio</i> - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(53.569 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.21462$	
		Status: PASS Ratio: 0.210

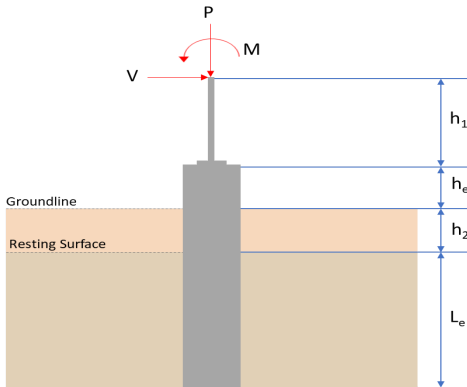REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: rectangular b = 48 in - Pile width D = 48 in - Pile depth L = 7.5 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>5.146</td><td>7.670</td></tr><tr><td>Vx (kip)</td><td>-4.220</td><td>-7.032</td></tr><tr><td>Vz (kip)</td><td>-0.008</td><td>-0.012</td></tr><tr><td>Mx (kipft)</td><td>-0.031</td><td>-0.043</td></tr><tr><td>Mz (kipft)</td><td>46.290</td><td>77.724</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	5.146	7.670	Vx (kip)	-4.220	-7.032	Vz (kip)	-0.008	-0.012	Mx (kipft)	-0.031	-0.043	Mz (kipft)	46.290	77.724	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	5.146	7.670																										
Vx (kip)	-4.220	-7.032																										
Vz (kip)	-0.008	-0.012																										
Mx (kipft)	-0.031	-0.043																										
Mz (kipft)	46.290	77.724																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ Considering x-direction: Ho - Lateral force per length of pile, $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.22 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.67197 \text{ kip/ft}$ Mo - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

	$M_o = \frac{(46.29 \text{ kipft}) + ((-4.22 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 7.371 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 6.8061 \text{ ft}$ - Required depth in x-direction, Considering z-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(-0.008 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.0012739 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.031 \text{ kipft}) + ((-0.008 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.0049363 \text{ kipft/ft}$ Required depth of embedment in earth: $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,z} = 0.69926 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(6.8061 \text{ ft}), (0.69926 \text{ ft})]$ $L_{e,req} = 6.806 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_c - h_2$ $L_e = (7.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 7.5 \text{ ft}$ Ratio - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(6.806 \text{ ft})}{(7.5 \text{ ft})}$ $\text{Ratio} = 0.90747$	Status: PASS Ratio: 0.910
	End-bearing Capacity (ASD) A - Pile cross-section area $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_o}{A}$ $q = \frac{(5.146 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.32163 \text{ kips/ft}^2$	


	$q = 0.32162 \text{ kip/ft}^2$	
	Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.32162 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.16081$	Status: PASS Ratio: 0.160
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(7.5 \text{ ft})}{(48 \text{ in})}$ $L/D = 1.875$ Since $L/D \leq 10$, Pile is short. Considering x-direction: $H_o = -0.67197 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 7.371 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (7.371 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (7.371 \text{ kipft/ft})) + (4 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))}$ $a = 5.1957 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (7.371 \text{ kipft/ft})) + (3 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^3 \times [(3 \times (7.371 \text{ kipft/ft})) + (2 \times (-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$ $p = 0.22863 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (7.371 \text{ kipft/ft})) + ((-0.67197 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$ $s = 1.0349 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.1957 \text{ ft})}{2}$ $p_a = 0.38968 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.22863 \text{ kip/ft}^2)}{(0.38968 \text{ kip/ft}^2)}$ $Ratio = 0.58673$ p_s - Allowable lateral soil pressure at depth L_e,	Status: PASS Ratio: 0.590

	$p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$ $p_s = 1.125 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(1.0349 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.91992$	Status: PASS Ratio: 0.920
	Considering z-direction: $H_o = -0.0012739 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.0049363 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.0049363 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0049363 \text{ kipft/ft})) + (4 \times (-0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))}$ $a = 5.3521 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.0049363 \text{ kipft/ft})) + (3 \times (-0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^3 \times [(3 \times (0.0049363 \text{ kipft/ft})) + (2 \times (-0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$ $p = -0.0002466 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.0049363 \text{ kipft/ft})) + ((-0.0012739 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$ $s = 0.00003397 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.3521 \text{ ft})}{2}$ $p_a = 0.40141 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(-0.0002466 \text{ kip/ft}^2)}{(0.40141 \text{ kip/ft}^2)}$ $\text{Ratio} = -0.00061433$ p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$ $p_s = 1.125 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $\text{Ratio} = \frac{s}{p_s}$	Status: PASS Ratio: 0.000

$$Ratio = \frac{(0.00003397 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$Ratio = 0.000030196$$

Status: **PASS**
Ratio: **0.000**

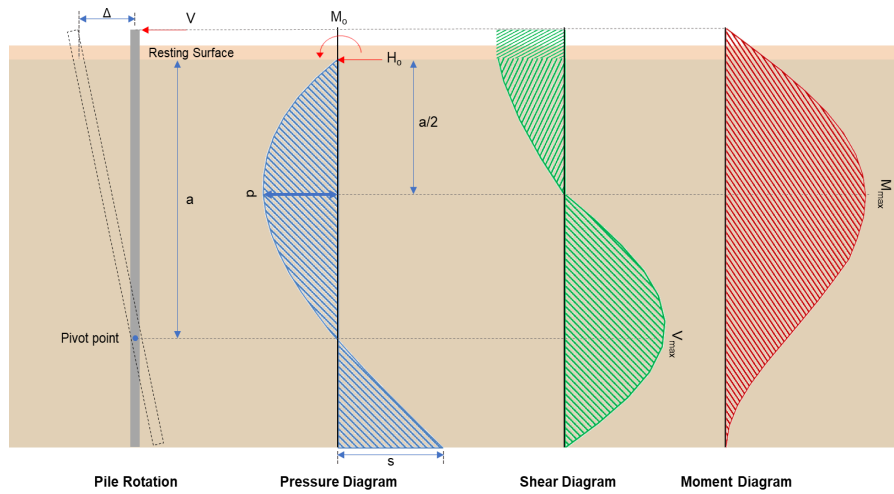

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.032 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.1197 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(77.724 \text{ kipft}) + ((-7.032 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 12.376 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(12.376 \text{ kipft/ft})}{(-1.1197 \text{ kip/ft})}$$

$$E = 11.053 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (12.376 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-1.1197 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (12.376 \text{ kipft/ft})) + (4 \times (-1.1197 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1947 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1197 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1947 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1947 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 14.633 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.1197 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(11.053 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.1947 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1947 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (11.053 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1947 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 51.831 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.012 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0019108 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.043 \text{ kipft}) + ((-0.012 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0068471 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0068471 \text{ kipft/ft})}{(-0.0019108 \text{ kip/ft})}$$

$$E = 3.5833 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0068471 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.0019108 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0068471 \text{ kipft/ft})) + (4 \times (-0.0019108 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.3641 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0019108 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.3641 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.3641 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.011558 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.0019108 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(3.5833 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.3641 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.3641 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.5833 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.3641 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right]$$

		$M_{max} = 0.038232 \text{ kipft}$	
		Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.8$ - Alpha factor for axial strength, $A_g = 2304 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required}$ $A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[\frac{\frac{(7.67 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$ $A_{st,required} = -84.341 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-84.341 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$ $A_{min} = 4.1472 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 14$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 4.2951 \text{ in}^2$ Ratio - Capacity $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$ $\text{Ratio} = 0.96556$ 25.2.3 s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq \text{No. } 10\phi$: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum spacing of ties, $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ Summary: Main reinforcement: 14 - #5 (0.625 in)	Status: PASS Ratio: 0.970

	Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.80 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.80 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2)) \right]$ $\phi P_N = 2675.2 \text{ kip}$ Ratio - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(7.67 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0028671$	Status: PASS Ratio: 0.000
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 48 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 7.67 \text{ kip} \rightarrow 7670 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(7670 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.51 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = MIN [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = MIN [(296.21 \text{ kip}), (119.51 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.51 \text{ kip}$	

22.5.1.2 22.5.8.5.3 22.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{tes}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{ysk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.51 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.76 \text{ kip}$ Considering x-direction: $V_{max} = 14.633 \text{ kip}$ - Maximum shear force in the x-direction, <i>Ratio</i> - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(14.633 \text{ kip})}{(110.76 \text{ kip})}$ $Ratio = 0.13212$ Considering z-direction: $V_{max} = 0.011558 \text{ kip}$ - Maximum shear force in the z-direction, <i>Ratio</i> - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.011558 \text{ kip})}{(110.76 \text{ kip})}$ $Ratio = 0.00010435$	Status: PASS Ratio: 0.130 Status: PASS Ratio: 0.000
	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{b D^3}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

14.5.2.1b	$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ Considering x-direction: $M_{max} = 51.831 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(51.831 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.20766$	Status: PASS Ratio: 0.210
	Considering z-direction: $M_{max} = 0.038232 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.038232 \text{ kipft})}{(249.6 \text{ kipft})}$ $\text{Ratio} = 0.00015317$	Status: PASS Ratio: 0.000