

Your Project Calculations

Project Name: MTSOLAR_IACG31EF1A-JB-RevA

S3D Model Link:

https://platform.skyciv.com/structural?preload_name=MTSOLAR_IACG31EF1A-JB-RevA&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/8_2023

Public Model Link:

https://platform.skyciv.com/structural-viewer?project_id=UTF5a3vUx8dQQKXIM3mfWJYgjrMESXatVBoltUTiKgo3GzdMOfEbQvshlgSOE4Yc



Array Specification

Product:	Beam
Unique ID:	1P-0-8TOP-XD-84-L-5Hx3W-BHI6
Duty Classification:	XD
Module Width:	45.00 in
Module Length:	90.00in
Number of Rows:	5
Number of Columns:	3
Total Number of Modules:	15
Desired Tilt Angle:	46
Front Edge Clearance:	8
Total Array Height at Tilt:	21.56 ft
Total Frame Length:	21.50 ft
Frame Weight:	1212 lbs
Array Dimensions N/S:	18.96 ft
Array Dimensions E/W:	22.75 ft
Rail Length:	227.50 in
Rail Spacing:	3.75 ft
Rail Check:	Not Checked

Support Specifications


Pole Size:	8in Pipe Sch 40
Pole Length above Grade:	14.82 ft
Number of Poles:	1
Pole Spacing:	0

Foundation Specifications

Foundation Type:	Square
Foundation Dimensions:	48 x 48 in
Foundation Depth (below grade):	Pile 1: 7.50 ft
Foundation Volume:	4.444 y ³
Foundation Result:	PASSED
Mount Twist:	0.000015 kip

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	345 Maple Ave, Branchburg, NJ 08853, USA
Wind Speed:	105 mph
Snow Load:	30 psf
Design Uplift Pressure:	0.015296 ksf
Design Downforce Pressure:	-0.015296 ksf
Design Snow Pressure:	0.007917 ksf

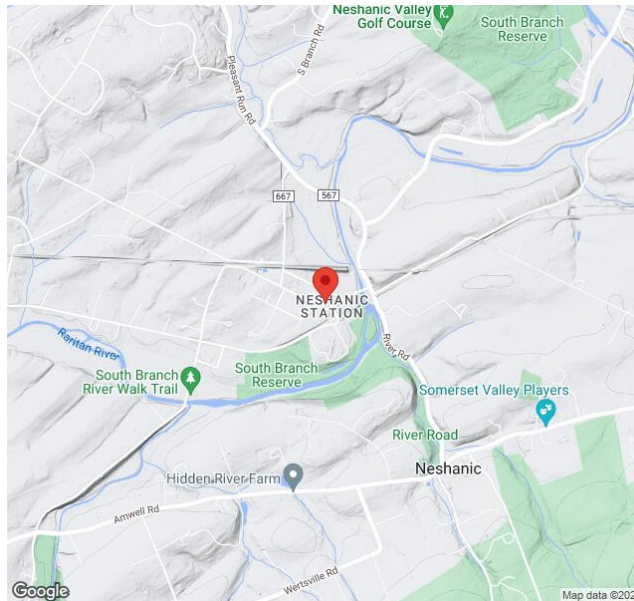

Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



AutoDesigner Input


```
{
  "wind_speed_override": null,
  "snow_load_override": null,
  "direct_snow_load": false,
  "product_type": "Beam",
  "project_id": "MTSOLAR_IACG31EF1A-JB-RevA",
  "site_address": "345 Maple Ave, Branchburg, NJ 08853, USA",
  "module_width": 45,
  "module_length": 90,
  "number_rows": 5,
  "number_columns": 3,
  "pole_mount_section": "4_40",
  "core_pipe_width": 65,
  "core_pipe_section": "2_40",
  "adjuster_section": "2_40",
  "core_beam_height": 65,
  "core_beam_section": "HSS3x2x1/8",
  "main_pipe_section": "2_12GA",
  "pole_spacing": 15,
  "tilt_angle": 46,
  "ground_clearance": 8,
  "risk_category": "I",
  "exposure_category": "B",
  "frame_duty_override": "XD",
  "pole_override": "8_40",
  "soil_type": "sand",
  "customer_foundation_override": "48_Square",
  "foundation_type": "Square",
  "foundation_size": 48,
  "check_rails": false
}
```

Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent


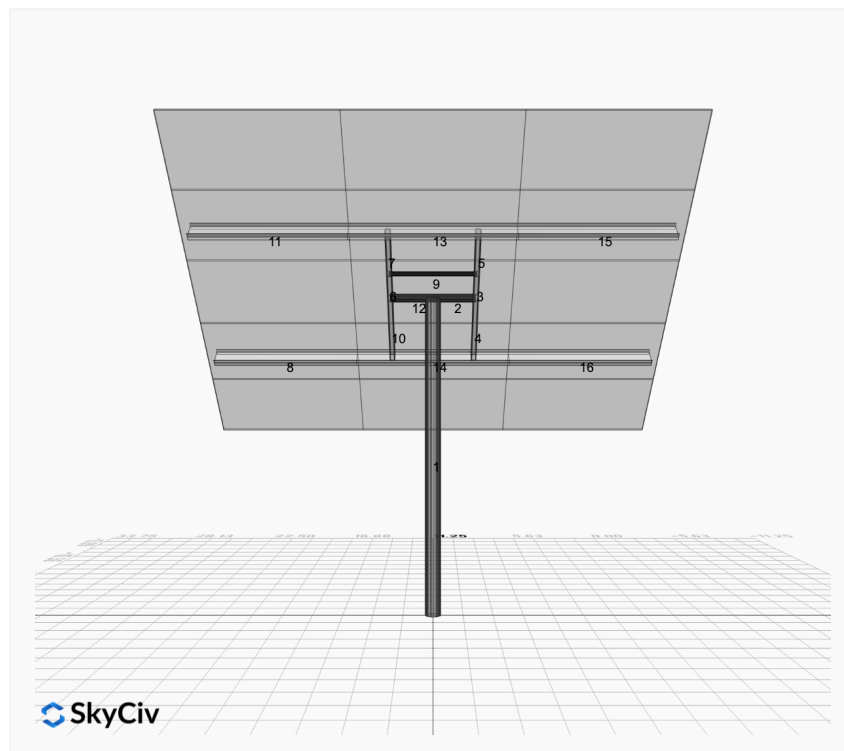


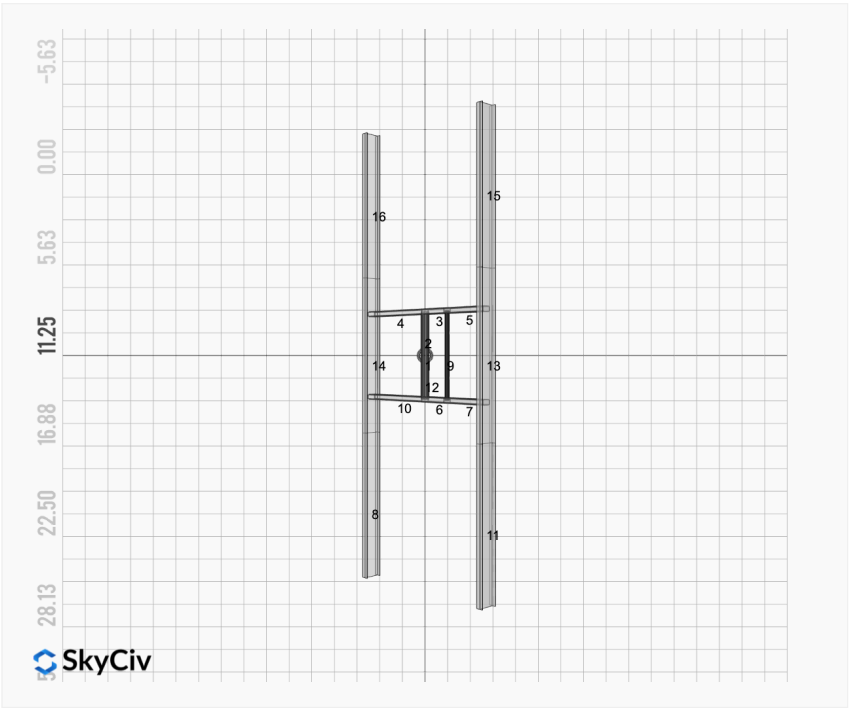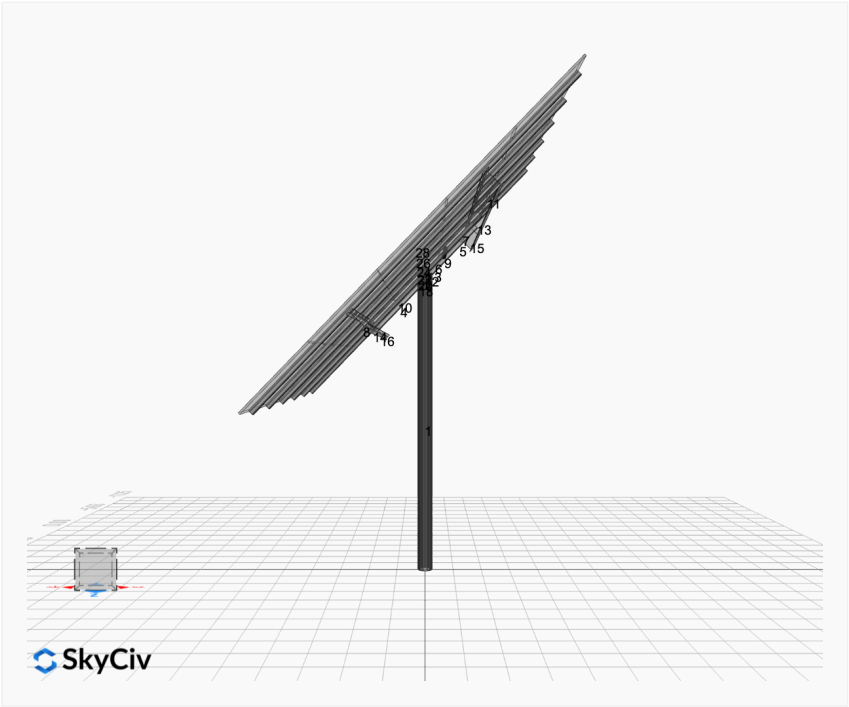


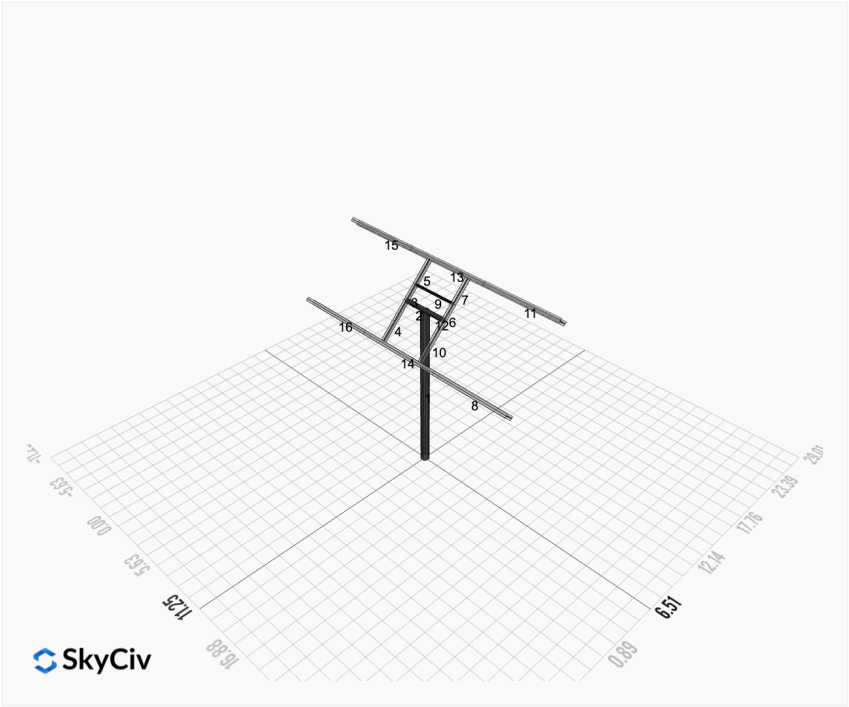

FEM Results (Envelope Worst Case for each member)

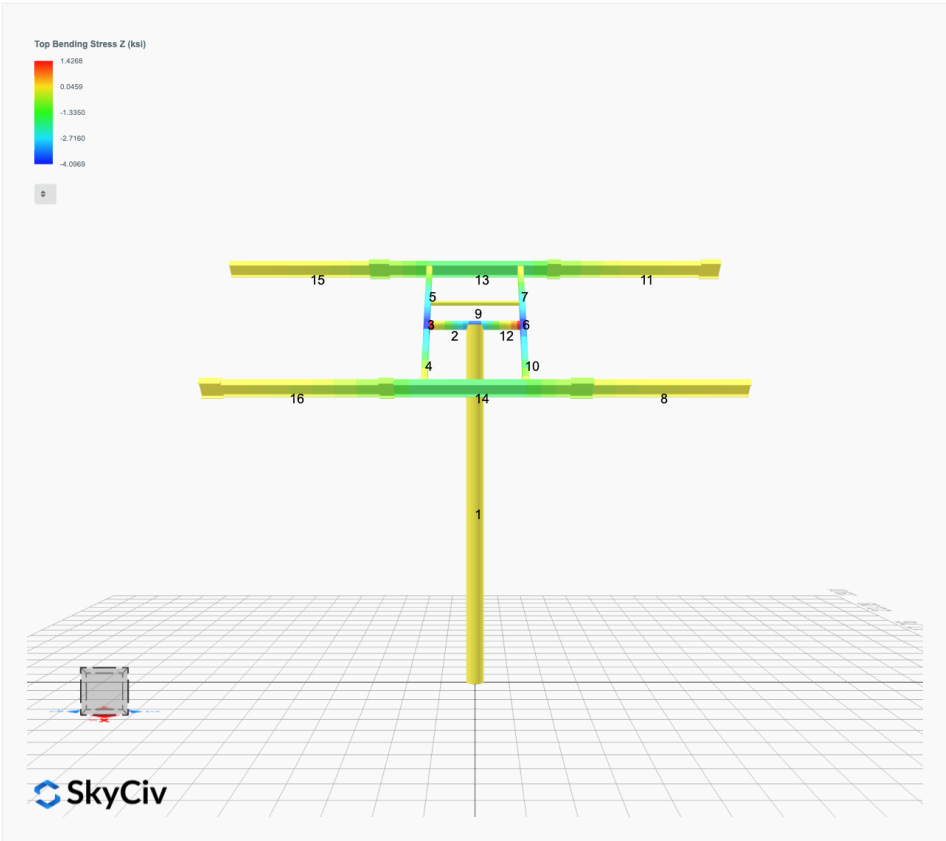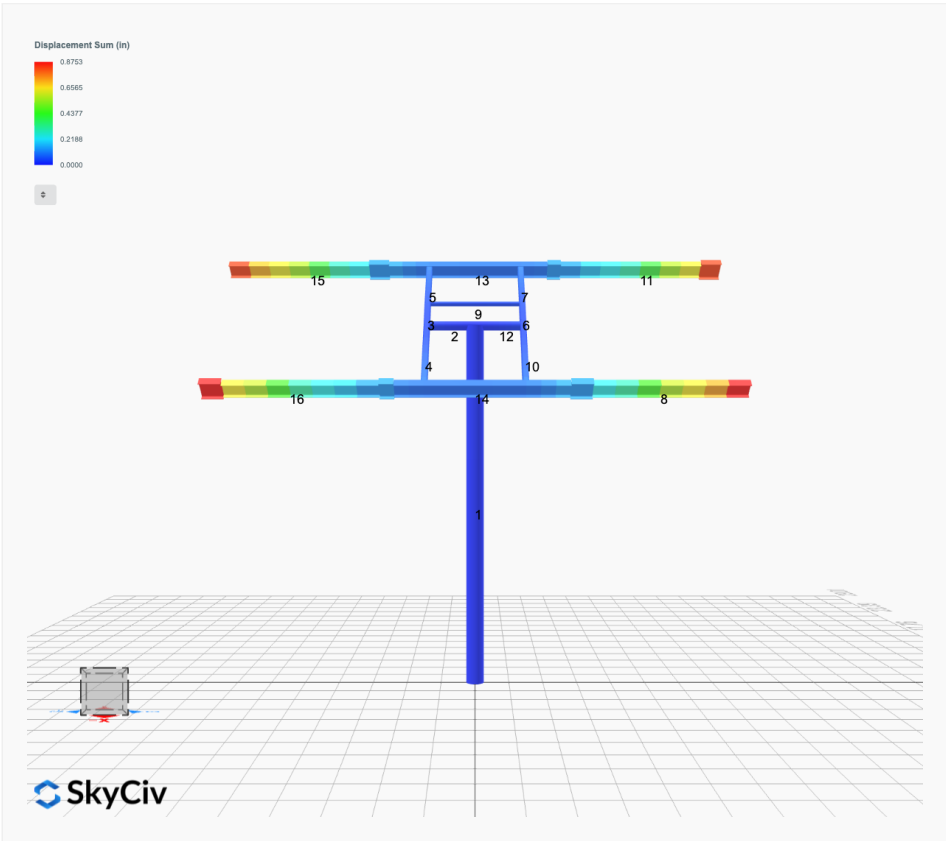

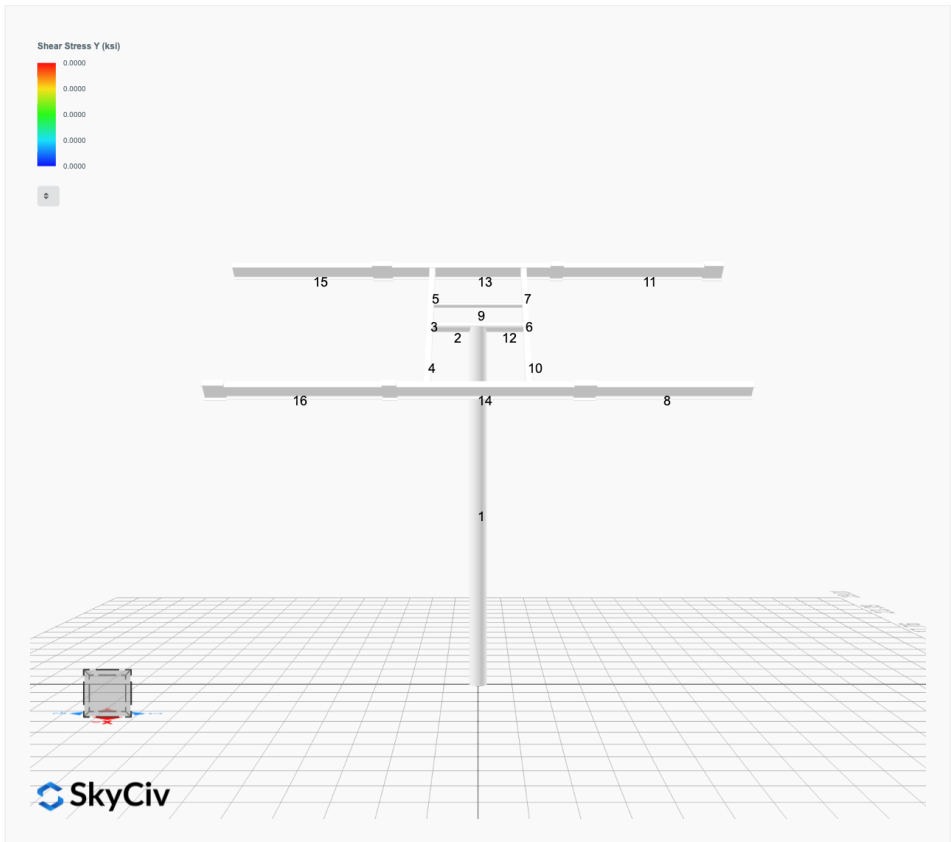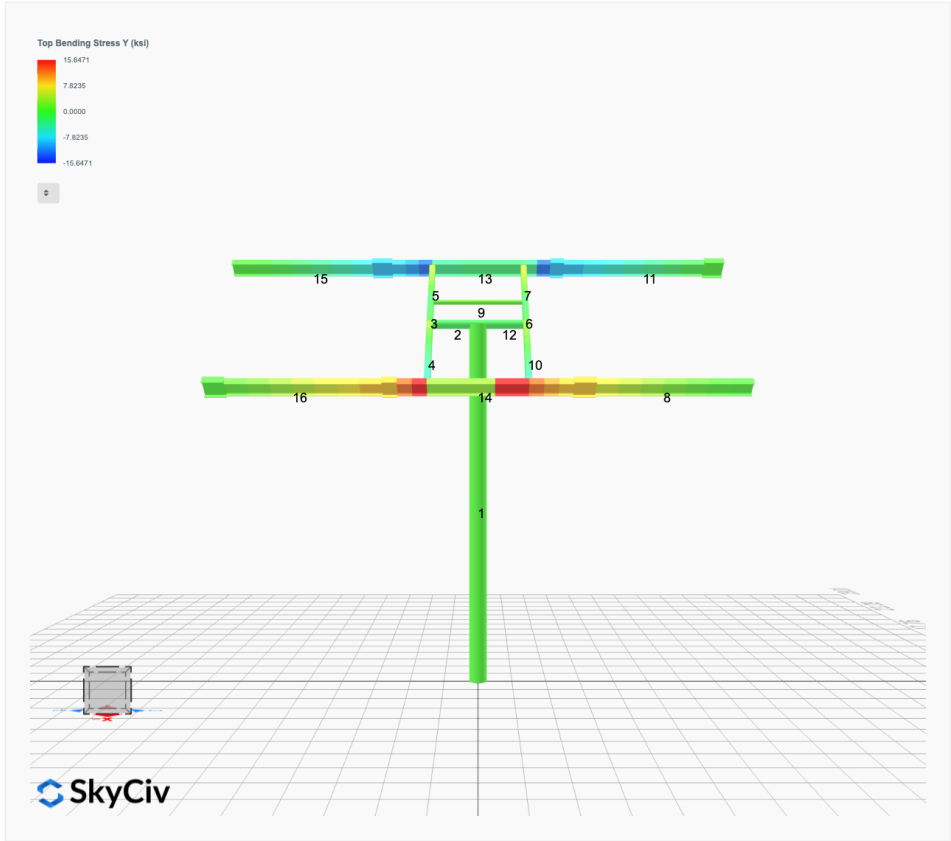

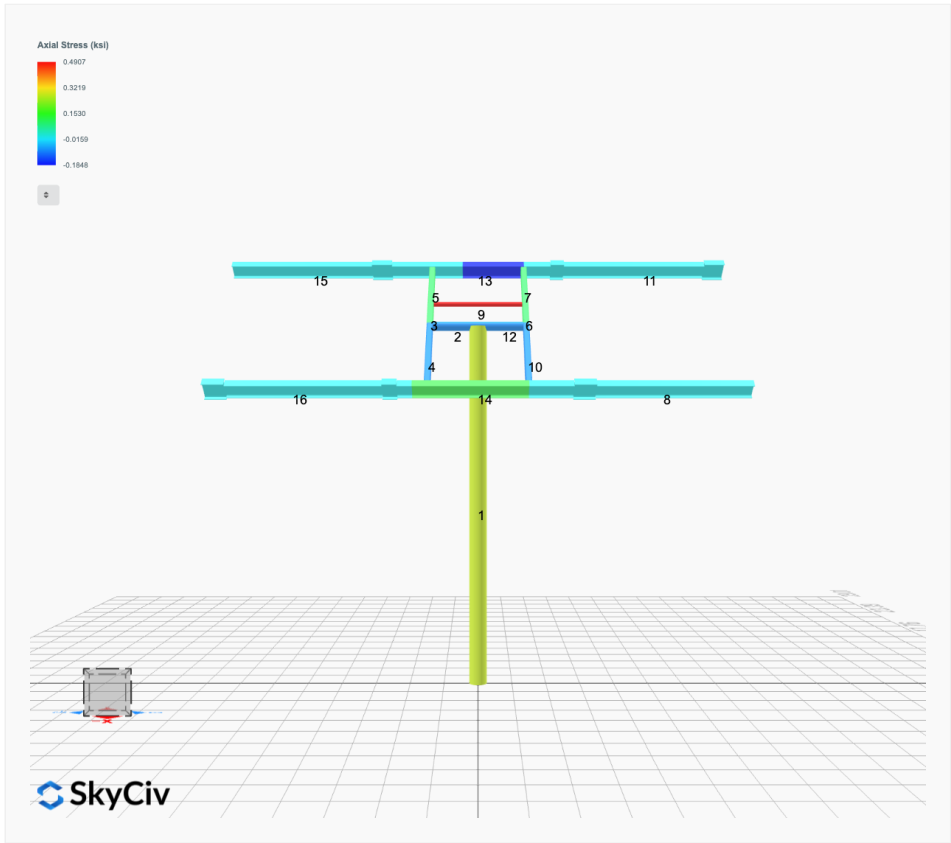

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 2. D + L	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 3. D + (S or Lr or R)	0.0000	5.3591	0.0000	0.0000	-0.0000	0.0319
ULS: 3. D + (S or Lr or R)	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	4.7987	-0.0000	0.0000	-0.0000	0.0306
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 5b. D + 0.7E	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	4.7987	-0.0000	0.0000	-0.0000	0.0306
ULS: 8. 0.6D + 0.7E	0.0000	1.8704	-0.0000	0.0000	-0.0000	0.0160
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.8474	5.8671	-0.0000	0.0000	-0.0000	43.2193
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.8474	0.3676	-0.0000	0.0000	-0.0000	-41.2252
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.1356	6.8610	-0.0000	0.0000	-0.0000	32.4251
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	4.7987	-0.0000	0.0000	-0.0000	0.0306
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.1356	2.7364	-0.0000	0.0000	-0.0000	-30.9084
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	4.7987	-0.0000	0.0000	-0.0000	0.0306
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.1356	5.1797	-0.0000	0.0000	-0.0000	32.4212
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.1356	1.0551	-0.0000	0.0000	-0.0000	-30.9123
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	3.1174	-0.0000	0.0000	-0.0000	0.0267
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.8474	4.6202	-0.0000	0.0000	-0.0000	43.2086
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0000	1.8704	-0.0000	0.0000	-0.0000	0.0160
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.8474	-0.8793	-0.0000	0.0000	-0.0000	-41.2359
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0000	1.8704	-0.0000	0.0000	-0.0000	0.0160

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	9.6191
Shear X	-4.7457
Shear Z	0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	73.9492

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.8610
Shear X	-2.8474
Shear Z	-0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	43.2193

Project Details


Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States
 User Name: sales@mtsolar.us
 Unit System: imperial




Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9


Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65

Section Dimensions							
							

ID	Name	d (in)	t_w (in)				
3	2in Pipe Sch 120	2.38	0.25				
6	4in Pipe Sch 120	4.50	0.44				
9	8in Pipe Sch 40	8.63	0.32				

							
---	--	--	--	--	--	--	--

ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)	
17	HSS5x3x1/4	5.00	3.00	0.23	0.23	0.23	

							
---	--	--	--	--	--	--	--

ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
20	W10x12	9.87	0.19	3.96	3.96	0.21	0.21	0.30

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I_{yp} (in ⁴)	I_{zp} (in ⁴)	I_w (in ⁶)	S_{yp} (in ³)	S_{zp} (in ³)
3	2in Pipe Sch 120	1.67	1.91	0.96	0.96	0.00	1.13	1.13
6	4in Pipe Sch 120	5.58	23.29	11.64	11.64	0.00	7.24	7.24
9	8in Pipe Sch 40	8.40	144.98	72.49	72.49	0.00	22.21	22.21

11	159.30	15.83	46.90	6.46	56.26	44.91
12	251.01	248.88	27.16	27.16	75.30	75.30
13	159.30	116.35	31.17	6.46	56.26	44.91
14	159.30	116.35	31.17	6.46	56.26	44.91
15	159.30	15.83	46.90	6.46	56.26	44.91
16	159.30	15.83	46.90	6.46	56.26	44.91


Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.082	0.888	0.000	0.042	0.000	0.928	#13	0.636	Not Required	Pass
2	0.007	0.267	0.184	0.060	0.032	0.454	#13	0.036	Not Required	Pass
3	0.008	0.447	0.063	0.044	0.015	0.462	#13	0.046	Not Required	Pass
4	0.008	0.445	0.236	0.044	0.048	0.529	#13	0.082	Not Required	Pass
5	0.008	0.277	0.245	0.044	0.065	0.320	#13	0.076	Not Required	Pass
6	0.008	0.447	0.063	0.044	0.015	0.462	#13	0.046	Not Required	Pass
7	0.008	0.277	0.245	0.044	0.065	0.320	#13	0.076	Not Required	Pass
8	0.000	0.114	0.412	0.027	0.017	0.507	#21	Not Required	Not Required	Pass
9	0.035	0.033	0.045	0.001	0.000	0.088	#13	0.206	Not Required	Pass
10	0.008	0.444	0.236	0.044	0.048	0.529	#13	0.082	Not Required	Pass
11	0.000	0.114	0.412	0.027	0.017	0.507	#21	Not Required	Not Required	Pass
12	0.007	0.267	0.184	0.060	0.032	0.454	#13	0.036	Not Required	Pass
13	0.012	0.278	0.644	0.034	0.021	0.867	#21	0.204	Not Required	Pass
14	0.012	0.281	0.644	0.034	0.021	0.867	#21	0.204	Not Required	Pass
15	0.000	0.114	0.412	0.027	0.017	0.507	#21	Not Required	Not Required	Pass
16	0.000	0.114	0.412	0.027	0.017	0.507	#21	Not Required	Not Required	Pass

Definitions

Φ _t	Safety factor for tensile
Φ _c	Safety factor for compression
Φ _b	Safety factor for flexure
Φ _v	Safety factor for shear
E	Modulus of elasticity
F _y	Specified minimum yield stress
F _u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I _{yp}	Moment of inertia about the Y axes
I _{zp}	Moment of inertia about the Z axes
I _w	Warping constant
S _{yp}	Plastic section modulus about the Y axis
S _{zp}	Plastic section modulus about the Z axis
KL	Effective length
C _b	Buckling modification factor (from all load combinations)
L _b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P _n	Nominal axial strength (tension/compression)
M _n	Nominal flexural strength (about Z/Y axis)
V _n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M _z	Design ratio in case of bending about Z axis
M _y	Design ratio in case of bending about Y axis
V _y	Design ratio in case of shear along Y axis
V _z	Design ratio in case of shear along Z axis
(P,M _z ,M _y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

no capacity is not provided

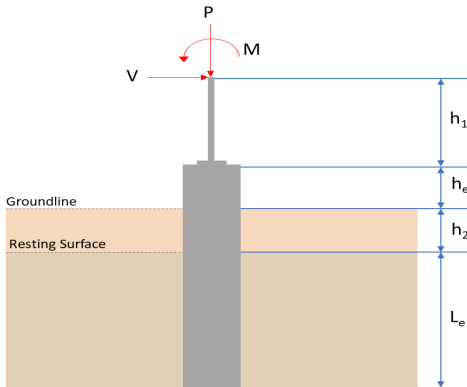REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: rectangular b = 48 in - Pile width D = 48 in - Pile depth L = 7.5 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>6.861</td><td>9.619</td></tr><tr><td>Vx (kip)</td><td>-2.847</td><td>-4.746</td></tr><tr><td>Vz (kip)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mx (kipft)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mz (kipft)</td><td>43.219</td><td>73.949</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	6.861	9.619	Vx (kip)	-2.847	-4.746	Vz (kip)	0.000	0.000	Mx (kipft)	0.000	0.000	Mz (kipft)	43.219	73.949	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	6.861	9.619																										
Vx (kip)	-2.847	-4.746																										
Vz (kip)	0.000	0.000																										
Mx (kipft)	0.000	0.000																										
Mz (kipft)	43.219	73.949																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0\text{ ft}) + (0\text{ ft}) + (0\text{ ft})$ $H = 0\text{ ft}$ Considering x-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_x}{1.57\text{ }D}$ $H_o = \frac{(-2.847\text{ kip})}{1.57 \times (48\text{ in})}$ $H_o = -0.45334\text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_z + (V_x\text{ }H)}{1.57\text{ }D}$																											

	$M_o = \frac{(43.219 \text{ kipft}) + ((-2.847 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 6.882 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 7.0973 \text{ ft}$ - Required depth in x-direction, Considering z-direction: $L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(7.0973 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 7.097 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (7.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 7.5 \text{ ft}$ <i>Ratio</i> - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(7.097 \text{ ft})}{(7.5 \text{ ft})}$ $\text{Ratio} = 0.94627$	Status: PASS Ratio: 0.950
	End-bearing Capacity (ASD) A - Pile cross-section area $A = b \ D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_v}{A}$ $q = \frac{(6.861 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.42881 \text{ kip/ft}^2$ Check bearing capacity ratio: <i>Ratio</i> - Capacity $\text{Ratio} = \frac{q}{q_a}$ $\text{Ratio} = \frac{(0.42881 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $\text{Ratio} = 0.21441$	Status: PASS Ratio: 0.210
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(7.5 \text{ ft})}{(48 \text{ in})}$	

$$L/D = 1.875$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.45334$ kip/ft - Lateral force per length of pile,

$M_o = 6.882$ kipft/ft - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.882 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.45334 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (6.882 \text{ kipft/ft})) + (4 \times (-0.45334 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1549 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (6.882 \text{ kipft/ft})) + (3 \times (-0.45334 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^3 \times [(3 \times (6.882 \text{ kipft/ft})) + (2 \times (-0.45334 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$$

$$p = 0.28914 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (6.882 \text{ kipft/ft})) + ((-0.45334 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$$

$$s = 1.1055 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.1549 \text{ ft})}{2}$$

$$p_a = 0.38661 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.28914 \text{ kip/ft}^2)}{(0.38661 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.74787$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$$

$$p_s = 1.125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$


$$\text{Ratio} = \frac{(1.1055 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.98265$$

Status: **PASS**
Ratio: **0.750**

Status: **PASS**
Ratio: **0.980**



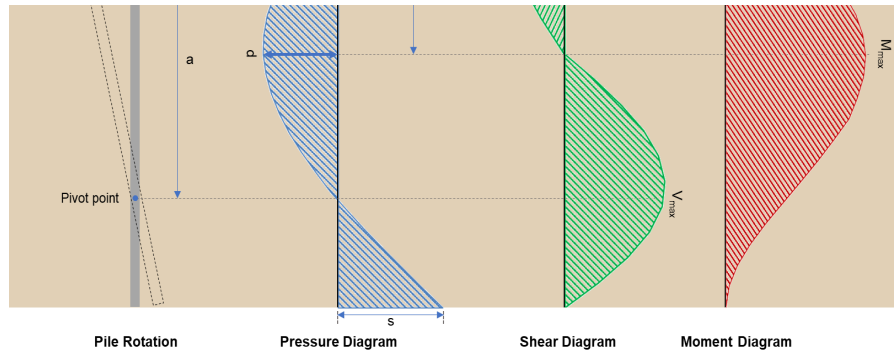

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-4.746 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.75573 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_e + (V_e H)}{1.57 D}$$

$$M_o = \frac{(73.949 \text{ kipft}) + ((-4.746 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 11.775 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(11.775 \text{ kipft/ft})}{(-0.75573 \text{ kip/ft})}$$

$$E = 15.581 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (11.775 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.75573 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (11.775 \text{ kipft/ft})) + (4 \times (-0.75573 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1518 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.75573 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (15.581 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1518 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (15.581 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1518 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 13.109 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.75573 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(15.581 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.1518 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (15.581 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1518 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (15.581 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1518 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right]$$

		$M_{max} = 47.096 \text{ kipft}$	
		</	

	Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.80 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.80 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2)) \right]$ $\phi P_N = 2675.2 \text{ kip}$ Ratio - Capacity $\text{Ratio} = \frac{P}{\phi P_N}$ $\text{Ratio} = \frac{(9.619 \text{ kip})}{(2675.2 \text{ kip})}$ $\text{Ratio} = 0.0035956$	Status: PASS Ratio: 0.000
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 48 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,max} = 296.21 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 9.619 \text{ kip} \rightarrow 9619 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(9619 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.77 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = \text{Min} [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = \text{Min} [(296.21 \text{ kip}), (119.77 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.77 \text{ kip}$	

22.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ 22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ 22.5.1.1 ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.77 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.93 \text{ kip}$ Considering x-direction: $V_{max} = 13.109 \text{ kip}$ - Maximum shear force in the x-direction, $Ratio$ - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(13.109 \text{ kip})}{(110.93 \text{ kip})}$ $Ratio = 0.11818$	Status: PASS Ratio: 0.120
14.5.2.1b	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = 0.85 f'_c S_m$	

