

# Project Details



**Project Name:** test 5

**Date:** Mon Nov 04 2024

**Location:** 28385 Post Office Rd, Mass City, MI 49948, USA


**Number of Modules:** 35

**Unique ID:** 3P-17-10TOP-SD-45-L-5Hx7W-BCLB

**Number of Poles:** 3

**Dealer:** \_\_\_\_\_

**Date Sold:** \_\_\_\_\_

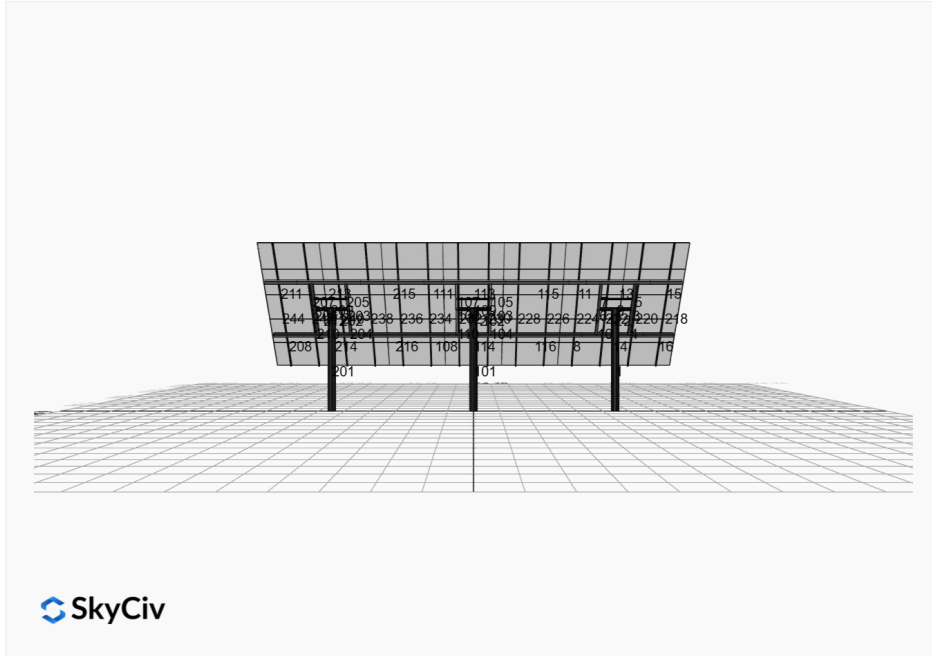

<b>Array Dimensions N/S</b>	17.42 ft
<b>Array Dimensions E/W</b>	49.53 ft
<b>Winter Tilt Angle</b>	55.8
<b>Front Edge Clearance</b>	5 ft


## MT Solar Bill of Materials (3P-17-10TOP-SD-45-L-5Hx7W-BCLB)

Part	Short Description	BOM Qty
MTS-PC-10	10IN Pole Cap Assembly	3
MTS-HF-SD	H-Frame Assembly-SD	3
MTS-SD-Wing-45	45IN SD Wing	4
MTS-SD-Splice-57	57IN SD Splice	8
MTS-CLAMP-ANGLE-4PK	Angle Clamp	7

## Rail Bill of Materials

Part	Qty
Rails (207in)	14
Rail Attachment	56
Module Mid Clamp	56
Module End Clamp	28
Ground Lug	7

## Site Details:

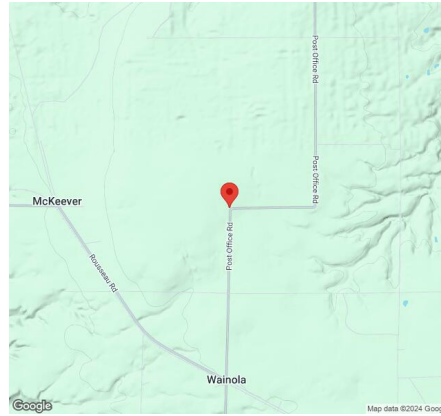

**Site Address:** 28385 Post Office Rd, Mass City, MI 49948, USA

### Array Specification

<b>Duty Classification:</b>	SD
<b>Module Width:</b>	41.30 in
<b>Module Length:</b>	83.90in
<b>Number of Rows:</b>	5
<b>Number of Columns:</b>	7
<b>Total Number of Modules:</b>	35
<b>Winter Tilt Angle:</b>	55.8
<b>Front Edge Clearance:</b>	5
<b>Total Array Height at Tilt:</b>	19.40 ft
<b>Total Frame Length:</b>	49.00 ft
<b>Frame Weight:</b>	3508 lbs
<b>Array Dimensions N/S:</b>	17.42 ft
<b>Array Dimensions E/W:</b>	49.53 ft
<b>Rail Length:</b>	209.00 in
<b>Rail Spacing:</b>	3.54 ft

### Support Specifications

<b>Pole Size:</b>	10in Pipe Sch 40
<b>Pole Length above Grade:</b>	12.20 ft
<b>Number of Poles:</b>	3
<b>Pole Spacing:</b>	17 ft

### Foundation Specifications

<b>Foundation Type:</b>	Square
<b>Foundation Dimensions:</b>	48 x 48 in
<b>Foundation Depth (below grade):</b>	Pile 1: 7.25 ft Pile 2: 7.25 ft Pile 3: 7.25 ft
<b>Foundation Volume:</b>	12.889 y <sup>3</sup>



### Site Info


<b>Risk Category:</b>	I
<b>Exposure:</b>	C
<b>Soil Classification:</b>	sand
<b>Site Location:</b>	28385 Post Office Rd, Mass City, MI 49948, USA
<b>Wind Speed:</b>	120 mph
<b>Snow Load:</b>	80 psf

### **Design Disclaimer**



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.




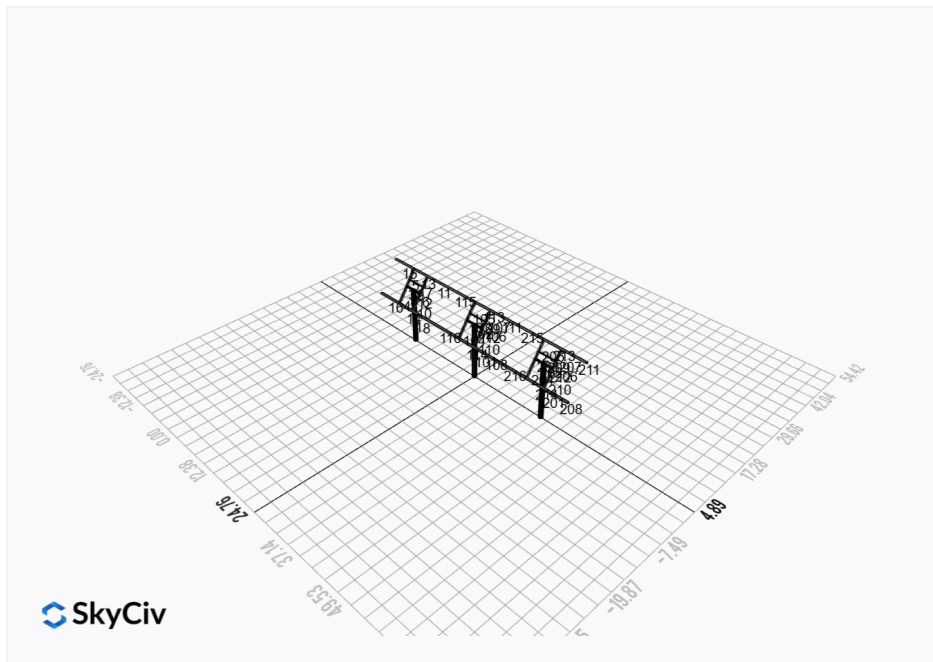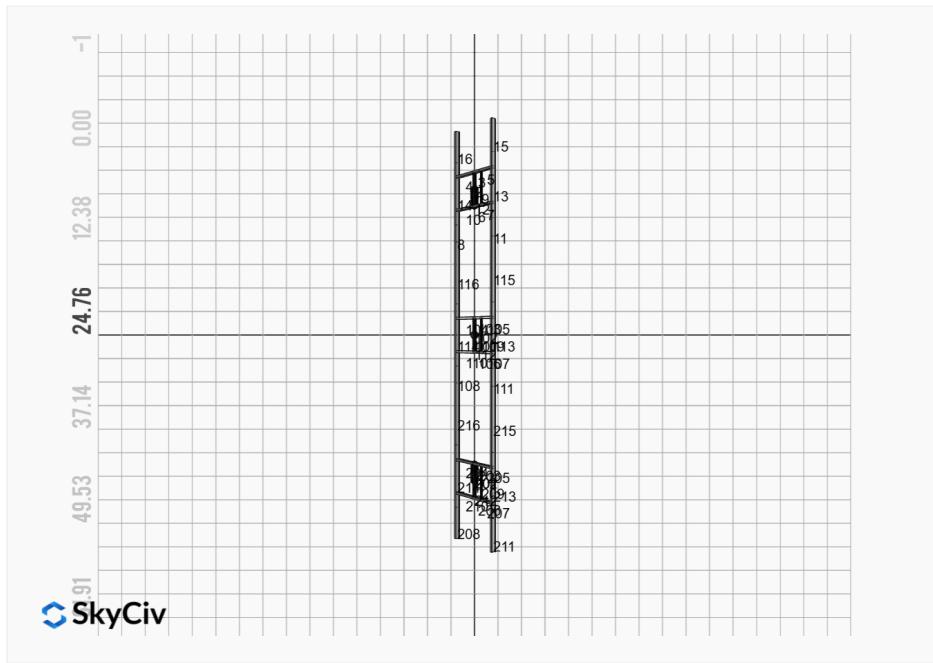

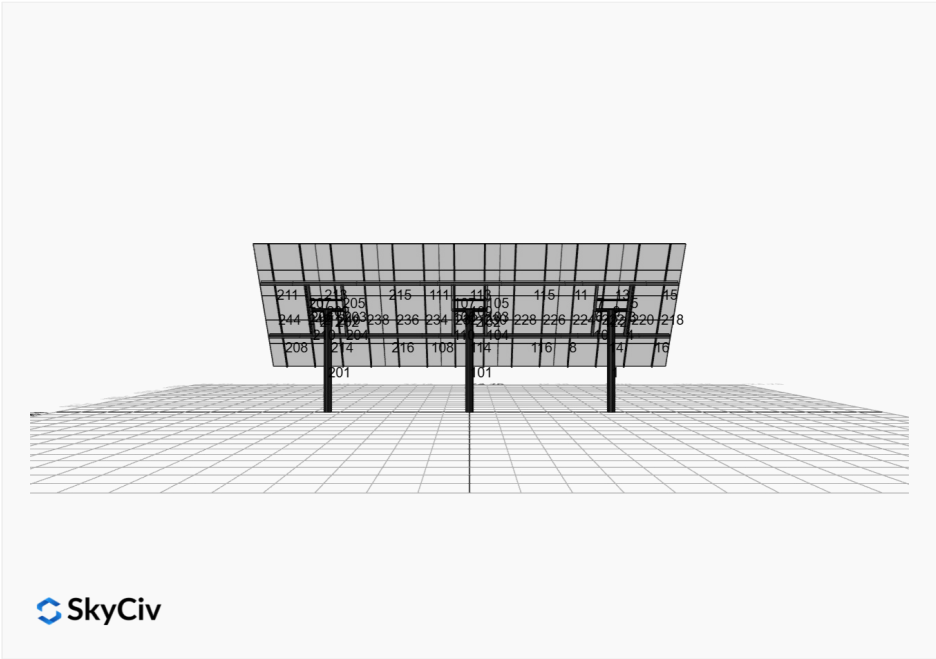


# FEM Results (Envelope Worst Case for each member)

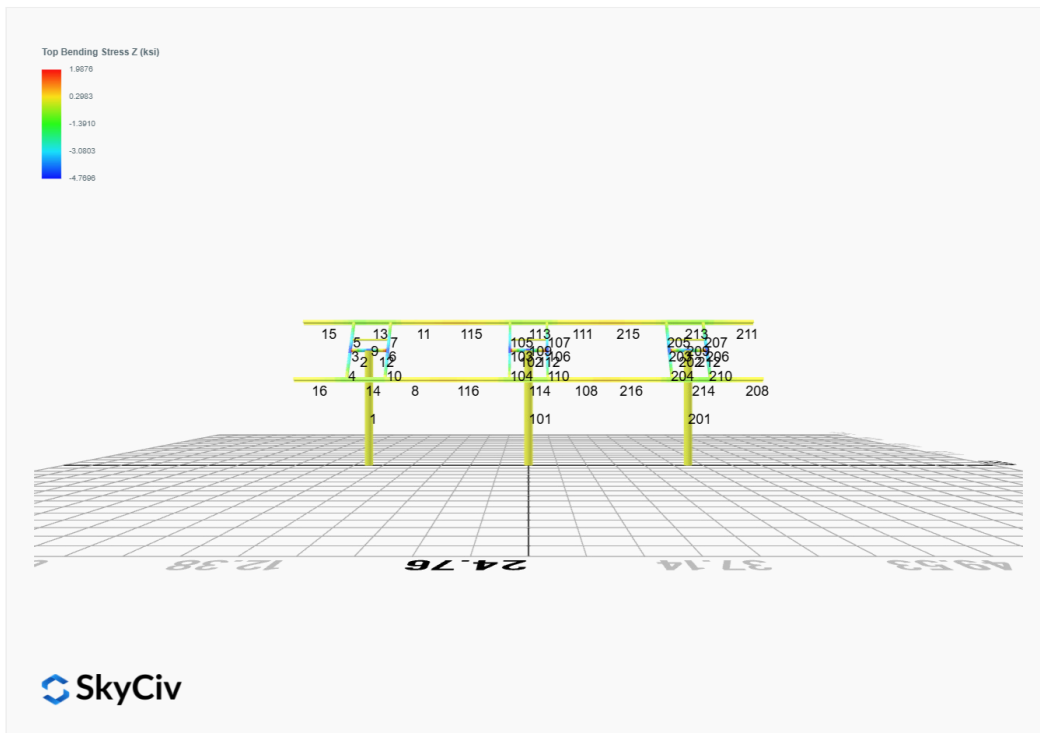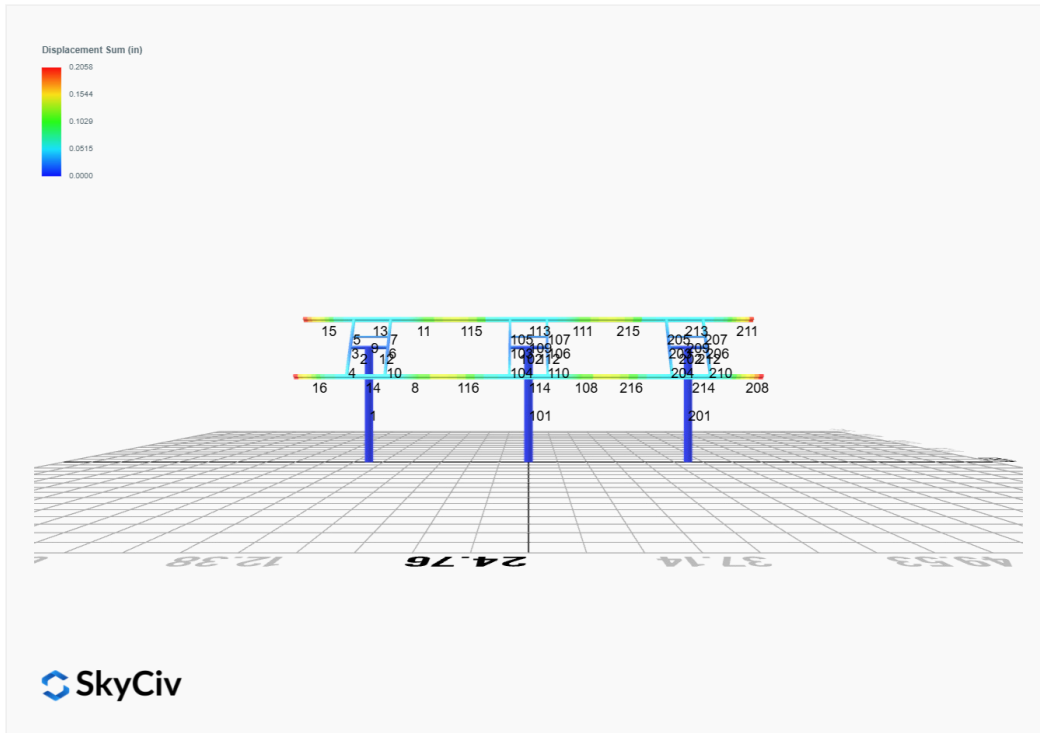


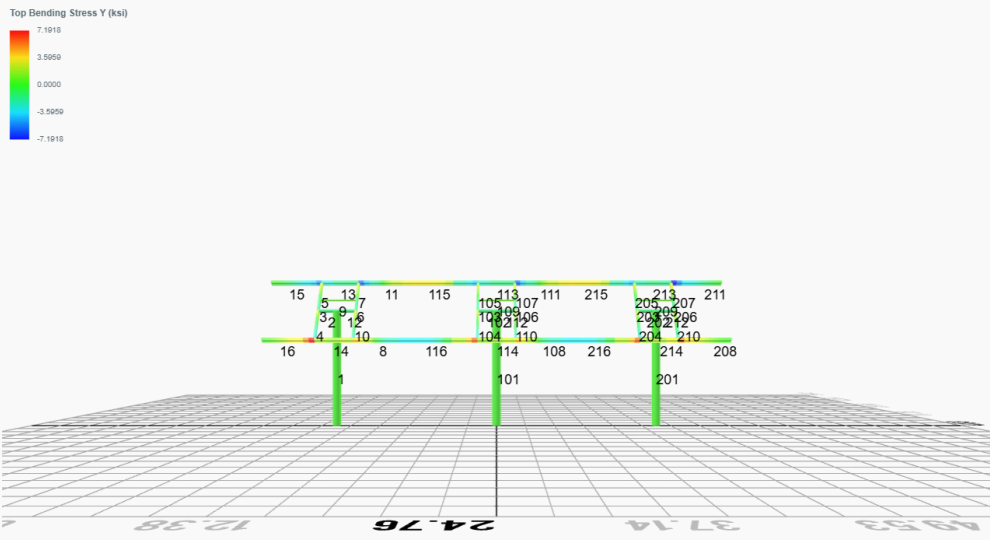

 SkyCiv

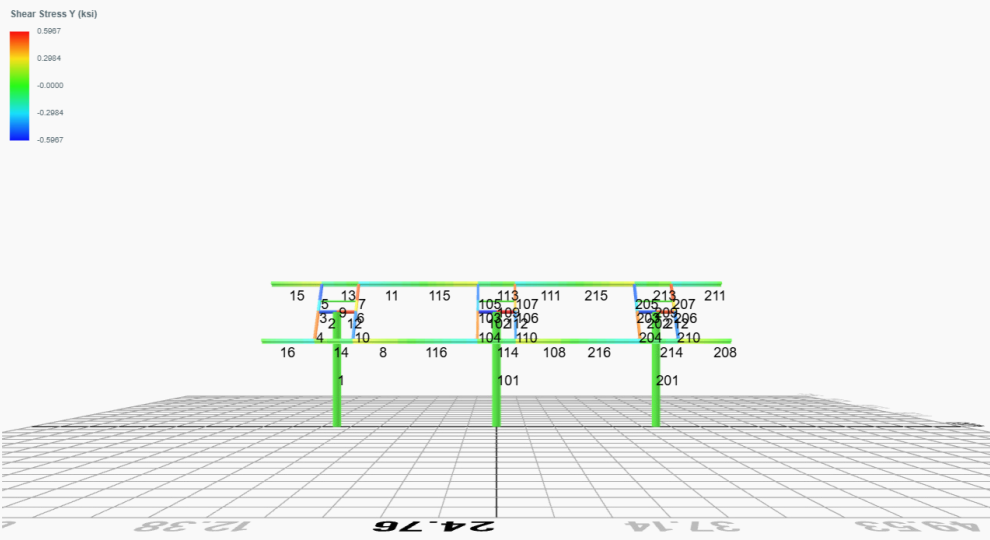

 SkyCiv

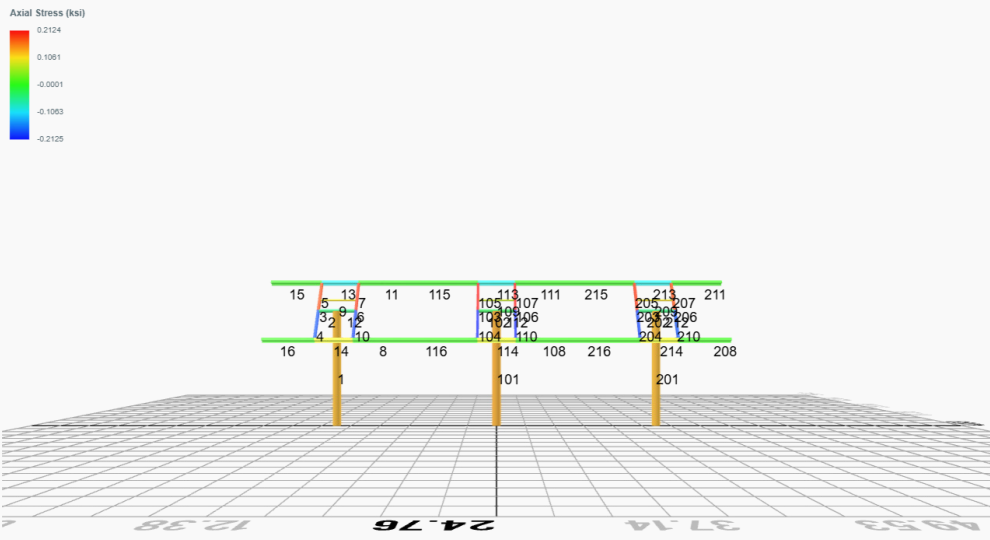

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 2. D + L	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 3. D + (S or Lr or R)	-0.0118	3.9189	-0.0012	0.0028	0.1162	0.1560
ULS: 3. D + (S or Lr or R)	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0102	3.4897	-0.0011	0.0023	0.1011	0.1370
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 5b. D + 0.7E	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0102	3.4897	-0.0011	0.0023	0.1011	0.1370
ULS: 8. 0.6D + 0.7E	-0.0034	1.3214	-0.0004	0.0007	0.0334	0.0479
ULS: 5a. D + 0.6W_Wind downforce Case A only	-3.1070	4.3063	-0.0108	-0.0269	0.1448	38.1422
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 5a. D + 0.6W_Wind uplift Case A only	3.0956	0.0984	0.0096	0.0293	-0.0345	-37.5727
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.3363	5.0677	-0.0087	-0.0187	0.1680	28.6837
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0102	3.4897	-0.0011	0.0023	0.1011	0.1370
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.3157	1.9118	0.0065	0.0235	0.0335	-28.1024
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0102	3.4897	-0.0011	0.0023	0.1011	0.1370
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.3317	3.7803	-0.0082	-0.0199	0.1225	28.6266
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.3203	0.6244	0.0070	0.0222	-0.0120	-28.1596
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0056	2.2023	-0.0006	0.0011	0.0556	0.0798
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-3.1048	3.4253	-0.0105	-0.0274	0.1226	38.1102
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0034	1.3214	-0.0004	0.0007	0.0334	0.0479
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	3.0978	-0.7825	0.0098	0.0288	-0.0567	-37.6046
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0034	1.3214	-0.0004	0.0007	0.0334	0.0479

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.1426
Shear X	-5.1791
Shear Z	-0.0179
Moment X	0.0489
Moment Y (Twist)	0.2449
Moment Z	63.9816

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.0677
Shear X	-3.1070
Shear Z	-0.0108
Moment X	0.0293
Moment Y (Twist)	0.1680
Moment Z	38.1422

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 2. D + L	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 3. D + (S or Lr or R)	0.0235	4.0973	-0.0000	0.0000	0.0000	-0.2526
ULS: 3. D + (S or Lr or R)	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0205	3.6448	-0.0000	0.0000	0.0000	-0.2183

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 5b. D + 0.7E	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0205	3.6448	-0.0000	0.0000	0.0000	-0.2183
ULS: 8. 0.6D + 0.7E	0.0068	1.3723	-0.0000	0.0000	0.0000	-0.0693
ULS: 5a. D + 0.6W_Wind downforce Case A only	-3.1648	4.4531	-0.0000	0.0000	0.0000	38.8303
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 5a. D + 0.6W_Wind uplift Case A only	3.1877	0.1212	-0.0000	0.0000	0.0000	-38.6381
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.3615	5.2693	-0.0000	0.0000	0.0000	28.9911
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0205	3.6448	-0.0000	0.0000	0.0000	-0.2183
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.4028	2.0203	-0.0000	0.0000	0.0000	-29.1102
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0205	3.6448	-0.0000	0.0000	0.0000	-0.2183
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.3707	3.9117	-0.0000	0.0000	0.0000	29.0938
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.3936	0.6627	-0.0000	0.0000	0.0000	-29.0075
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0113	2.2872	-0.0000	0.0000	0.0000	-0.1156
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-3.1693	3.5383	-0.0000	0.0000	0.0000	38.8765
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0068	1.3723	-0.0000	0.0000	0.0000	-0.0693
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	3.1832	-0.7937	-0.0000	0.0000	0.0000	-38.5919
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0068	1.3723	-0.0000	0.0000	0.0000	-0.0693

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.4457
Shear X	-5.3132
Shear Z	-0.0000
Moment X	0.0001
Moment Y (Twist)	0.0001
Moment Z	65.1277

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.2693
Shear X	-3.1877
Shear Z	-0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	38.8765

### Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

#### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 2. D + L	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 3. D + (S or Lr or R)	-0.0118	3.9189	0.0012	-0.0027	-0.1162	0.1560
ULS: 3. D + (S or Lr or R)	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0102	3.4897	0.0011	-0.0023	-0.1011	0.1370
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 5b. D + 0.7E	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0102	3.4897	0.0011	-0.0023	-0.1011	0.1370
ULS: 8. 0.6D + 0.7E	-0.0034	1.3214	0.0004	-0.0007	-0.0334	0.0479
ULS: 5a. D + 0.6W_Wind downforce Case A only	-3.1070	4.3063	0.0108	0.0269	-0.1448	38.1422
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 5a. D + 0.6W_Wind uplift Case A only	3.0956	0.0984	-0.0096	-0.0293	0.0345	-37.5727
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.3363	5.0677	0.0087	0.0187	-0.1680	28.6837
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0102	3.4897	0.0011	-0.0023	-0.1011	0.1370
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.3157	1.9118	-0.0065	-0.0235	-0.0335	-28.1024
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0102	3.4897	0.0011	-0.0023	-0.1011	0.1370
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-2.3317	3.7803	0.0082	0.0199	-0.1225	28.6266
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.3203	0.6244	-0.0070	-0.0222	0.0120	-28.1596
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0056	2.2023	0.0006	-0.0011	-0.0556	0.0798
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-3.1048	3.4253	0.0105	0.0274	-0.1225	38.1103
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0034	1.3214	0.0004	-0.0007	-0.0334	0.0479
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	3.0978	-0.7825	-0.0098	-0.0288	0.0567	-37.6046
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0034	1.3214	0.0004	-0.0007	-0.0334	0.0479

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.1426
Shear X	-5.1791
Shear Z	0.0179
Moment X	-0.0490
Moment Y (Twist)	0.2447
Moment Z	63.9822

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.0677
Shear X	-3.1070
Shear Z	0.0108
Moment X	-0.0293
Moment Y (Twist)	0.1680
Moment Z	38.1422

## Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States

User Name: sales@mtsolar.us  
 Unit System: imperial



## Design Input Information

Design Factors			
$\Phi_t$	$\Phi_c$	$\Phi_b$	$\Phi_v$
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F <sub>y</sub> (ksi)	F <sub>u</sub> (ksi)
1	29000	50	65

Section Dimensions							
ID	Name	d (in)	t <sub>w</sub> (in)				
1	2in Pipe Sch 40	2.38	0.15				
4	4in Pipe Sch 40	4.50	0.24				
11	10in Pipe Sch 40	10.75	0.36				

ID	Name	d (in)	b (in)	t <sub>w</sub> (in)	t <sub>b</sub> (in)	r (in)	
15	HSS5x3x1/8	5.00	3.00	0.12	0.12	0.12	

ID	Name	d (in)	t <sub>w</sub> (in)	b <sub>t</sub> (in)	b <sub>b</sub> (in)	t <sub>t</sub> (in)	t <sub>b</sub> (in)	r (in)
18	W6x9	5.90	0.17	3.94	3.94	0.21	0.21	0.25

Section Properties								
ID	Name	A (in <sup>2</sup> )	J (in <sup>4</sup> )	I <sub>yp</sub> (in <sup>4</sup> )	I <sub>zp</sub> (in <sup>4</sup> )	I <sub>w</sub> (in <sup>6</sup> )	S <sub>yp</sub> (in <sup>3</sup> )	S <sub>zp</sub> (in <sup>3</sup> )

1	2in Pipe Sch 40	1.07	1.33	0.67	0.67	0.00	0.76	0.76
4	4in Pipe Sch 40	3.17	14.47	7.23	7.23	0.00	4.31	4.31
11	10in Pipe Sch 40	11.91	321.47	160.73	160.73	0.00	39.38	39.38
15	HSS5x3x1/8	1.77	6.02	2.75	6.03	0.51	2.07	2.93
18	W6x9	2.68	0.04	2.20	16.40	17.70	1.72	6.23

**Member Properties**

Member ID	Section ID	K <sub>z</sub> L (ft)	K <sub>y</sub> L (ft)	L <sub>b</sub> (ft)	C <sub>b</sub>	LS T	LS C	L D
1	11	25.63	25.63	12.20	-	30	20	1
2	4	1.30	1.30	2.00	-	30	20	1
3	15	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.18,1.16,1.18,1.18,1.19,1.17,1.19,1.18,1.19,1.18,1.19	30	20	1
4	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.64,1.67,1.67,1.68,1.66,1.68,1.67,1.68,1.67,1.68	30	20	1
5	15	1.52	1.52	2.33	1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67	30	20	1
6	15	0.92	0.92	1.42	1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.16,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18	30	20	1
7	15	1.52	1.52	2.33	1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67	30	20	1
8	18	1.33	1.33	2.05	1.87,1.87,1.87,1.87,1.87,1.87,1.88,1.87,1.89,1.87,1.88,1.87,1.89,1.87,1.88,1.87,1.95,1.87,1.88,1.87,1.89,1.87,1.89,1.87,1.89,1.87	30	20	1
9	1	2.60	2.60	4.00	-	30	20	1
10	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.64,1.67,1.67,1.68,1.66,1.68,1.67,1.68,1.67,1.68	30	20	1
11	18	1.33	1.33	2.05	1.87,1.87,1.87,1.87,1.87,1.87,1.90,1.87,1.93,1.87,1.91,1.87,1.92,1.87,1.89,1.87,2.05,1.87,1.90,1.87,1.91,1.87,1.91,1.87,1.92,1.87	30	20	1
12	4	1.30	1.30	2.00	-	30	20	1
13	18	4.88	4.00	7.50	1.13,1.13,1.13,1.13,1.13,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.10,1.13,1.12,1.13,1.11,2.1,1.13,1.12,1.13,1.12,1.13	30	20	1
14	18	4.88	4.00	7.50	1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.10,1.12,1.12,1.12,1.11,2.1,1.12,1.12,1.12,1.12,1.12	30	20	1
15	18	7.88	7.88	3.75	2.33,2.33	30	20	1
16	18	7.88	7.88	3.75	2.33,2.33	30	20	1
101	11	25.63	25.63	12.20	-	30	20	1
102	4	1.30	1.30	2.00	-	30	20	1
103	15	0.92	0.92	1.42	1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.16,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18	30	20	1
104	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.64,1.67,1.67,1.68,1.66,1.68,1.67,1.68,1.67,1.68	30	20	1
105	15	1.52	1.52	2.33	1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67	30	20	1
106	15	0.92	0.92	1.42	1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.16,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.18	30	20	1
107	15	1.52	1.52	2.33	1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67	30	20	1
108	18	1.33	1.33	2.05	1.61,1.61,1.61,1.61,1.61,1.61,1.58,1.61,1.56,1.61,1.58,1.61,1.56,1.61,1.59,1.61,1.42,1.61,1.58,1.61,1.55,1.61,1.57,1.61,1.57,1.61	30	20	1
109	1	2.60	2.60	4.00	-	30	20	1
110	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.64,1.67,1.67,1.68,1.66,1.68,1.67,1.68,1.67,1.68	30	20	1
111	18	1.33	1.33	2.05	1.65,1.65,1.65,1.65,1.65,1.65,1.57,1.65,1.52,1.65,1.56,1.65,1.53,1.65,1.59,1.65,1.26,1.65,1.57,1.65,1.55,0.1,1.65,1.56,1.65,1.53,1.65	30	20	1
112	4	1.30	1.30	2.00	-	30	20	1

113	18	4.88	4.00	7.50	1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.07,1.06,1.06,1.06,1.07,1.06,1.06,1.06,1.12,1.06,1.06,1.06,1.07,1.06,1.06,1.06,1.06	300	200	1
114	18	4.88	4.00	7.50	1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.08,1.06,1.06,1.06,1.06,1.06,1.06,1.06,1.06	300	200	1
115	18	4.84	4.84	7.45	1.13,1.13,1.13,1.13,1.13,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.13,1.13,1.07,1.13,1.12,1.13,1.11,1.13,1.12,1.13,1.12,1.13	300	200	1
116	18	4.84	4.84	7.45	1.13,1.13,1.13,1.13,1.13,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.13,1.13,1.10,1.13,1.12,1.13,1.11,2.1.13,1.12,1.13,1.12,1.13	300	200	1
201	11	25.63	25.63	12.20	-	300	200	1
202	4	1.30	1.30	2.00	-	300	200	1
203	15	0.92	0.92	1.42	1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.16,1.18,1.18,1.18,1.11,7.1.18,1.18,1.18,1.18,1.18	300	200	1
204	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.64,1.67,1.67,1.68,1.66,6.1.68,1.67,1.68,1.67,1.68	300	200	1
205	15	1.52	1.52	2.33	1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,6.1.67,1.67,1.67,1.67,1.67	300	200	1
206	15	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.18,1.16,1.18,1.18,1.19,1.11,7.1.19,1.18,1.19,1.18,1.19	300	200	1
207	15	1.52	1.52	2.33	1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.66,1.67,1.67,1.67,1.67,1.65,1.67,1.67,1.67,1.66,6.1.67,1.67,1.67,1.67,1.67	300	200	1
208	18	7.88	7.88	3.75	2.33,3.2.33,2.33,2.33,2.33,2.33	300	200	1
209	1	2.60	2.60	4.00	-	300	200	1
210	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.67,1.64,1.67,1.67,1.68,1.66,6.1.68,1.67,1.68,1.67,1.68	300	200	1
211	18	7.88	7.88	3.75	2.33,3.2.33,2.33,2.33,2.33,2.33	300	200	1
212	4	1.30	1.30	2.00	-	300	200	1
213	18	4.88	4.00	7.50	1.13,1.13,1.13,1.13,1.13,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.12,1.13,1.10,1.13,1.12,1.13,1.11,2.1.13,1.12,1.13,1.12,1.13	300	200	1
214	18	4.88	4.00	7.50	1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.10,1.12,1.12,1.12,1.11,2.1.12,1.12,1.12,1.12,1.12	300	200	1
215	18	4.84	4.84	7.45	1.15,1.15,1.15,1.15,1.15,1.15,1.16,1.15,1.16,1.15,1.16,1.15,1.16,1.15,1.16,1.15,1.21,1.15,1.16,1.15,1.11,6.1.15,1.16,1.15,1.16,1.15	300	200	1
216	18	4.84	4.84	7.45	1.16,1.11,6.1.16,1.16,1.16,1.16,1.16	300	200	1

## Member Design Capacity

Member ID	$\Phi_t P_n$ (kip)	$\Phi_c P_n$ (kip)	$\Phi_b M_{zn}$ (k-ft)	$\Phi_b M_{yn}$ (k-ft)	$\Phi_v V_{yn}$ (kip)	$\Phi_v V_{zn}$ (kip)
1	535.87	321.07	147.68	147.68	160.76	160.76
2	142.83	141.72	16.17	16.17	42.85	42.85
3	79.65	74.02	10.99	6.26	29.14	16.61
4	79.65	72.01	10.99	6.26	29.14	16.61
5	79.65	73.44	10.99	6.26	29.14	16.61
6	79.65	74.02	10.99	6.26	29.14	16.61
7	79.65	73.44	10.99	6.26	29.14	16.61
8	120.60	115.40	23.36	6.45	30.09	45.74
9	48.35	43.11	2.85	2.85	14.51	14.51
10	79.65	72.01	10.99	6.26	29.14	16.61
11	120.60	115.40	23.36	6.45	30.09	45.74
12	142.83	141.72	16.17	16.17	42.85	42.85
13	120.60	84.03	19.34	6.45	30.09	45.74
14	120.60	84.03	19.38	6.45	30.09	45.74
15	120.60	54.44	23.36	6.45	30.09	45.74
16	120.60	54.44	23.36	6.45	30.09	45.74

101	535.87	321.07	147.08	147.08	100.70	100.70
102	142.83	141.72	16.17	16.17	42.85	42.85
103	79.65	74.02	10.99	6.26	29.14	16.61
104	79.65	72.01	10.99	6.26	29.14	16.61
105	79.65	73.44	10.99	6.26	29.14	16.61
106	79.65	74.02	10.99	6.26	29.14	16.61
107	79.65	73.44	10.99	6.26	29.14	16.61
108	120.60	115.40	23.36	6.45	30.09	45.74
109	48.35	43.11	2.85	2.85	14.51	14.51
110	79.65	72.01	10.99	6.26	29.14	16.61
111	120.60	115.40	23.36	6.45	30.09	45.74
112	142.83	141.72	16.17	16.17	42.85	42.85
113	120.60	84.03	18.63	6.45	30.09	45.74
114	120.60	84.03	18.63	6.45	30.09	45.74
115	120.60	84.26	19.00	6.45	30.09	45.74
116	120.60	84.26	19.42	6.45	30.09	45.74
201	535.87	321.07	147.68	147.68	160.76	160.76
202	142.83	141.72	16.17	16.17	42.85	42.85
203	79.65	74.02	10.99	6.26	29.14	16.61
204	79.65	72.01	10.99	6.26	29.14	16.61
205	79.65	73.44	10.99	6.26	29.14	16.61
206	79.65	74.02	10.99	6.26	29.14	16.61
207	79.65	73.44	10.99	6.26	29.14	16.61
208	120.60	54.44	23.36	6.45	30.09	45.74
209	48.35	43.11	2.85	2.85	14.51	14.51
210	79.65	72.01	10.99	6.26	29.14	16.61
211	120.60	54.44	23.36	6.45	30.09	45.74
212	142.83	141.72	16.17	16.17	42.85	42.85
213	120.60	84.03	19.33	6.45	30.09	45.74
214	120.60	84.03	19.40	6.45	30.09	45.74
215	120.60	84.26	20.41	6.45	30.09	45.74
216	120.60	84.26	20.43	6.45	30.09	45.74

## Design Ratio

Member ID	P	M <sub>z</sub>	M <sub>y</sub>	V <sub>y</sub>	V <sub>z</sub>	(P,M <sub>z</sub> ,M <sub>y</sub> )	Worst LC	KL/r	δ	Status
1	0.022	0.433	0.001	0.032	0.000	0.444	#13	0.418	Not Required	Pass
2	0.002	0.328	0.321	0.077	0.062	0.650	#13	0.034	Not Required	Pass
3	0.013	0.680	0.103	0.069	0.019	0.748	#13	0.044	Not Required	Pass
4	0.012	0.677	0.190	0.068	0.033	0.759	#13	0.078	Not Required	Pass
5	0.013	0.422	0.195	0.068	0.037	0.447	#13	0.073	Not Required	Pass
6	0.014	0.664	0.106	0.067	0.018	0.731	#13	0.044	Not Required	Pass
7	0.013	0.413	0.188	0.066	0.037	0.441	#13	0.073	Not Required	Pass
8	0.000	0.062	0.079	0.039	0.012	0.125	#21	0.088	Not Required	Pass
9	0.007	0.040	0.067	0.001	0.000	0.109	#13	0.198	Not Required	Pass
10	0.012	0.659	0.182	0.066	0.032	0.747	#13	0.078	Not Required	Pass
11	0.000	0.062	0.078	0.040	0.012	0.124	#21	0.088	Not Required	Pass
12	0.002	0.318	0.306	0.076	0.060	0.624	#13	0.034	Not Required	Pass
13	0.005	0.194	0.279	0.054	0.017	0.415	#21	0.265	Not Required	Pass
14	0.006	0.198	0.279	0.053	0.017	0.415	#21	0.177	Not Required	Pass
15	0.000	0.072	0.130	0.030	0.010	0.183	#21	Not Required	Not Required	Pass

16	0.000	0.072	0.130	0.030	0.010	0.183	#21	Not Required	Not Required	Pass
101	0.023	0.441	0.000	0.033	0.000	0.452	#13	0.418	Not Required	Pass
102	0.001	0.332	0.315	0.080	0.062	0.647	#13	0.034	Not Required	Pass
103	0.014	0.690	0.117	0.069	0.024	0.765	#13	0.044	Not Required	Pass
104	0.013	0.688	0.174	0.069	0.031	0.773	#13	0.078	Not Required	Pass
105	0.014	0.429	0.177	0.069	0.034	0.452	#13	0.073	Not Required	Pass
106	0.014	0.690	0.117	0.069	0.024	0.765	#13	0.044	Not Required	Pass
107	0.014	0.429	0.177	0.069	0.034	0.452	#13	0.073	Not Required	Pass
108	0.000	0.072	0.079	0.037	0.012	0.131	#21	0.088	Not Required	Pass
109	0.004	0.034	0.060	0.001	0.000	0.095	#13	0.198	Not Required	Pass
110	0.013	0.688	0.174	0.069	0.031	0.773	#13	0.078	Not Required	Pass
111	0.000	0.073	0.079	0.036	0.012	0.130	#21	0.088	Not Required	Pass
112	0.001	0.332	0.315	0.080	0.062	0.647	#13	0.034	Not Required	Pass
113	0.005	0.142	0.246	0.050	0.017	0.340	#21	0.265	Not Required	Pass
114	0.006	0.147	0.245	0.051	0.017	0.340	#21	0.265	Not Required	Pass
115	0.000	0.122	0.145	0.036	0.012	0.235	#21	0.321	Not Required	Pass
116	0.000	0.123	0.146	0.037	0.012	0.237	#21	0.321	Not Required	Pass
201	0.022	0.433	0.001	0.032	0.000	0.444	#13	0.418	Not Required	Pass
202	0.002	0.318	0.306	0.076	0.060	0.624	#13	0.034	Not Required	Pass
203	0.014	0.664	0.106	0.067	0.018	0.731	#13	0.044	Not Required	Pass
204	0.012	0.659	0.182	0.066	0.032	0.747	#13	0.078	Not Required	Pass
205	0.013	0.413	0.188	0.066	0.037	0.441	#13	0.073	Not Required	Pass
206	0.013	0.680	0.103	0.069	0.019	0.748	#13	0.044	Not Required	Pass
207	0.013	0.422	0.195	0.068	0.037	0.447	#13	0.073	Not Required	Pass
208	0.000	0.072	0.130	0.030	0.010	0.183	#21	Not Required	Not Required	Pass
209	0.007	0.040	0.067	0.001	0.000	0.109	#13	0.198	Not Required	Pass
210	0.012	0.677	0.190	0.068	0.033	0.759	#13	0.078	Not Required	Pass
211	0.000	0.072	0.130	0.030	0.010	0.183	#21	Not Required	Not Required	Pass
212	0.002	0.328	0.321	0.077	0.062	0.650	#13	0.034	Not Required	Pass
213	0.005	0.194	0.279	0.054	0.017	0.415	#21	0.177	Not Required	Pass
214	0.006	0.198	0.279	0.053	0.017	0.415	#21	0.265	Not Required	Pass
215	0.000	0.120	0.145	0.040	0.012	0.232	#21	0.321	Not Required	Pass
216	0.000	0.119	0.146	0.039	0.012	0.234	#21	0.321	Not Required	Pass

## Definitions

$\Phi_t$	Safety factor for tensile
$\Phi_c$	Safety factor for compression
$\Phi_b$	Safety factor for flexure
$\Phi_v$	Safety factor for shear
E	Modulus of elasticity
$F_y$	Specified minimum yield stress
$F_u$	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
$I_{yp}$	Moment of inertia about the Y axes
$I_{zp}$	Moment of inertia about the Z axes
$I_w$	Warping constant
$S_{yp}$	Plastic section modulus about the Y axis
$S_{zp}$	Plastic section modulus about the Z axis
KL	Effective length
$C_b$	Buckling modification factor (from all load combinations)
$L_b$	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
$P_n$	Nominal axial strength (tension/compression)

$M_n$	Nominal flexural strength (about Z/Y axis)
$V_n$	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
$M_z$	Design ratio in case of bending about Z axis
$M_y$	Design ratio in case of bending about Y axis
$V_y$	Design ratio in case of shear along Y axis
$V_z$	Design ratio in case of shear along Z axis
(P, $M_z$ , $M_y$ )	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
$\delta$	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided



REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

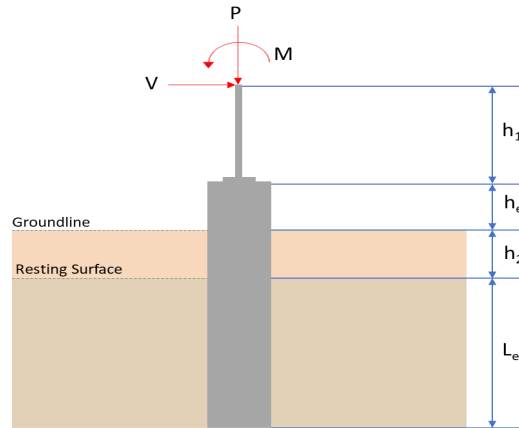

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 7.25$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

### Tabulation of Loads

Load Component	ASD	LRFD
$P$ (kip)	5.068	7.143
$V_x$ (kip)	-3.107	-5.179
$V_z$ (kip)	-0.011	-0.018
$M_x$ (kipft)	0.029	0.049
$M_z$ (kipft)	38.142	63.982

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.107 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.49475 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(38.142 \text{ kipft}) + ((-3.107 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.0736 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_e^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.6154 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.011 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0017516 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.029 \text{ kipft}) + ((-0.011 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0046178 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_e^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.66896 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.6154 \text{ ft}), (0.66896 \text{ ft})]$$

$$L_{e,req} = 6.615 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.615 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.91241$$

Status: **PASS**  
Ratio: **0.910**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(5.068 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.31675 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.31675 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.15837$$

Status: **PASS**  
Ratio: **0.160**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.49475 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 6.0736 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.0736 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (6.0736 \text{ kipft/ft})) + (4 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.004 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (6.0736 \text{ kipft/ft})) + (3 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (6.0736 \text{ kipft/ft})) + (2 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.23658 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (6.0736 \text{ kipft/ft})) + ((-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.97715 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.004 \text{ ft})}{2}$$

$$p_a = 0.3753 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.23658 \text{ kip/ft}^2)}{(0.3753 \text{ kip/ft}^2)}$$

$$Ratio = 0.63036$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.97715 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.89853$$

Status: **PASS**  
Ratio: **0.630**

Status: **PASS**  
Ratio: **0.900**

#### Considering z-direction:

$H_o = -0.0017516 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.0046178 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0046178 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.0046178 \text{ kipft/ft})) + (4 \times (-0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.2243 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.0046178 \text{ kipft/ft})) + (3 \times (-0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (0.0046178 \text{ kipft/ft})) + (2 \times (-0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = -0.00047606 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0046178 \text{ kipft/ft})) + ((-0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = -0.00039534 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.2243 \text{ ft})}{2}$$

$$p_a = 0.39182 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(-0.00047606 \text{ kip/ft}^2)}{(0.39182 \text{ kip/ft}^2)}$$

$$Ratio = -0.001215$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(-0.00039534 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = -0.00036353$$

Status: **PASS**  
Ratio: **0.000**

Status: **PASS**  
Ratio: **0.000**

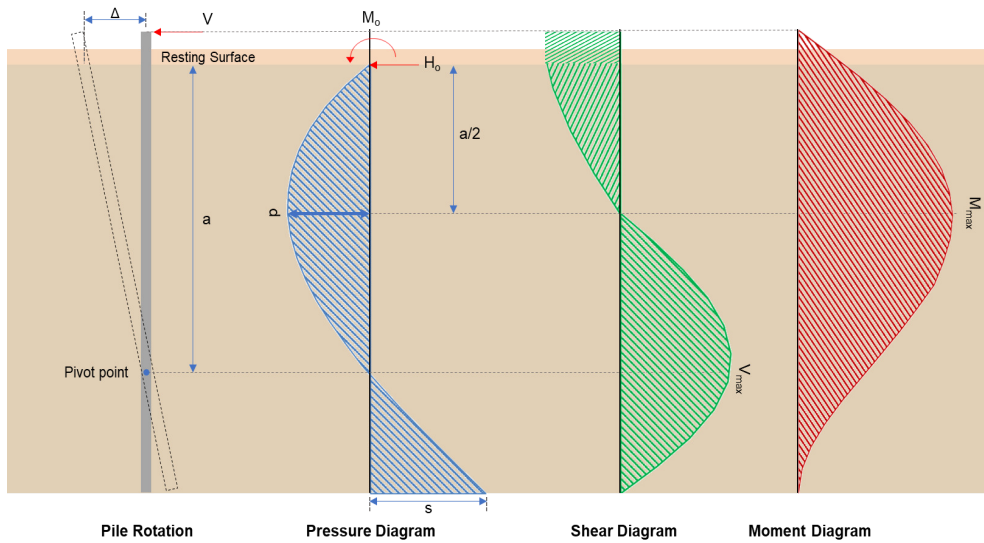

### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-5.179 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.82468 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(63.982 \text{ kipft}) + ((-5.179 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 10.188 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(10.188 \text{ kipft/ft})}{(-0.82468 \text{ kip/ft})}$$

$$E = 12.354 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (10.188 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.82468 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (10.188 \text{ kipft/ft})) + (4 \times (-0.82468 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = \frac{(-0.82468 \text{ kip/ft}) \times (48 \text{ in})}{(6 \times (10.188 \text{ kipft/ft})) + (4 \times (-0.82468 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0032 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.82468 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0032 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0032 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 12.122 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.82468 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(12.354 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.0032 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0032 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0032 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 41.772 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.018 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0028662 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.049 \text{ kipft}) + ((-0.018 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0078025 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0078025 \text{ kipft/ft})}{(-0.0028662 \text{ kip/ft})}$$

$$E = 2.7222 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0078025 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.0028662 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.0078025 \text{ kipft/ft})) + (4 \times (-0.0028662 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.2198 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0028662 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.2198 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.2198 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.01529 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \ b \ L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.0028662 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(2.7222 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.2198 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.2198 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.2198 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.04804 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(7.143 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.359 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.359 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]</math></p> <p><math>s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b> Ties: <b>#3(0.375 in) - 10 in</b></p>	<p>Status: <b>PASS</b> Ratio: <b>0.970</b></p>
<p>22.4.2.2</p>	<p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y k A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(7.143 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0026701</math></p>	<p>Status: <b>PASS</b> Ratio: <b>0.000</b></p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width, <math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p>	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 7.143 \text{ kip} \rightarrow 7143 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(7143 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.44 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.44 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.44 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.44 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.72 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 12.122 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(12.122 \text{ kip})}{(110.72 \text{ kip})}$$

$$Ratio = 0.10949$$

Status: **PASS**  
Ratio: **0.110**

**Considering z-direction:**

$V_{max} = 0.01529 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.01529 \text{ kip})}{(110.72 \text{ kip})}$$

$$Ratio = 0.0001381$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 41.772 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(41.772 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.16735$$

Status: **PASS**  
Ratio: **0.170**

**Considering z-direction:**

$M_{max} = 0.04804 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.04804 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.00019247$$

Status: **PASS**  
Ratio: **0.000**

REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

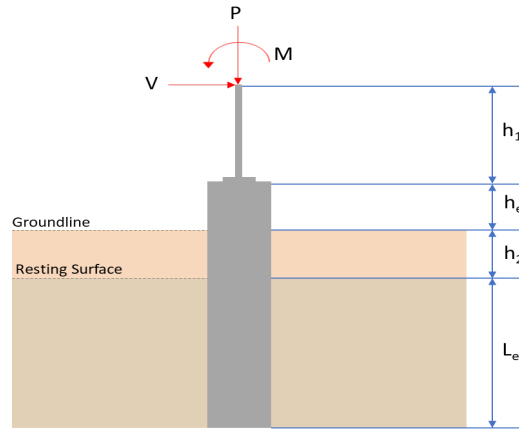

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 7.25$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

### Tabulation of Loads

Load Component	ASD	LRFD
$P$ (kip)	5.269	7.446
$V_x$ (kip)	-3.188	-5.313
$V_z$ (kip)	0.000	0.000
$M_x$ (kipft)	0.000	0.000
$M_z$ (kipft)	38.876	65.128

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.188 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.50764 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(38.876 \text{ kipft}) + ((-3.188 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.1904 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.6415 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$L_{e,z} = 0 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.6415 \text{ ft}), (0 \text{ ft})]$$

$$L_{e,req} = 6.641 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.641 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.916$$

Status: **PASS**  
Ratio: **0.920**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(5.269 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.32931 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

**Ratio** - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.32931 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.16466$$

Status: **PASS**  
Ratio: **0.160**

Czerniak

### Lateral Soil Pressure (ASD):

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.50764 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 6.1904 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.1904 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.50764 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (6.1904 \text{ kipft/ft})) + (4 \times (-0.50764 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0048 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (6.1904 \text{ kipft/ft})) + (3 \times (-0.50764 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (6.1904 \text{ kipft/ft})) + (2 \times (-0.50764 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.23961 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (6.1904 \text{ kipft/ft})) + ((-0.50764 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.99316 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.0048 \text{ ft})}{2}$$

$$p_a = 0.37536 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.23961 \text{ kip/ft}^2)}{(0.37536 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.63834$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$


$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.99316 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

Status: **PASS**  
Ratio: **0.640**

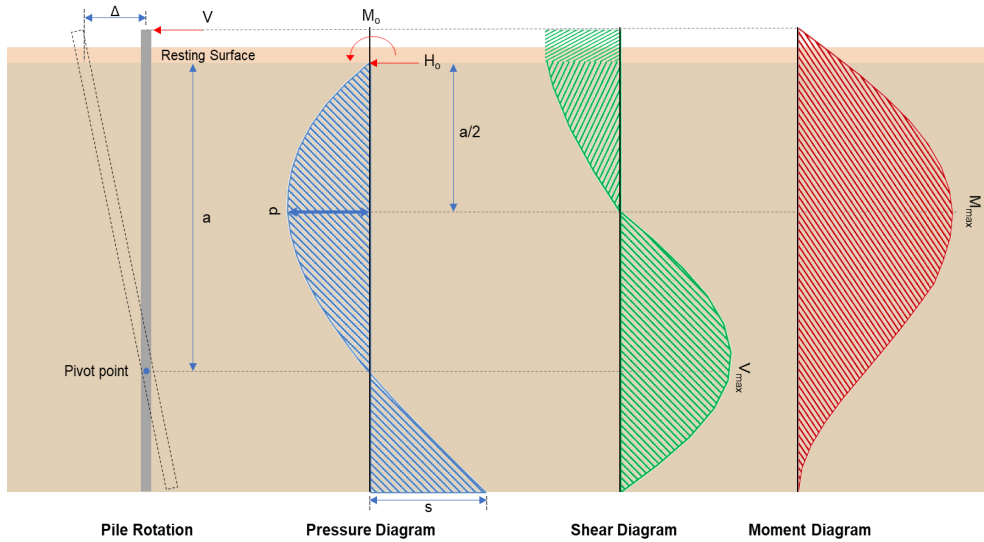

**Shear force and Bending moment (x-direction, LRFD)**

H<sub>o</sub> - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-5.313 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.84602 \text{ kip/ft}$$

M<sub>o</sub> - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(65.128 \text{ kipft}) + ((-5.313 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 10.371 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(10.371 \text{ kipft/ft})}{(-0.84602 \text{ kip/ft})}$$

$$E = 12.258 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (10.371 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.84602 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (10.371 \text{ kipft/ft})) + (4 \times (-0.84602 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0042 \text{ ft}$$

V<sub>max</sub> - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.84602 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (12.258 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0042 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (12.258 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0042 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 12.551 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.84602 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(12.258 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.0042 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (12.258 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0042 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (12.258 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0042 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 42.565 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = Min \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = Min \left[ \frac{\left( \frac{7.446 \text{ kip}}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2)) \right)}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.349 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = Max [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = Max [(-84.349 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$Ratio = \frac{A_{min}}{A_{st}}$$

$$Ratio = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$Ratio = 0.96556$$

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = Max [1.5, (1.5 d_{bar})]$$

Status: **PASS**  
Ratio: **0.970**

$$s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

**Ties:**

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10 $\emptyset$ : Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$$

$$s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

**Summary:**

Main reinforcement: **14 - #5 (0.625 in)**

Ties: **#3(0.375 in) - 10 in**

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2  $\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi \cdot 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

$$Ratio = \frac{P}{\phi P_N}$$

$$Ratio = \frac{(7.446 \text{ kip})}{(2675.2 \text{ kip})}$$

$$Ratio = 0.0027834$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

$b_w$  = 48 in - Effective width,

22.5.2.2  $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3  $\lambda_s$  - size effect modification factor

$$\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,

22.5.5.1.1  $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 296.21 \text{ kip}$$

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 7.446 \text{ kip} \rightarrow 7446 \text{ lbf}$ ,

22.5.5.1.1(a)  $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(7446 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.48 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.48 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.48 \text{ kip}$$

22.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.48 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.74 \text{ kip}$$

**Considering x-direction:**

$V_{max} = 12.357 \text{ kip}$  - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$\text{Ratio} = \frac{(12.357 \text{ kip})}{(110.74 \text{ kip})}$$

$$\text{Ratio} = 0.11158$$

Status: **PASS**  
Ratio: **0.110**

**Flexural Strength (ACI 318-19, LRFD)** $S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

 $\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

 $M_n$  shall be the lesser of: $\phi M_{n,1}$ 

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

 $\phi M_{n,2}$ 

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

 $\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:** $M_{max} = 42.565 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(42.565 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.17053$$

Status: **PASS**  
Ratio: **0.170**

REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

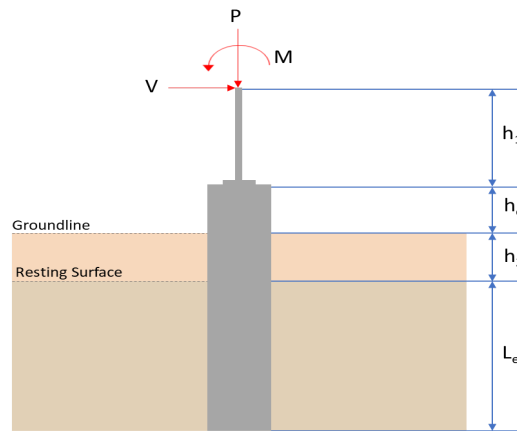

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 7.25$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

### Tabulation of Loads

Load Component	ASD	LRFD
$P$ (kip)	5.068	7.143
$V_x$ (kip)	-3.107	-5.179
$V_z$ (kip)	0.011	0.018
$M_x$ (kipft)	-0.029	-0.049
$M_z$ (kipft)	38.142	63.982

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.107 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.49475 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(38.142 \text{ kipft}) + ((-3.107 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.0736 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.6154 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.011 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0017516 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.029 \text{ kipft}) + ((0.011 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0046178 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.76635 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.6154 \text{ ft}), (0.76635 \text{ ft})]$$

$$L_{e,req} = 6.615 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.615 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.91241$$

Status: **PASS**  
Ratio: **0.910**

**End-bearing Capacity (ASD)**

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(5.068 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.31675 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.31675 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.15837$$

Status: **PASS**  
Ratio: **0.160**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.49475 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 6.0736 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.0736 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (6.0736 \text{ kipft/ft})) + (4 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.004 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (6.0736 \text{ kipft/ft})) + (3 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (6.0736 \text{ kipft/ft})) + (2 \times (-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.23658 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (6.0736 \text{ kipft/ft})) + ((-0.49475 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.97715 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.004 \text{ ft})}{2}$$

$$p_a = 0.3753 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.23658 \text{ kip/ft}^2)}{(0.3753 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.63036$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.97715 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.89853$$

Status: **PASS**  
Ratio: **0.630**

Status: **PASS**  
Ratio: **0.900**

#### Considering z-direction:

$H_o = 0.0017516 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.0046178 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0046178 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.0046178 \text{ kipft/ft})) + (4 \times (0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.2243 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.0046178 \text{ kipft/ft})) + (3 \times (0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (0.0046178 \text{ kipft/ft})) + (2 \times (0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.0011633 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0046178 \text{ kipft/ft})) + ((0.0017516 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.0025038 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.2243 \text{ ft})}{2}$$

$$p_a = 0.39182 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.0011633 \text{ kip/ft}^2)}{(0.39182 \text{ kip/ft}^2)}$$

$$Ratio = 0.0029689$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0025038 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.0023024$$

Status: **PASS**  
Ratio: **0.000**

Status: **PASS**  
Ratio: **0.000**

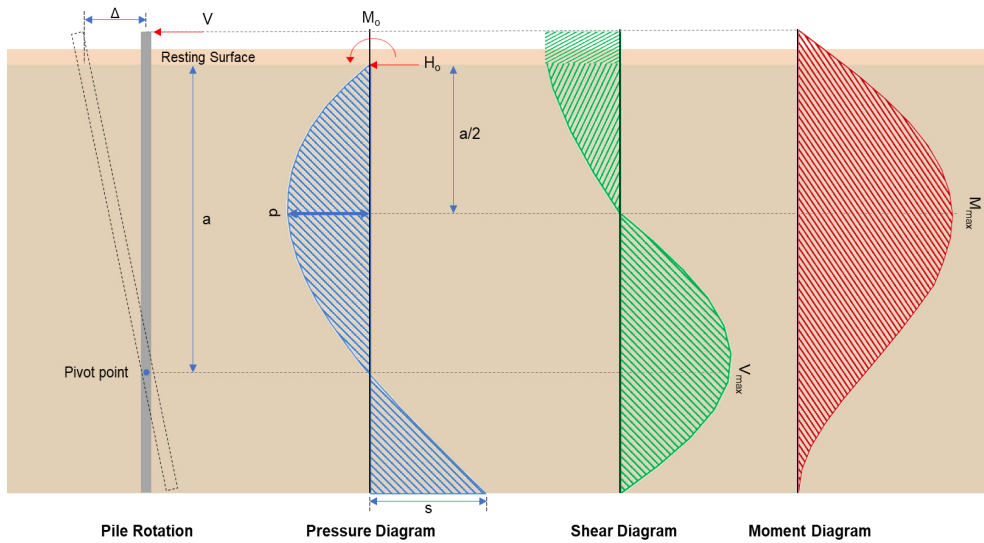

### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-5.179 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.82468 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(63.982 \text{ kipft}) + ((-5.179 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 10.188 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(10.188 \text{ kipft/ft})}{(-0.82468 \text{ kip/ft})}$$

$$E = 12.354 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (10.188 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.82468 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (10.188 \text{ kipft/ft})) + (4 \times (-0.82468 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = \frac{(-0.82468 \text{ kip/ft}) \times (48 \text{ in})}{(6 \times (10.188 \text{ kipft/ft})) + (4 \times (-0.82468 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0032 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.82468 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0032 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0032 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 12.122 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.82468 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(12.354 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.0032 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0032 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (12.354 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0032 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 41.772 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.018 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0028662 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.049 \text{ kipft}) + ((0.018 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0078025 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0078025 \text{ kipft/ft})}{(0.0028662 \text{ kip/ft})}$$

$$E = 2.7222 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0078025 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.0028662 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.0078025 \text{ kipft/ft})) + (4 \times (0.0028662 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.2198 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0028662 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.2198 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.2198 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.01529 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.0028662 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(2.7222 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.2198 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.2198 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.7222 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.2198 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.04804 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(7.143 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.359 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.359 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10: Use #3(0.375 in)</p> <p><math>s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]</math></p> <p><math>s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b> Ties: <b>#3(0.375 in) - 10 in</b></p>	<p>Status: <b>PASS</b> Ratio: <b>0.970</b></p>
<p>22.4.2.2</p>	<p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(7.143 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0026701</math></p>	<p>Status: <b>PASS</b> Ratio: <b>0.000</b></p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width, <math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p>	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 7.143 \text{ kip} \rightarrow 7143 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(7143 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 119.44 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (119.44 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 119.44 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((119.44 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 110.72 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 12.122 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(12.122 \text{ kip})}{(110.72 \text{ kip})}$$

$$Ratio = 0.10949$$

Status: **PASS**  
Ratio: **0.110**

**Considering z-direction:**

$V_{max} = 0.01529 \text{ kip}$  - Maximum shear force in the z-direction,  
Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.01529 \text{ kip})}{(110.72 \text{ kip})}$$

$$Ratio = 0.0001381$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 41.772 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(41.772 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.16735$$

Status: **PASS**  
Ratio: **0.170**

**Considering z-direction:**

$M_{max} = 0.04804 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.04804 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.00019247$$

Status: **PASS**  
Ratio: **0.000**