

Your Project Calculations



Project Name: MTSOLAR_CD370J5D063I

S3D Model Link:

https://platform.skyciv.com/structural?preload_name=MTSOLAR_CD370J5D063I&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/6_2023

Public Model Link:

https://platform.skyciv.com/structural-viewer?project_id=4swkFeFOfexYABHBhmQqh4ltOU2HD80PsEF6rfcCkgErsIO2iL6Orn8trUGh5Llx

Array Specification

Product:	Beam
Unique ID:	5P-19.75-10TOP-HD-45-L-5Hx15W-D3A4
Duty Classification:	HD
Module Width:	41.50 in
Module Length:	75.08in
Number of Rows:	5
Number of Columns:	15
Total Number of Modules:	75
Desired Tilt Angle:	60
Front Edge Clearance:	3
Total Array Height at Tilt:	18.07 ft
Total Frame Length:	94.00 ft
Frame Weight:	5096 lbs
Array Dimensions N/S:	17.50 ft
Array Dimensions E/W:	95.10 ft
Rail Length:	210.00 in
Rail Spacing:	3.13 ft
Rail Check:	Not Checked

Support Specifications


Pole Size:	10in Pipe Sch 40
Pole Length above Grade:	10.58 ft
Number of Poles:	5
Pole Spacing:	19.75 ft

Foundation Specifications

Foundation Type:	Square
Foundation Dimensions:	48 x 48 in
Foundation Depth (below grade):	Pile 1: 7.25 ft Pile 2: 7.50 ft Pile 3: 7.50 ft Pile 4: 7.50 ft Pile 5: 7.25 ft
Foundation Volume:	21.926 y ³
Foundation Result:	PASSED
Mount Twist:	1.155031 kip

Site Info

Risk Category:	I
Exposure:	C
Soil Classification:	sand
Site Location:	La Veta, CO 81055, USA
Wind Speed:	120 mph
Snow Load:	40 psf
Design Uplift Pressure:	0.025247 ksf
Design Downforce Pressure:	-0.025247 ksf
Design Snow Pressure:	0.004399 ksf

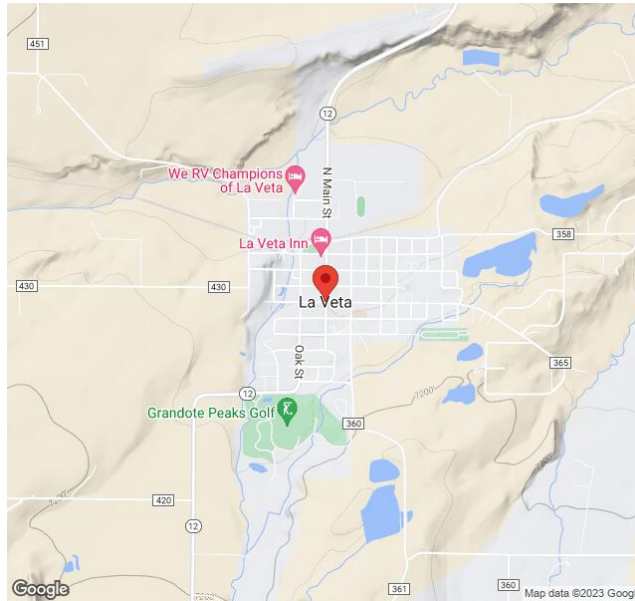

Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.




AutoDesigner Input


```
{
  "product_type": "Beam",
  "project_id": "MTSOLAR_CD370J5D0631",
  "site_address": "La Veta, CO 81055, USA",
  "module_width": 41.5,
  "module_length": 75.08,
  "number_rows": 5,
  "number_columns": 15,
  "pole_mount_section": "4_40",
  "core_pipe_width": 65,
  "core_pipe_section": "2_40",
  "adjuster_section": "2_40",
  "core_beam_height": 65,
  "core_beam_section": "HSS3x2x1/8",
  "main_pipe_section": "2_12GA",
  "pole_spacing": 15,
  "tilt_angle": 60,
  "ground_clearance": 3,
  "risk_category": "I",
  "exposure_category": "C",
  "frame_duty_override": "HD",
  "pole_override": "10_40",
  "soil_type": "sand",
  "foundation_type": "Square",
  "foundation_size": 48,
  "check_rails": false,
  "wind_speed_override": 120,
  "snow_load_override": 40,
  "direct_snow_load": false
}
```

Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Design and Sizing is approximate only


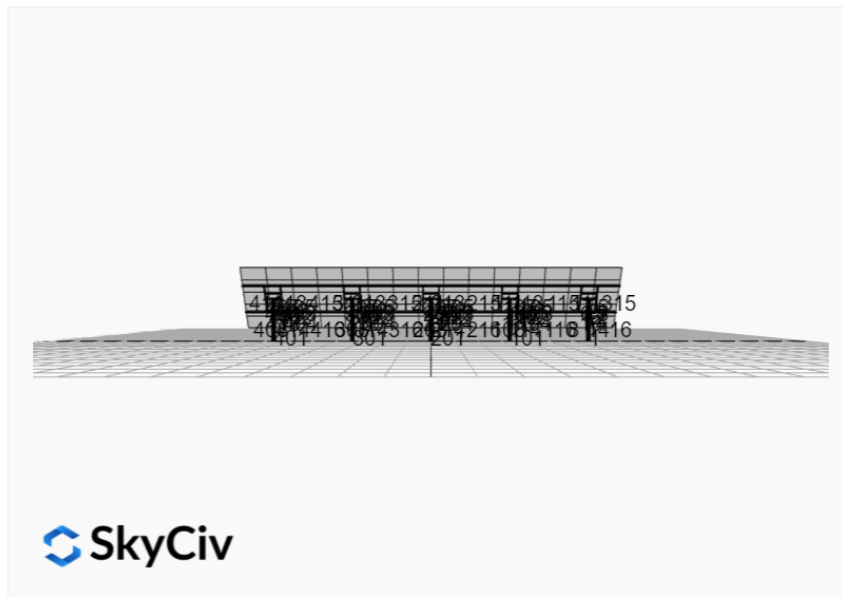


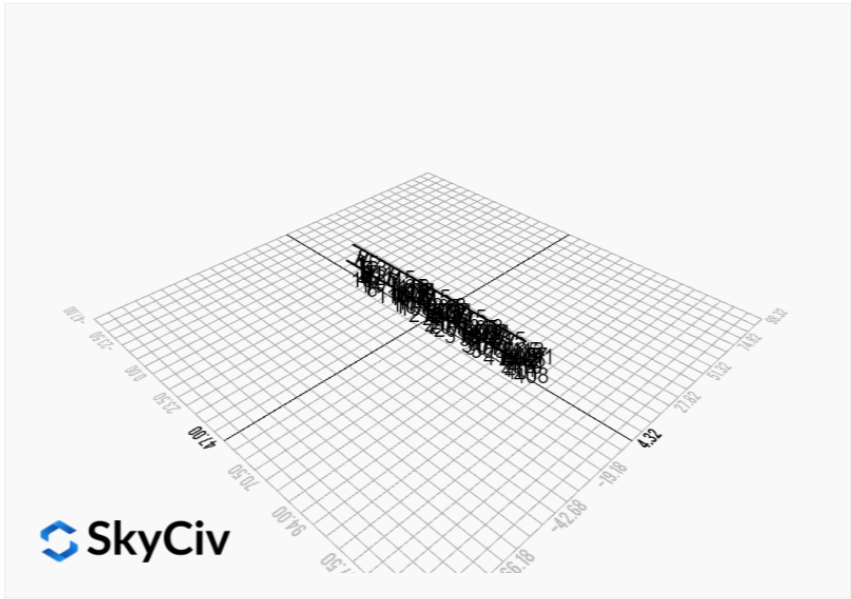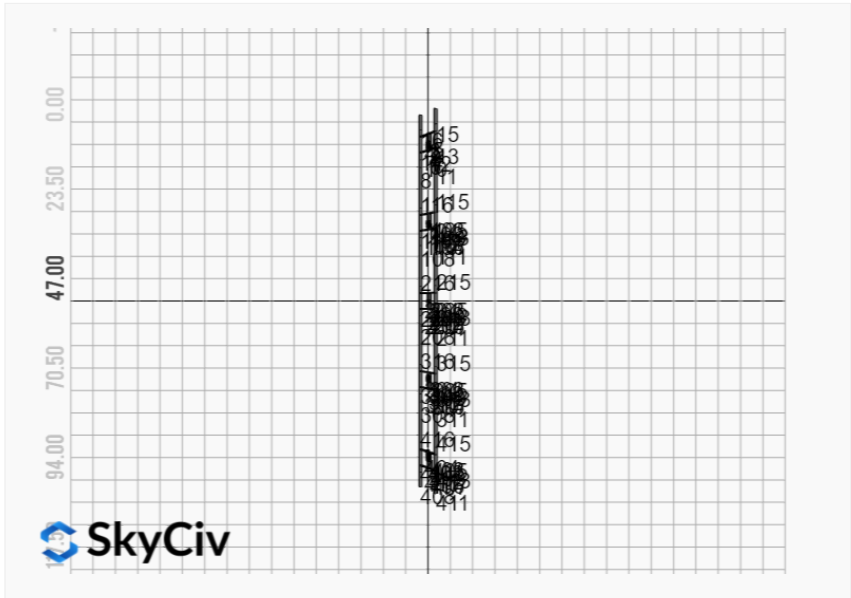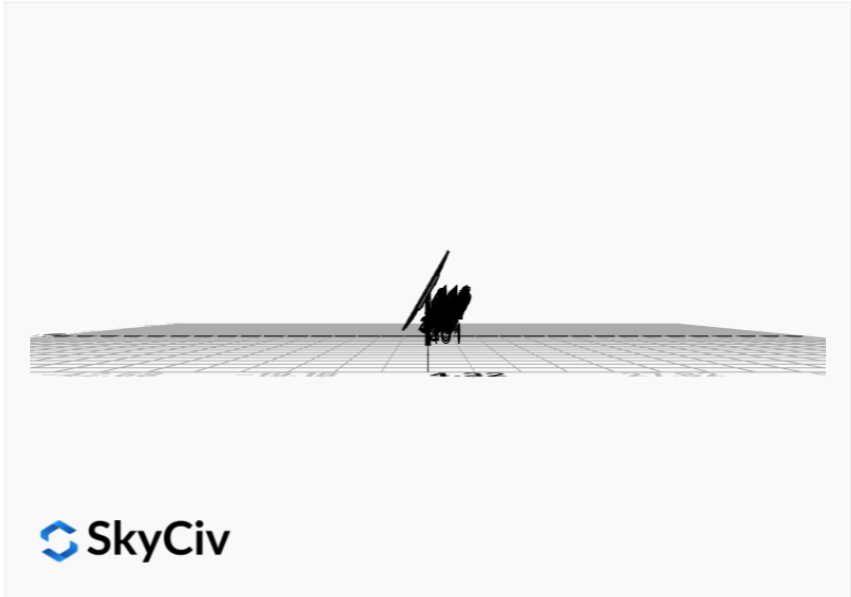


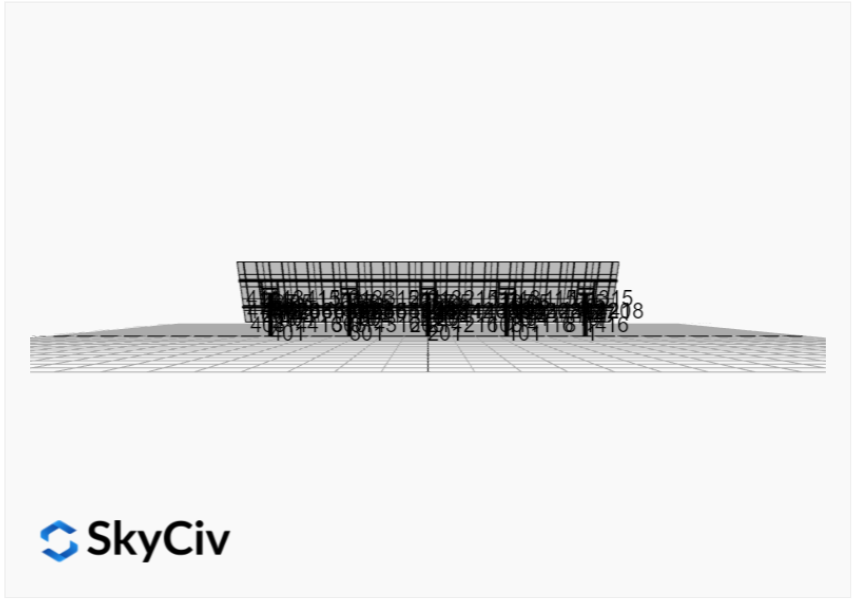

FEM Results (Envelope Worst Case for each member)

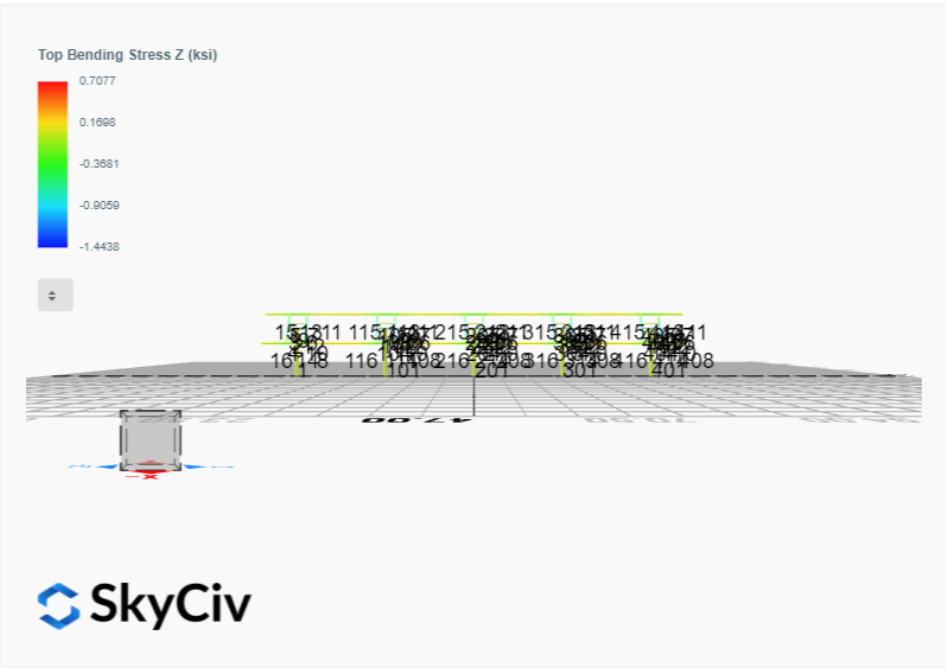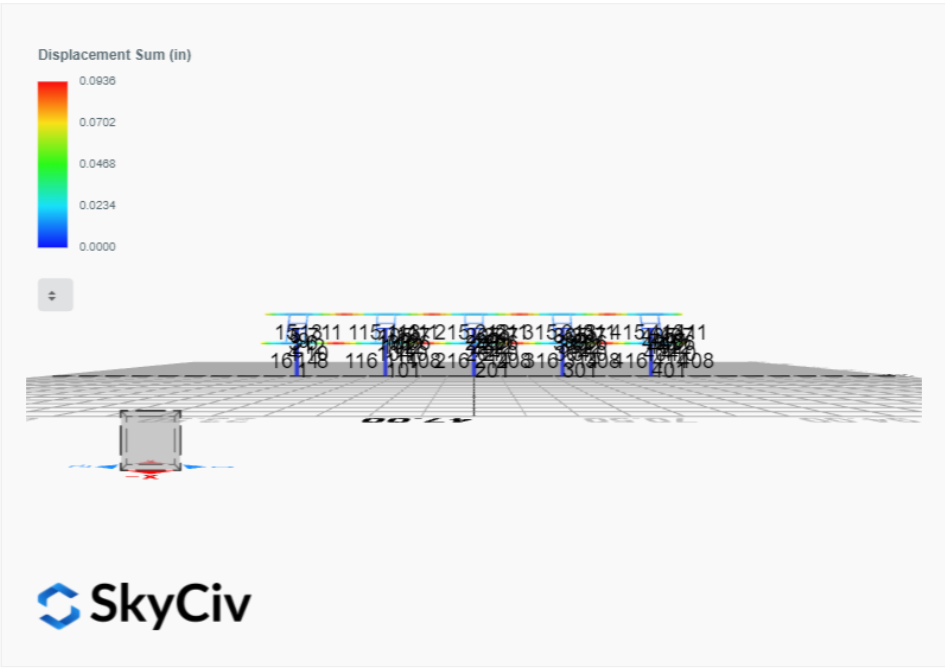

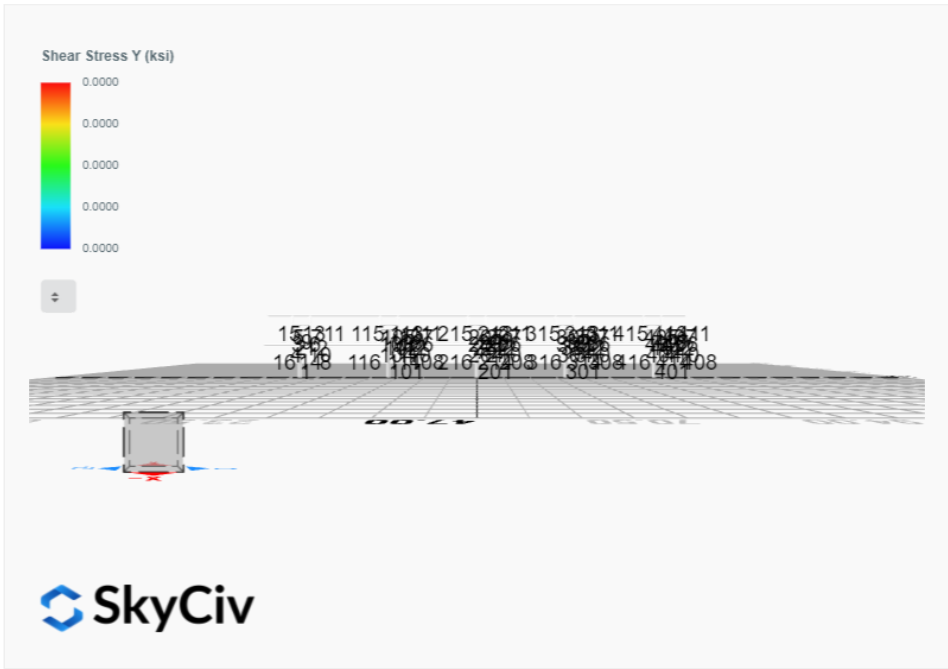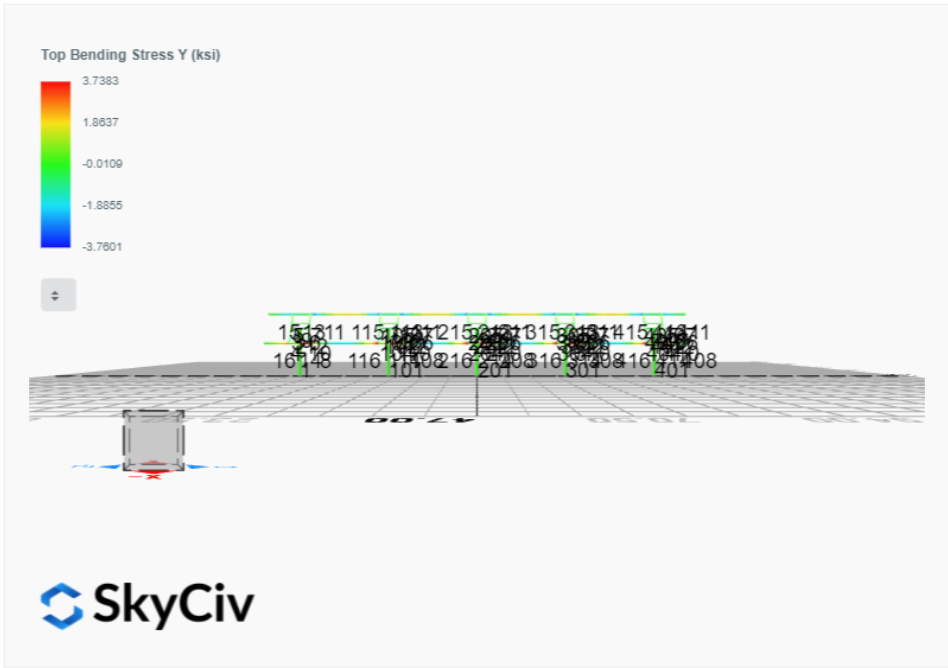

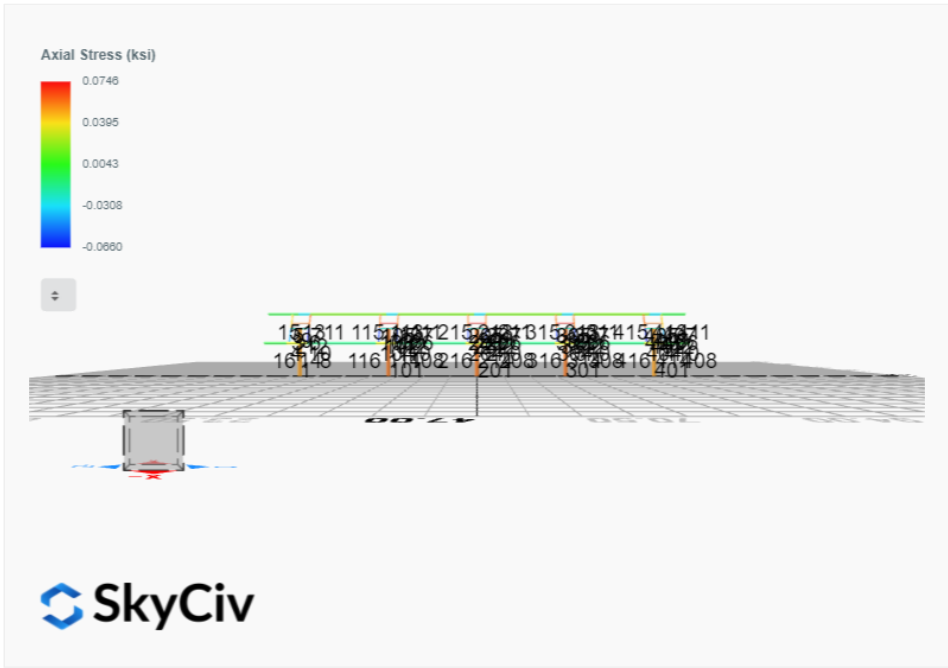

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 2. D + L	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 3. D + (S or Lr or R)	0.0105	3.0495	0.0473	0.1233	-0.0053	-0.0905
ULS: 3. D + (S or Lr or R)	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0097	2.8828	0.0440	0.1147	-0.0049	-0.0832
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 5b. D + 0.7E	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0097	2.8828	0.0440	0.1147	-0.0049	-0.0832
ULS: 8. 0.6D + 0.7E	0.0045	1.4296	0.0205	0.0534	-0.0022	-0.0366
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.0097	4.6937	0.0991	0.2169	-0.6922	42.6948
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.0242	0.0717	-0.0302	-0.0377	0.6796	-42.4311
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.0032	4.6161	0.0927	0.2106	-0.5213	31.9838
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0097	2.8828	0.0440	0.1147	-0.0049	-0.0832
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.0222	1.1496	-0.0043	0.0197	0.5076	-31.8607
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0097	2.8828	0.0440	0.1147	-0.0049	-0.0832
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.0054	4.1159	0.0829	0.1849	-0.5201	32.0059
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.0200	0.6495	-0.0141	-0.0060	0.5088	-31.8386
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0075	2.3826	0.0342	0.0890	-0.0037	-0.0611
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.0127	3.7407	0.0854	0.1813	-0.6907	42.7193
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0045	1.4296	0.0205	0.0534	-0.0022	-0.0366
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.0212	-0.8813	-0.0438	-0.0733	0.6811	-42.4067
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0045	1.4296	0.0205	0.0534	-0.0022	-0.0366

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.0445
Shear X	-6.7052
Shear Z	0.1561
Moment X	0.3379
Moment Y (Twist)	1.1547
Moment Z	71.4897

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.6937
Shear X	-4.0242
Shear Z	0.0991
Moment X	0.2169
Moment Y (Twist)	0.6922
Moment Z	42.7193

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 2. D + L	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 3. D + (S or Lr or R)	-0.0103	3.3926	-0.0011	-0.0041	0.0096	0.1210
ULS: 3. D + (S or Lr or R)	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0096	3.2021	-0.0010	-0.0038	0.0089	0.1137
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 5b. D + 0.7E	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0096	3.2021	-0.0010	-0.0038	0.0089	0.1137
ULS: 8. 0.6D + 0.7E	-0.0044	1.5784	-0.0005	-0.0018	0.0042	0.0550
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.6043	5.2926	0.0039	0.0021	-0.0708	48.8724
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.5902	-0.0316	-0.0052	-0.0076	0.0815	-48.2030
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.4572	5.1986	0.0025	-0.0000	-0.0493	36.6992
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0096	3.2021	-0.0010	-0.0038	0.0089	0.1137
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.4387	1.2054	-0.0043	-0.0073	0.0649	-36.1073
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0096	3.2021	-0.0010	-0.0038	0.0089	0.1137
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.4551	4.6271	0.0027	0.0008	-0.0513	36.6772
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.4408	0.6340	-0.0041	-0.0064	0.0628	-36.1293
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0074	2.6307	-0.0008	-0.0030	0.0069	0.0917
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.6014	4.2403	0.0042	0.0033	-0.0735	48.8357
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0044	1.5784	-0.0005	-0.0018	0.0042	0.0550
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.5932	-1.0839	-0.0048	-0.0064	0.0787	-48.2397
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0044	1.5784	-0.0005	-0.0018	0.0042	0.0550

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.9741
Shear X	-7.6713
Shear Z	-0.0085
Moment X	-0.0120
Moment Y (Twist)	0.1359
Moment Z	81.8168

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.2926
Shear X	-4.6043
Shear Z	-0.0052
Moment X	-0.0076
Moment Y (Twist)	0.0815
Moment Z	48.8724

Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 2. D + L	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 3. D + (S or Lr or R)	-0.0004	3.3862	0.0000	-0.0000	0.0000	0.0271
ULS: 3. D + (S or Lr or R)	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0003	3.1961	0.0000	-0.0000	0.0000	0.0263
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 5b. D + 0.7E	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0003	3.1961	0.0000	-0.0000	0.0000	0.0263
ULS: 8. 0.6D + 0.7E	-0.0002	1.5756	0.0000	-0.0000	0.0000	0.0144
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.6052	5.2854	0.0000	-0.0000	0.0000	49.0252
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.6043	-0.0331	0.0000	-0.0000	0.0000	-48.4751
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.4540	5.1906	0.0000	-0.0000	0.0000	36.7773
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0003	3.1961	0.0000	-0.0000	0.0000	0.0263
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.4531	1.2018	0.0000	-0.0000	0.0000	-36.3480
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0003	3.1961	0.0000	-0.0000	0.0000	0.0263

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.4539	4.6206	0.0000	-0.0000	0.0000	36.7749
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.4532	0.6317	0.0000	-0.0000	0.0000	-36.3504
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0003	2.6260	0.0000	-0.0000	0.0000	0.0240
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.6051	4.2350	0.0000	-0.0000	0.0000	49.0156
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0002	1.5756	0.0000	-0.0000	0.0000	0.0144
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.6044	-1.0835	0.0000	-0.0000	0.0000	-48.4847
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0002	1.5756	0.0000	-0.0000	0.0000	0.0144

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.9638
Shear X	-7.6755
Shear Z	0.0000
Moment X	0.0000
Moment Y (Twist)	0.0002
Moment Z	82.1022

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.2854
Shear X	-4.6052
Shear Z	0.0000
Moment X	-0.0000
Moment Y (Twist)	0.0000
Moment Z	49.0252

Reaction Forces for Foundation 4 (Node ID#301), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 2. D + L	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 3. D + (S or Lr or R)	-0.0103	3.3926	0.0011	0.0041	-0.0096	0.1210
ULS: 3. D + (S or Lr or R)	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0096	3.2021	0.0010	0.0038	-0.0089	0.1137
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 5b. D + 0.7E	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0096	3.2021	0.0010	0.0038	-0.0089	0.1137
ULS: 8. 0.6D + 0.7E	-0.0044	1.5784	0.0005	0.0018	-0.0041	0.0550
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.6043	5.2926	-0.0039	-0.0021	0.0708	48.8724
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.5902	-0.0316	0.0052	0.0076	-0.0815	-48.2030
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.4572	5.1986	-0.0025	0.0000	0.0493	36.6992
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0096	3.2021	0.0010	0.0038	-0.0089	0.1137
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.4387	1.2054	0.0043	0.0073	-0.0648	-36.1073
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0096	3.2021	0.0010	0.0038	-0.0089	0.1137
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.4551	4.6271	-0.0027	-0.0008	0.0514	36.6772
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.4408	0.6340	0.0041	0.0064	-0.0628	-36.1293
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0074	2.6307	0.0008	0.0030	-0.0069	0.0917
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.6014	4.2403	-0.0042	-0.0033	0.0735	48.8357
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0044	1.5784	0.0005	0.0018	-0.0041	0.0550
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.5932	-1.0839	0.0048	0.0064	-0.0787	-48.2397
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0044	1.5784	0.0005	0.0018	-0.0041	0.0550

Worst Case Reactions LRFD

Worst Case Reactions ASD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module. Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.9741
Shear X	-7.6713
Shear Z	0.0085
Moment X	0.0120
Moment Y (Twist)	0.1361
Moment Z	81.8168

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module. Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	5.2926
Shear X	-4.6043
Shear Z	0.0052
Moment X	0.0076
Moment Y (Twist)	0.0815
Moment Z	48.8724

Reaction Forces for Foundation 5 (Node ID#401), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 2. D + L	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 3. D + (S or Lr or R)	0.0105	3.0495	-0.0473	-0.1233	0.0053	-0.0905
ULS: 3. D + (S or Lr or R)	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0097	2.8828	-0.0440	-0.1148	0.0049	-0.0832
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 5b. D + 0.7E	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0097	2.8828	-0.0440	-0.1148	0.0049	-0.0832
ULS: 8. 0.6D + 0.7E	0.0045	1.4296	-0.0205	-0.0534	0.0022	-0.0366
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.0097	4.6937	-0.0991	-0.2169	0.6922	42.6949
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 5a. D + 0.6W_Wind uplift Case A only	4.0242	0.0717	0.0302	0.0377	-0.6796	-42.4311
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.0032	4.6161	-0.0927	-0.2107	0.5213	31.9838
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0097	2.8828	-0.0440	-0.1148	0.0049	-0.0832
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.0222	1.1496	0.0042	-0.0197	-0.5076	-31.8607
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0097	2.8828	-0.0440	-0.1148	0.0049	-0.0832
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.0054	4.1159	-0.0829	-0.1850	0.5201	32.0059
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	3.0200	0.6495	0.0141	0.0060	-0.5088	-31.8386
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0075	2.3826	-0.0342	-0.0891	0.0037	-0.0611
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.0127	3.7407	-0.0854	-0.1813	0.6907	42.7193
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0045	1.4296	-0.0205	-0.0534	0.0022	-0.0366
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	4.0212	-0.8813	0.0438	0.0733	-0.6811	-42.4067
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0045	1.4296	-0.0205	-0.0534	0.0022	-0.0366

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module. Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.0445
Shear X	-6.7053
Shear Z	-0.1561
Moment X	-0.3379
Moment Y (Twist)	1.1550
Moment Z	71.4904

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module. Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.6937
Shear X	-4.0242
Shear Z	-0.0991
Moment X	-0.2169
Moment Y (Twist)	0.6922
Moment Z	42.7193

Project Details

Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States
 User Name: sales@mtsolar.us
 Unit System: imperial




Design Input Information


Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65


Section Dimensions



ID	Name	d (in)	t_w (in)				
2	2in Pipe Sch 80	2.38	0.22				
5	4in Pipe Sch 80	4.50	0.34				
11	10in Pipe Sch 40	10.75	0.36				



ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)	
16	HSS5x3x3/16	5.00	3.00	0.17	0.17	0.17	



ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
19	W8x10	7.89	0.17	3.94	3.94	0.20	0.20	0.30

Section Properties

ID	Name	A (in ²)	J (in ⁴)	I_{yp} (in ⁴)	I_{zp} (in ⁴)	I_w (in ⁶)	S_{yp} (in ³)	S_{zp} (in ³)
2	2in Pipe Sch 80	1.48	1.74	0.87	0.87	0.00	1.02	1.02
5	4in Pipe Sch 80	4.41	19.22	9.61	9.61	0.00	5.85	5.85
11	10in Pipe Sch 40	11.91	321.47	160.73	160.73	0.00	39.38	39.38

108	19	1.33	1.33	2.0 5	2.08,2.08,2.08,2.09,2.08,2.08,2.08,2.08,2.08,2.08,2.08,2.08,2.08,2.08,2.08,2.09,2.07,2.09,2.0 8,2.08,2.08,2.08,2.08,2.08,2.08,2.08	3 0 0	2 0 0	1
109	2	2.60	2.60	4.0 0	-	3 0 0	2 0 0	1
110	16	2.44	2.44	3.7 5	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
111	19	1.33	1.33	2.0 5	2.08,2.08,2.08,2.08,2.08,2.08,2.07,2.08,2.06,2.08,2.07,2.08,2.06,2.08,2.07,2.08,2.04,2.08,2.0 7,2.08,2.06,2.08,2.07,2.08,2.06,2.08	3 0 0	2 0 0	1
112	5	1.30	1.30	2.0 0	-	3 0 0	2 0 0	1
113	19	4.88	4.00	7.5 0	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.05,1.04,1.06,1.04,1.05,1.04,1.05,1.04,1.05,1.04,1.06,1.04,1.0 5,1.04,1.06,1.04,1.05,1.04,1.05,1.04	3 0 0	2 0 0	1
114	19	4.88	4.00	7.5 0	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.05,1.04,1.05,1.04,1.05,1.04,1.05,1.04,1.05,1.04,1.05,1.04,1.0 5,1.04,1.05,1.04,1.05,1.04,1.05,1.04	3 0 0	2 0 0	1
115	19	6.63	6.63	10. 20	1.15,1.15,1.15,1.15,1.15,1.15,1.14,1.15,1.13,1.15,1.14,1.15,1.13,1.15,1.14,1.15,1.13,1.15,1.1 4,1.15,1.13,1.15,1.14,1.15,1.14,1.15	3 0 0	2 0 0	1
116	19	6.63	6.63	10. 20	1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.15,1.1 5,1.15,1.15,1.15,1.15,1.15,1.15,1.15	3 0 0	2 0 0	1
201	11	22.2 1	22.2 1	10. 58	-	3 0 0	2 0 0	1
202	5	1.30	1.30	2.0 0	-	3 0 0	2 0 0	1
203	16	0.92	0.92	1.4 2	1.19,1.18,1.19,1.18,1.19,1.19,1.18,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.18,1.17,1.18,1.1 8,1.19,1.17,1.19,1.18,1.19,1.18,1.19	3 0 0	2 0 0	1
204	16	2.44	2.44	3.7 5	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
205	16	1.52	1.52	2.3 3	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
206	16	0.92	0.92	1.4 2	1.19,1.18,1.19,1.18,1.19,1.19,1.18,1.18,1.18,1.18,1.18,1.19,1.18,1.19,1.18,1.18,1.17,1.18,1.1 8,1.19,1.17,1.19,1.18,1.19,1.18,1.19	3 0 0	2 0 0	1
207	16	1.52	1.52	2.3 3	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.67,1.67,1.68,1.66,1.68,1.67,1.67,1.66,1.67,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
208	19	1.33	1.33	2.0 5	2.08,2.08,2.08,2.08,2.08,2.08,2.08,2.08,2.09,2.08,2.08,2.08,2.09,2.08,2.08,2.08,2.09,2.08,2.0 8,2.08,2.09,2.08,2.08,2.08,2.09,2.08	3 0 0	2 0 0	1
209	2	2.60	2.60	4.0 0	-	3 0 0	2 0 0	1
210	16	2.44	2.44	3.7 5	1.68,1.68,1.68,1.68,1.68,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.67,1.68,1.66,1.68,1.6 7,1.68,1.66,1.68,1.67,1.68,1.67,1.68	3 0 0	2 0 0	1
211	19	1.33	1.33	2.0 5	2.09,2.09,2.09,2.09,2.09,2.09,2.08,2.09,2.08,2.09,2.08,2.09,2.08,2.09,2.08,2.09,2.08,2.09,2.0 8,2.09,2.08,2.09,2.08,2.09,2.08,2.09	3 0 0	2 0 0	1
212	5	1.30	1.30	2.0 0	-	3 0 0	2 0 0	1
213	19	4.88	4.00	7.5 0	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.0 4,1.04,1.04,1.04,1.04,1.04,1.04,1.04	3 0 0	2 0 0	1
214	19	4.88	4.00	7.5 0	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.0 4,1.04,1.04,1.04,1.04,1.04,1.04,1.04	3 0 0	2 0 0	1
215	19	6.63	6.63	10. 20	1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.15,1.16,1.1 6,1.16,1.16,1.16,1.16,1.16,1.16,1.16	3 0 0	2 0 0	1
216	19	6.63	6.63	10. 20	1.15,1.15,1.15,1.16,1.15,1.15,1.16,1.15,1.16,1.15,1.16,1.15,1.16,1.15,1.16,1.16,1.16,1.1 6,1.15,1.16,1.15,1.16,1.15,1.16,1.15	3 0 0	2 0 0	1
301	11	22.2 1	22.2 1	10. 58	-	3 0 0	2 0 0	1

412	5	1.30	1.30	2.00	-	0	0	1
413	19	4.88	4.00	7.50	1.10,1.10,1.10,1.10,1.10,1.10,1.10,1.10,1.09,1.10,1.10,1.10,1.09,1.10,1.10,1.10,1.09,1.10,1.10,1.10,1.10,1.10	300	200	1
414	19	4.88	4.00	7.50	1.10,1.10	300	200	1
415	19	6.63	6.63	10.20	1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.13,1.14,1.13,1.13	300	200	1
416	19	6.63	6.63	10.20	1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12	300	200	1

Member Design Capacity

Member ID	$\Phi_t P_n$ (kip)	$\Phi_c P_n$ (kip)	$\Phi_b M_{zn}$ (k-ft)	$\Phi_b M_{yn}$ (k-ft)	$\Phi_v V_{yn}$ (kip)	$\Phi_v V_{zn}$ (kip)
1	535.87	364.67	147.68	147.68	160.76	160.76
2	198.33	196.72	21.95	21.95	59.50	59.50
3	116.10	115.41	15.79	11.10	42.08	23.28
4	116.10	111.33	15.79	11.10	42.08	23.28
5	116.10	114.23	15.79	11.10	42.08	23.28
6	116.10	115.41	15.79	11.10	42.08	23.28
7	116.10	114.23	15.79	11.10	42.08	23.28
8	133.20	126.01	32.87	6.12	40.24	43.62
9	66.48	58.89	3.82	3.82	19.94	19.94
10	116.10	111.33	15.79	11.10	42.08	23.28
11	133.20	126.01	32.87	6.12	40.24	43.62
12	198.33	196.72	21.95	21.95	59.50	59.50
13	133.20	104.94	24.98	6.12	40.24	43.62
14	133.20	104.94	25.21	6.12	40.24	43.62
15	133.20	52.83	32.87	6.12	40.24	43.62
16	133.20	52.83	32.87	6.12	40.24	43.62
101	535.87	364.67	147.68	147.68	160.76	160.76
102	198.33	196.72	21.95	21.95	59.50	59.50
103	116.10	115.41	15.79	11.10	42.08	23.28
104	116.10	111.33	15.79	11.10	42.08	23.28
105	116.10	114.23	15.79	11.10	42.08	23.28
106	116.10	115.41	15.79	11.10	42.08	23.28
107	116.10	114.23	15.79	11.10	42.08	23.28
108	133.20	126.01	32.87	6.12	40.24	43.62
109	66.48	58.89	3.82	3.82	19.94	19.94
110	116.10	111.33	15.79	11.10	42.08	23.28
111	133.20	126.01	32.87	6.12	40.24	43.62
112	198.33	196.72	21.95	21.95	59.50	59.50
113	133.20	104.94	23.83	6.12	40.24	43.62
114	133.20	104.94	23.83	6.12	40.24	43.62
115	133.20	69.16	17.49	6.12	40.24	43.62
116	133.20	69.16	17.80	6.12	40.24	43.62
201	535.87	364.67	147.68	147.68	160.76	160.76
202	198.33	196.72	21.95	21.95	59.50	59.50
203	116.10	115.41	15.79	11.10	42.08	23.28
204	116.10	111.33	15.79	11.10	42.08	23.28
205	116.10	114.23	15.79	11.10	42.08	23.28
206	116.10	115.41	15.79	11.10	42.08	23.28
207	116.10	114.23	15.79	11.10	42.08	23.28

208	133.20	126.01	32.87	6.12	40.24	43.62
209	66.48	58.89	3.82	3.82	19.94	19.94
210	116.10	111.33	15.79	11.10	42.08	23.28
211	133.20	126.01	32.87	6.12	40.24	43.62
212	198.33	196.72	21.95	21.95	59.50	59.50
213	133.20	104.94	23.83	6.12	40.24	43.62
214	133.20	104.94	23.83	6.12	40.24	43.62
215	133.20	69.16	17.80	6.12	40.24	43.62
216	133.20	69.16	17.80	6.12	40.24	43.62
301	535.87	364.67	147.68	147.68	160.76	160.76
302	198.33	196.72	21.95	21.95	59.50	59.50
303	116.10	115.41	15.79	11.10	42.08	23.28
304	116.10	111.33	15.79	11.10	42.08	23.28
305	116.10	114.23	15.79	11.10	42.08	23.28
306	116.10	115.41	15.79	11.10	42.08	23.28
307	116.10	114.23	15.79	11.10	42.08	23.28
308	133.20	126.01	32.87	6.12	40.24	43.62
309	66.48	58.89	3.82	3.82	19.94	19.94
310	116.10	111.33	15.79	11.10	42.08	23.28
311	133.20	126.01	32.87	6.12	40.24	43.62
312	198.33	196.72	21.95	21.95	59.50	59.50
313	133.20	104.94	23.83	6.12	40.24	43.62
314	133.20	104.94	23.83	6.12	40.24	43.62
315	133.20	69.16	17.64	6.12	40.24	43.62
316	133.20	69.16	17.80	6.12	40.24	43.62
401	535.87	364.67	147.68	147.68	160.76	160.76
402	198.33	196.72	21.95	21.95	59.50	59.50
403	116.10	115.41	15.79	11.10	42.08	23.28
404	116.10	111.33	15.79	11.10	42.08	23.28
405	116.10	114.23	15.79	11.10	42.08	23.28
406	116.10	115.41	15.79	11.10	42.08	23.28
407	116.10	114.23	15.79	11.10	42.08	23.28
408	133.20	52.83	32.87	6.12	40.24	43.62
409	66.48	58.89	3.82	3.82	19.94	19.94
410	116.10	111.33	15.79	11.10	42.08	23.28
411	133.20	52.83	32.87	6.12	40.24	43.62
412	198.33	196.72	21.95	21.95	59.50	59.50
413	133.20	104.94	24.98	6.12	40.24	43.62
414	133.20	104.94	25.21	6.12	40.24	43.62
415	133.20	69.16	17.49	6.12	40.24	43.62
416	133.20	69.16	17.33	6.12	40.24	43.62

Design Ratio


Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.019	0.484	0.009	0.042	0.001	0.496	#13	0.363	Not Required	Pass
2	0.002	0.208	0.259	0.050	0.053	0.467	#13	0.035	Not Required	Pass
3	0.006	0.498	0.029	0.049	0.003	0.521	#13	0.045	Not Required	Pass
4	0.005	0.497	0.085	0.050	0.019	0.552	#13	0.080	Not Required	Pass
5	0.005	0.309	0.082	0.050	0.021	0.323	#13	0.074	Not Required	Pass
6	0.007	0.576	0.052	0.058	0.011	0.621	#13	0.045	Not Required	Pass
7	0.007	0.358	0.113	0.057	0.028	0.380	#13	0.074	Not Required	Pass
8	0.001	0.069	0.100	0.038	0.011	0.103	#23	0.095	Not Required	Pass

9	0.007	0.035	0.066	0.002	0.001	0.095	#13	0.204	Not Required	Pass
10	0.007	0.565	0.110	0.057	0.024	0.613	#13	0.080	Not Required	Pass
11	0.001	0.065	0.102	0.039	0.011	0.107	#23	0.095	Not Required	Pass
12	0.002	0.267	0.311	0.060	0.061	0.579	#13	0.035	Not Required	Pass
13	0.004	0.176	0.261	0.050	0.014	0.343	#21	0.286	Not Required	Pass
14	0.004	0.175	0.259	0.049	0.014	0.334	#21	0.190	Not Required	Pass
15	0.000	0.055	0.091	0.024	0.007	0.125	#13	Not Required	Not Required	Pass
16	0.000	0.055	0.091	0.024	0.007	0.125	#13	Not Required	Not Required	Pass
101	0.022	0.554	0.001	0.048	0.000	0.565	#13	0.363	Not Required	Pass
102	0.002	0.270	0.324	0.063	0.064	0.594	#13	0.035	Not Required	Pass
103	0.007	0.607	0.044	0.061	0.007	0.645	#13	0.045	Not Required	Pass
104	0.007	0.613	0.109	0.061	0.023	0.675	#13	0.080	Not Required	Pass
105	0.007	0.377	0.113	0.060	0.028	0.399	#13	0.074	Not Required	Pass
106	0.007	0.616	0.044	0.062	0.007	0.653	#13	0.045	Not Required	Pass
107	0.007	0.383	0.111	0.061	0.028	0.405	#13	0.074	Not Required	Pass
108	0.002	0.050	0.097	0.039	0.011	0.117	#21	0.095	Not Required	Pass
109	0.008	0.030	0.058	0.001	0.000	0.091	#13	0.204	Not Required	Pass
110	0.007	0.615	0.107	0.062	0.023	0.674	#13	0.080	Not Required	Pass
111	0.001	0.054	0.099	0.039	0.011	0.117	#21	0.095	Not Required	Pass
112	0.002	0.273	0.329	0.063	0.065	0.603	#13	0.035	Not Required	Pass
113	0.004	0.186	0.261	0.051	0.014	0.366	#13	0.286	Not Required	Pass
114	0.005	0.199	0.260	0.052	0.014	0.377	#13	0.286	Not Required	Pass
115	0.003	0.239	0.143	0.040	0.011	0.352	#13	0.473	Not Required	Pass
116	0.001	0.237	0.144	0.040	0.011	0.349	#13	0.473	Not Required	Pass
201	0.022	0.556	0.000	0.048	0.000	0.567	#13	0.363	Not Required	Pass
202	0.002	0.271	0.327	0.063	0.065	0.599	#13	0.035	Not Required	Pass
203	0.007	0.615	0.044	0.062	0.007	0.653	#13	0.045	Not Required	Pass
204	0.007	0.610	0.107	0.061	0.023	0.670	#13	0.080	Not Required	Pass
205	0.007	0.382	0.111	0.061	0.028	0.404	#13	0.074	Not Required	Pass
206	0.007	0.615	0.044	0.062	0.007	0.653	#13	0.045	Not Required	Pass
207	0.007	0.382	0.111	0.061	0.028	0.404	#13	0.074	Not Required	Pass
208	0.002	0.049	0.098	0.039	0.011	0.118	#21	0.095	Not Required	Pass
209	0.008	0.029	0.058	0.001	0.000	0.090	#13	0.204	Not Required	Pass
210	0.007	0.610	0.107	0.061	0.023	0.670	#13	0.080	Not Required	Pass
211	0.001	0.050	0.099	0.040	0.011	0.120	#21	0.095	Not Required	Pass
212	0.002	0.271	0.327	0.063	0.064	0.599	#13	0.035	Not Required	Pass
213	0.004	0.196	0.257	0.051	0.014	0.377	#13	0.286	Not Required	Pass
214	0.005	0.200	0.255	0.051	0.014	0.376	#13	0.286	Not Required	Pass
215	0.003	0.214	0.143	0.040	0.011	0.325	#13	0.473	Not Required	Pass
216	0.002	0.212	0.144	0.039	0.011	0.321	#13	0.473	Not Required	Pass
301	0.022	0.554	0.001	0.048	0.000	0.565	#13	0.363	Not Required	Pass
302	0.002	0.273	0.329	0.063	0.065	0.603	#13	0.035	Not Required	Pass
303	0.007	0.616	0.044	0.062	0.007	0.653	#13	0.045	Not Required	Pass
304	0.007	0.615	0.107	0.062	0.023	0.674	#13	0.080	Not Required	Pass
305	0.007	0.383	0.111	0.061	0.028	0.405	#13	0.074	Not Required	Pass
306	0.007	0.607	0.044	0.061	0.007	0.645	#13	0.045	Not Required	Pass
307	0.007	0.377	0.113	0.060	0.028	0.399	#13	0.074	Not Required	Pass
308	0.001	0.058	0.101	0.040	0.011	0.118	#21	0.095	Not Required	Pass
309	0.008	0.030	0.058	0.001	0.000	0.091	#13	0.204	Not Required	Pass
310	0.007	0.613	0.109	0.061	0.023	0.675	#13	0.080	Not Required	Pass
311	0.001	0.063	0.102	0.040	0.011	0.116	#21	0.095	Not Required	Pass
312	0.002	0.270	0.324	0.063	0.064	0.594	#13	0.035	Not Required	Pass
313	0.004	0.186	0.261	0.051	0.014	0.366	#13	0.286	Not Required	Pass
314	0.005	0.199	0.260	0.052	0.014	0.377	#13	0.286	Not Required	Pass

315	0.003	0.214	0.143	0.039	0.011	0.327	#13	0.473	Not Required	Pass
316	0.002	0.210	0.144	0.039	0.011	0.322	#13	0.473	Not Required	Pass
401	0.019	0.484	0.009	0.042	0.001	0.496	#13	0.363	Not Required	Pass
402	0.002	0.267	0.311	0.060	0.061	0.579	#13	0.035	Not Required	Pass
403	0.007	0.576	0.052	0.058	0.011	0.621	#13	0.045	Not Required	Pass
404	0.007	0.565	0.110	0.057	0.024	0.613	#13	0.080	Not Required	Pass
405	0.007	0.358	0.113	0.057	0.028	0.380	#13	0.074	Not Required	Pass
406	0.006	0.498	0.029	0.049	0.003	0.521	#13	0.045	Not Required	Pass
407	0.005	0.309	0.082	0.050	0.021	0.323	#13	0.074	Not Required	Pass
408	0.000	0.055	0.091	0.024	0.007	0.125	#13	Not Required	Not Required	Pass
409	0.007	0.035	0.066	0.002	0.001	0.095	#13	0.204	Not Required	Pass
410	0.005	0.497	0.085	0.050	0.019	0.552	#13	0.080	Not Required	Pass
411	0.000	0.055	0.091	0.024	0.007	0.125	#13	Not Required	Not Required	Pass
412	0.002	0.208	0.259	0.050	0.053	0.467	#13	0.035	Not Required	Pass
413	0.004	0.176	0.261	0.050	0.014	0.343	#21	0.190	Not Required	Pass
414	0.004	0.175	0.259	0.049	0.014	0.334	#21	0.286	Not Required	Pass
415	0.003	0.243	0.143	0.039	0.011	0.353	#13	0.473	Not Required	Pass
416	0.001	0.243	0.144	0.038	0.011	0.353	#13	0.473	Not Required	Pass

Definitions

Φ_t	Safety factor for tensile
Φ_c	Safety factor for compression
Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z, M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

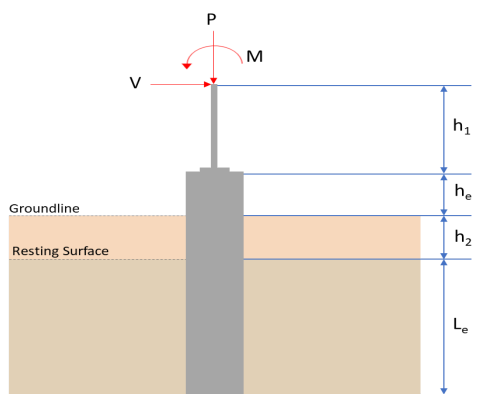REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.25$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="414 1097 1189 1198"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="670 1288 933 1456"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>4.694</td> <td>7.045</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.024</td> <td>-6.705</td> </tr> <tr> <td>V_z (kip)</td> <td>0.099</td> <td>0.156</td> </tr> <tr> <td>M_x (kipft)</td> <td>0.217</td> <td>0.338</td> </tr> <tr> <td>M_z (kipft)</td> <td>42.719</td> <td>71.490</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 3$ ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	4.694	7.045	V_x (kip)	-4.024	-6.705	V_z (kip)	0.099	0.156	M_x (kipft)	0.217	0.338	M_z (kipft)	42.719	71.490	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	4.694	7.045																										
V_x (kip)	-4.024	-6.705																										
V_z (kip)	0.099	0.156																										
M_x (kipft)	0.217	0.338																										
M_z (kipft)	42.719	71.490																										
	<p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.024 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.64076 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(42.719 \text{ kipft}) + ((-4.024 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.8024 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.6174 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.099 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.015764 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.217 \text{ kipft}) + ((0.099 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.034554 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.6264 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.6174 \text{ ft}), (1.6264 \text{ ft})]$$

$$L_{e,req} = 6.617 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.617 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.91269$$

Status: **PASS**
Ratio: **0.910**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(4.694 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.2934 \text{ kip/ft}^2$$

$$q = 0.29337 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$Ratio = \frac{q}{q_a}$$

$$Ratio = \frac{(0.29337 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$Ratio = 0.14669$$

Status: **PASS**
Ratio: **0.150**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.64076 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 6.8024 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.8024 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (6.8024 \text{ kipft/ft})) + (4 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0223 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (6.8024 \text{ kipft/ft})) + (3 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 [(3 \times (6.8024 \text{ kipft/ft})) + (2 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.22613 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 [(2 \times (6.8024 \text{ kipft/ft})) + ((-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 1.0227 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.0223 \text{ ft})}{2}$$

$$p_a = 0.37668 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.22613 \text{ kip/ft}^2)}{(0.37668 \text{ kip/ft}^2)}$$

$$Ratio = 0.60034$$

p_a - Allowable lateral soil pressure at depth L_e ,

Status: **PASS**
Ratio: **0.600**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(1.0227 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.94041$$

Status: **PASS**
Ratio: **0.940**

Considering z-direction:

$H_o = 0.015764 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 0.034554 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.034554 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.015764 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.034554 \text{ kipft/ft})) + (4 \times (0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.249 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.034554 \text{ kipft/ft})) + (3 \times (0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (0.034554 \text{ kipft/ft})) + (2 \times (0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.00994 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.034554 \text{ kipft/ft})) + ((0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.020935 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.249 \text{ ft})}{2}$$

$$p_a = 0.39367 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.00994 \text{ kip/ft}^2)}{(0.39367 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.025249$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**
Ratio: **0.030**

$$Ratio = \frac{(0.020935 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.019251$$

Status: **PASS**
Ratio: **0.020**

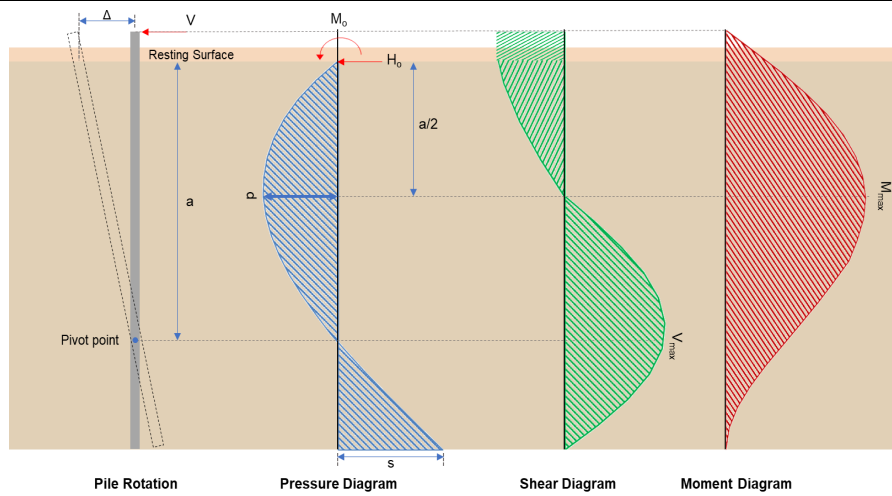

Shear force and Bending moment (x-direction, LRF)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-6.705 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.0677 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(71.49 \text{ kipft}) + ((-6.705 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 11.384 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(11.384 \text{ kipft/ft})}{(-1.0677 \text{ kip/ft})}$$

$$E = 10.662 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (11.384 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-1.0677 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (11.384 \text{ kipft/ft})) + (4 \times (-1.0677 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0218 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{L_c} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-1.0677 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.0218 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.0218 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 13.93 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.0677 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(10.662 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.0218 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.0218 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.0218 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 47.69 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.156 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.024841 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.338 \text{ kipft}) + ((0.156 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.053822 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.053822 \text{ kipft/ft})}{(0.024841 \text{ kip/ft})}$$

$$E = 2.1667 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.053822 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.024841 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.053822 \text{ kipft/ft})) + (4 \times (0.024841 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.2505 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.024841 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.2505 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.2505 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.11927 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.024841 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(2.1667 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.2505 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.2505 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.2505 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.36852 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(7.045 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102.03 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102.03 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: 14 - #5 (0.625 in)

Status: **PASS**
Ratio: **0.970**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}] + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.045 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.002213$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 7.045 \text{ kip} \rightarrow 7045 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7045 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.73 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

V_c - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.73 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.73 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.73 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.06 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 13.93 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(13.93 \text{ kip})}{(118.06 \text{ kip})}$ $\text{Ratio} = 0.11799$ <p>Considering z-direction:</p> <p>$V_{max} = 0.11927 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.11927 \text{ kip})}{(118.06 \text{ kip})}$ $\text{Ratio} = 0.0010103$	<p>Status: PASS Ratio: 0.120</p> <p>Status: PASS Ratio: 0.000</p>
	<p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p>Considering x-direction: $M_{max} = 47.69\text{kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(47.69\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.17442$	<p>Status: PASS Ratio: 0.170</p>
	<p>Considering z-direction: $M_{max} = 0.36852\text{kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.36852\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.0013478$	<p>Status: PASS Ratio: 0.000</p>

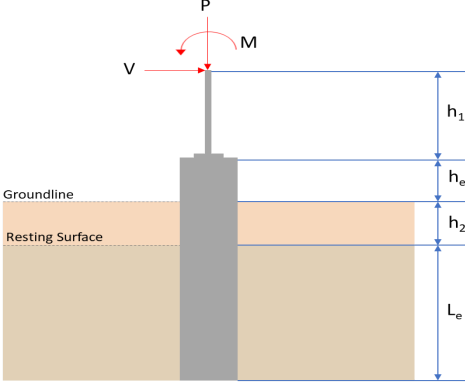REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.25$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1285 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>4.694</td> <td>7.045</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.024</td> <td>-6.705</td> </tr> <tr> <td>V_z (kip)</td> <td>-0.099</td> <td>-0.156</td> </tr> <tr> <td>M_x (kipft)</td> <td>-0.217</td> <td>-0.338</td> </tr> <tr> <td>M_z (kipft)</td> <td>42.719</td> <td>71.490</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 3$ ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	4.694	7.045	V_x (kip)	-4.024	-6.705	V_z (kip)	-0.099	-0.156	M_x (kipft)	-0.217	-0.338	M_z (kipft)	42.719	71.490	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	4.694	7.045																										
V_x (kip)	-4.024	-6.705																										
V_z (kip)	-0.099	-0.156																										
M_x (kipft)	-0.217	-0.338																										
M_z (kipft)	42.719	71.490																										
	<p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.024 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.64076 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(42.719 \text{ kipft}) + ((-4.024 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.8024 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.6174 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.099 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.015764 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.217 \text{ kipft}) + ((-0.099 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.034554 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.181 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.6174 \text{ ft}), (1.181 \text{ ft})]$$

$$L_{e,req} = 6.617 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.617 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.91269$$

Status: **PASS**
Ratio: **0.910**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(4.694 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.2934 \text{ kip/ft}^2$$

$$q = 0.29337 \text{ kip/ft}$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.29337 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.14669$$

Status: **PASS**
Ratio: **0.150**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.64076 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 6.8024 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.8024 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (6.8024 \text{ kipft/ft})) + (4 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0223 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (6.8024 \text{ kipft/ft})) + (3 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (6.8024 \text{ kipft/ft})) + (2 \times (-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.22613 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (6.8024 \text{ kipft/ft})) + ((-0.64076 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 1.0227 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.0223 \text{ ft})}{2}$$

$$p_a = 0.37668 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.22613 \text{ kip/ft}^2)}{(0.37668 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.60034$$

p_a - Allowable lateral soil pressure at depth L_e ,

Status: **PASS**
Ratio: **0.600**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(1.0227 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.94041$$

Status: **PASS**
Ratio: **0.940**

Considering z-direction:

$H_o = -0.015764 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 0.034554 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.034554 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.015764 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.034554 \text{ kipft/ft})) + (4 \times (-0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.249 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.034554 \text{ kipft/ft})) + (3 \times (-0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (0.034554 \text{ kipft/ft})) + (2 \times (-0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = -0.0047842 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.034554 \text{ kipft/ft})) + ((-0.015764 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = -0.0051576 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.249 \text{ ft})}{2}$$

$$p_a = 0.39367 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(-0.0047842 \text{ kip/ft}^2)}{(0.39367 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.012153$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**
Ratio: **-0.010**

$$\text{Ratio} = \frac{(-0.0051576 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.0047427$$

Status: **PASS**
Ratio: **0.000**

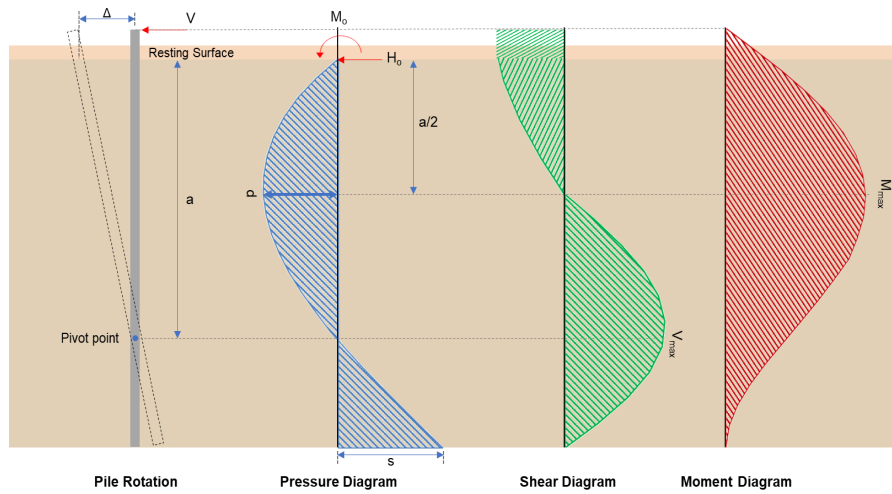

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-6.705 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.0677 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(71.49 \text{ kipft}) + ((-6.705 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 11.384 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(11.384 \text{ kipft/ft})}{(-1.0677 \text{ kip/ft})}$$

$$E = 10.662 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (11.384 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-1.0677 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (11.384 \text{ kipft/ft})) + (4 \times (-1.0677 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0218 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.0677 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.0218 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.0218 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 13.93 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.0677 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(10.662 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.0218 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.0218 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (10.662 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.0218 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 47.69 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.156 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.024841 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.338 \text{ kipft}) + ((-0.156 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.053822 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.053822 \text{ kipft/ft})}{(-0.024841 \text{ kip/ft})}$$

$$E = 2.1667 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.053822 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.024841 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.053822 \text{ kipft/ft})) + (4 \times (-0.024841 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.2505 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 + 4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.024841 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.2505 \text{ ft})}{(7.25 \text{ ft})} \right)^2 + 4 \times \left(\frac{3 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.2505 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.11927 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.024841 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[\left(\frac{(2.1667 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.2505 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left(\frac{(5.2505 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (2.1667 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left(\frac{(5.2505 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.36852 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(7.045 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102.03 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102.03 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2

Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1

s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}] + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.045 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.002213$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 7.045 \text{ kip} \rightarrow 7045 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7045 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.73 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

V_c - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.73 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.73 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.73 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.06 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 13.93 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(13.93 \text{ kip})}{(118.06 \text{ kip})}$ $\text{Ratio} = 0.11799$ <p>Considering z-direction:</p> <p>$V_{max} = 0.11927 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.11927 \text{ kip})}{(118.06 \text{ kip})}$ $\text{Ratio} = 0.0010103$	<p>Status: PASS Ratio: 0.120</p> <p>Status: PASS Ratio: 0.000</p>
	<p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3 \text{ksi}} \times 18432.001 \text{in}^3$ $\phi M_{n,1} = 273.423 \text{kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3 \text{ksi}) \times (18432 \text{in}^3)$ $\phi M_{n,2} = 2545.9 \text{kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42 \text{kipft}), (2545.9 \text{kipft})]$ $\phi M_n = 273.42 \text{kipft}$ <p>Considering x-direction: $M_{max} = 47.69 \text{kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(47.69 \text{kipft})}{(273.42 \text{kipft})}$ $\text{Ratio} = 0.17442$	<p>Status: PASS Ratio: 0.170</p>
	<p>Considering z-direction: $M_{max} = 0.36852 \text{kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.36852 \text{kipft})}{(273.42 \text{kipft})}$ $\text{Ratio} = 0.0013478$	<p>Status: PASS Ratio: 0.000</p>

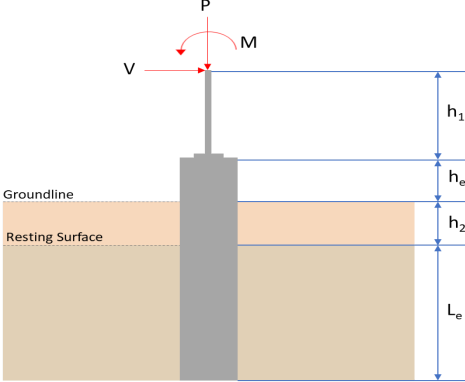REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry</p> <p>Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.5$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1193"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>5.293</td> <td>7.974</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.604</td> <td>-7.671</td> </tr> <tr> <td>V_z (kip)</td> <td>-0.005</td> <td>-0.009</td> </tr> <tr> <td>M_x (kipft)</td> <td>-0.008</td> <td>-0.012</td> </tr> <tr> <td>M_z (kipft)</td> <td>48.872</td> <td>81.817</td> </tr> </tbody> </table> <p>Material Properties</p> <p>$f'_{ck} = 3$ ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	5.293	7.974	V_x (kip)	-4.604	-7.671	V_z (kip)	-0.005	-0.009	M_x (kipft)	-0.008	-0.012	M_z (kipft)	48.872	81.817	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	5.293	7.974																										
V_x (kip)	-4.604	-7.671																										
V_z (kip)	-0.005	-0.009																										
M_x (kipft)	-0.008	-0.012																										
M_z (kipft)	48.872	81.817																										
	<p>Required depth to resist lateral loads (ASD)</p> <p>H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction:</p> <p>H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.604 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.73312 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(48.872 \text{ kipft}) + ((-4.604 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 7.7822 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.8491 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.005 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.00079618 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.008 \text{ kipft}) + ((-0.005 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0012739 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.4324 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.8491 \text{ ft}), (0.4324 \text{ ft})]$$

$$L_{e,req} = 6.849 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.5 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.849 \text{ ft})}{(7.5 \text{ ft})}$$

$$\text{Ratio} = 0.9132$$

Status: **PASS**
Ratio: **0.910**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(5.293 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.33081 \text{ kip/ft}^2$$

$$q = 0.33081 \text{ kip/ft}$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.33081 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.16541$$

Status: **PASS**
Ratio: **0.170**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.875$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.73312 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 7.7822 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (7.7822 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (7.7822 \text{ kipft/ft})) + (4 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.2001 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (7.7822 \text{ kipft/ft})) + (3 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^2 [(3 \times (7.7822 \text{ kipft/ft})) + (2 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$$

$$p = 0.23119 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 [(2 \times (7.7822 \text{ kipft/ft})) + ((-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$$

$$s = 1.0737 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.2001 \text{ ft})}{2}$$

$$p_a = 0.39001 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.23119 \text{ kip/ft}^2)}{(0.39001 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59279$$

p_a - Allowable lateral soil pressure at depth L_e ,

Status: **PASS**
Ratio: **0.590**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$$

$$p_s = 1.125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(1.0737 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.9544$$

Status: **PASS**
Ratio: **0.950**

Considering z-direction:

$H_o = -0.00079618 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 0.0012739 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0012739 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0012739 \text{ kipft/ft})) + (4 \times (-0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.4735 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.0012739 \text{ kipft/ft})) + (3 \times (-0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^2 \times [(3 \times (0.0012739 \text{ kipft/ft})) + (2 \times (-0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$$

$$p = -0.00026977 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0012739 \text{ kipft/ft})) + ((-0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$$

$$s = -0.00036518 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.4735 \text{ ft})}{2}$$

$$p_a = 0.41051 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(-0.00026977 \text{ kip/ft}^2)}{(0.41051 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.00065717$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$$

$$p_s = 1.125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**
Ratio: **0.000**

$$Ratio = \frac{(-0.00036518 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$Ratio = -0.0003246$$

Status: **PASS**
Ratio: **0.000**

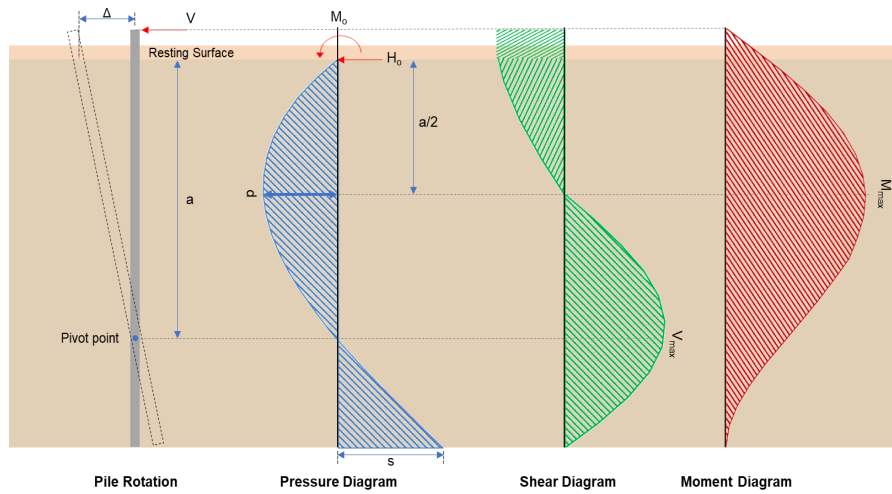

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-7.671 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.2215 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_e + (V_e H)}{1.57 D}$$

$$M_o = \frac{(81.817 \text{ kipft}) + ((-7.671 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 13.028 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(13.028 \text{ kipft/ft})}{(-1.2215 \text{ kip/ft})}$$

$$E = 10.666 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (13.028 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-1.2215 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (13.028 \text{ kipft/ft})) + (4 \times (-1.2215 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1995 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.2215 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1995 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1995 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 15.517 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-1.2215 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(10.666 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.1995 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1995 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1995 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 54.87 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.009 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0014331 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.012 \text{ kipft}) + ((-0.009 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0019108 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0019108 \text{ kipft/ft})}{(-0.0014331 \text{ kip/ft})}$$

$$E = 1.3333 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0019108 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.0014331 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0019108 \text{ kipft/ft})) + (4 \times (-0.0014331 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.4934 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 + 4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0014331 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.4934 \text{ ft})}{(7.5 \text{ ft})} \right)^2 + 4 \times \left(\frac{3 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.4934 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.0056808 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-0.0014331 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(1.3333 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.4934 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.4934 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.4934 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 0.017511 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(7.974 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3 s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}] + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.974 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0025049$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 7.974 \text{ kip} \rightarrow 7974 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7974 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.86 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

V_c - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.86 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.86 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.86 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.14 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 15.517 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(15.517 \text{ kip})}{(118.14 \text{ kip})}$ $\text{Ratio} = 0.13134$ <p>Considering z-direction:</p> <p>$V_{max} = 0.0056808 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.0056808 \text{ kip})}{(118.14 \text{ kip})}$ $\text{Ratio} = 0.000048086$	<p>Status: PASS Ratio: 0.130</p> <p>Status: PASS Ratio: 0.000</p>
	<p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p>Considering x-direction: $M_{max} = 54.87\text{kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(54.87\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.20068$	<p>Status: PASS Ratio: 0.200</p>
	<p>Considering z-direction: $M_{max} = 0.017511\text{kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.017511\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.000064043$	<p>Status: PASS Ratio: 0.000</p>

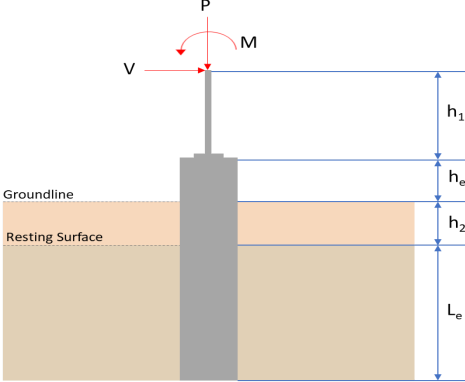REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.5$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>5.285</td> <td>7.964</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.605</td> <td>-7.675</td> </tr> <tr> <td>V_z (kip)</td> <td>0.000</td> <td>0.000</td> </tr> <tr> <td>M_x (kipft)</td> <td>0.000</td> <td>0.000</td> </tr> <tr> <td>M_z (kipft)</td> <td>49.025</td> <td>82.102</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 3$ ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	5.285	7.964	V_x (kip)	-4.605	-7.675	V_z (kip)	0.000	0.000	M_x (kipft)	0.000	0.000	M_z (kipft)	49.025	82.102	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	5.285	7.964																										
V_x (kip)	-4.605	-7.675																										
V_z (kip)	0.000	0.000																										
M_x (kipft)	0.000	0.000																										
M_z (kipft)	49.025	82.102																										
	<p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.605 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.73328 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(49.025 \text{ kipft}) + ((-4.605 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 7.8065 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$$L_{e,x} = 6.8593 \text{ ft} - \text{Required depth in x-direction,}$$

Considering z-direction:

$$L_{e,z} = 0 \text{ ft} - \text{Required depth in z-direction,}$$

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.8593 \text{ ft}), (0 \text{ ft})]$$

$$L_{e,req} = 6.859 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.5 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.859 \text{ ft})}{(7.5 \text{ ft})}$$

$$\text{Ratio} = 0.91453$$

Status: **PASS**
Ratio: **0.910**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(5.285 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.33031 \text{ kip/ft}^2$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_o}$$

$$\text{Ratio} = \frac{(0.33031 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.16516$$

Status: **PASS**
Ratio: **0.170**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.875$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.73328$ kip/ft - Lateral force per length of pile,

$M_o = 7.8065$ kipft/ft - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (7.8065 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.73328 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (7.8065 \text{ kipft/ft})) + (4 \times (-0.73328 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1997 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (7.8065 \text{ kipft/ft})) + (3 \times (-0.73328 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^2 \times [(3 \times (7.8065 \text{ kipft/ft})) + (2 \times (-0.73328 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$$

$$p = 0.23284 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (7.8065 \text{ kipft/ft})) + ((-0.73328 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$$

$$s = 1.0788 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{q}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.1997 \text{ ft})}{2}$$

$$p_a = 0.38998 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.23284 \text{ kip/ft}^2)}{(0.38998 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59705$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$$

$$p_s = 1.125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$


$$\text{Ratio} = \frac{(1.0788 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.95891$$

Status: **PASS**
Ratio: **0.600**

Status: **PASS**
Ratio: **0.960**

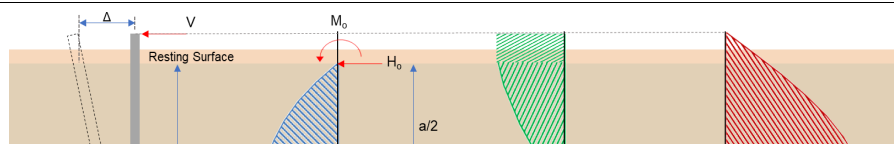

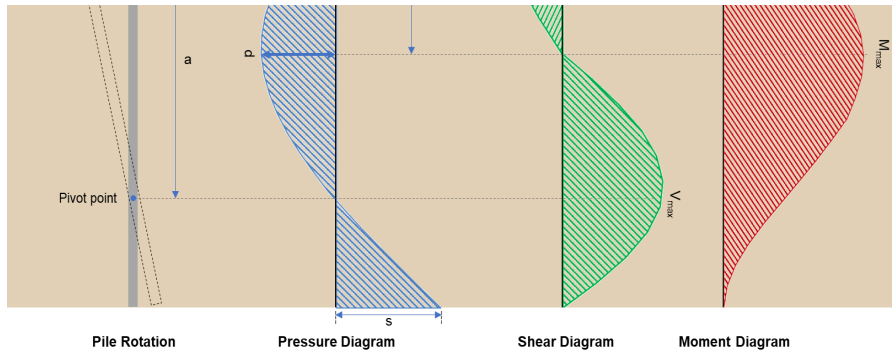

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.675 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.2221 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(82.102 \text{ kipft}) + ((-7.675 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 13.074 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(13.074 \text{ kipft/ft})}{(-1.2221 \text{ kip/ft})}$$

$$E = 10.697 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (13.074 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-1.2221 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (13.074 \text{ kipft/ft})) + (4 \times (-1.2221 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1991 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{L_c} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-1.2221 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (10.697 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1991 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (10.697 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1991 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 15.561 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_c) \left[\left(\frac{E}{L_c} + \frac{a}{2 L_c} \right) - \left[\left(\frac{4 E}{L_c} + 3 \right) \left(\frac{a}{2 L_c} \right)^3 \right] + \left[\left(\frac{3 E}{L_c} + 2 \right) \left(\frac{a}{2 L_c} \right)^4 \right] \right]$$

$$M_{max} = ((-1.2221 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(10.697 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.1991 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (10.697 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1991 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (10.697 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1991 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 55.035 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(7.964 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**
Ratio: **0.970**

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Axial Compression Strength (ACI 318-19, LRFD)22.4.2.2 ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.964 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0025017$$

Status: **PASS**
Ratio: **0.000****Shear Strength (ACI 318-19, LRFD)****Parameters:** $b_w = 48 \text{ in}$ - Effective width,22.5.2.2 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3 λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,22.5.5.1.1 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 7.964 \text{ kip} \rightarrow 7964 \text{ lbf}$,22.5.5.1.1(a) $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7964 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.86 \text{ kip}$$

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,22.5.5.1.2 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

 V_c - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.86 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.86 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$.</p> <p>$V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.86 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.14 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 15.561 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(15.561 \text{ kip})}{(118.14 \text{ kip})}$ $\text{Ratio} = 0.13172$	<p>Status: PASS Ratio: 0.130</p>
<p>14.5.2.1b</p>	<p>Flexural Strength (ACI 318-19, LRFD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ <p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of:</p> <p>$\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(3 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 273.423 \text{ kip ft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = 0.85 f'_c S_m$	

$\phi M_{n,z} = \phi M_{n,y}$

$$\phi M_{n,z} = (0.65) \times 0.85 \times (3 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,z} = 2545.9 \text{ kipft}$$

Therefore,

ϕM_n - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(273.42 \text{ kipft}), (2545.9 \text{ kipft})]$$

$$\phi M_n = 273.42 \text{ kipft}$$

Considering x-direction:

$M_{max} = 55.035 \text{ kipft}$ - Maximum moment in the x-direction,


Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(55.035 \text{ kipft})}{(273.42 \text{ kipft})}$$

$$\text{Ratio} = 0.20128$$

Status: **PASS**
Ratio: **0.200**

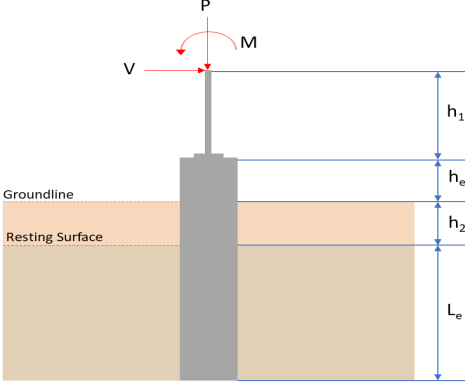REFERENCES	CALCULATIONS	RESULTS																										
	<p>SkyCiv Foundation Design Pile Foundation</p> <p>Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p>Pile Input</p>  <p>Geometry Pile shape: rectangular $b = 48$ in - Pile width $D = 48$ in - Pile depth $L = 7.5$ ft - Total pile length $h_1 = 0$ ft - Lateral load height from the top of the pile, $h_2 = 0$ ft - Depth to resting surface $h_e = 0$ ft - Length of pile above the ground</p> <p>Tabulation of Soil Parameters</p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (q_a) (psf)</th> <th>Allowable Lateral Pressure (R) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p>Tabulation of Loads</p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td>P (kip)</td> <td>5.293</td> <td>7.974</td> </tr> <tr> <td>V_x (kip)</td> <td>-4.604</td> <td>-7.671</td> </tr> <tr> <td>V_z (kip)</td> <td>0.005</td> <td>0.009</td> </tr> <tr> <td>M_x (kipft)</td> <td>0.008</td> <td>0.012</td> </tr> <tr> <td>M_z (kipft)</td> <td>48.872</td> <td>81.817</td> </tr> </tbody> </table> <p>Material Properties $f'_{ck} = 3$ ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	5.293	7.974	V_x (kip)	-4.604	-7.671	V_z (kip)	0.005	0.009	M_x (kipft)	0.008	0.012	M_z (kipft)	48.872	81.817	
Layer	Label	Allowable Bearing Pressure (q_a) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	5.293	7.974																										
V_x (kip)	-4.604	-7.671																										
V_z (kip)	0.005	0.009																										
M_x (kipft)	0.008	0.012																										
M_z (kipft)	48.872	81.817																										
	<p>Required depth to resist lateral loads (ASD) H - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p>Considering x-direction: H_o - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.604 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.73312 \text{ kip/ft}$ <p>M_o - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(48.872 \text{ kipft}) + ((-4.604 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 7.7822 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.8491 \text{ ft}$ - Required depth in x-direction,

Considering z-direction:

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.005 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.00079618 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.008 \text{ kipft}) + ((0.005 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0012739 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.50085 \text{ ft}$ - Required depth in z-direction,

Minimum embedded depth required:

$L_{e,req}$ - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.8491 \text{ ft}), (0.50085 \text{ ft})]$$

$$L_{e,req} = 6.849 \text{ ft}$$

L_e - Actual embedded length of pile,

$$L_e = L - h_c - h_2$$

$$L_e = (7.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.5 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.849 \text{ ft})}{(7.5 \text{ ft})}$$

$$\text{Ratio} = 0.9132$$

Status: **PASS**
Ratio: **0.910**

End-bearing Capacity (ASD)

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(5.293 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.33081 \text{ kip/ft}^2$$

$$q = 0.33081 \text{ kip/ft}$$

Check bearing capacity ratio:

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.33081 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.16541$$

Status: **PASS**
Ratio: **0.170**

Czerniak

Lateral Soil Pressure (ASD):

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.875$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.73312 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 7.7822 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (7.7822 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (7.7822 \text{ kipft/ft})) + (4 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.2001 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (7.7822 \text{ kipft/ft})) + (3 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^2 \times [(3 \times (7.7822 \text{ kipft/ft})) + (2 \times (-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$$

$$p = 0.23119 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (7.7822 \text{ kipft/ft})) + ((-0.73312 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$$

$$s = 1.0737 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.2001 \text{ ft})}{2}$$

$$p_a = 0.39001 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.23119 \text{ kip/ft}^2)}{(0.39001 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59279$$

p_a - Allowable lateral soil pressure at depth L_e ,


Status: **PASS**
Ratio: **0.590**

	$p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$ $p_s = 1.125 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(1.0737 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.9544$	Status: PASS Ratio: 0.950
	<p>Considering z-direction:</p> <p>$H_o = 0.00079618 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.0012739 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.0012739 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0012739 \text{ kipft/ft})) + (4 \times (0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))}$ $a = 5.4735 \text{ ft}$ <p>p - Earth pressure against the pile at distance $a/2$ from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.0012739 \text{ kipft/ft})) + (3 \times (0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))]^2}{(7.5 \text{ ft})^2 \times [(3 \times (0.0012739 \text{ kipft/ft})) + (2 \times (0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))]}$ $p = 0.0004478 \text{ kip/ft}^2$ <p>s - Earth pressure against the pile at distance L_e,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.0012739 \text{ kipft/ft})) + ((0.00079618 \text{ kip/ft}) \times (7.5 \text{ ft}))]}{(7.5 \text{ ft})^2}$ $s = 0.0009087 \text{ kip/ft}^2$ <p>Check lateral soil pressure capacity:</p> <p>p_a - Allowable lateral soil pressure at depth $a/2$,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.4735 \text{ ft})}{2}$ $p_a = 0.41051 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.0004478 \text{ kip/ft}^2)}{(0.41051 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.0010908$ <p>p_s - Allowable lateral soil pressure at depth L_e,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7.5 \text{ ft})$ $p_s = 1.125 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$	Status: PASS Ratio: 0.000

$$\text{Ratio} = \frac{(0.0009087 \text{ kip/ft}^2)}{(1.125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.00080774$$

Status: **PASS**
Ratio: **0.000**

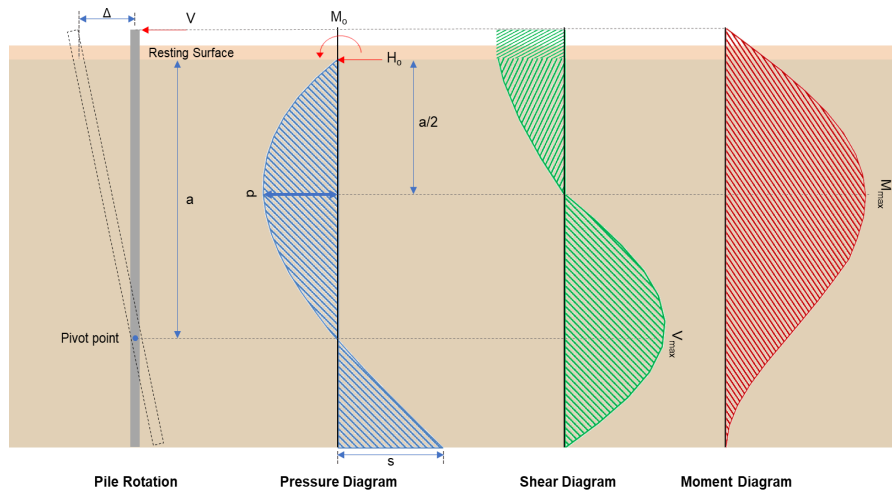

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-7.671 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.2215 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(81.817 \text{ kipft}) + ((-7.671 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 13.028 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(13.028 \text{ kipft/ft})}{(-1.2215 \text{ kip/ft})}$$

$$E = 10.666 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (13.028 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (-1.2215 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (13.028 \text{ kipft/ft})) + (4 \times (-1.2215 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.1995 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.2215 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1995 \text{ ft})}{(7.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1995 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 15.517 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-1.2215 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(10.666 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.1995 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.1995 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (10.666 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.1995 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 54.87 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.009 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0014331 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.012 \text{ kipft}) + ((0.009 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0019108 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0019108 \text{ kipft/ft})}{(0.0014331 \text{ kip/ft})}$$

$$E = 1.3333 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0019108 \text{ kipft/ft}) \times (7.5 \text{ ft})) + (3 \times (0.0014331 \text{ kip/ft}) \times (7.5 \text{ ft})^2)}{(6 \times (0.0019108 \text{ kipft/ft})) + (4 \times (0.0014331 \text{ kip/ft}) \times (7.5 \text{ ft}))}$$

$$a = 5.4934 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 + 4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0014331 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.4934 \text{ ft})}{(7.5 \text{ ft})} \right)^2 + 4 \times \left(\frac{3 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.4934 \text{ ft})}{(7.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.0056808 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((0.0014331 \text{ kip/ft}) \times (48 \text{ in}) \times (7.5 \text{ ft})) \times \left[\left(\frac{(1.3333 \text{ ft})}{(7.5 \text{ ft})} + \frac{(5.4934 \text{ ft})}{2 \times (7.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 3 \right) \times \left(\frac{(5.4934 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (1.3333 \text{ ft})}{(7.5 \text{ ft})} + 2 \right) \times \left(\frac{(5.4934 \text{ ft})}{2 \times (7.5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 0.017511 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 3 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Table 22.4.2.1

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(7.974 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

25.2.3

s_{rebar} - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

Ties:

25.7.2.2 Since longitudinal reinforcement is \leq No. 10: Use #3(0.375 in)

25.7.2.1 s_{ties} - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

Summary:

Main reinforcement: 14 - #5 (0.625 in)

Status: **PASS**
Ratio: **0.970**

Ties: #3(0.375 in) - 10 in

Axial Compression Strength (ACI 318-19, LRFD)

22.4.2.2

ϕP_N - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.974 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0025049$$

Status: **PASS**
Ratio: **0.000**

Shear Strength (ACI 318-19, LRFD)

Parameters:

22.5.2.2

$b_w = 48 \text{ in}$ - Effective width,
 d - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

λ_s - size effect modification factor

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,max}$ - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $P = 7.974 \text{ kip} \rightarrow 7974 \text{ lbf}$,
 $V_{c,a}$ - Shear strength of concrete (a)

$$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7974 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.86 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

V_c - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.86 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.86 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p>A_v - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p>V_s - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 ϕV_n - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.86 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.14 \text{ kip}$ <p>Considering x-direction:</p> <p>$V_{max} = 15.517 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(15.517 \text{ kip})}{(118.14 \text{ kip})}$ $\text{Ratio} = 0.13134$ <p>Considering z-direction:</p> <p>$V_{max} = 0.0056808 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.0056808 \text{ kip})}{(118.14 \text{ kip})}$ $\text{Ratio} = 0.000048086$	<p>Status: PASS Ratio: 0.130</p> <p>Status: PASS Ratio: 0.000</p>
	<p>Flexural Strength (ACI 318-19, LFRD)</p> <p>S_m - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p>$\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$</p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p>$\phi M_{n,2}$</p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore, ϕM_n - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p>Considering x-direction: $M_{max} = 54.87\text{kipft}$ - Maximum moment in the x-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(54.87\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.20068$	<p>Status: PASS Ratio: 0.200</p>
	<p>Considering z-direction: $M_{max} = 0.017511\text{kipft}$ - Maximum moment in the z-direction, Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.017511\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.000064043$	<p>Status: PASS Ratio: 0.000</p>