

**Project Name:** Buffalo MTSOLAR\_7K0855GFA88KD **Date:** Tue May 20 2025

**Location:** Rand, CO 80473, USA


**Number of Modules:** 9

**Unique ID:** 1P-0-6TOP-SD-57-L-3Hx3W-4C82

**Number of Poles:** 1

**Dealer:** \_\_\_\_\_

**Date Sold:** \_\_\_\_\_

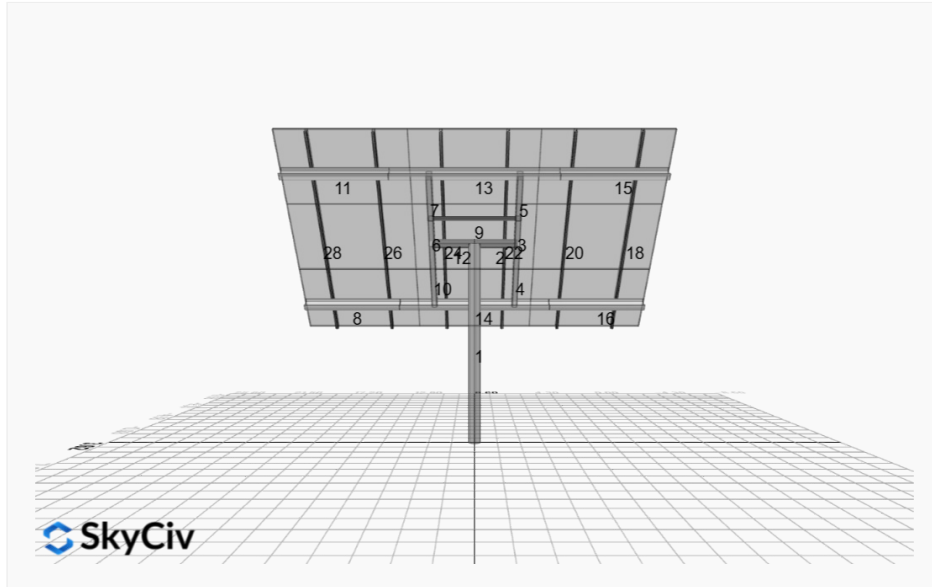

|                             |          |
|-----------------------------|----------|
| <b>Array Dimensions N/S</b> | 11.28 ft |
| <b>Array Dimensions E/W</b> | 17.20 ft |
| <b>Winter Tilt Angle</b>    | 50       |
| <b>Front Edge Clearance</b> | 5 ft     |

### MT Solar Bill of Materials (1P-0-6TOP-SD-57-L-3Hx3W-4C82)

| Part               | Short Description     | BOM Qty |
|--------------------|-----------------------|---------|
| MTS-PC-6           | 6IN Pole Cap Assembly | 1       |
| MTS-HF-SD          | H-Frame Assembly-SD   | 1       |
| MTS-SD-Wing-57     | 57IN SD Wing          | 4       |
| MTS-CLAMP-HOOK-4PK | Hook Clamp            | 3       |

### Rail Bill of Materials

| Part             | Qty |
|------------------|-----|
| Rails (135in)    | 6   |
| Rail Attachment  | 12  |
| Module Mid Clamp | 12  |
| Module End Clamp | 12  |
| Ground Lug       | 3   |

## Site Details:



**Site Address:** Rand, CO 80473, USA

### Array Specification

|                                    |           |
|------------------------------------|-----------|
| <b>Duty Classification:</b>        | SD        |
| <b>Module Width:</b>               | 44.60 in  |
| <b>Module Length:</b>              | 67.80in   |
| <b>Number of Rows:</b>             | 3         |
| <b>Number of Columns:</b>          | 3         |
| <b>Total Number of Modules:</b>    | 9         |
| <b>Winter Tilt Angle:</b>          | 50        |
| <b>Front Edge Clearance:</b>       | 5         |
| <b>Total Array Height at Tilt:</b> | 13.64 ft  |
| <b>Total Frame Length:</b>         | 17.00 ft  |
| <b>Module Info/Notes:</b>          | Hyundai   |
| <b>Array Dimensions N/S:</b>       | 11.28 ft  |
| <b>Array Dimensions E/W:</b>       | 17.20 ft  |
| <b>Rail Length:</b>                | 135.30 in |
| <b>Rail Spacing:</b>               | 2.87 ft   |

### Support Specifications

|                                 |                 |
|---------------------------------|-----------------|
| <b>Pole Size:</b>               | 6in Pipe Sch 40 |
| <b>Pole Length above Grade:</b> | 9.32 ft         |
| <b>Number of Poles:</b>         | 1               |
| <b>Pole Spacing:</b>            | 0               |

### Foundation Specifications

|  |                      |
|--|----------------------|
| <b>Foundation Type:</b>                | Round                |
| <b>Foundation Dimensions:</b>          | Ø36 in               |
| <b>Foundation Depth (below grade):</b> | Pile 1: 7.25 ft      |
| <b>Foundation Volume:</b>              | 1.898 y <sup>3</sup> |

### Site Info

|                             |                     |
|-----------------------------|---------------------|
| <b>Risk Category:</b>       | I                   |
| <b>Exposure:</b>            | C                   |
| <b>Soil Classification:</b> | sand                |
| <b>Site Location:</b>       | Rand, CO 80473, USA |
| <b>Wind Speed:</b>          | 110 mph             |
| <b>Snow Load:</b>           | 90 psf              |

### **Design Disclaimer**



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.




## AutoDesigner Input

```
{ "product_type": "Beam", "designer_name": "Talmath Lakai", "designer_email": "tal@solarbearheating.com", "designer_phone": "9705310219", "project_id": "Buffalo MTSOLAR_7K0855GFA88KD", "site_address": "Rand, CO 80473, USA", "module_info": "Hyundai", "module_width": 44.6, "module_length": 67.8, "number_rows": 3, "number_columns": 3, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": 15, "tilt_angle": 50, "ground_clearance": 5, "risk_category": "I", "exposure_category": "C", "frame_duty_override": "auto", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "36_Round", "foundation_type": "Round", "foundation_size": 36, "check_rails": false, "wind_speed_override": 110, "snow_load_override": 90, "direct_snow_load": false, "add_angle_brace": false }
```



## Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

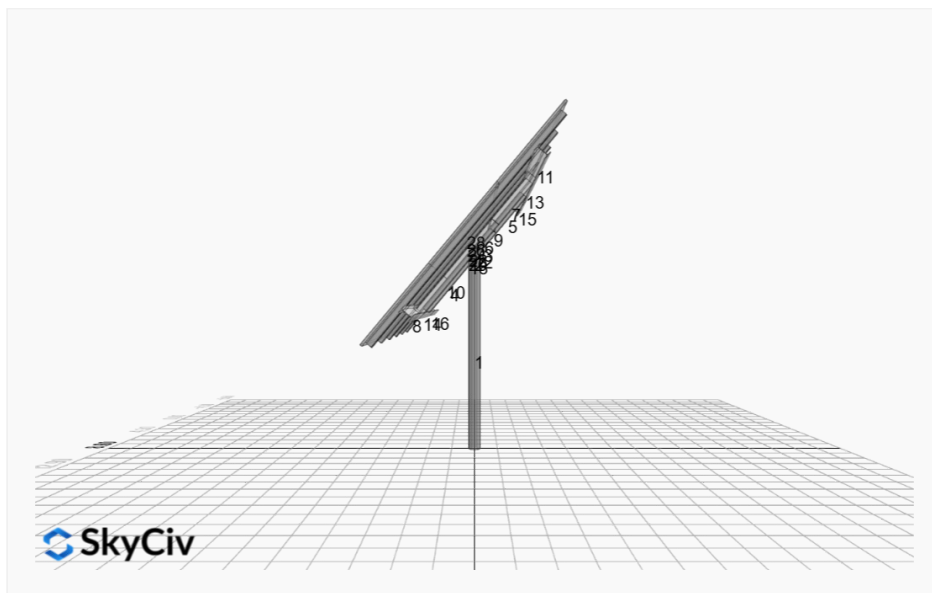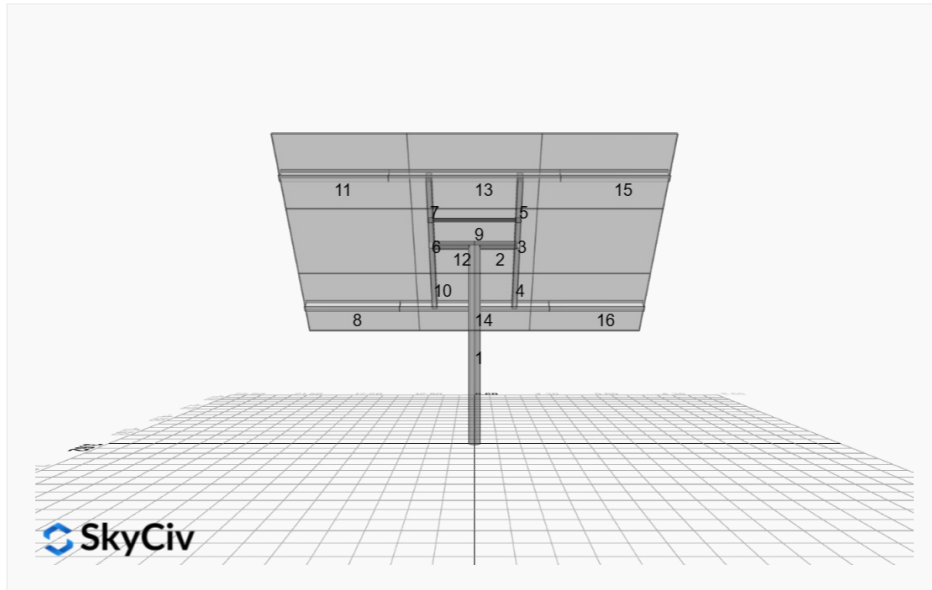


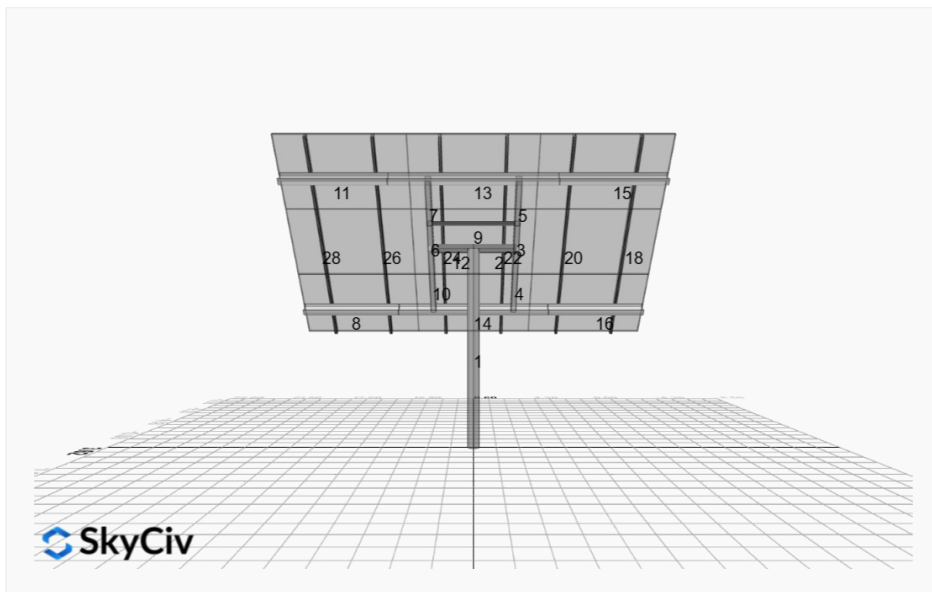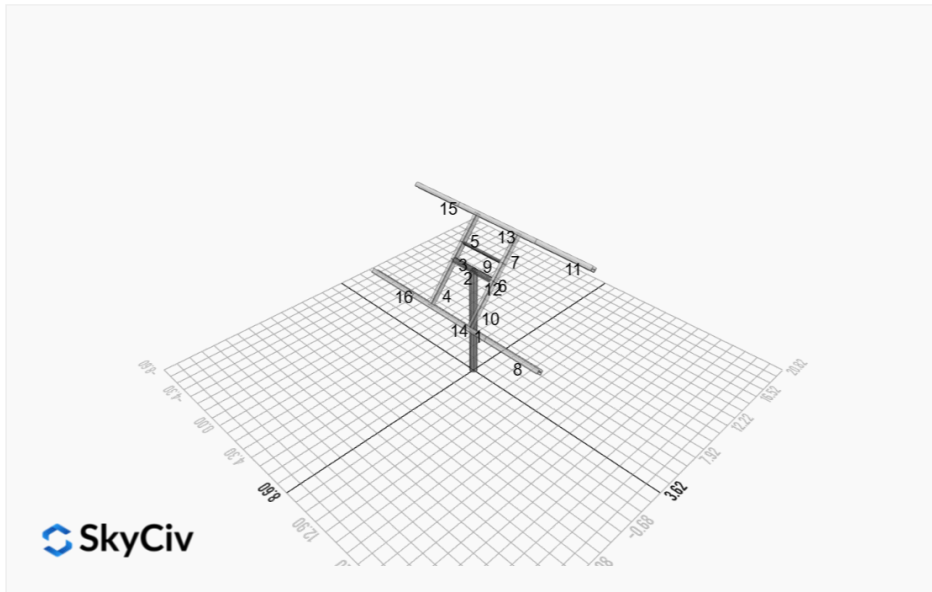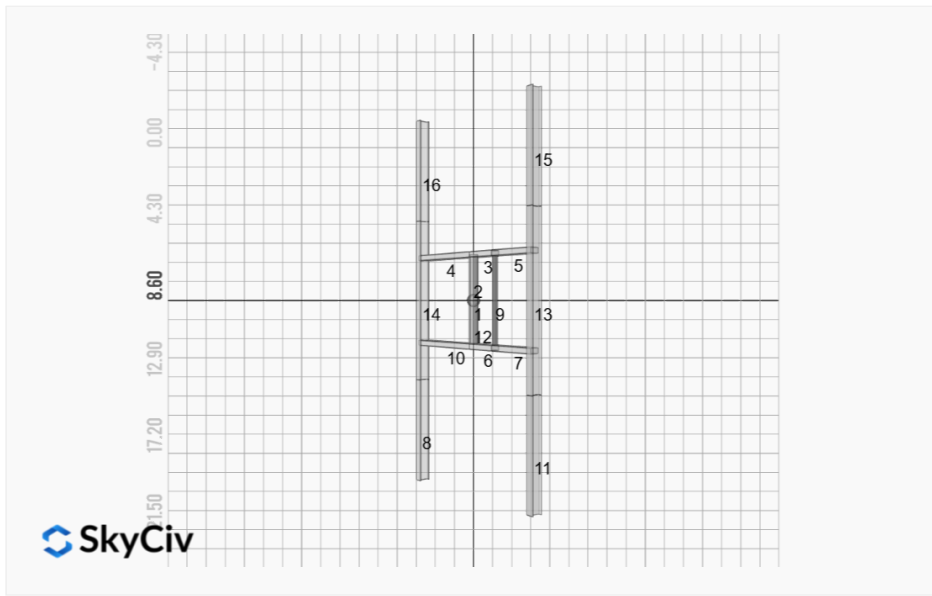

# FEM Results (Envelope Worst Case for each member)

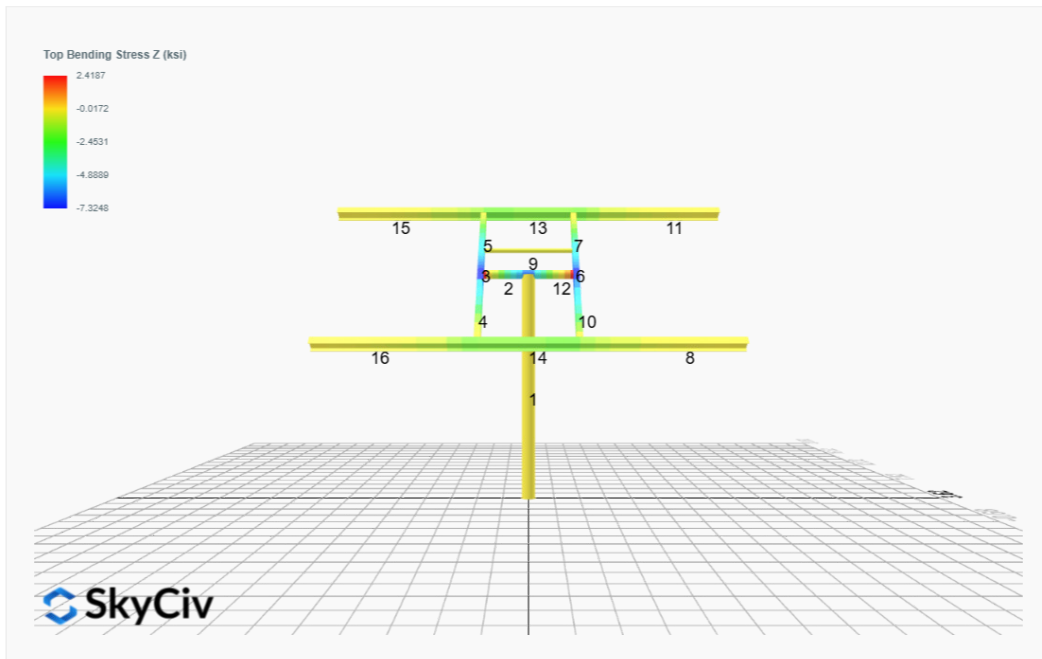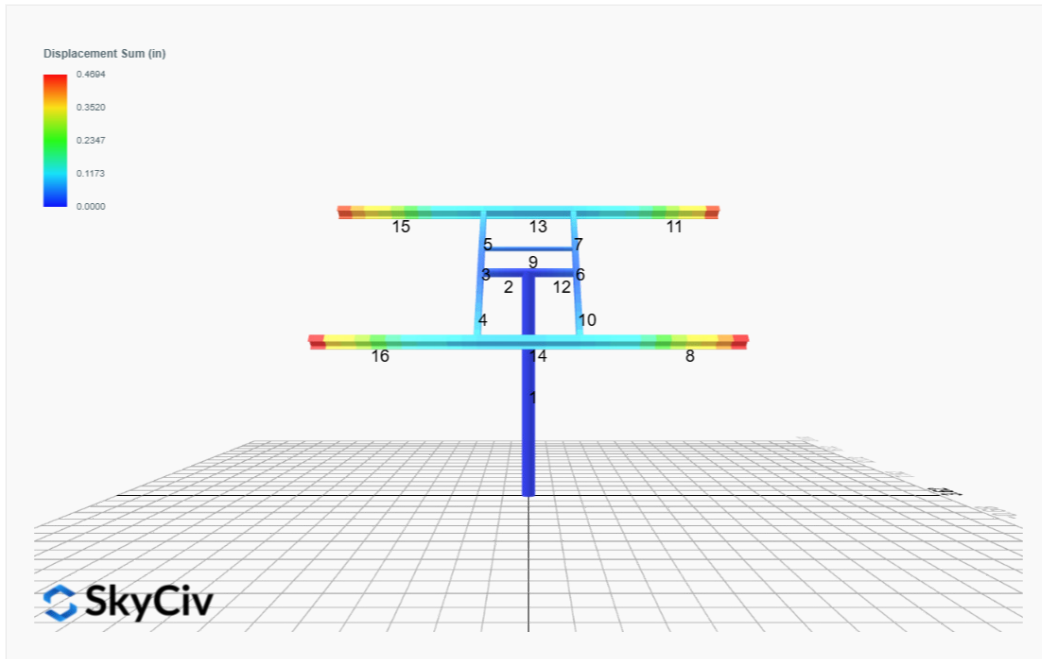

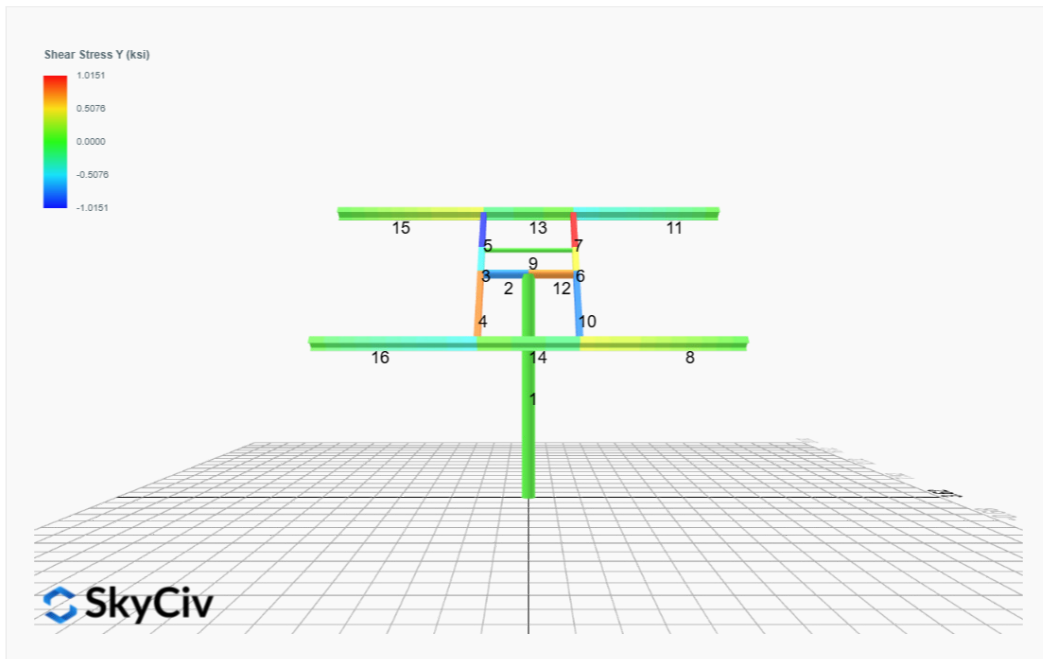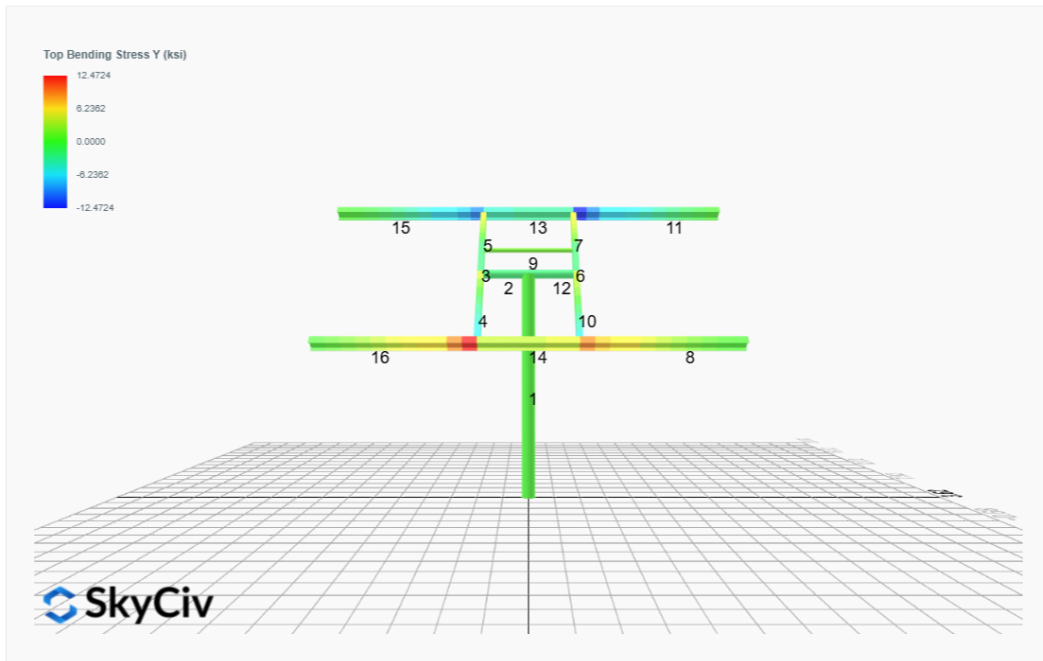

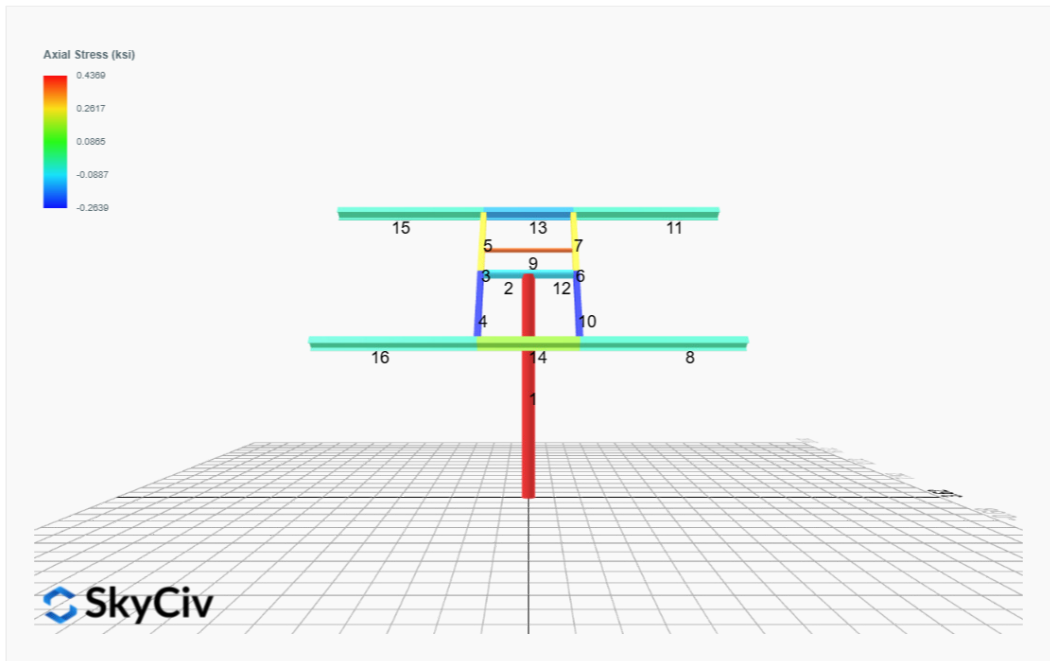

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name  | Fx      | Fy      | Fz     | Mx     | My      | Mz       |
|---|---------|---------|--------|--------|---------|----------|
| ULS: 1. D   | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 2. D + L   | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 3. D + (S or Lr or R)  | 0.0000  | 4.0296  | 0.0000 | 0.0000 | -0.0000 | 0.0260   |
| ULS: 3. D + (S or Lr or R)  | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0000  | 3.4199  | 0.0000 | 0.0000 | -0.0000 | 0.0233   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 5b. D + 0.7E   | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | 0.0000  | 3.4199  | 0.0000 | 0.0000 | -0.0000 | 0.0233   |
| ULS: 8. 0.6D + 0.7E   | 0.0000  | 0.9546  | 0.0000 | 0.0000 | -0.0000 | 0.0091   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -1.5525 | 2.8936  | 0.0000 | 0.0000 | -0.0000 | 14.6447  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 1.5525  | 0.2882  | 0.0000 | 0.0000 | -0.0000 | -14.2934 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.1644 | 4.3970  | 0.0000 | 0.0000 | -0.0000 | 10.9955  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0000  | 3.4199  | 0.0000 | 0.0000 | -0.0000 | 0.0233   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.1644  | 2.4429  | 0.0000 | 0.0000 | -0.0000 | -10.7081 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.0000  | 3.4199  | 0.0000 | 0.0000 | -0.0000 | 0.0233   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.1644 | 2.5679  | 0.0000 | 0.0000 | -0.0000 | 10.9874  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.1644  | 0.6139  | 0.0000 | 0.0000 | -0.0000 | -10.7162 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.0000  | 1.5909  | 0.0000 | 0.0000 | -0.0000 | 0.0152   |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -1.5525 | 2.2572  | 0.0000 | 0.0000 | -0.0000 | 14.6386  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | 0.0000  | 0.9546  | 0.0000 | 0.0000 | -0.0000 | 0.0091   |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 1.5525  | -0.3481 | 0.0000 | 0.0000 | -0.0000 | -14.2995 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.0000  | 0.9546  | 0.0000 | 0.0000 | -0.0000 | 0.0091   |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 6.8966              |
| Shear X          | -2.5875             |
| Shear Z          | 0.0000              |
| Moment X         | 0.0000              |
| Moment Y (Twist) | 0.0000              |
| Moment Z         | 24.8451             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 4.3970              |
| Shear X          | -1.5525             |
| Shear Z          | 0.0000              |
| Moment X         | 0.0000              |
| Moment Y (Twist) | 0.0000              |
| Moment Z         | 14.6447             |

# Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States  
 User Name: sales@mtsolar.us  
 Unit System: imperial




# Design Input Information


| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |                      |                      |
|------------------|---------|----------------------|----------------------|
| ID               | E (ksi) | F <sub>y</sub> (ksi) | F <sub>u</sub> (ksi) |
| 1                | 29000   | 50                   | 65                   |


## Section Dimensions



| ID | Name            | d (in) | t <sub>w</sub> (in) |  |  |  |  |
|----|-----------------|--------|---------------------|--|--|--|--|
| 1  | 2in Pipe Sch 40 | 2.38   | 0.15                |  |  |  |  |
| 4  | 4in Pipe Sch 40 | 4.50   | 0.24                |  |  |  |  |
| 7  | 6in Pipe Sch 40 | 6.63   | 0.28                |  |  |  |  |



| ID | Name       | d (in) | b (in) | t <sub>w</sub> (in) | t <sub>b</sub> (in) | r (in) |  |
|----|------------|--------|--------|---------------------|---------------------|--------|--|
| 15 | HSS5x3x1/8 | 5.00   | 3.00   | 0.12                | 0.12                | 0.12   |  |



| ID | Name | d (in) | t <sub>w</sub> (in) | b <sub>t</sub> (in) | b <sub>b</sub> (in) | t <sub>t</sub> (in) | t <sub>b</sub> (in) | r (in) |
|----|------|--------|---------------------|---------------------|---------------------|---------------------|---------------------|--------|
| 18 | W6x9 | 5.90   | 0.17                | 3.94                | 3.94                | 0.21                | 0.21                | 0.25   |

## Section Properties

| ID | Name | A (in <sup>2</sup> ) | J (in <sup>4</sup> ) | I <sub>yp</sub> (in <sup>4</sup> ) | I <sub>zp</sub> (in <sup>4</sup> ) | I <sub>w</sub> (in <sup>6</sup> ) | S <sub>yp</sub> (in <sup>3</sup> ) | S <sub>zp</sub> (in <sup>3</sup> ) |
|----|------|----------------------|----------------------|------------------------------------|------------------------------------|-----------------------------------|------------------------------------|------------------------------------|
|----|------|----------------------|----------------------|------------------------------------|------------------------------------|-----------------------------------|------------------------------------|------------------------------------|



|    |        |       |       |      |       |       |
|----|--------|-------|-------|------|-------|-------|
| 15 | 120.60 | 34.69 | 23.36 | 6.45 | 30.09 | 45.74 |
| 16 | 120.60 | 34.69 | 23.36 | 6.45 | 30.09 | 45.74 |

## Design Ratio

| Member ID | P     | M <sub>z</sub> | M <sub>y</sub> | V <sub>y</sub> | V <sub>z</sub> | (P,M <sub>z</sub> ,M <sub>y</sub> ) | Worst LC | KL/r         | δ            | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|--------------|--------------|--------|
| 1         | 0.061 | 0.587          | 0.000          | 0.034          | 0.000          | 0.611                               | #13      | 0.523        | Not Required | Pass   |
| 2         | 0.005 | 0.315          | 0.176          | 0.078          | 0.030          | 0.446                               | #21      | 0.034        | Not Required | Pass   |
| 3         | 0.014 | 0.451          | 0.087          | 0.045          | 0.005          | 0.544                               | #21      | 0.044        | Not Required | Pass   |
| 4         | 0.013 | 0.446          | 0.288          | 0.045          | 0.048          | 0.638                               | #21      | 0.078        | Not Required | Pass   |
| 5         | 0.014 | 0.280          | 0.302          | 0.045          | 0.061          | 0.360                               | #21      | 0.073        | Not Required | Pass   |
| 6         | 0.014 | 0.451          | 0.087          | 0.045          | 0.005          | 0.544                               | #21      | 0.044        | Not Required | Pass   |
| 7         | 0.014 | 0.280          | 0.302          | 0.045          | 0.061          | 0.360                               | #21      | 0.073        | Not Required | Pass   |
| 8         | 0.000 | 0.073          | 0.214          | 0.024          | 0.013          | 0.287                               | #21      | Not Required | Not Required | Pass   |
| 9         | 0.021 | 0.031          | 0.052          | 0.001          | 0.000          | 0.087                               | #21      | 0.198        | Not Required | Pass   |
| 10        | 0.013 | 0.446          | 0.288          | 0.045          | 0.048          | 0.638                               | #21      | 0.078        | Not Required | Pass   |
| 11        | 0.000 | 0.073          | 0.214          | 0.024          | 0.013          | 0.287                               | #21      | Not Required | Not Required | Pass   |
| 12        | 0.005 | 0.315          | 0.176          | 0.078          | 0.030          | 0.446                               | #21      | 0.034        | Not Required | Pass   |
| 13        | 0.008 | 0.182          | 0.400          | 0.033          | 0.017          | 0.577                               | #21      | 0.177        | Not Required | Pass   |
| 14        | 0.009 | 0.185          | 0.400          | 0.033          | 0.017          | 0.577                               | #21      | 0.177        | Not Required | Pass   |
| 15        | 0.000 | 0.073          | 0.214          | 0.024          | 0.013          | 0.287                               | #21      | Not Required | Not Required | Pass   |
| 16        | 0.000 | 0.073          | 0.214          | 0.024          | 0.013          | 0.287                               | #21      | Not Required | Not Required | Pass   |

## Definitions

|                                     |   |
|-------------------------------------|---|
| Φ <sub>t</sub>                      | Safety factor for tensile                                 |
| Φ <sub>c</sub>                      | Safety factor for compression                             |
| Φ <sub>b</sub>                      | Safety factor for flexure                                 |
| Φ <sub>v</sub>                      | Safety factor for shear                                   |
| E                                   | Modulus of elasticity                                     |
| F <sub>y</sub>                      | Specified minimum yield stress                            |
| F <sub>u</sub>                      | Specified minimum tensile strength                        |
| A                                   | Cross-sectional area                                      |
| J                                   | Torsional constant  |
| I <sub>yp</sub>                     | Moment of inertia about the Y axes                        |
| I <sub>zp</sub>                     | Moment of inertia about the Z axes                        |
| I <sub>w</sub>                      | Warping constant  |
| S <sub>yp</sub>                     | Plastic section modulus about the Y axis                  |
| S <sub>zp</sub>                     | Plastic section modulus about the Z axis                  |
| KL                                  | Effective length  |
| C <sub>b</sub>                      | Buckling modification factor (from all load combinations) |
| L <sub>b</sub>                      | Length between braced points                              |
| LST                                 | Limited slenderness for tension                           |
| LSC                                 | Limited slenderness for compression                       |
| LD                                  | Limited deflection  |
| P <sub>n</sub>                      | Nominal axial strength (tension/compression)              |
| M <sub>n</sub>                      | Nominal flexural strength (about Z/Y axis)                |
| V <sub>n</sub>                      | Nominal shear strength (along Z/Y axis)                   |
| P                                   | Design ratio in case of axial force                       |
| M <sub>z</sub>                      | Design ratio in case of bending about Z axis              |
| M <sub>y</sub>                      | Design ratio in case of bending about Y axis              |
| V <sub>y</sub>                      | Design ratio in case of shear along Y axis                |
| V <sub>z</sub>                      | Design ratio in case of shear along Z axis                |
| (P,M <sub>z</sub> ,M <sub>y</sub> ) | Design ratio in case of axial force and bending action    |
| KL/r                                | Design ratio in case of section slenderness               |
| δ                                   | Design ratio in case of member deflection                 |
| OK                                  | Capacity is provided                                      |
| NG                                  | Capacity is not provided                                  |



| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

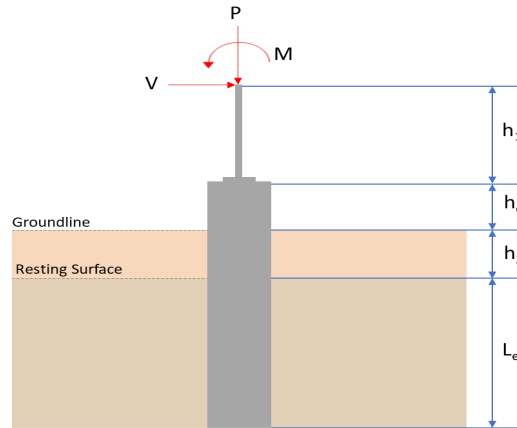

### Geometry

Pile shape: round

$D = 36$  in - Pile diameter

$L = 7.25$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label   | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|---|--|---|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 4.397  | 6.897  |
| $V_x$ (kip)    | -1.552 | -2.587 |
| $V_z$ (kip)    | 0.000  | 0.000  |
| $M_x$ (kipft)  | 0.000  | 0.000  |
| $M_z$ (kipft)  | 14.645 | 24.845 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength,

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{D}$$

$$H_o = \frac{(-1.552 \text{ kip})}{(36 \text{ in})}$$

$$H_o = -0.51733 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{D}$$

$$M_o = \frac{(14.645 \text{ kipft}) + ((-1.552 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$$

$$M_o = 4.8817 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.6228 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$L_{e,z} = 0 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.6228 \text{ ft}), (0 \text{ ft})]$$

$$L_{e,req} = 6.623 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

Ratio - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.623 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.91352$$

Status: **PASS**  
Ratio: **0.910**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = \pi \left(\frac{D}{2}\right)^2$$

$$A = \pi \times \left(\frac{(36 \text{ in})}{2}\right)^2$$

$$A = 7.0686 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(4.397 \text{ kip})}{(7.0686 \text{ ft}^2)}$$

$$q = 0.62205 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.62205 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.31102$$

Status: **PASS**  
Ratio: **0.310**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(36 \text{ in})}$$

$$L/D = 2.4167$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.51733 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 4.8817 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (4.8817 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.51733 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (4.8817 \text{ kipft/ft})) + (4 \times (-0.51733 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.038 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{1.178 [(4 M_o) + (3 H_o L_c)]^2}{L_c^2 [(3 M_o) + (2 H_o L_c)]}$$

$$p = \frac{1.178 \times [(4 \times (4.8817 \text{ kipft/ft})) + (3 \times (-0.51733 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (4.8817 \text{ kipft/ft})) + (2 \times (-0.51733 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.21481 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_c$ ,

$$s = \frac{9.425 [(2 M_o) + (H_o L_c)]}{L_c^2}$$

$$s = \frac{9.425 \times [(2 \times (4.8817 \text{ kipft/ft})) + ((-0.51733 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 1.0781 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.038 \text{ ft})}{2}$$

$$p_a = 0.37785 \text{ kip/ft}^2$$

*Ratio* - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.21481 \text{ kip/ft}^2)}{(0.37785 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.5685$$

$p_s$  - Allowable lateral soil pressure at depth  $L_c$ ,

$$p_s = R L_c$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

*Ratio* - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$


$$(1.0781 \text{ kip/ft}^2)$$

Status: **PASS**  
Ratio: **0.570**

$$\text{Ratio} = \frac{\dots}{(1.0875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.9914$$

Status: **PASS**  
Ratio: **0.990**

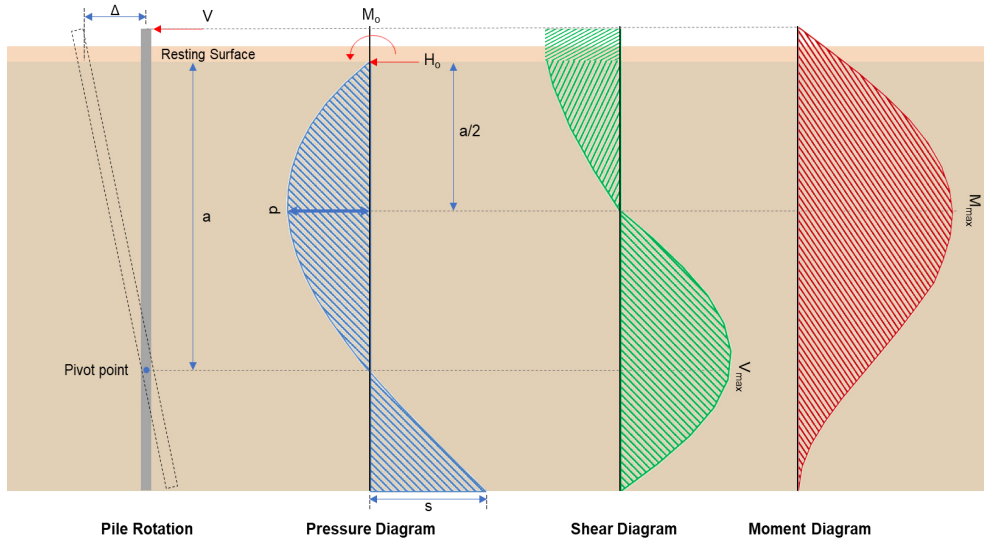

### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{D}$$

$$H_o = \frac{(-2.587 \text{ kip})}{(36 \text{ in})}$$

$$H_o = -0.86233 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{D}$$

$$M_o = \frac{(24.845 \text{ kipft}) + ((-2.587 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$$

$$M_o = 8.2817 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(8.2817 \text{ kipft/ft})}{(-0.86233 \text{ kip/ft})}$$

$$E = 9.6038 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (8.2817 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.86233 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (8.2817 \text{ kipft/ft})) + (4 \times (-0.86233 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.0356 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 + 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.86233 \text{ kip/ft}) \times (36 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (9.6038 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0356 \text{ ft})}{(7.25 \text{ ft})} \right)^2 + 4 \times \left( \frac{3 \times (9.6038 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0356 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 7.7699 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.86233 \text{ kip/ft}) \times (36 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(9.6038 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.0356 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (9.6038 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.0356 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (9.6038 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.0356 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 26.469 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.85$  - Alpha factor for axial strength,

$A_g = 1017.9 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(6.897 \text{ kip})}{(0.65) \times (0.85)} - (0.85 \times (2.5 \text{ ksi}) \times (1017.9 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (1017.9 \text{ in}^2)) \right]$$

$$A_{st,required} = -37.158 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-37.158 \text{ in}^2), (0.0018 \times (1017.9 \text{ in}^2))]$$

$$A_{min} = 1.8322 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(1.8322 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 6$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (6) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 1.8408 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(1.8322 \text{ in}^2)}{(1.8408 \text{ in}^2)}$$

$$\text{Ratio} = 0.99533$$

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

Status: **PASS**  
Ratio: **1.000**

|  |  |  |
|--|--|--|
| <p>25.7.2.2<br/>25.7.2.1</p>   | $s_{rebar} = Max[1.5, (1.5 d_{bar})]$ $s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b><br/>Since longitudinal reinforcement is <math>\leq</math> No. 10e: Use #3(0.375 in)<br/><math>s_{ties}</math> - Maximum center-to-center spacing of ties,</p> $s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), D]$ $s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), (36 \text{ in})]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p>Main reinforcement: <b>6 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>  |  |
| <p>22.4.2.2</p>  | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> $\phi P_N = \phi 0.85 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.85 \times [(0.85 \times (2.5 \text{ ksi}) \times [(1017.9 \text{ in}^2) - (1.8408 \text{ in}^2)]) + ((60 \text{ ksi}) \times (1.8408 \text{ in}^2))]$ $\phi P_N = 1253.9 \text{ kip}$ <p>Ratio - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(6.897 \text{ kip})}{(1253.9 \text{ kip})}$ $Ratio = 0.0055004$   | <p>Status: <b>PASS</b><br/>Ratio: <b>0.010</b></p> |
| <p>22.5.2.2<br/><br/>22.5.5.1.3<br/><br/>22.5.5.1.1<br/><br/>22.5.5.1.1(a)</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b><br/><math>b_w = 36 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (36 \text{ in})$ $d = 28.8 \text{ in}$ <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(28.8 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.71796$ <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.71796) \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,max} = 186.09 \text{ kip}$ <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>, <math>P = 6.897 \text{ kip} \rightarrow 6897 \text{ lbf}</math>,</p> <p><math>V_{c,a}</math> - Shear strength of concrete (a)</p> $V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ |  |

$$V_{c,a} = \left[ 2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + \frac{(6897 \text{ lbf})}{6 \times (1017.9 \text{ in}^2)} \right] \times (36 \text{ in}) \times (28.8 \text{ in})$$

$$V_{c,a} = 75.609 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (36 \text{ in}) \times (28.8 \text{ in})$$

$$V_{c,b} = 204.04 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min} [V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min} [(186.09 \text{ kip}), (75.609 \text{ kip}), (204.04 \text{ kip})]$$

$$V_c = 75.609 \text{ kip}$$

22.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$$

$$V_{s,a} = 414.72 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (28.8 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 38.17 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN} [V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN} [(414.72 \text{ kip}), (38.17 \text{ kip})]$$

$$V_s = 38.17 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((75.609 \text{ kip}) + (38.17 \text{ kip}))$$

$$\phi V_n = 73.956 \text{ kip}$$

**Considering x-direction:**

$V_{max} = 7.7699 \text{ kip}$  - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$\text{Ratio} = \frac{(7.7699 \text{ kip})}{(73.956 \text{ kip})}$$

$$\text{Ratio} = 0.10506$$

**Flexural Strength (ACI 318-19, LRFD)** $S_m$  - Section modulus

$$S_m = \frac{\pi D^3}{32}$$

$$S_m = \frac{\pi \times (36 \text{ in})^3}{32}$$

$$S_m = 4580.4 \text{ in}^3$$

 $\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

 $M_n$  shall be the lesser of: $\phi M_{n,1}$ 

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 4580.442 \text{ in}^3$$

$$\phi M_{n,1} = 62.027 \text{ kipft}$$

14.5.2.1b  $\phi M_{n,2}$ 

$$\phi M_{n,2} = \phi \times 0.85 f'_c S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (4580.4 \text{ in}^3)$$

$$\phi M_{n,2} = 527.23 \text{ kipft}$$

Therefore,

 $\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(62.027 \text{ kipft}), (527.23 \text{ kipft})]$$

$$\phi M_n = 62.027 \text{ kipft}$$

**Considering x-direction:** $M_{max} = 26.469 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(26.469 \text{ kipft})}{(62.027 \text{ kipft})}$$

$$\text{Ratio} = 0.42674$$