

Your Project Calculations

Project Name: MTSOLAR_K6KLA9KKA4DC

S3D Model Link:

[https://platform.skyciv.com/structural?](https://platform.skyciv.com/structural?preload_name=MTSOLAR_K6KLA9KKA4DC&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/9_2023)

[preload_name=MTSOLAR_K6KLA9KKA4DC&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/9_2023](https://platform.skyciv.com/structural?preload_name=MTSOLAR_K6KLA9KKA4DC&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/9_2023)

Public Model Link:

https://platform.skyciv.com/structural-viewer?project_id=2wKUvql2GpCbyqXCgBcsIC7S0EmZobieUpya0NQXZLAUEslkza8IkOKoogk3m8eB



Array Specification

Product:	Beam
Unique ID:	3P-19.75-8TOP-HD-45-L-5Hx8W-E1JL
Duty Classification:	HD
Module Width:	42.00 in
Module Length:	81.50in
Number of Rows:	5
Number of Columns:	8
Total Number of Modules:	40
Desired Tilt Angle:	30
Front Edge Clearance:	9
Total Array Height at Tilt:	17.80 ft
Total Frame Length:	54.50 ft
Frame Weight:	2884 lbs
Array Dimensions N/S:	17.71 ft
Array Dimensions E/W:	55.00 ft
Rail Length:	212.50 in
Rail Spacing:	3.40 ft
Rail Check:	Not Checked

Support Specifications


Pole Size:	8in Pipe Sch 40
Pole Length above Grade:	13.43 ft
Number of Poles:	3
Pole Spacing:	19.75 ft

Foundation Specifications

Foundation Type:	Round
Foundation Dimensions:	Ø36 in
Foundation Depth (below grade):	Pile 1: 9.25 ft Pile 2: 9.50 ft Pile 3: 9.25 ft
Foundation Volume:	7.330 y ³
Foundation Result:	PASSED
Mount Twist:	0.396874 kip

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	9590 W 600 S, Topeka, IN 46571, USA
Wind Speed:	100 mph
Snow Load:	20 psf
Design Uplift Pressure:	Multiple pressures
Design Downforce Pressure:	Multiple pressures
Design Snow Pressure:	0.008797 ksf

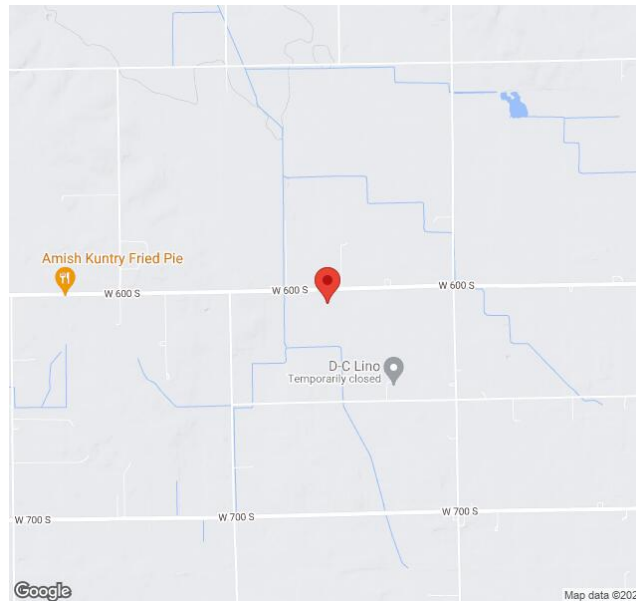

Design Disclaimer

This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.

AutoDesigner Input


```
{
  "wind_speed_override": null,
  "snow_load_override": null,
  "direct_snow_load": false,
  "product_type": "Beam",
  "project_id": "MTSOLAR_K6KLA9KKA4DC",
  "site_address": "9590 W 600 S, Topeka, IN 46571, USA",
  "module_width": 42,
  "module_length": 81.5,
  "number_rows": 5,
  "number_columns": 8,
  "pole_mount_section": "4_40",
  "core_pipe_width": 65,
  "core_pipe_section": "2_40",
  "adjuster_section": "2_40",
  "core_beam_height": 65,
  "core_beam_section": "HSS3x2x1/8",
  "main_pipe_section": "2_12GA",
  "pole_spacing": 15,
  "tilt_angle": 30,
  "ground_clearance": 9,
  "risk_category": "I",
  "exposure_category": "B",
  "frame_duty_override": "auto",
  "pole_override": "8_40",
  "soil_type": "sand",
  "customer_foundation_override": "36_Round",
  "foundation_type": "Round",
  "foundation_size": 36,
  "check_rails": false
}
```

Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Design and Sizing is approximate only







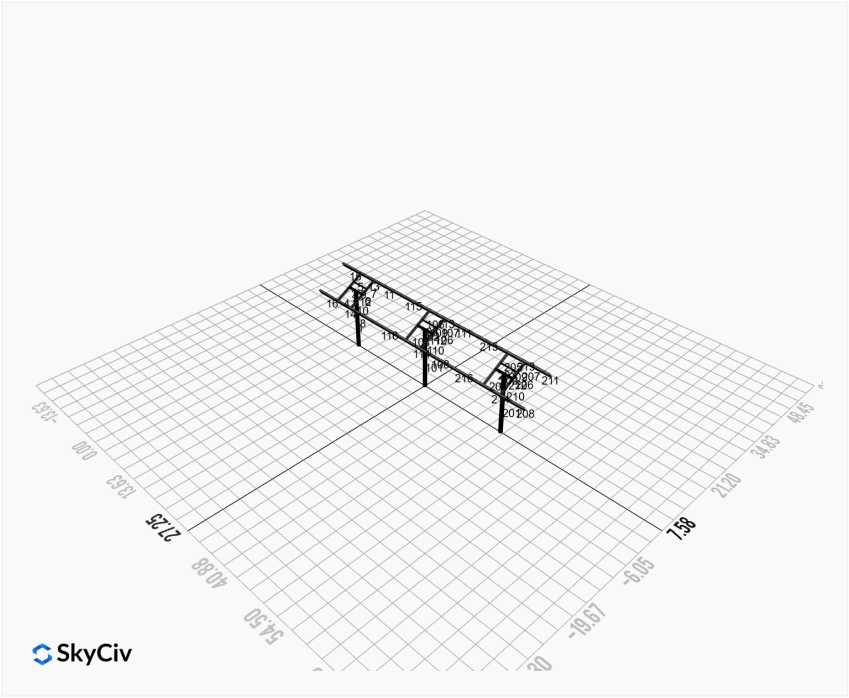

FEM Results (Envelope Worst Case for each member)

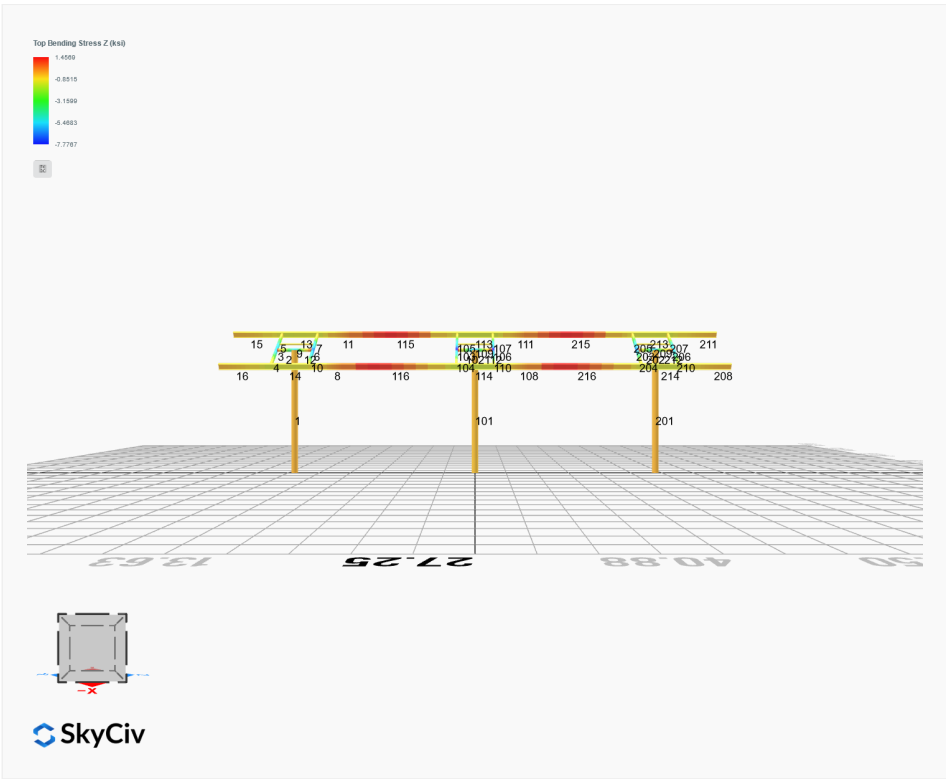
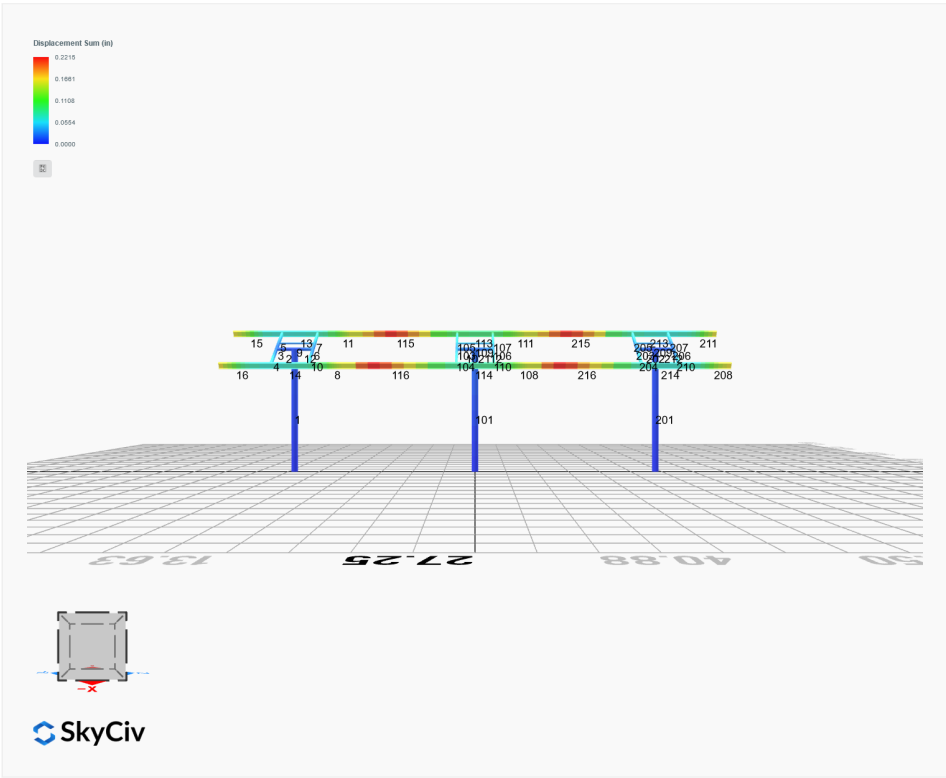


Top Bending Stress Y (ksi)


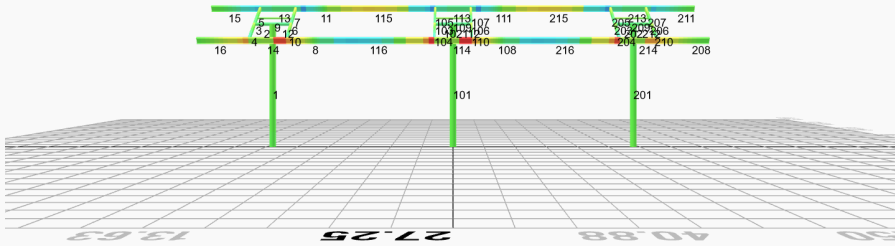


SkyCiv

Shear Stress Y (ksi)

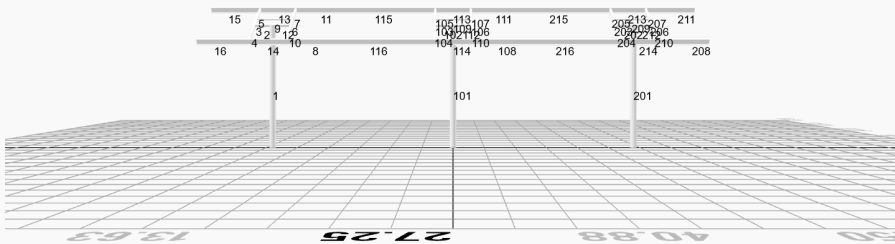

SkyCiv

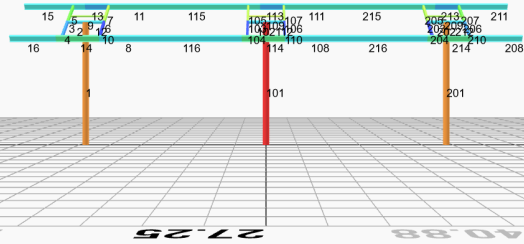

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0068	2.3251	0.0271	0.1140	-0.0109	-0.0539
ULS: 2. D + L	0.0068	2.3251	0.0271	0.1140	-0.0109	-0.0539
ULS: 3. D + (S or Lr or R)	0.0159	4.6481	0.0638	0.2681	-0.0260	-0.1574
ULS: 3. D + (S or Lr or R)	0.0068	2.3251	0.0271	0.1140	-0.0109	-0.0539
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0137	4.0674	0.0546	0.2296	-0.0222	-0.1316
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0068	2.3251	0.0271	0.1140	-0.0109	-0.0539
ULS: 5b. D + 0.7E	0.0068	2.3251	0.0271	0.1140	-0.0109	-0.0539
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0137	4.0674	0.0546	0.2296	-0.0222	-0.1316
ULS: 8. 0.6D + 0.7E	0.0041	1.3950	0.0163	0.0684	-0.0065	-0.0323
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.0204	5.7928	0.1098	0.4490	-0.2338	27.9631
ULS: 5a. D + 0.6W_Wind downforce Case B only	-2.0204	5.7928	0.1098	0.4490	-0.2338	27.9631
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.7416	-0.6451	-0.0413	-0.1625	0.1736	-22.9809
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.4652	-0.1594	-0.0393	-0.1540	0.1715	-26.4309
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.5067	6.6681	0.1166	0.4808	-0.1894	20.8812
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.5067	6.6681	0.1166	0.4808	-0.1894	20.8812
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3148	1.8397	0.0033	0.0222	0.1161	-17.3268
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1075	2.2041	0.0048	0.0286	0.1145	-19.9143
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.5136	4.9258	0.0891	0.3652	-0.1781	20.9588
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.5136	4.9258	0.0891	0.3652	-0.1781	20.9588
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3079	0.0974	-0.0242	-0.0934	0.1275	-17.2491
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1006	0.4618	-0.0227	-0.0870	0.1259	-19.8367
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.0231	4.8627	0.0989	0.4034	-0.2295	27.9846
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-2.0231	4.8627	0.0989	0.4034	-0.2295	27.9846
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.7389	-1.5752	-0.0522	-0.2081	0.1779	-22.9593
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.4625	-1.0894	-0.0501	-0.1996	0.1758	-26.4093

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	9.7327
Shear X	-3.3786
Shear Z	0.1904
Moment X	0.7803
Moment Y (Twist)	0.3968
Moment Z	47.4565

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.6681
Shear X	-2.0231
Shear Z	0.1166
Moment X	0.4808
Moment Y (Twist)	0.2338
Moment Z	27.9846

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0136	2.6102	0.0000	0.0000	0.0000	0.1902
ULS: 2. D + L	-0.0136	2.6102	0.0000	0.0000	0.0000	0.1902
ULS: 3. D + (S or Lr or R)	-0.0319	5.3167	0.0000	-0.0000	0.0000	0.4180
ULS: 3. D + (S or Lr or R)	-0.0136	2.6102	0.0000	0.0000	0.0000	0.1902
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0273	4.6401	0.0000	0.0000	0.0000	0.3611
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0136	2.6102	0.0000	0.0000	0.0000	0.1902
ULS: 5b. D + 0.7E	-0.0136	2.6102	0.0000	0.0000	0.0000	0.1902

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0273	4.6401	0.0000	0.0000	0.0000	0.3611
ULS: 8. 0.6D + 0.7E	-0.0081	1.5661	0.0000	0.0000	0.0000	0.1141
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.2748	6.6137	0.0000	0.0000	0.0000	31.1503
ULS: 5a. D + 0.6W_Wind downforce Case B only	-2.2748	6.6137	0.0000	0.0000	0.0000	31.1503
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.9301	-0.8256	0.0000	0.0000	0.0000	-25.1174
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.5807	-0.2345	0.0000	0.0000	0.0000	-28.5277
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7232	7.6427	0.0000	-0.0000	0.0000	23.5811
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.7232	7.6427	0.0000	-0.0000	0.0000	23.5811
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.4304	2.0632	0.0000	0.0000	0.0000	-18.6196
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1684	2.5066	0.0000	0.0000	0.0000	-21.1773
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7095	5.6129	0.0000	0.0000	0.0000	23.4102
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.7095	5.6129	0.0000	0.0000	0.0000	23.4102
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.4442	0.0333	0.0000	0.0000	0.0000	-18.7905
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1822	0.4767	0.0000	0.0000	0.0000	-21.3482
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.2694	5.5697	0.0000	0.0000	0.0000	31.0742
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-2.2694	5.5697	0.0000	0.0000	0.0000	31.0742
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.9355	-1.8697	0.0000	0.0000	0.0000	-25.1935
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.5862	-1.2785	0.0000	0.0000	0.0000	-28.6037

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	11.1549
Shear X	-3.7898
Shear Z	-0.0000
Moment X	0.0001
Moment Y (Twist)	0.0001
Moment Z	52.9361

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.6427
Shear X	-2.2748
Shear Z	0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	31.1503

Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0068	2.3251	-0.0271	-0.1140	0.0109	-0.0539
ULS: 2. D + L	0.0068	2.3251	-0.0271	-0.1140	0.0109	-0.0539
ULS: 3. D + (S or Lr or R)	0.0159	4.6481	-0.0638	-0.2681	0.0260	-0.1574
ULS: 3. D + (S or Lr or R)	0.0068	2.3251	-0.0271	-0.1140	0.0109	-0.0539
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0137	4.0674	-0.0546	-0.2296	0.0222	-0.1315
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0068	2.3251	-0.0271	-0.1140	0.0109	-0.0539
ULS: 5b. D + 0.7E	0.0068	2.3251	-0.0271	-0.1140	0.0109	-0.0539
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0137	4.0674	-0.0546	-0.2296	0.0222	-0.1315
ULS: 8. 0.6D + 0.7E	0.0041	1.3950	-0.0163	-0.0684	0.0065	-0.0323
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.0204	5.7928	-0.1098	-0.4490	0.2338	27.9631
ULS: 5a. D + 0.6W_Wind downforce Case B only	-2.0204	5.7928	-0.1098	-0.4490	0.2338	27.9631
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.7416	-0.6451	0.0413	0.1625	-0.1736	-22.9808
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.4652	-0.1594	0.0393	0.1540	-0.1714	-26.4309
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.5067	6.6681	-0.1166	-0.4808	0.1894	20.8812
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.5067	6.6681	-0.1166	-0.4808	0.1894	20.8812
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3148	1.8397	-0.0033	-0.0222	-0.1161	-17.3267
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1075	2.2041	-0.0048	-0.0286	-0.1145	-19.9143

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.5136	4.9258	-0.0891	-0.3652	0.1781	20.9588
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.5136	4.9258	-0.0891	-0.3652	0.1781	20.9588
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3079	0.0974	0.0242	0.0934	-0.1275	-17.2491
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1006	0.4618	0.0227	0.0870	-0.1259	-19.8366
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.0231	4.8627	-0.0989	-0.4034	0.2295	27.9846
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-2.0231	4.8627	-0.0989	-0.4034	0.2295	27.9846
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.7389	-1.5752	0.0522	0.2081	-0.1779	-22.9593
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.4625	-1.0894	0.0501	0.1996	-0.1758	-26.4093

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	9.7326
Shear X	-3.3786
Shear Z	-0.1904
Moment X	-0.7804
Moment Y (Twist)	0.3969
Moment Z	47.4572

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.6681
Shear X	-2.0231
Shear Z	-0.1166
Moment X	-0.4808
Moment Y (Twist)	0.2338
Moment Z	27.9846

Project Details

Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States

User Name: sales@mtsolar.us
 Project Name: MTSOLAR_K6KLA9KKA4DC
 Unit System: imperial



Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65

Section Dimensions								
ID	Name	d (in)	t_w (in)					
2	2in Pipe Sch 80	2.38	0.22					
5	4in Pipe Sch 80	4.50	0.34					
9	8in Pipe Sch 40	8.63	0.32					
ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)		
16	HSS5x3x16	5.00	3.00	0.17	0.17	0.17		
ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
19	W8x10	7.89	0.17	3.94	3.94	0.20	0.20	0.30

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I_{yp} (in ⁴)	I_{zp} (in ⁴)	I_w (in ⁶)	S_{yp} (in ³)	S_{zp} (in ³)
2	2in Pipe Sch 80	1.48	1.74	0.87	0.87	0.00	1.02	1.02
5	4in Pipe Sch 80	4.41	19.22	9.61	9.61	0.00	5.85	5.85

9	8in Pipe Sch 40	8.40	144.98	72.49	72.49	0.00	22.21	22.21
16	HSS5x3x3/16	2.58	8.64	3.85	8.53	92.39	2.96	4.21
19	W8x10	2.96	0.04	2.09	30.80	30.90	1.66	8.87

Member Properties									
Member ID	Section ID	K _z L (ft)	K _y L (ft)	L _b (ft)	C _b	L S T	L S C	L D	
1	9	28.20	28.20	13.43	-	300	200	1	
2	5	1.30	1.30	2.00	-	300	200	1	
3	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.17,1.17,1.18,1.18,1.20,1.18,1.18,1.15,1.17,1.18,1.18,1.17,1.17	300	200	1	
4	16	2.44	2.44	3.75	1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.67,1.65,1.69,1.67,1.67,1.66,1.75,1.67,1.67,1.68,1.68,1.67,1.67,1.63,1.70,1.67,1.67,1.66,1.30	300	200	1	
5	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.69,1.67,1.67,1.64,1.66,1.67,1.67,1.66,1.66	300	200	1	
6	16	0.92	0.92	1.42	1.19,1.19,1.19,1.18,1.19,1.19,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.19,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18	300	200	1	
7	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.69,1.67,1.67,1.65,1.66,1.67,1.67,1.66,1.66	300	200	1	
8	19	1.33	1.33	2.05	1.72,1.72,1.72,1.72,1.72,1.72,1.71,1.71,1.70,2.07,1.71,1.71,1.71,1.59,1.71,1.71,1.73,1.78,1.71,1.71,1.70,2.00,1.71,1.71,1.71,1.15	300	200	1	
9	2	2.60	2.60	4.00	-	300	200	1	
10	16	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.69,1.67,1.67,1.66,1.92,1.67,1.67,1.68,1.67,1.67,1.67,1.64,1.70,1.67,1.67,1.66,1.60	300	200	1	
11	19	1.33	1.33	2.05	1.75,1.76,1.75,1.76,1.75,1.75,1.82,1.82,1.91,1.97,1.82,1.82,1.86,1.93,1.79,1.79,1.66,1.42,1.81,1.81,1.98,2.02,1.83,1.83,1.85,1.91	300	200	1	
12	5	1.30	1.30	2.00	-	300	200	1	
13	19	4.88	4.00	7.50	1.11,1.11,1.11,1.11,1.11,1.11,1.10,1.10,1.09,1.11,1.10,1.10,1.09,1.11,1.10,1.10,1.12,1.10,1.10,1.10,1.08,1.11,1.10,1.10,1.10,1.11	300	200	1	
14	19	4.88	4.00	7.50	1.10,1.10,1.10,1.11,1.10,1.10,1.10,1.10,1.09,1.40,1.10,1.10,1.10,1.93,1.10,1.10,1.11,1.13,1.10,1.10,1.09,1.20,1.10,1.10,1.10,1.20	300	200	1	
15	19	7.88	7.88	3.75	2.33,2.33	300	200	1	
16	19	7.88	7.88	3.75	2.33,2.33	300	200	1	
101	9	28.20	28.20	13.43	-	300	200	1	
102	5	1.30	1.30	2.00	-	300	200	1	
103	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.17,1.18,1.18,1.18,1.19,1.18,1.18,1.16,1.17,1.18,1.18,1.18,1.18	300	200	1	
104	16	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.69,1.67,1.67,1.66,1.82,1.67,1.67,1.68,1.67,1.67,1.67,1.64,1.69,1.67,1.67,1.66,1.59	300	200	1	
105	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.68,1.67,1.67,1.65,1.66,1.67,1.67,1.66,1.66	300	200	1	
106	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.17,1.18,1.18,1.18,1.19,1.18,1.18,1.16,1.17,1.18,1.18,1.18,1.18	300	200	1	
107	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.68,1.67,1.67,1.67,1.65,1.66,1.67,1.67,1.66,1.66	300	200	1	

						0	0	
108	19	1.33	1.33	2.05	2.08,2.08,2.08,2.08,2.08,2.08,2.07,2.07,2.06,2.02,2.07,2.07,2.06,1.32,2.07,2.07,2.10,2.08,2.07,2.07,1.98,2.06,2.07,2.07,2.07,2.21	300	200	1
109	2	2.60	2.60	4.00	-	300	200	1
110	16	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.69,1.67,1.67,1.66,1.82,1.67,1.67,1.68,1.67,1.67,1.67,1.64,1.69,1.67,1.67,1.66,1.59	300	200	1
111	19	1.33	1.33	2.05	2.07,2.07,2.07,2.07,2.07,2.07,1.75,1.75,1.47,1.50,1.73,1.73,1.57,1.57,1.90,1.90,2.33,1.63,1.79,1.79,1.37,1.45,1.71,1.71,1.60,1.59	300	200	1
112	5	1.30	1.30	2.00	-	300	200	1
113	19	4.88	4.00	7.50	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.06,1.06,1.04,1.04,1.05,1.06,1.04,1.04,1.03,1.02,1.04,1.04,1.07,1.08,1.04,1.04,1.05,1.05	300	200	1
114	19	4.88	4.00	7.50	1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.40,1.04,1.04,1.04,1.03,1.04,1.04,1.03,1.04,1.04,1.04,1.15,1.04,1.04,1.04,1.01	300	200	1
115	19	6.63	6.63	10.20	1.15,1.15,1.15,1.15,1.15,1.15,1.13,1.13,1.10,1.10,1.13,1.13,1.11,1.11,1.14,1.14,1.20,1.49,1.13,1.13,1.09,1.10,1.12,1.12,1.12,1.11	300	200	1
116	19	6.63	6.63	10.20	1.16,1.16,1.16,1.16,1.16,1.16,1.15,1.15,1.15,1.14,1.15,1.15,1.13,1.15,1.15,1.17,1.15,1.15,1.15,1.14,1.15,1.15,1.15,1.30	300	200	1
201	9	28.20	28.20	13.43	-	300	200	1
202	5	1.30	1.30	2.00	-	300	200	1
203	16	0.92	0.92	1.42	1.19,1.19,1.19,1.18,1.19,1.19,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.19,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18	300	200	1
204	16	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.70,1.67,1.67,1.66,1.92,1.67,1.67,1.68,1.67,1.67,1.67,1.64,1.70,1.67,1.67,1.66,1.60	300	200	1
205	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.69,1.67,1.67,1.65,1.66,1.67,1.67,1.66,1.66	300	200	1
206	16	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.17,1.17,1.18,1.18,1.20,1.18,1.18,1.15,1.17,1.18,1.18,1.17,1.17	300	200	1
207	16	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.69,1.67,1.67,1.64,1.66,1.67,1.67,1.66,1.66	300	200	1
208	19	7.88	7.88	3.75	2.33,2.33	300	200	1
209	2	2.60	2.60	4.00	-	300	200	1
210	16	2.44	2.44	3.75	1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.67,1.65,1.69,1.67,1.67,1.66,1.75,1.67,1.67,1.68,1.68,1.67,1.67,1.63,1.70,1.67,1.67,1.66,1.30	300	200	1
211	19	7.88	7.88	3.75	2.33,2.33	300	200	1
212	5	1.30	1.30	2.00	-	300	200	1
213	19	4.88	4.00	7.50	1.11,1.11,1.11,1.11,1.11,1.11,1.10,1.10,1.09,1.11,1.10,1.10,1.09,1.11,1.10,1.10,1.12,1.10,1.10,1.10,1.08,1.11,1.10,1.10,1.10,1.11	300	200	1
214	19	4.88	4.00	7.50	1.10,1.10,1.10,1.11,1.10,1.10,1.10,1.10,1.09,1.40,1.10,1.10,1.10,1.95,1.10,1.10,1.11,1.13,1.10,1.10,1.09,1.20,1.10,1.10,1.10,1.20	300	200	1
215	19	6.63	6.63	10.20	1.12,1.12,1.12,1.12,1.12,1.12,1.13,1.13,1.14,1.15,1.13,1.13,1.14,1.14,1.13,1.13,1.12,1.13,1.13,1.13,1.15,1.13,1.13,1.14,1.14	300	200	1
216	19	6.63	6.63	10.20	1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.12,1.15,1.12,1.12,1.12,1.58,1.12,1.12,1.12,1.13,1.12,1.12,1.12,1.14,1.12,1.12,1.12,1.09	300	200	1

Member Design Capacity


Member ID	$\Phi_t P_n$ (kip)	$\Phi_c P_n$ (kip)	$\Phi_b M_{zn}$ (k-ft)	$\Phi_b M_{yn}$ (k-ft)	$\Phi_v V_{yn}$ (kip)	$\Phi_v V_{zn}$ (kip)
1	377.97	143.04	83.29	83.29	113.39	113.39
2	198.33	196.72	21.95	21.95	59.50	59.50
3	116.10	115.41	15.79	11.10	42.08	23.28
4	116.10	111.33	15.79	11.10	42.08	23.28
5	116.10	114.23	15.79	11.10	42.08	23.28
6	116.10	115.41	15.79	11.10	42.08	23.28
7	116.10	114.23	15.79	11.10	42.08	23.28
8	133.20	126.01	32.87	6.12	40.24	43.62
9	66.48	58.89	3.82	3.82	19.94	19.94
10	116.10	111.33	15.79	11.10	42.08	23.28
11	133.20	126.01	32.87	6.12	40.24	43.62
12	198.33	196.72	21.95	21.95	59.50	59.50
13	133.20	104.94	24.75	6.12	40.24	43.62
14	133.20	104.94	24.98	6.12	40.24	43.62
15	133.20	52.83	32.87	6.12	40.24	43.62
16	133.20	52.83	32.87	6.12	40.24	43.62
101	377.97	143.04	83.29	83.29	113.39	113.39
102	198.33	196.72	21.95	21.95	59.50	59.50
103	116.10	115.41	15.79	11.10	42.08	23.28
104	116.10	111.33	15.79	11.10	42.08	23.28
105	116.10	114.23	15.79	11.10	42.08	23.28
106	116.10	115.41	15.79	11.10	42.08	23.28
107	116.10	114.23	15.79	11.10	42.08	23.28
108	133.20	126.01	32.87	6.12	40.24	43.62
109	66.48	58.89	3.82	3.82	19.94	19.94
110	116.10	111.33	15.79	11.10	42.08	23.28
111	133.20	126.01	32.87	6.12	40.24	43.62
112	198.33	196.72	21.95	21.95	59.50	59.50
113	133.20	104.94	23.37	6.12	40.24	43.62
114	133.20	104.94	23.14	6.12	40.24	43.62
115	133.20	69.16	16.87	6.12	40.24	43.62
116	133.20	69.16	17.49	6.12	40.24	43.62
201	377.97	143.04	83.29	83.29	113.39	113.39
202	198.33	196.72	21.95	21.95	59.50	59.50
203	116.10	115.41	15.79	11.10	42.08	23.28
204	116.10	111.33	15.79	11.10	42.08	23.28
205	116.10	114.23	15.79	11.10	42.08	23.28
206	116.10	115.41	15.79	11.10	42.08	23.28
207	116.10	114.23	15.79	11.10	42.08	23.28
208	133.20	52.83	32.87	6.12	40.24	43.62
209	66.48	58.89	3.82	3.82	19.94	19.94
210	116.10	111.33	15.79	11.10	42.08	23.28
211	133.20	52.83	32.87	6.12	40.24	43.62
212	198.33	196.72	21.95	21.95	59.50	59.50
213	133.20	104.94	24.75	6.12	40.24	43.62
214	133.20	104.94	24.98	6.12	40.24	43.62
215	133.20	69.16	17.33	6.12	40.24	43.62
216	133.20	69.16	16.87	6.12	40.24	43.62

Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.068	0.570	0.021	0.030	0.002	0.613	#13	0.576	Not Required	Pass
2	0.002	0.322	0.146	0.072	0.027	0.469	#13	0.035	Not Required	Pass
3	0.006	0.534	0.027	0.053	0.003	0.551	#13	0.045	Not Required	Pass
4	0.005	0.531	0.091	0.053	0.020	0.579	#13	0.080	Not Required	Pass
5	0.006	0.331	0.087	0.053	0.022	0.339	#13	0.074	Not Required	Pass
6	0.007	0.617	0.054	0.063	0.011	0.652	#13	0.045	Not Required	Pass
7	0.008	0.383	0.123	0.061	0.031	0.400	#13	0.074	Not Required	Pass
8	0.001	0.074	0.110	0.040	0.012	0.116	#24	0.095	Not Required	Pass
9	0.008	0.063	0.047	0.002	0.001	0.108	#13	0.204	Not Required	Pass
10	0.008	0.600	0.119	0.060	0.025	0.627	#13	0.080	Not Required	Pass
11	0.002	0.072	0.112	0.042	0.012	0.114	#24	0.095	Not Required	Pass
12	0.002	0.403	0.164	0.084	0.030	0.567	#13	0.053	Not Required	Pass
13	0.004	0.186	0.282	0.054	0.015	0.394	#21	0.286	Not Required	Pass
14	0.004	0.185	0.279	0.052	0.015	0.381	#21	0.190	Not Required	Pass
15	0.000	0.059	0.097	0.026	0.007	0.148	#21	Not Required	Not Required	Pass
16	0.000	0.059	0.097	0.026	0.007	0.148	#21	Not Required	Not Required	Pass
101	0.078	0.636	0.000	0.033	0.000	0.675	#13	0.576	Not Required	Pass
102	0.002	0.417	0.176	0.090	0.032	0.593	#13	0.035	Not Required	Pass
103	0.008	0.651	0.046	0.065	0.007	0.677	#13	0.045	Not Required	Pass
104	0.007	0.663	0.122	0.067	0.026	0.714	#13	0.080	Not Required	Pass
105	0.007	0.403	0.126	0.065	0.032	0.424	#13	0.074	Not Required	Pass
106	0.008	0.651	0.046	0.065	0.007	0.677	#13	0.045	Not Required	Pass
107	0.007	0.403	0.126	0.065	0.032	0.424	#13	0.074	Not Required	Pass
108	0.001	0.060	0.117	0.043	0.012	0.145	#21	0.095	Not Required	Pass
109	0.010	0.057	0.037	0.001	0.000	0.098	#13	0.204	Not Required	Pass
110	0.007	0.663	0.122	0.067	0.026	0.714	#13	0.080	Not Required	Pass
111	0.002	0.074	0.118	0.042	0.012	0.137	#21	0.095	Not Required	Pass
112	0.002	0.417	0.176	0.090	0.032	0.593	#13	0.035	Not Required	Pass
113	0.004	0.179	0.290	0.054	0.015	0.441	#21	0.286	Not Required	Pass
114	0.005	0.210	0.289	0.055	0.015	0.456	#21	0.286	Not Required	Pass
115	0.003	0.262	0.153	0.042	0.012	0.383	#21	0.473	Not Required	Pass
116	0.002	0.250	0.154	0.043	0.012	0.375	#21	0.473	Not Required	Pass
201	0.068	0.570	0.021	0.030	0.002	0.613	#13	0.576	Not Required	Pass
202	0.002	0.403	0.164	0.084	0.030	0.567	#13	0.053	Not Required	Pass
203	0.007	0.617	0.054	0.063	0.011	0.652	#13	0.045	Not Required	Pass
204	0.008	0.600	0.119	0.060	0.025	0.627	#13	0.080	Not Required	Pass
205	0.008	0.383	0.123	0.061	0.031	0.400	#13	0.074	Not Required	Pass
206	0.006	0.534	0.027	0.053	0.003	0.551	#13	0.045	Not Required	Pass
207	0.006	0.331	0.087	0.053	0.022	0.339	#13	0.074	Not Required	Pass
208	0.000	0.059	0.097	0.026	0.007	0.148	#21	Not Required	Not Required	Pass
209	0.008	0.063	0.047	0.002	0.001	0.108	#13	0.204	Not Required	Pass
210	0.005	0.531	0.091	0.053	0.020	0.579	#13	0.080	Not Required	Pass
211	0.000	0.059	0.097	0.026	0.007	0.148	#21	Not Required	Not Required	Pass
212	0.002	0.322	0.146	0.072	0.027	0.469	#13	0.035	Not Required	Pass
213	0.004	0.186	0.282	0.054	0.015	0.394	#21	0.190	Not Required	Pass
214	0.004	0.185	0.279	0.052	0.015	0.381	#21	0.286	Not Required	Pass
215	0.003	0.269	0.153	0.042	0.012	0.383	#21	0.473	Not Required	Pass
216	0.002	0.257	0.153	0.040	0.012	0.378	#21	0.473	Not Required	Pass

Definitions

Φ_t	Safety factor for tensile
Φ_c	Safety factor for compression
Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z, M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

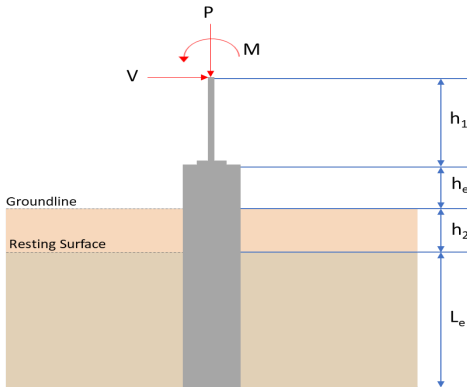REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: round D = 36 in - Pile diameter L = 9.25 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>6.668</td><td>9.733</td></tr><tr><td>Vx (kip)</td><td>-2.023</td><td>-3.379</td></tr><tr><td>Vz (kip)</td><td>0.117</td><td>0.190</td></tr><tr><td>Mx (kipft)</td><td>0.481</td><td>0.780</td></tr><tr><td>Mz (kipft)</td><td>27.985</td><td>47.457</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	6.668	9.733	Vx (kip)	-2.023	-3.379	Vz (kip)	0.117	0.190	Mx (kipft)	0.481	0.780	Mz (kipft)	27.985	47.457	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	6.668	9.733																										
Vx (kip)	-2.023	-3.379																										
Vz (kip)	0.117	0.190																										
Mx (kipft)	0.481	0.780																										
Mz (kipft)	27.985	47.457																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0\text{ ft}) + (0\text{ ft}) + (0\text{ ft})$ $H = 0\text{ ft}$ Considering x-direction: Ho - Lateral force per length of pile, $H_o = \frac{V_x}{D}$ $H_o = \frac{(-2.023\text{ kip})}{(36\text{ in})}$ $H_o = -0.67433\text{ kip/ft}$ Mo - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{D}$																											

	$M_o = \frac{(27.985 \text{ kipft}) + ((-2.023 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 9.3283 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$ Solving the cubic equation: $L_{e,x} = 8.5632 \text{ ft}$ - Required depth in x-direction, Considering z-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_z}{D}$ $H_o = \frac{(0.117 \text{ kip})}{(36 \text{ in})}$ $H_o = 0.039 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{D}$ $M_o = \frac{(0.481 \text{ kipft}) + ((0.117 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 0.16033 \text{ kipft/ft}$ Required depth of embedment in earth: $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$ Solving the cubic equation: $L_{e,z} = 3.168 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(8.5632 \text{ ft}), (3.168 \text{ ft})]$ $L_{e,req} = 8.563 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_c - h_2$ $L_e = (9.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 9.25 \text{ ft}$ Ratio - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(8.563 \text{ ft})}{(9.25 \text{ ft})}$ $\text{Ratio} = 0.92573$	Status: PASS Ratio: 0.930
	End-bearing Capacity (ASD) A - Pile cros-section area $A = \pi \left(\frac{D}{2} \right)^2$ $A = \pi \times \left(\frac{(36 \text{ in})}{2} \right)^2$ $A = 7.0686 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_o}{A}$ $q = \frac{(6.668 \text{ kip})}{(7.0686 \text{ ft}^2)}$	

	$q = 0.94333 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.94333 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.47166$	Status: PASS Ratio: 0.470
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(9.25 \text{ ft})}{(36 \text{ in})}$ $L/D = 3.0833$ Since $L/D \leq 10$, Pile is short. Considering x-direction: $H_o = -0.67433 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 9.3283 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (9.3283 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (9.3283 \text{ kipft/ft})) + (4 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))}$ $a = 6.4043 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{1.178 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{1.178 \times [(4 \times (9.3283 \text{ kipft/ft})) + (3 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))]^2}{(9.25 \text{ ft})^2 \times [(3 \times (9.3283 \text{ kipft/ft})) + (2 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))]}$ $p = 0.30712 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{9.425 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{9.425 \times [(2 \times (9.3283 \text{ kipft/ft})) + ((-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))]}{(9.25 \text{ ft})^2}$ $s = 1.368 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(6.4043 \text{ ft})}{2}$ $p_a = 0.48033 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.30712 \text{ kip/ft}^2)}{(0.48033 \text{ kip/ft}^2)}$ $Ratio = 0.6394$	Status: PASS Ratio: 0.640


	p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (9.25 \text{ ft})$ $p_s = 1.3875 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(1.368 \text{ kip/ft}^2)}{(1.3875 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.98595$	Status: PASS Ratio: 0.990
	Considering z-direction: $H_o = 0.039 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.16033 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.16033 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (0.039 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (0.16033 \text{ kipft/ft})) + (4 \times (0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))}$ $a = 6.6292 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{1.178 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{1.178 \times [(4 \times (0.16033 \text{ kipft/ft})) + (3 \times (0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))]^2}{(9.25 \text{ ft})^2 \times [(3 \times (0.16033 \text{ kipft/ft})) + (2 \times (0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))]}$ $p = 0.034013 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{9.425 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{9.425 \times [(2 \times (0.16033 \text{ kipft/ft})) + ((0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))]}{(9.25 \text{ ft})^2}$ $s = 0.07506 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(6.6292 \text{ ft})}{2}$ $p_a = 0.49719 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.034013 \text{ kip/ft}^2)}{(0.49719 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.06841$ p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (9.25 \text{ ft})$ $p_s = 1.3875 \text{ kip/ft}^2$ Ratio - Lateral soil capacity	Status: PASS Ratio: 0.070

$$Ratio = \frac{M_o}{p_s}$$

$$Ratio = \frac{(0.07506 \text{ kip/ft}^2)}{(1.3875 \text{ kip/ft}^2)}$$

$$Ratio = 0.054098$$

Status: **PASS**
Ratio: **0.050**

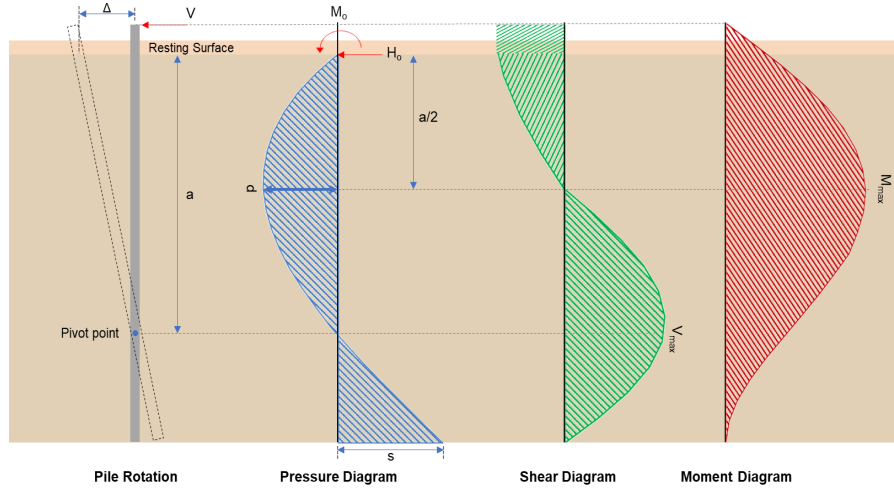

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{D}$$

$$H_o = \frac{(-3.379 \text{ kip})}{(36 \text{ in})}$$

$$H_o = -1.1263 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{D}$$

$$M_o = \frac{(47.457 \text{ kipft}) + ((-3.379 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$$

$$M_o = 15.819 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(15.819 \text{ kipft/ft})}{(-1.1263 \text{ kip/ft})}$$

$$E = 14.045 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (15.819 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (-1.1263 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (15.819 \text{ kipft/ft})) + (4 \times (-1.1263 \text{ kip/ft}) \times (9.25 \text{ ft}))}$$

$$a = 6.4019 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 + 4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1263 \text{ kip/ft}) \times (36 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.4019 \text{ ft})}{(9.25 \text{ ft})} \right)^2 + 4 \times \left(\frac{3 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.4019 \text{ ft})}{(9.25 \text{ ft})} \right)^3 \right] \right]$$


	$V_{max} = 11.306 \text{ kip}$ M_{max} - Max bending moment located at depth $a/2$, $M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$ $M_{max} = ((-1.1263 \text{ kip/ft}) \times (36 \text{ in}) \times (9.25 \text{ ft})) \times \left[\left(\frac{(14.045 \text{ ft})}{(9.25 \text{ ft})} + \frac{(6.4019 \text{ ft})}{2 \times (9.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.4019 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.4019 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^4 \right] \right]$ $M_{max} = 49.459 \text{ kipft}$	
	Shear force and Bending moment (z-direction, LRFD) H_o - Lateral force per length of pile, $H_o = \frac{V_z}{D}$ $H_o = \frac{(0.19 \text{ kip})}{(36 \text{ in})}$ $H_o = 0.063333 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{D}$ $M_o = \frac{(0.78 \text{ kipft}) + ((0.19 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 0.26 \text{ kipft/ft}$ E - Distance from lateral load to resisting surface, $E = \frac{M_o}{H_o}$ $E = \frac{(0.26 \text{ kipft/ft})}{(0.063333 \text{ kip/ft})}$ $E = 4.1053 \text{ ft}$ a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.26 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (0.063333 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (0.26 \text{ kipft/ft})) + (4 \times (0.063333 \text{ kip/ft}) \times (9.25 \text{ ft}))}$ $a = 6.6294 \text{ ft}$ V_{max} - Max shear force located at depth a, $V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$ $V_{max} = ((0.063333 \text{ kip/ft}) \times (36 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.6294 \text{ ft})}{(9.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.6294 \text{ ft})}{(9.25 \text{ ft})} \right)^3 \right] \right]$ $V_{max} = 0.27603 \text{ kip}$ M_{max} - Max bending moment located at depth $a/2$, $M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$ $M_{max} = ((0.063333 \text{ kip/ft}) \times (36 \text{ in}) \times (9.25 \text{ ft})) \times \left[\left(\frac{(4.1053 \text{ ft})}{(9.25 \text{ ft})} + \frac{(6.6294 \text{ ft})}{2 \times (9.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.6294 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.6294 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^4 \right] \right]$	

		$M_{max} = 1.1202 \text{ kipft}$	
		Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.85$ - Alpha factor for axial strength, $A_g = 1017.9 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required}$ $A_{st,required} = Min \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = Min \left[\frac{\frac{(9.733 \text{ kip})}{(0.65) \times (0.85)} - (0.85 \times (2.5 \text{ ksi}) \times (1017.9 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (1017.9 \text{ in}^2)) \right]$ $A_{st,required} = -37.069 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = Max [A_{st,required}, (0.0018 A_g)]$ $A_{min} = Max [(-37.069 \text{ in}^2), (0.0018 \times (1017.9 \text{ in}^2))]$ $A_{min} = 1.8322 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(1.8322 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 6$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (6) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 1.8408 \text{ in}^2$ Ratio - Capacity $Ratio = \frac{A_{min}}{A_{st}}$ $Ratio = \frac{(1.8322 \text{ in}^2)}{(1.8408 \text{ in}^2)}$ $Ratio = 0.99533$ 25.2.3 s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = Max [1.5, (1.5 d_{bar})]$ $s_{rebar} = Max [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq \text{No. } 10\emptyset$: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum center-to-center spacing of ties, $s_{ties} = Min [(16 d_{bar}), (48 d_{ties}), D]$ $s_{ties} = Min [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), (36 \text{ in})]$ $s_{ties} = 10 \text{ in}$ Summary:	Status: PASS Ratio: 1.000

	Main reinforcement: 6 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.85 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.85 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(1017.9 \text{ in}^2) - (1.8408 \text{ in}^2)]) + ((60 \text{ ksi}) \times (1.8408 \text{ in}^2)) \right]$ $\phi P_N = 1253.9 \text{ kip}$ Ratio - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(9.733 \text{ kip})}{(1253.9 \text{ kip})}$ $Ratio = 0.0077621$	Status: PASS Ratio: 0.010
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 36 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (36 \text{ in})$ $d = 28.8 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(28.8 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.71796$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$. $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.71796) \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,max} = 186.09 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 9.733 \text{ kip} \rightarrow 9733 \text{ lbf}$. $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + \frac{(9733 \text{ lbf})}{6 \times (1017.9 \text{ in}^2)} \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,a} = 76.09 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$. $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,b} = 204.04 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = MIN [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = MIN [(186.09 \text{ kip}), (76.09 \text{ kip}), (204.04 \text{ kip})]$	

	$V_c = 76.09 \text{ kip}$ The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, 22.5.1.2 $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{s,a} = 414.72 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ 22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (28.8 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 38.17 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(414.72 \text{ kip}), (38.17 \text{ kip})]$ $V_s = 38.17 \text{ kip}$ 22.5.1.1 ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((76.09 \text{ kip}) + (38.17 \text{ kip}))$ $\phi V_n = 74.269 \text{ kip}$ Considering x-direction: $V_{max} = 11.306 \text{ kip}$ - Maximum shear force in the x-direction, Ratio - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(11.306 \text{ kip})}{(74.269 \text{ kip})}$ $Ratio = 0.15223$ Considering z-direction: $V_{max} = 0.27603 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.27603 \text{ kip})}{(74.269 \text{ kip})}$ $Ratio = 0.0037167$	Status: PASS Ratio: 0.150 Status: PASS Ratio: 0.000
	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{\pi D^3}{32}$ $S_m = \frac{\pi \times (36 \text{ in})^3}{32}$	

14.5.2.1b	$S_m = 4580.4 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 4580.442 \text{ in}^3$ $\phi M_{n,1} = 62.027 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (4580.4 \text{ in}^3)$ $\phi M_{n,2} = 527.23 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(62.027 \text{ kipft}), (527.23 \text{ kipft})]$ $\phi M_n = 62.027 \text{ kipft}$ Considering x-direction: $M_{max} = 49.459 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(49.459 \text{ kipft})}{(62.027 \text{ kipft})}$ $\text{Ratio} = 0.79738$	Status: PASS Ratio: 0.800
	Considering z-direction: $M_{max} = 1.1202 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(1.1202 \text{ kipft})}{(62.027 \text{ kipft})}$ $\text{Ratio} = 0.018059$	Status: PASS Ratio: 0.020

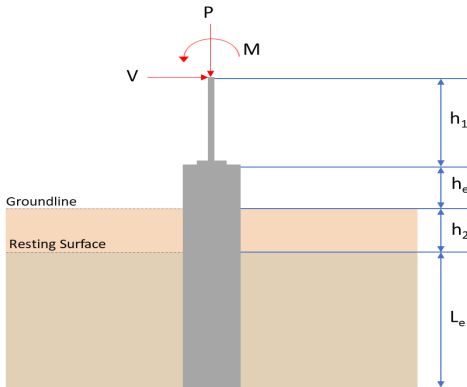REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: round D = 36 in - Pile diameter L = 9.25 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>6.668</td><td>9.733</td></tr><tr><td>Vx (kip)</td><td>-2.023</td><td>-3.379</td></tr><tr><td>Vz (kip)</td><td>-0.117</td><td>-0.190</td></tr><tr><td>Mx (kipft)</td><td>-0.481</td><td>-0.780</td></tr><tr><td>Mz (kipft)</td><td>27.985</td><td>47.457</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	6.668	9.733	Vx (kip)	-2.023	-3.379	Vz (kip)	-0.117	-0.190	Mx (kipft)	-0.481	-0.780	Mz (kipft)	27.985	47.457	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	6.668	9.733																										
Vx (kip)	-2.023	-3.379																										
Vz (kip)	-0.117	-0.190																										
Mx (kipft)	-0.481	-0.780																										
Mz (kipft)	27.985	47.457																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ Considering x-direction: Ho - Lateral force per length of pile, $H_o = \frac{V_x}{D}$ $H_o = \frac{(-2.023 \text{ kip})}{(36 \text{ in})}$ $H_o = -0.67433 \text{ kip/ft}$ Mo - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{D}$																											

	$M_o = \frac{(27.985 \text{ kipft}) + ((-2.023 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 9.3283 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 8.5632 \text{ ft}$ - Required depth in x-direction, Considering z-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_z}{D}$ $H_o = \frac{(-0.117 \text{ kip})}{(36 \text{ in})}$ $H_o = -0.039 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{D}$ $M_o = \frac{(0.481 \text{ kipft}) + ((-0.117 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 0.16033 \text{ kipft/ft}$ Required depth of embedment in earth: $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,z} = 2.2755 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(8.5632 \text{ ft}), (2.2755 \text{ ft})]$ $L_{e,req} = 8.563 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_c - h_2$ $L_e = (9.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 9.25 \text{ ft}$ Ratio - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(8.563 \text{ ft})}{(9.25 \text{ ft})}$ $\text{Ratio} = 0.92573$	Status: PASS Ratio: 0.930
	End-bearing Capacity (ASD) A - Pile cros-section area $A = \pi \left(\frac{D}{2}\right)^2$ $A = \pi \times \left(\frac{(36 \text{ in})}{2}\right)^2$ $A = 7.0686 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_o}{A}$ $q = \frac{(6.668 \text{ kip})}{(7.0686 \text{ ft}^2)}$	

	$q = 0.94333 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.94333 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.47166$	Status: PASS Ratio: 0.470
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(9.25 \text{ ft})}{(36 \text{ in})}$ $L/D = 3.0833$ Since $L/D \leq 10$, Pile is short. Considering x-direction: $H_o = -0.67433 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 9.3283 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (9.3283 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (9.3283 \text{ kipft/ft})) + (4 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))}$ $a = 6.4043 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{1.178 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{1.178 \times [(4 \times (9.3283 \text{ kipft/ft})) + (3 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))]^2}{(9.25 \text{ ft})^2 \times [(3 \times (9.3283 \text{ kipft/ft})) + (2 \times (-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))]}$ $p = 0.30712 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{9.425 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{9.425 \times [(2 \times (9.3283 \text{ kipft/ft})) + ((-0.67433 \text{ kip/ft}) \times (9.25 \text{ ft}))]}{(9.25 \text{ ft})^2}$ $s = 1.368 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(6.4043 \text{ ft})}{2}$ $p_a = 0.48033 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.30712 \text{ kip/ft}^2)}{(0.48033 \text{ kip/ft}^2)}$ $Ratio = 0.6394$	Status: PASS Ratio: 0.640


	p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (9.25 \text{ ft})$ $p_s = 1.3875 \text{ kip/ft}^2$ <i>Ratio</i> - Lateral soil capacity $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(1.368 \text{ kip/ft}^2)}{(1.3875 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.98595$	Status: PASS Ratio: 0.990
	Considering z-direction: $H_o = -0.039 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.16033 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.16033 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (-0.039 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (0.16033 \text{ kipft/ft})) + (4 \times (-0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))}$ $a = 6.6292 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{1.178 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{1.178 \times [(4 \times (0.16033 \text{ kipft/ft})) + (3 \times (-0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))]^2}{(9.25 \text{ ft})^2 \times [(3 \times (0.16033 \text{ kipft/ft})) + (2 \times (-0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))]}$ $p = -0.011129 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{9.425 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{9.425 \times [(2 \times (0.16033 \text{ kipft/ft})) + ((-0.039 \text{ kip/ft}) \times (9.25 \text{ ft}))]}{(9.25 \text{ ft})^2}$ $s = -0.0044153 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(6.6292 \text{ ft})}{2}$ $p_a = 0.49719 \text{ kip/ft}^2$ <i>Ratio</i> - Lateral soil capacity $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(-0.011129 \text{ kip/ft}^2)}{(0.49719 \text{ kip/ft}^2)}$ $\text{Ratio} = -0.022384$ p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (9.25 \text{ ft})$ $p_s = 1.3875 \text{ kip/ft}^2$ <i>Ratio</i> - Lateral soil capacity	Status: PASS Ratio: -0.020

$$Ratio = \frac{M_o}{p_s}$$

$$Ratio = \frac{(-0.0044153 \text{ kip/ft}^2)}{(1.3875 \text{ kip/ft}^2)}$$

$$Ratio = -0.0031822$$

Status: **PASS**
Ratio: **0.000**

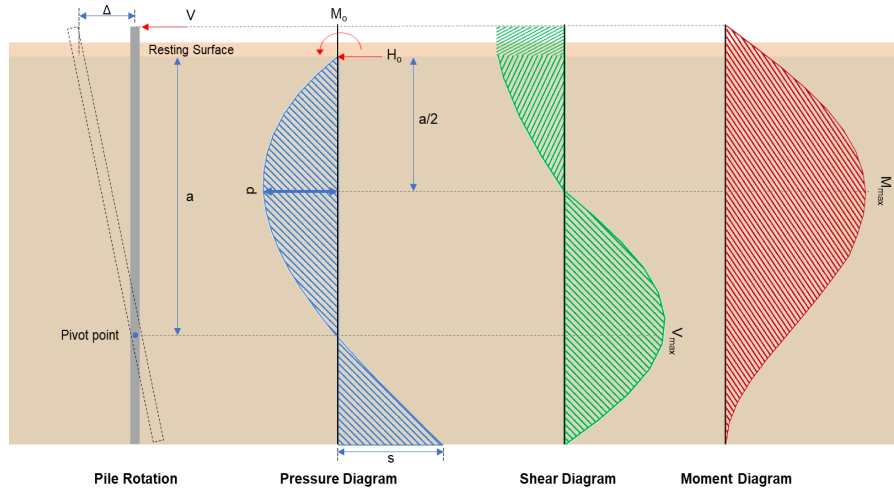

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{D}$$

$$H_o = \frac{(-3.379 \text{ kip})}{(36 \text{ in})}$$

$$H_o = -1.1263 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{D}$$

$$M_o = \frac{(47.457 \text{ kipft}) + ((-3.379 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$$

$$M_o = 15.819 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(15.819 \text{ kipft/ft})}{(-1.1263 \text{ kip/ft})}$$

$$E = 14.045 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (15.819 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (-1.1263 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (15.819 \text{ kipft/ft})) + (4 \times (-1.1263 \text{ kip/ft}) \times (9.25 \text{ ft}))}$$

$$a = 6.4019 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 + 4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1263 \text{ kip/ft}) \times (36 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.4019 \text{ ft})}{(9.25 \text{ ft})} \right)^2 + 4 \times \left(\frac{3 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.4019 \text{ ft})}{(9.25 \text{ ft})} \right)^3 \right] \right]$$


	$V_{max} = 11.306 \text{ kip}$ M_{max} - Max bending moment located at depth $a/2$, $M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$ $M_{max} = ((-1.1263 \text{ kip/ft}) \times (36 \text{ in}) \times (9.25 \text{ ft})) \times \left[\left(\frac{(14.045 \text{ ft})}{(9.25 \text{ ft})} + \frac{(6.4019 \text{ ft})}{2 \times (9.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.4019 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (14.045 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.4019 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^4 \right] \right]$ $M_{max} = 49.459 \text{ kipft}$	
	Shear force and Bending moment (z-direction, LRFD) H_o - Lateral force per length of pile, $H_o = \frac{V_z}{D}$ $H_o = \frac{(-0.19 \text{ kip})}{(36 \text{ in})}$ $H_o = -0.063333 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{D}$ $M_o = \frac{(0.78 \text{ kipft}) + ((-0.19 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 0.26 \text{ kipft/ft}$ E - Distance from lateral load to resisting surface, $E = \frac{M_o}{H_o}$ $E = \frac{(0.26 \text{ kipft/ft})}{(-0.063333 \text{ kip/ft})}$ $E = 4.1053 \text{ ft}$ a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.26 \text{ kipft/ft}) \times (9.25 \text{ ft})) + (3 \times (-0.063333 \text{ kip/ft}) \times (9.25 \text{ ft})^2)}{(6 \times (0.26 \text{ kipft/ft})) + (4 \times (-0.063333 \text{ kip/ft}) \times (9.25 \text{ ft}))}$ $a = 6.6294 \text{ ft}$ V_{max} - Max shear force located at depth a, $V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$ $V_{max} = ((-0.063333 \text{ kip/ft}) \times (36 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.6294 \text{ ft})}{(9.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.6294 \text{ ft})}{(9.25 \text{ ft})} \right)^3 \right] \right]$ $V_{max} = 0.27603 \text{ kip}$ M_{max} - Max bending moment located at depth $a/2$, $M_{max} = (H_o b L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$ $M_{max} = ((-0.063333 \text{ kip/ft}) \times (36 \text{ in}) \times (9.25 \text{ ft})) \times \left[\left(\frac{(4.1053 \text{ ft})}{(9.25 \text{ ft})} + \frac{(6.6294 \text{ ft})}{2 \times (9.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 3 \right) \times \left(\frac{(6.6294 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (4.1053 \text{ ft})}{(9.25 \text{ ft})} + 2 \right) \times \left(\frac{(6.6294 \text{ ft})}{2 \times (9.25 \text{ ft})} \right)^4 \right] \right]$	

		$M_{max} = 1.1202 \text{ kipft}$	
		Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.85$ - Alpha factor for axial strength, $A_g = 1017.9 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required}$ $A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[\frac{\frac{(9.733 \text{ kip})}{(0.65) \times (0.85)} - (0.85 \times (2.5 \text{ ksi}) \times (1017.9 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (1017.9 \text{ in}^2)) \right]$ $A_{st,required} = -37.069 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-37.069 \text{ in}^2), (0.0018 \times (1017.9 \text{ in}^2))]$ $A_{min} = 1.8322 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(1.8322 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 6$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (6) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 1.8408 \text{ in}^2$ Ratio - Capacity $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(1.8322 \text{ in}^2)}{(1.8408 \text{ in}^2)}$ $\text{Ratio} = 0.99533$ 25.2.3 s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq \text{No. } 10\phi$: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum center-to-center spacing of ties, $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), D]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), (36 \text{ in})]$ $s_{ties} = 10 \text{ in}$ Summary:	Status: PASS Ratio: 1.000

	Main reinforcement: 6 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.85 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.85 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(1017.9 \text{ in}^2) - (1.8408 \text{ in}^2)]) + ((60 \text{ ksi}) \times (1.8408 \text{ in}^2)) \right]$ $\phi P_N = 1253.9 \text{ kip}$ Ratio - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(9.733 \text{ kip})}{(1253.9 \text{ kip})}$ $Ratio = 0.0077621$	Status: PASS Ratio: 0.010
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 36 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (36 \text{ in})$ $d = 28.8 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(28.8 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.71796$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$. $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.71796) \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,max} = 186.09 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 9.733 \text{ kip} \rightarrow 9733 \text{ lbf}$. $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + \frac{(9733 \text{ lbf})}{6 \times (1017.9 \text{ in}^2)} \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,a} = 76.09 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$. $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,b} = 204.04 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = MIN [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = MIN [(186.09 \text{ kip}), (76.09 \text{ kip}), (204.04 \text{ kip})]$	

22.5.1.2	$V_c = 76.09 \text{ kip}$ The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{s,a} = 414.72 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ 22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (28.8 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 38.17 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(414.72 \text{ kip}), (38.17 \text{ kip})]$ $V_s = 38.17 \text{ kip}$ 22.5.1.1 ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((76.09 \text{ kip}) + (38.17 \text{ kip}))$ $\phi V_n = 74.269 \text{ kip}$ Considering x-direction: $V_{max} = 11.306 \text{ kip}$ - Maximum shear force in the x-direction, <i>Ratio</i> - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(11.306 \text{ kip})}{(74.269 \text{ kip})}$ $Ratio = 0.15223$ Considering z-direction: $V_{max} = 0.27603 \text{ kip}$ - Maximum shear force in the z-direction, <i>Ratio</i> - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.27603 \text{ kip})}{(74.269 \text{ kip})}$ $Ratio = 0.0037167$	Status: PASS Ratio: 0.150 Status: PASS Ratio: 0.000
	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{\pi D^3}{32}$ $S_m = \frac{\pi \times (36 \text{ in})^3}{32}$	

14.5.2.1b	$S_m = 4580.4 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 4580.442 \text{ in}^3$ $\phi M_{n,1} = 62.027 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (4580.4 \text{ in}^3)$ $\phi M_{n,2} = 527.23 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(62.027 \text{ kipft}), (527.23 \text{ kipft})]$ $\phi M_n = 62.027 \text{ kipft}$ Considering x-direction: $M_{max} = 49.459 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(49.459 \text{ kipft})}{(62.027 \text{ kipft})}$ $\text{Ratio} = 0.79738$	Status: PASS Ratio: 0.800
	Considering z-direction: $M_{max} = 1.1202 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(1.1202 \text{ kipft})}{(62.027 \text{ kipft})}$ $\text{Ratio} = 0.018059$	Status: PASS Ratio: 0.020

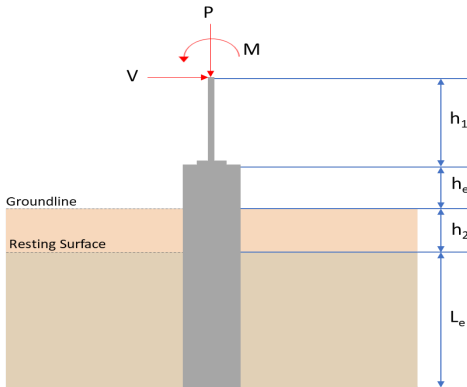REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: round D = 36 in - Pile diameter Le = 9.5 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>7.643</td><td>11.155</td></tr><tr><td>Vx (kip)</td><td>-2.275</td><td>-3.790</td></tr><tr><td>Vz (kip)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mx (kipft)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mz (kipft)</td><td>31.150</td><td>52.936</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	7.643	11.155	Vx (kip)	-2.275	-3.790	Vz (kip)	0.000	0.000	Mx (kipft)	0.000	0.000	Mz (kipft)	31.150	52.936	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	7.643	11.155																										
Vx (kip)	-2.275	-3.790																										
Vz (kip)	0.000	0.000																										
Mx (kipft)	0.000	0.000																										
Mz (kipft)	31.150	52.936																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0\text{ ft}) + (0\text{ ft}) + (0\text{ ft})$ $H = 0\text{ ft}$ Considering x-direction: Ho - Lateral force per length of pile, $H_o = \frac{V_x}{D}$ $H_o = \frac{(-2.275\text{ kip})}{(36\text{ in})}$ $H_o = -0.75833\text{ kip/ft}$ Mo - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{D}$																											

	$M_o = \frac{(31.15 \text{ kipft}) + ((-2.275 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 10.383 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 8.7812 \text{ ft}$ - Required depth in x-direction, Considering z-direction: $L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = MAX[L_{e,x}, L_{e,z}]$ $L_{e,req} = MAX[(8.7812 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 8.781 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (9.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 9.5 \text{ ft}$ Ratio - Embedded depth $Ratio = \frac{L_{e,req}}{L_e}$ $Ratio = \frac{(8.781 \text{ ft})}{(9.5 \text{ ft})}$ $Ratio = 0.92432$	Status: PASS Ratio: 0.920
	End-bearing Capacity (ASD) A - Pile cross-section area $A = \pi \left(\frac{D}{2}\right)^2$ $A = \pi \times \left(\frac{(36 \text{ in})}{2}\right)^2$ $A = 7.0686 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_o}{A}$ $q = \frac{(7.643 \text{ kip})}{(7.0686 \text{ ft}^2)}$ $q = 1.0813 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(1.0813 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.54063$	Status: PASS Ratio: 0.540
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(9.5 \text{ ft})}{(36 \text{ in})}$	

$$L/D = 3.1667$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.75833$ kip/ft - Lateral force per length of pile,

$M_o = 10.383$ kipft/ft - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (10.383 \text{ kipft/ft}) \times (9.5 \text{ ft})) + (3 \times (-0.75833 \text{ kip/ft}) \times (9.5 \text{ ft})^2)}{(6 \times (10.383 \text{ kipft/ft})) + (4 \times (-0.75833 \text{ kip/ft}) \times (9.5 \text{ ft}))}$$

$$a = 6.5837 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{1.178 [(4 M_o) + (3 H_o L_e)]^2}{L_e^3 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{1.178 \times [(4 \times (10.383 \text{ kipft/ft})) + (3 \times (-0.75833 \text{ kip/ft}) \times (9.5 \text{ ft}))]^2}{(9.5 \text{ ft})^3 \times [(3 \times (10.383 \text{ kipft/ft})) + (2 \times (-0.75833 \text{ kip/ft}) \times (9.5 \text{ ft}))]}$$

$$p = 0.3094 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{9.425 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{9.425 \times [(2 \times (10.383 \text{ kipft/ft})) + ((-0.75833 \text{ kip/ft}) \times (9.5 \text{ ft}))]}{(9.5 \text{ ft})^2}$$

$$s = 1.4164 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(6.5837 \text{ ft})}{2}$$

$$p_a = 0.49378 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.3094 \text{ kip/ft}^2)}{(0.49378 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.62659$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (9.5 \text{ ft})$$

$$p_s = 1.425 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$


$$\text{Ratio} = \frac{(1.4164 \text{ kip/ft}^2)}{(1.425 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.99394$$

Status: **PASS**
Ratio: **0.630**

Status: **PASS**
Ratio: **0.990**



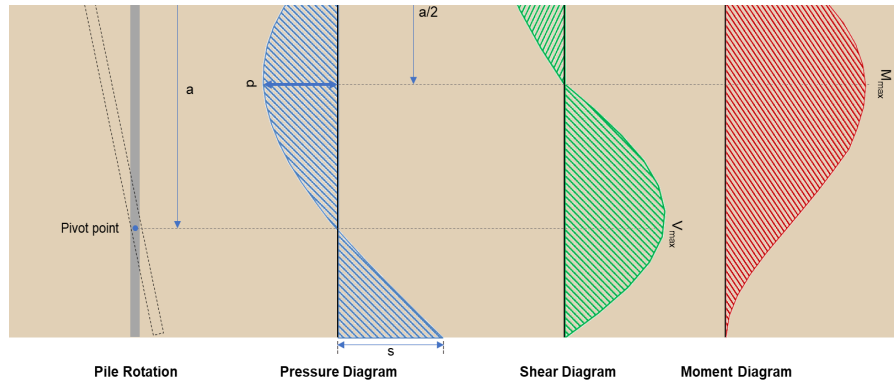

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{D}$$

$$H_o = \frac{(-3.79 \text{ kip})}{(36 \text{ in})}$$

$$H_o = -1.2633 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{D}$$

$$M_o = \frac{(52.936 \text{ kipft}) + ((-3.79 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$$

$$M_o = 17.645 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(17.645 \text{ kipft/ft})}{(-1.2633 \text{ kip/ft})}$$

$$E = 13.967 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (17.645 \text{ kipft/ft}) \times (9.5 \text{ ft})) + (3 \times (-1.2633 \text{ kip/ft}) \times (9.5 \text{ ft})^2)}{(6 \times (17.645 \text{ kipft/ft})) + (4 \times (-1.2633 \text{ kip/ft}) \times (9.5 \text{ ft}))}$$

$$a = 6.5803 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.2633 \text{ kip/ft}) \times (36 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (13.967 \text{ ft})}{(9.5 \text{ ft})} + 3 \right) \times \left(\frac{(6.5803 \text{ ft})}{(9.5 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (13.967 \text{ ft})}{(9.5 \text{ ft})} + 2 \right) \times \left(\frac{(6.5803 \text{ ft})}{(9.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 12.359 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.2633 \text{ kip/ft}) \times (36 \text{ in}) \times (9.5 \text{ ft})) \times \left[\left(\frac{(13.967 \text{ ft})}{(9.5 \text{ ft})} + \frac{(6.5803 \text{ ft})}{2 \times (9.5 \text{ ft})} \right) - \left[\left(\frac{4 \times (13.967 \text{ ft})}{(9.5 \text{ ft})} + 3 \right) \times \left(\frac{(6.5803 \text{ ft})}{2 \times (9.5 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (13.967 \text{ ft})}{(9.5 \text{ ft})} + 2 \right) \times \left(\frac{(6.5803 \text{ ft})}{2 \times (9.5 \text{ ft})} \right)^4 \right] \right]$$

		$M_{max} = 55.443 \text{ kipft}$	
Table 22.4.2.1	22.4.2.2, 10.6.1.1	Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.85$ - Alpha factor for axial strength, $A_g = 1017.9 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[\frac{\frac{(11.155 \text{ kip})}{(0.65) \times (0.85)} - (0.85 \times (2.5 \text{ ksi}) \times (1017.9 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (1017.9 \text{ in}^2)) \right]$ $A_{st,required} = -37.025 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-37.025 \text{ in}^2), (0.0018 \times (1017.9 \text{ in}^2))]$ $A_{min} = 1.8322 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(1.8322 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 6$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (6) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 1.8408 \text{ in}^2$ Ratio - Capacity $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(1.8322 \text{ in}^2)}{(1.8408 \text{ in}^2)}$ $\text{Ratio} = 0.99533$ 25.2.3 s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq \text{No. } 10\emptyset$: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum center-to-center spacing of ties, $s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), D]$ $s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), (36 \text{ in})]$ $s_{ties} = 10 \text{ in}$ Summary:	Status: PASS Ratio: 1.000

	Main reinforcement: 6 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in	
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.85 \left[(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st}) \right]$ $\phi P_N = (0.65) \times 0.85 \times \left[(0.85 \times (2.5 \text{ ksi}) \times [(1017.9 \text{ in}^2) - (1.8408 \text{ in}^2)]) + ((60 \text{ ksi}) \times (1.8408 \text{ in}^2)) \right]$ $\phi P_N = 1253.9 \text{ kip}$ Ratio - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(11.155 \text{ kip})}{(1253.9 \text{ kip})}$ $Ratio = 0.0088962$	Status: PASS Ratio: 0.010
22.5.2.2	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 36 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (36 \text{ in})$ $d = 28.8 \text{ in}$	
22.5.5.1.3	λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(28.8 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.71796$	
22.5.5.1.1	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.71796) \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,max} = 186.09 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 11.155 \text{ kip} \rightarrow 11155 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a) $V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + \frac{(11155 \text{ lbf})}{6 \times (1017.9 \text{ in}^2)} \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,a} = 76.332 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b) $V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{c,b} = 204.04 \text{ kip}$ V_c - Governing shear strength of concrete $V_c = Min [V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = Min [(186.09 \text{ kip}), (76.332 \text{ kip}), (204.04 \text{ kip})]$	

22.5.1.2 22.5.8.5.3 22.5.1.1	$V_c = 76.332 \text{ kip}$ The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a) $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$ $V_{s,a} = 414.72 \text{ kip}$ A_v - Ties rebar area, $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ $V_{s,b}$ - Shear strength of steel (b) $V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (28.8 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 38.17 \text{ kip}$ V_s - Governing shear strength of steel $V_s = MIN[V_{s,a}, V_{s,b}]$ $V_s = MIN[(414.72 \text{ kip}), (38.17 \text{ kip})]$ $V_s = 38.17 \text{ kip}$ ϕV_n - Allowable shear strength $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((76.332 \text{ kip}) + (38.17 \text{ kip}))$ $\phi V_n = 74.426 \text{ kip}$ Considering x-direction: $V_{max} = 12.359 \text{ kip}$ - Maximum shear force in the x-direction, $Ratio$ - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(12.359 \text{ kip})}{(74.426 \text{ kip})}$ $Ratio = 0.16606$ Status: PASS Ratio: 0.170	
14.5.2.1b	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{\pi D^3}{32}$ $S_m = \frac{\pi \times (36 \text{ in})^3}{32}$ $S_m = 4580.4 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 4580.442 \text{ in}^3$ $\phi M_{n,1} = 62.027 \text{ kipft}$ $\phi M_{n,2}$	

$$\phi M_{n,2} = \phi 0.85 f'_{ck} S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (4580.4 \text{ in}^3)$$

$$\phi M_{n,2} = 527.23 \text{ kipft}$$

Therefore,

ϕM_n - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(62.027 \text{ kipft}), (527.23 \text{ kipft})]$$

$$\phi M_n = 62.027 \text{ kipft}$$

Considering x-direction:

$M_{max} = 55.443 \text{ kipft}$ - Maximum moment in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(55.443 \text{ kipft})}{(62.027 \text{ kipft})}$$

$$\text{Ratio} = 0.89386$$

Status: **PASS**
Ratio: **0.890**