

**Project Name:** MTSOLAR\_1A35C12E226A - 48insquare **Date:** Thu Jan 30 2025

- V1jb

**Number of Modules:** 50

**Location:** 1 Foundry St, Lebanon, NH 03766, USA


**Number of Poles:** 4

**Unique ID:** 4P-19.75-8TOP-XD-12-L-5Hx10W-HF0H

**Date Sold:**

**Dealer:** \_\_\_\_\_

\_\_\_\_\_

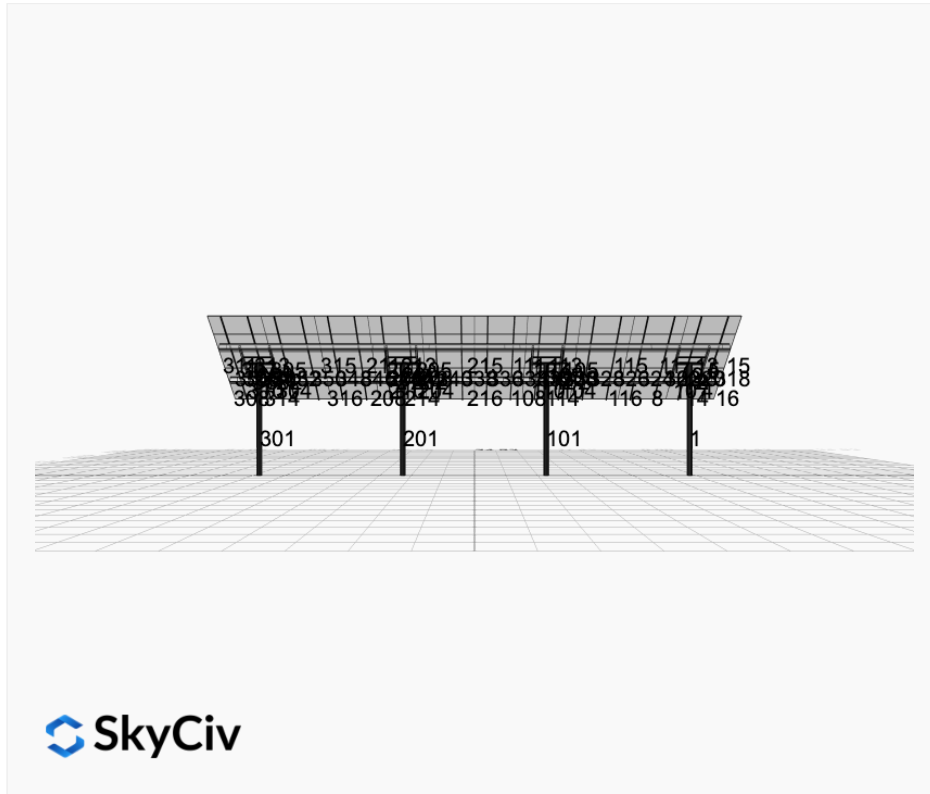

|                             |          |
|-----------------------------|----------|
| <b>Array Dimensions N/S</b> | 18.79 ft |
| <b>Array Dimensions E/W</b> | 69.67 ft |
| <b>Winter Tilt Angle</b>    | 35       |
| <b>Front Edge Clearance</b> | 10 ft    |

### MT Solar Bill of Materials (4P-19.75-8TOP-XD-12-L-5Hx10W-HF0H)

| Part                | Short Description     | BOM Qty |
|---------------------|-----------------------|---------|
| MTS-PC-8            | 8IN Pole Cap Assembly | 4       |
| MTS-HF-XD           | H-Frame Assembly-XD   | 4       |
| MTS-XD-Wing-12      | 12IN XD Wing          | 4       |
| MTS-XD-Splice-90    | 90IN XD Splice        | 6       |
| MTS-XD-Splice-57    | 57IN XD Splice        | 6       |
| MTS-CLAMP-ANGLE-4PK | Angle Clamp           | 10      |

### Rail Bill of Materials

| Part             | Qty |
|------------------|-----|
| Rails (223in)    | 20  |
| Rail Attachment  | 80  |
| Module Mid Clamp | 80  |
| Module End Clamp | 40  |
| Ground Lug       | 10  |

## Site Details:



**Site Address:** 1 Foundry St, Lebanon, NH 03766, USA

### Array Specification

|                                    |           |
|------------------------------------|-----------|
| <b>Duty Classification:</b>        | XD        |
| <b>Module Width:</b>               | 44.60 in  |
| <b>Module Length:</b>              | 82.60in   |
| <b>Number of Rows:</b>             | 5         |
| <b>Number of Columns:</b>          | 10        |
| <b>Total Number of Modules:</b>    | 50        |
| <b>Winter Tilt Angle:</b>          | 35        |
| <b>Front Edge Clearance:</b>       | 10        |
| <b>Total Array Height at Tilt:</b> | 20.78 ft  |
| <b>Total Frame Length:</b>         | 68.75 ft  |
| <b>Frame Weight:</b>               | 6471 lbs  |
| <b>Array Dimensions N/S:</b>       | 18.79 ft  |
| <b>Array Dimensions E/W:</b>       | 69.67 ft  |
| <b>Rail Length:</b>                | 225.50 in |
| <b>Rail Spacing:</b>               | 3.48 ft   |

### Support Specifications

|                                 |                 |
|---------------------------------|-----------------|
| <b>Pole Size:</b>               | 8in Pipe Sch 80 |
| <b>Pole Length above Grade:</b> | 15.39 ft        |
| <b>Number of Poles:</b>         | 4               |
| <b>Pole Spacing:</b>            | 19.75 ft        |

### Foundation Specifications

|                                        |                                                                          |
|----------------------------------------|--------------------------------------------------------------------------|
| <b>Foundation Type:</b>                | Square                                                                   |
| <b>Foundation Dimensions:</b>          | 48 x 48 in                                                               |
| <b>Foundation Depth (below grade):</b> | Pile 1: 7.25 ft<br>Pile 2: 7.75 ft<br>Pile 3: 7.75 ft<br>Pile 4: 7.25 ft |
| <b>Foundation Volume:</b>              | 17.778 y <sup>3</sup>                                                    |

### Site Info

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Risk Category:</b>       | I                                    |
| <b>Exposure:</b>            | B                                    |
| <b>Soil Classification:</b> | sand                                 |
| <b>Site Location:</b>       | 1 Foundry St, Lebanon, NH 03766, USA |
| <b>Wind Speed:</b>          | 102 mph                              |

**Snow Load:**

60 psf

### **Design Disclaimer**


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



## AutoDesigner Input


```
{ "wind_speed_override": null, "snow_load_override": null, "direct_snow_load": false, "add_angle_brace": false, "product_type": "Beam", "designer_name": "Evan", "designer_email": "Evan@mainselectric.com", "designer_phone": "6035074422", "project_id": "MTSOLAR_1A35C12E226A - 48insquare - V1Jb", "site_address": "1 Foundry St, Lebanon, NH 03766, USA", "module_width": 44.6, "module_length": 82.6, "number_rows": 5, "number_columns": 10, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": 15, "tilt_angle": 35, "ground_clearance": 10, "risk_category": "I", "exposure_category": "B", "frame_duty_override": "auto", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "36_Round", "foundation_type": "Square", "foundation_size": 48, "check_rails": false }
```

## Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)

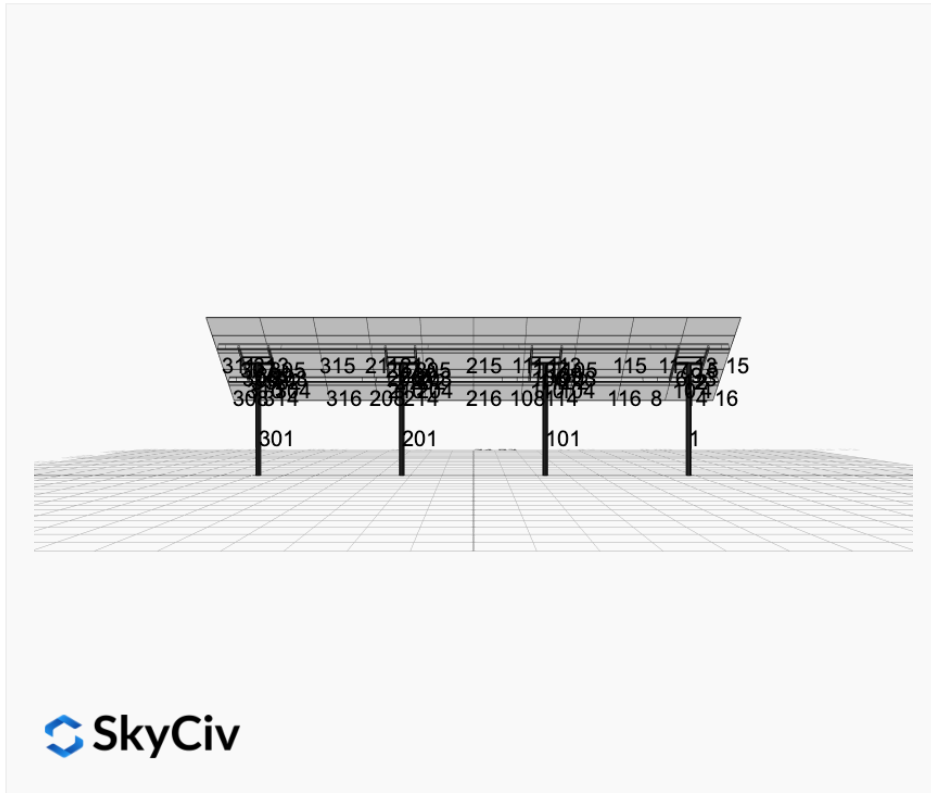

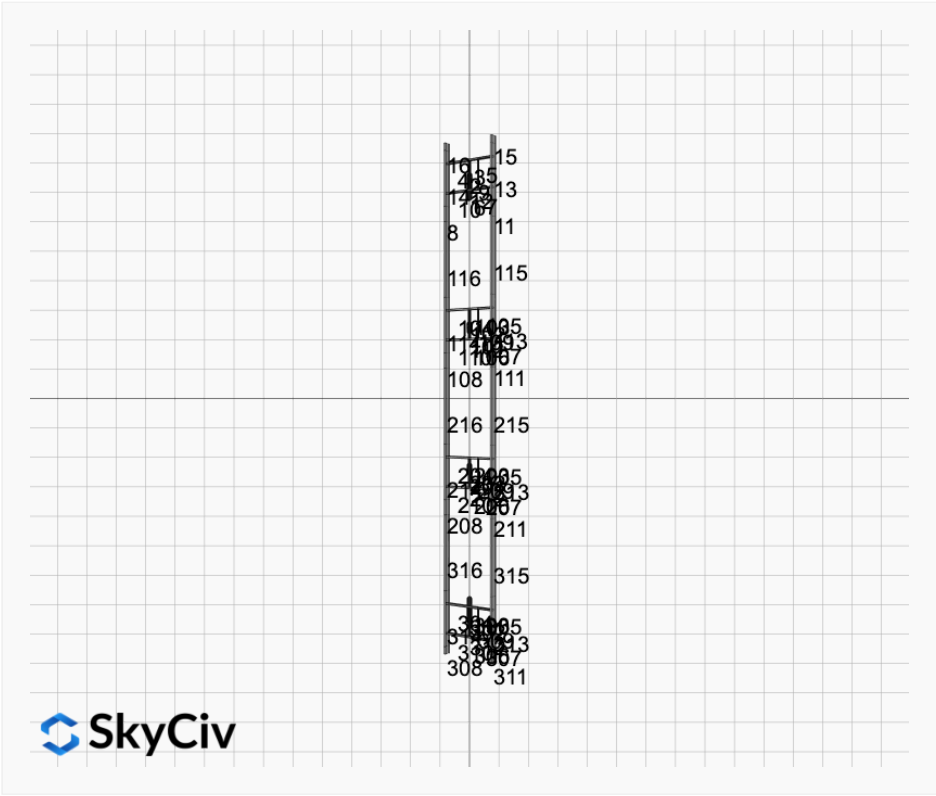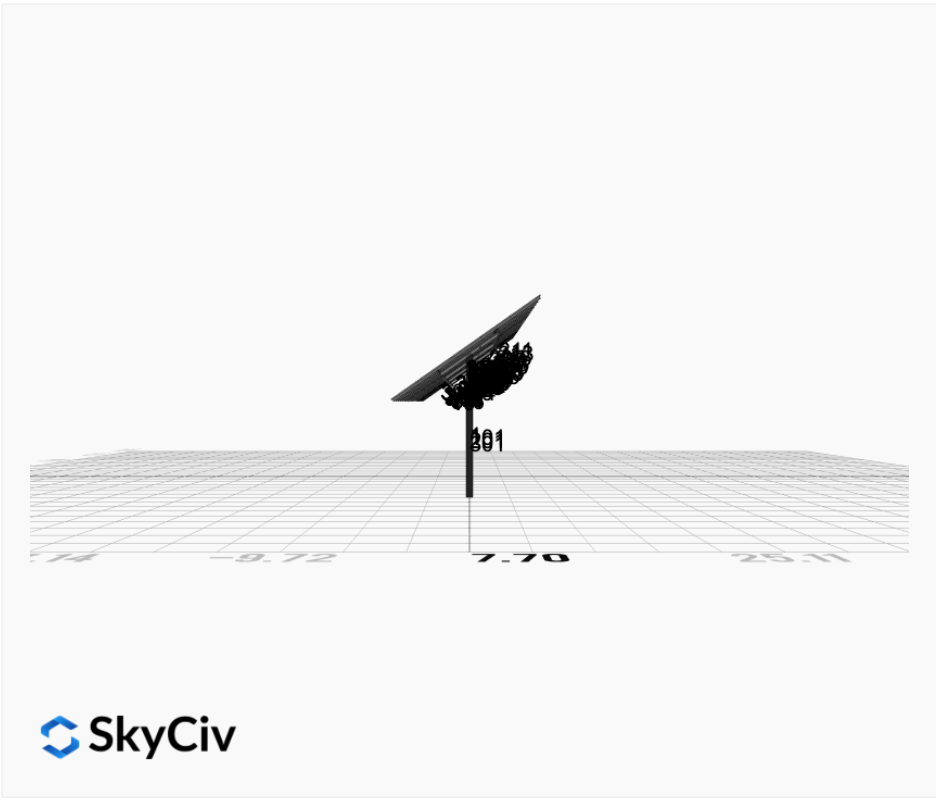


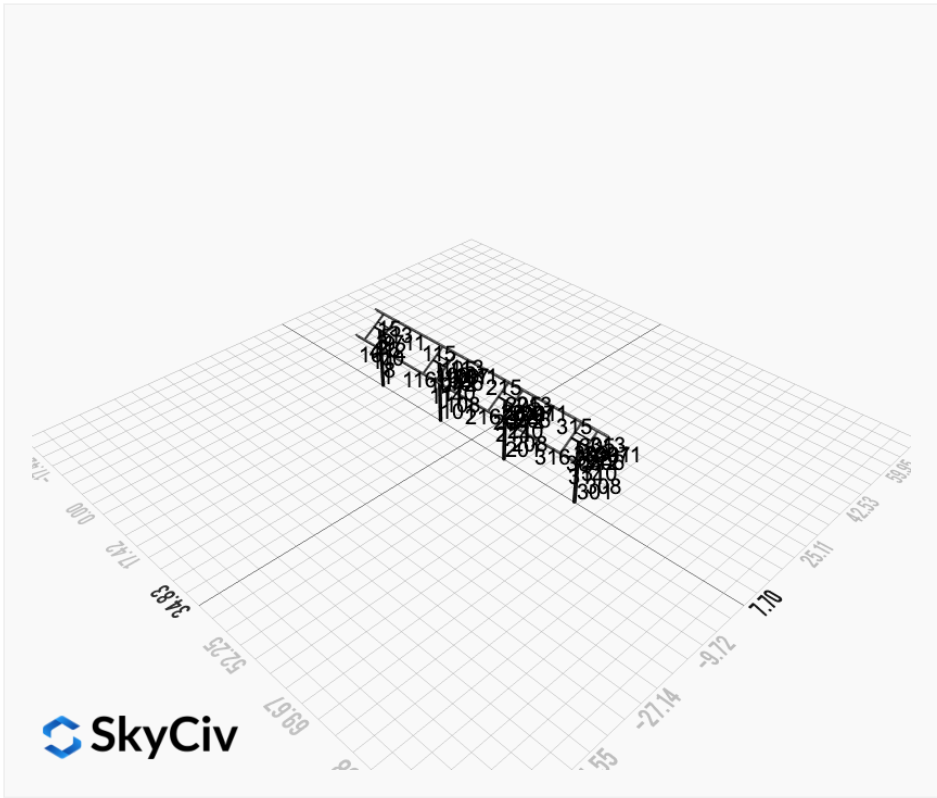


# FEM Results (Envelope Worst Case for each member)

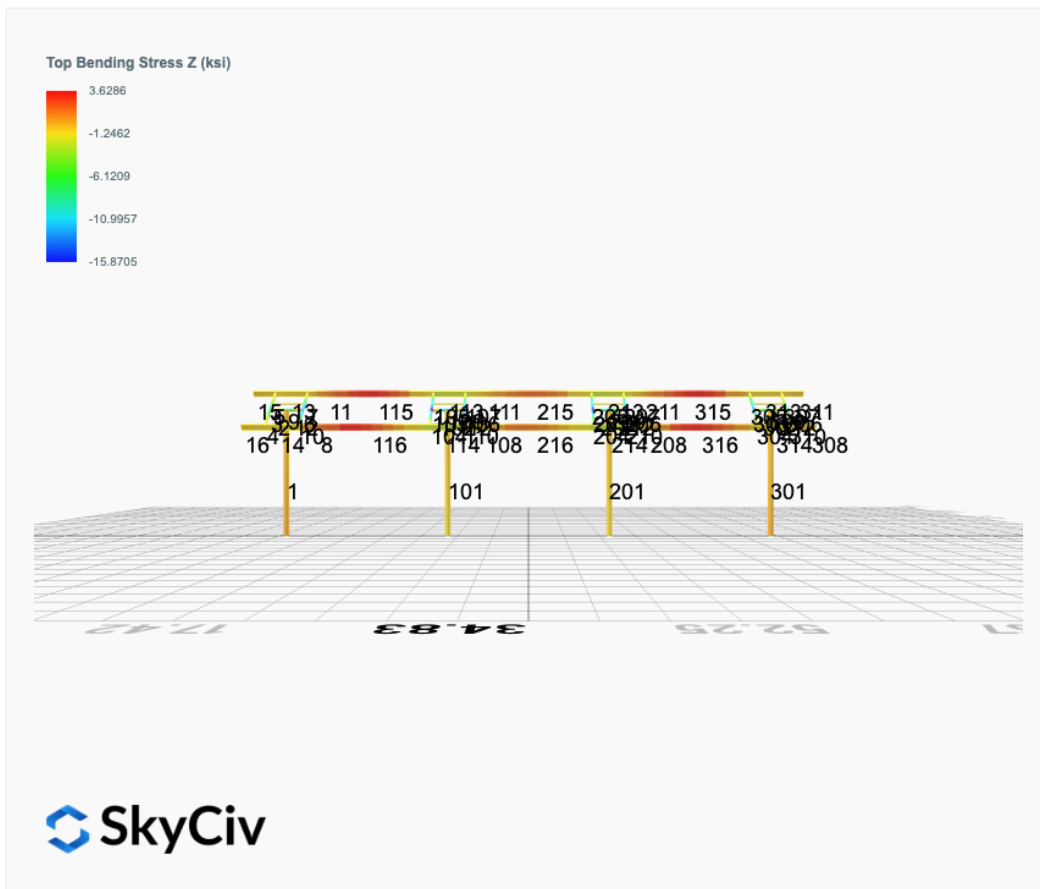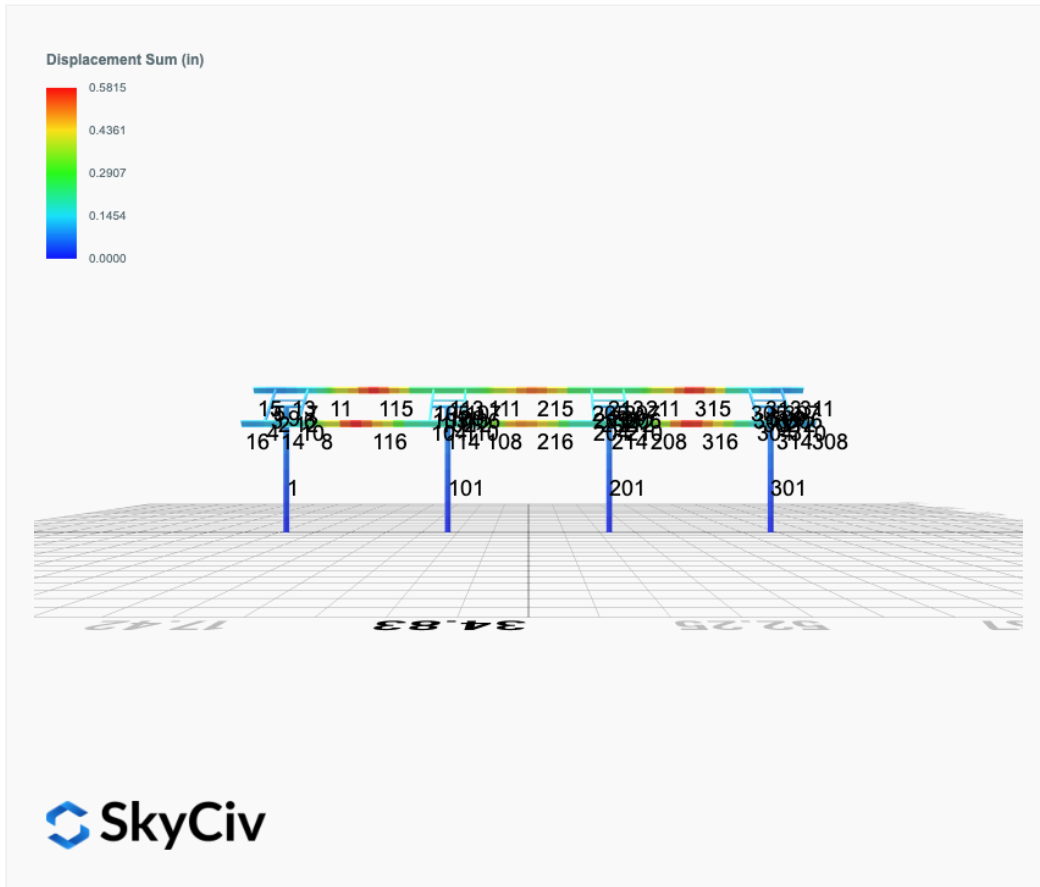


Top Bending Stress Y (ksi)

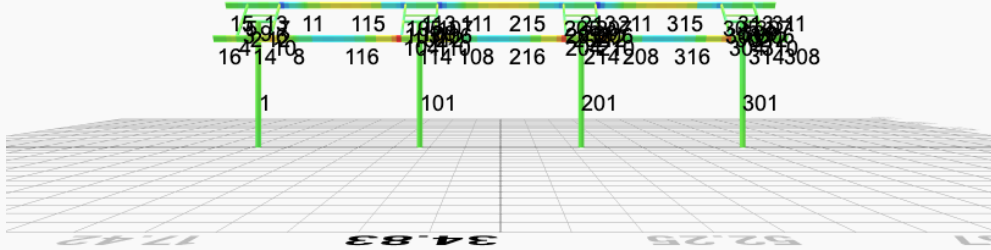

Shear Stress Y (ksi)

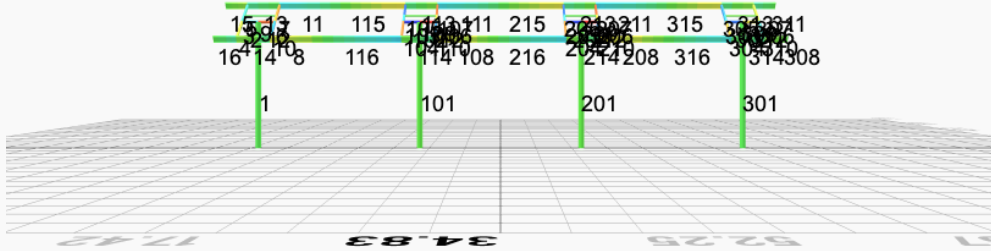

Axial Stress (ksi)

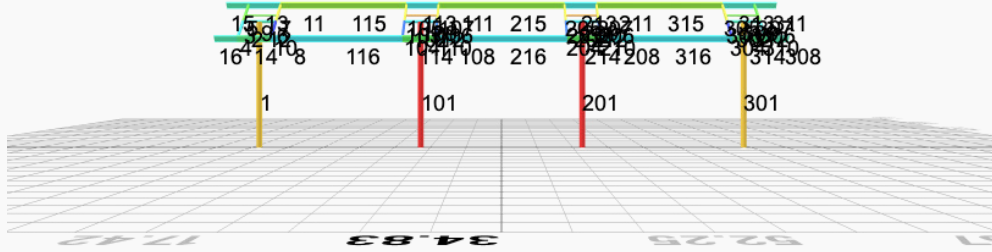

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|----------|
| ULS: 1. D                                                                       | 0.0337  | 2.4728  | 0.0786  | 0.3804  | -0.0836 | -0.4559  |
| ULS: 2. D + L                                                                   | 0.0337  | 2.4728  | 0.0786  | 0.3804  | -0.0836 | -0.4559  |
| ULS: 3. D + (S or Lr or R)                                                      | 0.1431  | 7.4754  | 0.3366  | 1.6325  | -0.3606 | -2.0194  |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0337  | 2.4728  | 0.0786  | 0.3804  | -0.0836 | -0.4559  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.1157  | 6.2248  | 0.2721  | 1.3195  | -0.2913 | -1.6285  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0337  | 2.4728  | 0.0786  | 0.3804  | -0.0836 | -0.4559  |
| ULS: 5b. D + 0.7E                                                               | 0.0337  | 2.4728  | 0.0786  | 0.3804  | -0.0836 | -0.4559  |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | 0.1157  | 6.2248  | 0.2721  | 1.3195  | -0.2913 | -1.6285  |
| ULS: 8. 0.6D + 0.7E                                                             | 0.0202  | 1.4837  | 0.0471  | 0.2283  | -0.0502 | -0.2736  |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -2.2173 | 5.5533  | 0.3520  | 1.6695  | -1.1072 | 35.5269  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -2.2173 | 5.5533  | 0.3520  | 1.6695  | -1.1072 | 35.5269  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 1.9224  | -0.1183 | -0.1429 | -0.6608 | 0.7448  | -29.3830 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 1.6457  | 0.2901  | -0.1336 | -0.6169 | 0.7197  | -31.3551 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.5725 | 8.5352  | 0.4771  | 2.2863  | -1.0590 | 25.3587  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -1.5725 | 8.5352  | 0.4771  | 2.2863  | -1.0590 | 25.3587  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.5323  | 4.2814  | 0.1060  | 0.5386  | 0.3300  | -23.3238 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.3248  | 4.5877  | 0.1129  | 0.5715  | 0.3112  | -24.8028 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.6545 | 4.7832  | 0.2836  | 1.3472  | -0.8513 | 26.5312  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -1.6545 | 4.7832  | 0.2836  | 1.3472  | -0.8513 | 26.5312  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.4503  | 0.5295  | -0.0875 | -0.4005 | 0.5377  | -22.1512 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.2427  | 0.8358  | -0.0805 | -0.3675 | 0.5188  | -23.6303 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -2.2308 | 4.5642  | 0.3205  | 1.5173  | -1.0738 | 35.7093  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -2.2308 | 4.5642  | 0.3205  | 1.5173  | -1.0738 | 35.7093  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 1.9090  | -1.1074 | -0.1743 | -0.8130 | 0.7783  | -29.2006 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 1.6323  | -0.6990 | -0.1650 | -0.7690 | 0.7531  | -31.1727 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 13.5462             |
| Shear X          | -3.7516             |
| Shear Z          | 0.7465              |
| Moment X         | 3.6012              |
| Moment Y (Twist) | 1.9805              |
| Moment Z         | 60.2248             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.5352              |
| Shear X          | -2.2308             |
| Shear Z          | 0.4771              |
| Moment X         | 2.2863              |
| Moment Y (Twist) | 1.1072              |
| Moment Z         | 35.7093             |

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

| Name                                   | Fx      | Fy      | Fz      | Mx      | My     | Mz     |
|----------------------------------------|---------|---------|---------|---------|--------|--------|
| ULS: 1. D                              | -0.0337 | 3.1516  | -0.0017 | -0.0089 | 0.0021 | 0.5147 |
| ULS: 2. D + L                          | -0.0337 | 3.1516  | -0.0017 | -0.0089 | 0.0021 | 0.5147 |
| ULS: 3. D + (S or Lr or R)             | -0.1431 | 10.3682 | -0.0068 | -0.0363 | 0.0076 | 2.1699 |
| ULS: 3. D + (S or Lr or R)             | -0.0337 | 3.1516  | -0.0017 | -0.0089 | 0.0021 | 0.5147 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.1157 | 8.5640  | -0.0055 | -0.0295 | 0.0062 | 1.7561 |

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|----------|
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | -0.0337 | 3.1516  | -0.0017 | -0.0089 | 0.0021  | 0.5147   |
| ULS: 5b. D + 0.7E                                                               | -0.0337 | 3.1516  | -0.0017 | -0.0089 | 0.0021  | 0.5147   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | -0.1157 | 8.5640  | -0.0055 | -0.0295 | 0.0062  | 1.7561   |
| ULS: 8. 0.6D + 0.7E                                                             | -0.0202 | 1.8910  | -0.0010 | -0.0053 | 0.0013  | 0.3088   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -3.0334 | 7.5699  | 0.0436  | 0.2014  | -0.2259 | 47.8652  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -3.0334 | 7.5699  | 0.0436  | 0.2014  | -0.2259 | 47.8652  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 2.5079  | -0.5844 | -0.0345 | -0.1604 | 0.1718  | -37.4050 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 2.0462  | 0.0617  | -0.0445 | -0.2077 | 0.2129  | -39.1273 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.3655 | 11.8778 | 0.0285  | 0.1283  | -0.1648 | 37.2690  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.3655 | 11.8778 | 0.0285  | 0.1283  | -0.1648 | 37.2690  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.7904  | 5.7620  | -0.0301 | -0.1431 | 0.1335  | -26.6837 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.4442  | 6.2466  | -0.0377 | -0.1786 | 0.1643  | -27.9754 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.2835 | 6.4654  | 0.0323  | 0.1488  | -0.1689 | 36.0276  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.2835 | 6.4654  | 0.0323  | 0.1488  | -0.1689 | 36.0276  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.8725  | 0.3496  | -0.0263 | -0.1225 | 0.1294  | -27.9251 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.5262  | 0.8342  | -0.0338 | -0.1580 | 0.1602  | -29.2168 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -3.0200 | 6.3093  | 0.0443  | 0.2050  | -0.2267 | 47.6594  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -3.0200 | 6.3093  | 0.0443  | 0.2050  | -0.2267 | 47.6594  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 2.5213  | -1.8450 | -0.0338 | -0.1568 | 0.1709  | -37.6109 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 2.0597  | -1.1989 | -0.0439 | -0.2041 | 0.2121  | -39.3332 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 19.0028             |
| Shear X          | -5.0832             |
| Shear Z          | -0.0809             |
| Moment X         | -0.3787             |
| Moment Y (Twist) | 0.4001              |
| Moment Z         | 82.6010             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 11.8778             |
| Shear X          | -3.0334             |
| Shear Z          | -0.0445             |
| Moment X         | -0.2077             |
| Moment Y (Twist) | 0.2267              |
| Moment Z         | 47.8652             |

### Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

#### ASD Load Combination Results

| Name                                         | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|----------------------------------------------|---------|---------|---------|---------|---------|----------|
| ULS: 1. D                                    | -0.0337 | 3.1516  | 0.0017  | 0.0089  | -0.0021 | 0.5147   |
| ULS: 2. D + L                                | -0.0337 | 3.1516  | 0.0017  | 0.0089  | -0.0021 | 0.5147   |
| ULS: 3. D + (S or Lr or R)                   | -0.1431 | 10.3682 | 0.0068  | 0.0361  | -0.0072 | 2.1700   |
| ULS: 3. D + (S or Lr or R)                   | -0.0337 | 3.1516  | 0.0017  | 0.0089  | -0.0021 | 0.5147   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)       | -0.1157 | 8.5640  | 0.0055  | 0.0293  | -0.0059 | 1.7561   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)       | -0.0337 | 3.1516  | 0.0017  | 0.0089  | -0.0021 | 0.5147   |
| ULS: 5b. D + 0.7E                            | -0.0337 | 3.1516  | 0.0017  | 0.0089  | -0.0021 | 0.5147   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S      | -0.1157 | 8.5640  | 0.0055  | 0.0293  | -0.0059 | 1.7561   |
| ULS: 8. 0.6D + 0.7E                          | -0.0202 | 1.8910  | 0.0010  | 0.0053  | -0.0013 | 0.3088   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only | -3.0334 | 7.5699  | -0.0436 | -0.2014 | 0.2259  | 47.8652  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only | -3.0334 | 7.5699  | -0.0436 | -0.2014 | 0.2259  | 47.8652  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only    | 2.5079  | -0.5844 | 0.0345  | 0.1604  | -0.1717 | -37.4050 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only    | 2.0462  | 0.0617  | 0.0445  | 0.2077  | -0.2129 | -39.1273 |

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|----------|
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.3655 | 11.8778 | -0.0284 | -0.1284 | 0.1651  | 37.2690  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.3655 | 11.8778 | -0.0284 | -0.1284 | 0.1651  | 37.2690  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.7904  | 5.7620  | 0.0302  | 0.1429  | -0.1332 | -26.6836 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.4442  | 6.2466  | 0.0377  | 0.1784  | -0.1640 | -27.9753 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.2835 | 6.4654  | -0.0323 | -0.1488 | 0.1689  | 36.0276  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.2835 | 6.4654  | -0.0323 | -0.1488 | 0.1689  | 36.0276  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.8725  | 0.3496  | 0.0263  | 0.1225  | -0.1293 | -27.9251 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.5262  | 0.8342  | 0.0338  | 0.1580  | -0.1602 | -29.2168 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -3.0200 | 6.3093  | -0.0443 | -0.2050 | 0.2267  | 47.6594  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -3.0200 | 6.3093  | -0.0443 | -0.2050 | 0.2267  | 47.6594  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 2.5213  | -1.8450 | 0.0338  | 0.1568  | -0.1709 | -37.6109 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 2.0597  | -1.1989 | 0.0439  | 0.2041  | -0.2120 | -39.3332 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 19.0028             |
| Shear X          | -5.0832             |
| Shear Z          | 0.0809              |
| Moment X         | 0.3793              |
| Moment Y (Twist) | 0.4009              |
| Moment Z         | 82.6014             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 11.8778             |
| Shear X          | -3.0334             |
| Shear Z          | 0.0445              |
| Moment X         | 0.2077              |
| Moment Y (Twist) | 0.2267              |
| Moment Z         | 47.8652             |

### Reaction Forces for Foundation 4 (Node ID#301), (kip, kip-ft)

#### ASD Load Combination Results

| Name                                                                            | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---------------------------------------------------------------------------------|---------|---------|---------|---------|---------|----------|
| ULS: 1. D                                                                       | 0.0337  | 2.4728  | -0.0786 | -0.3804 | 0.0837  | -0.4559  |
| ULS: 2. D + L                                                                   | 0.0337  | 2.4728  | -0.0786 | -0.3804 | 0.0837  | -0.4559  |
| ULS: 3. D + (S or Lr or R)                                                      | 0.1430  | 7.4754  | -0.3366 | -1.6330 | 0.3609  | -2.0190  |
| ULS: 3. D + (S or Lr or R)                                                      | 0.0337  | 2.4728  | -0.0786 | -0.3804 | 0.0837  | -0.4559  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.1157  | 6.2247  | -0.2721 | -1.3198 | 0.2916  | -1.6282  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)                                          | 0.0337  | 2.4728  | -0.0786 | -0.3804 | 0.0837  | -0.4559  |
| ULS: 5b. D + 0.7E                                                               | 0.0337  | 2.4728  | -0.0786 | -0.3804 | 0.0837  | -0.4559  |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S                                         | 0.1157  | 6.2247  | -0.2721 | -1.3198 | 0.2916  | -1.6282  |
| ULS: 8. 0.6D + 0.7E                                                             | 0.0202  | 1.4837  | -0.0471 | -0.2283 | 0.0502  | -0.2735  |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -2.2173 | 5.5533  | -0.3520 | -1.6695 | 1.1073  | 35.5270  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -2.2173 | 5.5533  | -0.3520 | -1.6695 | 1.1073  | 35.5270  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 1.9224  | -0.1183 | 0.1429  | 0.6608  | -0.7448 | -29.3830 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 1.6457  | 0.2901  | 0.1336  | 0.6168  | -0.7197 | -31.3550 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.5725 | 8.5351  | -0.4771 | -2.2866 | 1.0593  | 25.3589  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -1.5725 | 8.5351  | -0.4771 | -2.2866 | 1.0593  | 25.3589  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.5323  | 4.2814  | -0.1060 | -0.5389 | -0.3297 | -23.3235 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.3247  | 4.5877  | -0.1129 | -0.5719 | -0.3109 | -24.8026 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.6545 | 4.7832  | -0.2836 | -1.3472 | 0.8514  | 26.5313  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -1.6545 | 4.7832  | -0.2836 | -1.3472 | 0.8514  | 26.5313  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.4502  | 0.5295  | 0.0875  | 0.4005  | -0.5377 | -22.1512 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.2427  | 0.8358  | 0.0805  | 0.3675  | -0.5188 | -23.6302 |

| Name                                           | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|------------------------------------------------|---------|---------|---------|---------|---------|----------|
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only | -2.2308 | 4.5642  | -0.3205 | -1.5173 | 1.0738  | 35.7093  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only | -2.2308 | 4.5642  | -0.3205 | -1.5173 | 1.0738  | 35.7093  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only    | 1.9090  | -1.1074 | 0.1743  | 0.8130  | -0.7783 | -29.2006 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only    | 1.6323  | -0.6990 | 0.1650  | 0.7690  | -0.7531 | -31.1727 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
 Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 13.5461             |
| Shear X          | -3.7516             |
| Shear Z          | -0.7465             |
| Moment X         | -3.6031             |
| Moment Y (Twist) | 1.9812              |
| Moment Z         | 60.2258             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
 Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.5351              |
| Shear X          | -2.2308             |
| Shear Z          | -0.4771             |
| Moment X         | -2.2866             |
| Moment Y (Twist) | 1.1073              |
| Moment Z         | 35.7093             |

# Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States  
  
 User Name: sales@mtsolar.us  
 Project Name: MTSOLAR\_1A35C12E226A - 48insquare - V1Jb  
 Unit System: imperial



## Design Input Information

| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |             |             |
|------------------|---------|-------------|-------------|
| ID               | E (ksi) | $F_y$ (ksi) | $F_u$ (ksi) |
| 1                | 29000   | 50          | 65          |

**Section Dimensions**

| ID | Name             | d (in) | $t_w$ (in) |  |  |  |  |  |
|----|------------------|--------|------------|--|--|--|--|--|
| 3  | 2in Pipe Sch 120 | 2.38   | 0.25       |  |  |  |  |  |
| 6  | 4in Pipe Sch 120 | 4.50   | 0.44       |  |  |  |  |  |
| 10 | 8in Pipe Sch 80  | 8.63   | 0.50       |  |  |  |  |  |

| ID | Name       | d (in) | b (in) | $t_w$ (in) | $t_b$ (in) | r (in) |  |  |
|----|------------|--------|--------|------------|------------|--------|--|--|
| 17 | HSS5x3x1/4 | 5.00   | 3.00   | 0.23       | 0.23       | 0.23   |  |  |

| ID | Name   | d (in) | $t_w$ (in) | $b_t$ (in) | $b_b$ (in) | $t_t$ (in) | $t_b$ (in) | r (in) |
|----|--------|--------|------------|------------|------------|------------|------------|--------|
| 20 | W10x12 | 9.87   | 0.19       | 3.96       | 3.96       | 0.21       | 0.21       | 0.30   |

| Section Properties |      |                      |                      |                             |                             |                          |                             |                             |
|--------------------|------|----------------------|----------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------|-----------------------------|
| ID                 | Name | A (in <sup>2</sup> ) | J (in <sup>4</sup> ) | $I_{yD}$ (in <sup>4</sup> ) | $I_{zD}$ (in <sup>4</sup> ) | $I_w$ (in <sup>6</sup> ) | $S_{yD}$ (in <sup>3</sup> ) | $S_{zD}$ (in <sup>3</sup> ) |

|    |                  |       |        |        |        |       |       |       |
|----|------------------|-------|--------|--------|--------|-------|-------|-------|
| 3  | 2in Pipe Sch 120 | 1.67  | 1.91   | 0.96   | 0.96   | 0.00  | 1.13  | 1.13  |
| 6  | 4in Pipe Sch 120 | 5.58  | 23.29  | 11.64  | 11.64  | 0.00  | 7.24  | 7.24  |
| 10 | 8in Pipe Sch 80  | 12.76 | 211.43 | 105.72 | 105.72 | 0.00  | 33.05 | 33.05 |
| 17 | HSS5x3x1/4       | 3.37  | 11.00  | 4.81   | 10.70  | 0.93  | 3.77  | 5.38  |
| 20 | W10x12           | 3.54  | 0.05   | 2.18   | 53.80  | 50.90 | 1.74  | 12.60 |

**Member Properties**

| Member ID | Section ID | K <sub>z</sub> L (ft) | K <sub>y</sub> L (ft) | L <sub>b</sub> (ft) | C <sub>b</sub>                                                                                                                        | LS T    | LS C    | L D |
|-----------|------------|-----------------------|-----------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------|---------|-----|
| 1         | 10         | 32.3<br>2             | 32.3<br>2             | 15.39               | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |
| 2         | 6          | 1.30                  | 1.30                  | 2.0<br>0            | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |
| 3         | 17         | 0.92                  | 0.92                  | 1.4<br>2            | 1.19,1.18,1.19,1.17,1.18,1.19,1.17,1.17,1.13,1.15,1.17,1.17,1.15,1.16,1.17,1.17,1.18,1.18,1.17,1.17,1.1<br>3,1.15,1.17,1.17,1.16,1.16 | 30<br>0 | 20<br>0 | 1   |
| 4         | 17         | 2.44                  | 2.44                  | 3.7<br>5            | 1.70,1.68,1.70,1.67,1.69,1.70,1.67,1.67,1.63,1.69,1.67,1.67,1.65,1.75,1.67,1.67,1.68,1.67,1.68,1.68,1.6<br>1,1.71,1.67,1.67,1.66,1.83 | 30<br>0 | 20<br>0 | 1   |
| 5         | 17         | 1.52                  | 1.52                  | 2.3<br>3            | 1.69,1.67,1.69,1.67,1.68,1.69,1.67,1.67,1.64,1.65,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.67,1.67,1.6<br>3,1.65,1.67,1.67,1.66,1.66      | 30<br>0 | 20<br>0 | 1   |
| 6         | 17         | 0.92                  | 0.92                  | 1.4<br>2            | 1.19,1.19,1.19,1.18,1.19,1.19,1.19,1.19,1.18,1.18,1.19,1.19,1.18,1.18,1.18,1.18,1.19,1.19,1.19,1.1<br>8,1.18,1.19,1.19,1.18,1.18      | 30<br>0 | 20<br>0 | 1   |
| 7         | 17         | 1.52                  | 1.52                  | 2.3<br>3            | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.67,1.67,1.6<br>5,1.66,1.67,1.67,1.66,1.66      | 30<br>0 | 20<br>0 | 1   |
| 8         | 20         | 1.33                  | 1.33                  | 2.0<br>5            | 1.23,1.23,1.23,1.23,1.23,1.23,1.23,1.23,1.24,1.28,1.23,1.23,1.23,1.05,1.23,1.23,1.22,1.23,1.23,1.23,1.2<br>4,1.31,1.23,1.23,1.23,1.13 | 30<br>0 | 20<br>0 | 1   |
| 9         | 3          | 2.60                  | 2.60                  | 4.0<br>0            | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |
| 10        | 17         | 2.44                  | 2.44                  | 3.7<br>5            | 1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.67,1.65,1.69,1.67,1.67,1.66,1.61,1.67,1.67,1.68,1.67,1.67,1.67,1.6<br>4,1.74,1.67,1.67,1.66,1.64 | 30<br>0 | 20<br>0 | 1   |
| 11        | 20         | 1.33                  | 1.33                  | 2.0<br>5            | 1.25,1.25,1.25,1.25,1.25,1.25,1.31,1.31,1.59,1.48,1.33,1.33,1.37,1.38,1.28,1.28,1.22,1.19,1.31,1.31,1.4<br>8,1.44,1.33,1.33,1.36,1.37 | 30<br>0 | 20<br>0 | 1   |
| 12        | 6          | 1.30                  | 1.30                  | 2.0<br>0            | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |
| 13        | 20         | 4.88                  | 4.00                  | 7.5<br>0            | 1.35,1.37,1.36,1.37,1.37,1.36,1.22,1.22,1.37,1.47,1.20,1.20,1.20,1.32,1.28,1.28,1.78,1.98,1.22,1.22,1.3<br>2,1.43,1.19,1.19,1.17,1.30 | 30<br>0 | 20<br>0 | 1   |
| 14        | 20         | 4.88                  | 4.00                  | 7.5<br>0            | 1.58,1.62,1.58,1.63,1.60,1.58,1.61,1.61,1.59,1.87,1.60,1.60,1.62,1.66,1.62,1.62,1.64,1.63,1.60,1.60,1.6<br>4,1.80,1.60,1.60,1.62,1.76 | 30<br>0 | 20<br>0 | 1   |
| 15        | 20         | 2.10                  | 2.10                  | 1.0<br>0            | 2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.3<br>3,2.33,2.33,2.33,2.33,2.33      | 30<br>0 | 20<br>0 | 1   |
| 16        | 20         | 2.10                  | 2.10                  | 1.0<br>0            | 2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.33,2.3<br>3,2.33,2.33,2.33,2.33,2.32      | 30<br>0 | 20<br>0 | 1   |
| 101       | 10         | 32.3<br>2             | 32.3<br>2             | 15.39               | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |
| 102       | 6          | 1.30                  | 1.30                  | 2.0<br>0            | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |
| 103       | 17         | 0.92                  | 0.92                  | 1.4<br>2            | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.16,1.17,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18,1.18,1.1<br>6,1.17,1.18,1.18,1.17,1.17      | 30<br>0 | 20<br>0 | 1   |
| 104       | 17         | 2.44                  | 2.44                  | 3.7<br>5            | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.65,1.68,1.67,1.67,1.66,1.13,1.67,1.67,1.67,1.67,1.67,1.67,1.6<br>4,1.70,1.67,1.67,1.66,1.62 | 30<br>0 | 20<br>0 | 1   |
| 105       | 17         | 1.52                  | 1.52                  | 2.3<br>3            | 1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.65,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.67,1.67,1.6<br>5,1.66,1.67,1.67,1.66,1.66      | 30<br>0 | 20<br>0 | 1   |
| 106       | 17         | 0.92                  | 0.92                  | 1.4<br>2            | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.1<br>7,1.17,1.18,1.18,1.18,1.18           | 30<br>0 | 20<br>0 | 1   |
| 107       | 17         | 1.52                  | 1.52                  | 2.3<br>3            | 1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.67,1.67,1.6<br>5,1.66,1.67,1.67,1.66,1.66      | 30<br>0 | 20<br>0 | 1   |
| 108       | 20         | 1.33                  | 1.33                  | 2.0<br>5            | 2.11,2.12,2.11,2.12,2.12,2.11,2.08,2.08,1.58,2.26,2.07,2.07,2.02,1.13,2.10,2.10,2.36,2.30,2.08,2.08,1.7<br>2,2.15,2.07,2.07,2.06,1.40 | 30<br>0 | 20<br>0 | 1   |
| 109       | 3          | 2.60                  | 2.60                  | 4.0<br>0            | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |
| 110       | 17         | 2.44                  | 2.44                  | 3.7<br>5            | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.65,1.68,1.67,1.67,1.66,1.56,1.67,1.67,1.67,1.67,1.67,1.6<br>4,1.71,1.67,1.67,1.66,1.63      | 30<br>0 | 20<br>0 | 1   |
| 111       | 20         | 1.33                  | 1.33                  | 2.0<br>5            | 2.07,2.07,2.07,2.07,2.07,2.07,1.53,1.53,1.18,1.26,1.47,1.47,1.35,1.38,1.77,1.77,2.31,2.14,1.53,1.53,1.2<br>3,1.30,1.46,1.46,1.37,1.40 | 30<br>0 | 20<br>0 | 1   |
| 112       | 6          | 1.30                  | 1.30                  | 2.0<br>0            | -                                                                                                                                     | 30<br>0 | 20<br>0 | 1   |



|     |    |      |      |       |                                                                                                                                   |      |      |   |
|-----|----|------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------|------|------|---|
| 314 | 20 | 4.88 | 4.00 | 0     | 4,1.80,1.60,1.60,1.62,1.76                                                                                                        | 0    | 0    | 1 |
| 315 | 20 | 6.63 | 6.63 | 10.20 | 1.08,1.08,1.08,1.08,1.08,1.08,1.08,1.08,1.17,1.12,1.09,1.09,1.10,1.10,1.07,1.07,1.08,1.08,1.08,1.08,1.13,1.12,1.09,1.09,1.10,1.10 | 30.0 | 20.0 | 1 |
| 316 | 20 | 6.63 | 6.63 | 10.20 | 1.08,1.08,1.08,1.08,1.08,1.08,1.07,1.07,1.07,1.09,1.07,1.07,1.07,1.03,1.08,1.08,1.08,1.08,1.07,1.07,1.07,1.09,1.07,1.07,1.07,1.05 | 30.0 | 20.0 | 1 |

## Member Design Capacity

| Member ID | $\Phi_t P_n$ (kip) | $\Phi_c P_n$ (kip) | $\Phi_b M_{zn}$ (k-ft) | $\Phi_b M_{yn}$ (k-ft) | $\Phi_v V_{yn}$ (kip) | $\Phi_v V_{zn}$ (kip) |
|-----------|--------------------|--------------------|------------------------|------------------------|-----------------------|-----------------------|
| 1         | 574.32             | 158.80             | 123.94                 | 123.94                 | 172.30                | 172.30                |
| 2         | 251.01             | 248.88             | 27.16                  | 27.16                  | 75.30                 | 75.30                 |
| 3         | 151.65             | 150.70             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 4         | 151.65             | 145.15             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 5         | 151.65             | 149.10             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 6         | 151.65             | 150.70             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 7         | 151.65             | 149.10             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 8         | 159.30             | 140.46             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 9         | 75.10              | 66.32              | 4.25                   | 4.25                   | 22.53                 | 22.53                 |
| 10        | 151.65             | 145.15             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 11        | 159.30             | 140.46             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 12        | 251.01             | 248.88             | 27.16                  | 27.16                  | 75.30                 | 75.30                 |
| 13        | 159.30             | 97.43              | 35.85                  | 6.46                   | 56.26                 | 44.91                 |
| 14        | 159.30             | 97.43              | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 15        | 159.30             | 137.23             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 16        | 159.30             | 137.23             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 101       | 574.32             | 158.80             | 123.94                 | 123.94                 | 172.30                | 172.30                |
| 102       | 251.01             | 248.88             | 27.16                  | 27.16                  | 75.30                 | 75.30                 |
| 103       | 151.65             | 150.70             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 104       | 151.65             | 145.15             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 105       | 151.65             | 149.10             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 106       | 151.65             | 150.70             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 107       | 151.65             | 149.10             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 108       | 159.30             | 140.46             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 109       | 75.10              | 66.32              | 4.25                   | 4.25                   | 22.53                 | 22.53                 |
| 110       | 151.65             | 145.15             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 111       | 159.30             | 140.46             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 112       | 251.01             | 248.88             | 27.16                  | 27.16                  | 75.30                 | 75.30                 |
| 113       | 159.30             | 97.43              | 31.97                  | 6.46                   | 56.26                 | 44.91                 |
| 114       | 159.30             | 97.43              | 32.23                  | 6.46                   | 56.26                 | 44.91                 |
| 115       | 159.30             | 75.13              | 20.33                  | 6.46                   | 56.26                 | 44.91                 |
| 116       | 159.30             | 75.13              | 21.15                  | 6.46                   | 56.26                 | 44.91                 |
| 201       | 574.32             | 158.80             | 123.94                 | 123.94                 | 172.30                | 172.30                |
| 202       | 251.01             | 248.88             | 27.16                  | 27.16                  | 75.30                 | 75.30                 |
| 203       | 151.65             | 150.70             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 204       | 151.65             | 145.15             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 205       | 151.65             | 149.10             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 206       | 151.65             | 150.70             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 207       | 151.65             | 149.10             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 208       | 159.30             | 140.46             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |
| 209       | 75.10              | 66.32              | 4.25                   | 4.25                   | 22.53                 | 22.53                 |
| 210       | 151.65             | 145.15             | 20.17                  | 14.14                  | 54.12                 | 28.95                 |
| 211       | 159.30             | 140.46             | 46.90                  | 6.46                   | 56.26                 | 44.91                 |

|     |        |        |        |        |        |        |
|-----|--------|--------|--------|--------|--------|--------|
| 212 | 251.01 | 248.88 | 27.16  | 27.16  | 75.30  | 75.30  |
| 213 | 159.30 | 97.43  | 31.97  | 6.46   | 56.26  | 44.91  |
| 214 | 159.30 | 97.43  | 32.23  | 6.46   | 56.26  | 44.91  |
| 215 | 159.30 | 75.13  | 20.46  | 6.46   | 56.26  | 44.91  |
| 216 | 159.30 | 75.13  | 20.18  | 6.46   | 56.26  | 44.91  |
| 301 | 574.32 | 158.80 | 123.94 | 123.94 | 172.30 | 172.30 |
| 302 | 251.01 | 248.88 | 27.16  | 27.16  | 75.30  | 75.30  |
| 303 | 151.65 | 150.70 | 20.17  | 14.14  | 54.12  | 28.95  |
| 304 | 151.65 | 145.15 | 20.17  | 14.14  | 54.12  | 28.95  |
| 305 | 151.65 | 149.10 | 20.17  | 14.14  | 54.12  | 28.95  |
| 306 | 151.65 | 150.70 | 20.17  | 14.14  | 54.12  | 28.95  |
| 307 | 151.65 | 149.10 | 20.17  | 14.14  | 54.12  | 28.95  |
| 308 | 159.30 | 137.23 | 46.90  | 6.46   | 56.26  | 44.91  |
| 309 | 75.10  | 66.32  | 4.25   | 4.25   | 22.53  | 22.53  |
| 310 | 151.65 | 145.15 | 20.17  | 14.14  | 54.12  | 28.95  |
| 311 | 159.30 | 137.23 | 46.90  | 6.46   | 56.26  | 44.91  |
| 312 | 251.01 | 248.88 | 27.16  | 27.16  | 75.30  | 75.30  |
| 313 | 159.30 | 97.43  | 35.86  | 6.46   | 56.26  | 44.91  |
| 314 | 159.30 | 97.43  | 46.90  | 6.46   | 56.26  | 44.91  |
| 315 | 159.30 | 75.13  | 20.69  | 6.46   | 56.26  | 44.91  |
| 316 | 159.30 | 75.13  | 19.90  | 6.46   | 56.26  | 44.91  |

## Design Ratio

| Member ID | P     | M <sub>z</sub> | M <sub>y</sub> | V <sub>y</sub> | V <sub>z</sub> | (P,M <sub>z</sub> ,M <sub>y</sub> ) | Worst LC | KL/r         | δ            | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|--------------|--------------|--------|
| 1         | 0.085 | 0.486          | 0.063          | 0.022          | 0.004          | 0.545                               | #13      | 0.674        | Not Required | Pass   |
| 2         | 0.002 | 0.226          | 0.098          | 0.059          | 0.021          | 0.298                               | #21      | 0.054        | Not Required | Pass   |
| 3         | 0.006 | 0.403          | 0.029          | 0.038          | 0.006          | 0.419                               | #21      | 0.046        | Not Required | Pass   |
| 4         | 0.005 | 0.397          | 0.077          | 0.040          | 0.018          | 0.476                               | #21      | 0.122        | Not Required | Pass   |
| 5         | 0.006 | 0.250          | 0.037          | 0.040          | 0.011          | 0.259                               | #21      | 0.076        | Not Required | Pass   |
| 6         | 0.014 | 0.671          | 0.136          | 0.068          | 0.039          | 0.814                               | #21      | 0.046        | Not Required | Pass   |
| 7         | 0.015 | 0.416          | 0.229          | 0.066          | 0.056          | 0.462                               | #21      | 0.076        | Not Required | Pass   |
| 8         | 0.006 | 0.143          | 0.243          | 0.037          | 0.028          | 0.289                               | #24      | 0.102        | Not Required | Pass   |
| 9         | 0.007 | 0.071          | 0.104          | 0.004          | 0.007          | 0.157                               | #21      | 0.206        | Not Required | Pass   |
| 10        | 0.015 | 0.628          | 0.212          | 0.063          | 0.046          | 0.732                               | #21      | 0.082        | Not Required | Pass   |
| 11        | 0.009 | 0.136          | 0.255          | 0.041          | 0.028          | 0.292                               | #24      | 0.102        | Not Required | Pass   |
| 12        | 0.002 | 0.516          | 0.171          | 0.110          | 0.031          | 0.639                               | #21      | 0.054        | Not Required | Pass   |
| 13        | 0.014 | 0.074          | 0.640          | 0.053          | 0.035          | 0.651                               | #23      | 0.306        | Not Required | Pass   |
| 14        | 0.006 | 0.069          | 0.624          | 0.050          | 0.035          | 0.643                               | #24      | 0.204        | Not Required | Pass   |
| 15        | 0.000 | 0.004          | 0.016          | 0.007          | 0.004          | 0.020                               | #21      | Not Required | Not Required | Pass   |
| 16        | 0.000 | 0.004          | 0.016          | 0.007          | 0.004          | 0.020                               | #21      | Not Required | Not Required | Pass   |
| 101       | 0.120 | 0.666          | 0.007          | 0.030          | 0.000          | 0.716                               | #13      | 0.674        | Not Required | Pass   |
| 102       | 0.005 | 0.529          | 0.187          | 0.121          | 0.031          | 0.682                               | #21      | 0.054        | Not Required | Pass   |
| 103       | 0.014 | 0.750          | 0.085          | 0.074          | 0.011          | 0.842                               | #21      | 0.046        | Not Required | Pass   |
| 104       | 0.014 | 0.763          | 0.249          | 0.076          | 0.054          | 0.933                               | #21      | 0.082        | Not Required | Pass   |
| 105       | 0.014 | 0.466          | 0.257          | 0.074          | 0.066          | 0.531                               | #21      | 0.076        | Not Required | Pass   |
| 106       | 0.013 | 0.774          | 0.082          | 0.077          | 0.012          | 0.855                               | #21      | 0.046        | Not Required | Pass   |
| 107       | 0.013 | 0.481          | 0.234          | 0.076          | 0.061          | 0.546                               | #21      | 0.076        | Not Required | Pass   |
| 108       | 0.007 | 0.049          | 0.237          | 0.043          | 0.027          | 0.277                               | #21      | 0.102        | Not Required | Pass   |
| 109       | 0.024 | 0.061          | 0.058          | 0.002          | 0.000          | 0.125                               | #21      | 0.206        | Not Required | Pass   |
| 110       | 0.013 | 0.765          | 0.222          | 0.076          | 0.049          | 0.916                               | #21      | 0.082        | Not Required | Pass   |

|     |       |       |       |       |       |       |     |              |              |      |
|-----|-------|-------|-------|-------|-------|-------|-----|--------------|--------------|------|
| 110 | 0.013 | 0.703 | 0.222 | 0.070 | 0.040 | 0.910 | #21 | 0.002        | Not Required | Pass |
| 111 | 0.010 | 0.083 | 0.246 | 0.043 | 0.027 | 0.280 | #24 | 0.102        | Not Required | Pass |
| 112 | 0.005 | 0.542 | 0.202 | 0.121 | 0.036 | 0.703 | #21 | 0.036        | Not Required | Pass |
| 113 | 0.014 | 0.188 | 0.699 | 0.059 | 0.036 | 0.844 | #21 | 0.306        | Not Required | Pass |
| 114 | 0.011 | 0.235 | 0.690 | 0.061 | 0.037 | 0.881 | #21 | 0.306        | Not Required | Pass |
| 115 | 0.018 | 0.423 | 0.349 | 0.046 | 0.029 | 0.780 | #21 | 0.507        | Not Required | Pass |
| 116 | 0.006 | 0.395 | 0.343 | 0.049 | 0.029 | 0.739 | #21 | 0.507        | Not Required | Pass |
| 201 | 0.120 | 0.666 | 0.007 | 0.030 | 0.000 | 0.716 | #13 | 0.674        | Not Required | Pass |
| 202 | 0.005 | 0.542 | 0.202 | 0.121 | 0.036 | 0.703 | #21 | 0.036        | Not Required | Pass |
| 203 | 0.013 | 0.774 | 0.082 | 0.077 | 0.012 | 0.855 | #21 | 0.046        | Not Required | Pass |
| 204 | 0.013 | 0.765 | 0.222 | 0.076 | 0.048 | 0.916 | #21 | 0.082        | Not Required | Pass |
| 205 | 0.013 | 0.481 | 0.234 | 0.076 | 0.061 | 0.546 | #21 | 0.076        | Not Required | Pass |
| 206 | 0.014 | 0.750 | 0.085 | 0.074 | 0.011 | 0.842 | #21 | 0.046        | Not Required | Pass |
| 207 | 0.014 | 0.466 | 0.257 | 0.074 | 0.066 | 0.531 | #21 | 0.076        | Not Required | Pass |
| 208 | 0.006 | 0.086 | 0.293 | 0.049 | 0.029 | 0.312 | #21 | 0.102        | Not Required | Pass |
| 209 | 0.024 | 0.061 | 0.058 | 0.002 | 0.000 | 0.125 | #21 | 0.206        | Not Required | Pass |
| 210 | 0.014 | 0.763 | 0.249 | 0.076 | 0.054 | 0.933 | #21 | 0.082        | Not Required | Pass |
| 211 | 0.009 | 0.110 | 0.302 | 0.046 | 0.029 | 0.318 | #21 | 0.102        | Not Required | Pass |
| 212 | 0.005 | 0.529 | 0.187 | 0.121 | 0.031 | 0.682 | #21 | 0.054        | Not Required | Pass |
| 213 | 0.014 | 0.188 | 0.700 | 0.059 | 0.036 | 0.844 | #21 | 0.306        | Not Required | Pass |
| 214 | 0.011 | 0.235 | 0.689 | 0.061 | 0.037 | 0.880 | #21 | 0.306        | Not Required | Pass |
| 215 | 0.018 | 0.317 | 0.350 | 0.043 | 0.027 | 0.668 | #21 | 0.507        | Not Required | Pass |
| 216 | 0.010 | 0.249 | 0.342 | 0.043 | 0.027 | 0.592 | #21 | 0.507        | Not Required | Pass |
| 301 | 0.085 | 0.486 | 0.063 | 0.022 | 0.004 | 0.545 | #13 | 0.674        | Not Required | Pass |
| 302 | 0.002 | 0.516 | 0.171 | 0.110 | 0.031 | 0.639 | #21 | 0.054        | Not Required | Pass |
| 303 | 0.014 | 0.671 | 0.136 | 0.068 | 0.039 | 0.814 | #21 | 0.046        | Not Required | Pass |
| 304 | 0.015 | 0.628 | 0.212 | 0.063 | 0.046 | 0.732 | #21 | 0.082        | Not Required | Pass |
| 305 | 0.015 | 0.416 | 0.229 | 0.066 | 0.056 | 0.462 | #21 | 0.076        | Not Required | Pass |
| 306 | 0.006 | 0.403 | 0.029 | 0.038 | 0.006 | 0.419 | #21 | 0.046        | Not Required | Pass |
| 307 | 0.006 | 0.250 | 0.037 | 0.040 | 0.011 | 0.259 | #21 | 0.076        | Not Required | Pass |
| 308 | 0.000 | 0.004 | 0.016 | 0.007 | 0.004 | 0.020 | #21 | Not Required | Not Required | Pass |
| 309 | 0.007 | 0.071 | 0.104 | 0.004 | 0.007 | 0.157 | #21 | 0.206        | Not Required | Pass |
| 310 | 0.005 | 0.397 | 0.077 | 0.040 | 0.018 | 0.477 | #21 | 0.122        | Not Required | Pass |
| 311 | 0.000 | 0.004 | 0.016 | 0.007 | 0.004 | 0.020 | #21 | Not Required | Not Required | Pass |
| 312 | 0.002 | 0.226 | 0.098 | 0.059 | 0.021 | 0.298 | #21 | 0.054        | Not Required | Pass |
| 313 | 0.014 | 0.074 | 0.640 | 0.053 | 0.035 | 0.651 | #23 | 0.204        | Not Required | Pass |
| 314 | 0.006 | 0.069 | 0.624 | 0.050 | 0.035 | 0.643 | #24 | 0.306        | Not Required | Pass |
| 315 | 0.018 | 0.436 | 0.349 | 0.041 | 0.028 | 0.788 | #21 | 0.507        | Not Required | Pass |
| 316 | 0.006 | 0.423 | 0.338 | 0.037 | 0.028 | 0.760 | #21 | 0.507        | Not Required | Pass |

## Definitions

|          |                                          |
|----------|------------------------------------------|
| $\Phi_t$ | Safety factor for tensile                |
| $\Phi_c$ | Safety factor for compression            |
| $\Phi_b$ | Safety factor for flexure                |
| $\Phi_v$ | Safety factor for shear                  |
| E        | Modulus of elasticity                    |
| $F_y$    | Specified minimum yield stress           |
| $F_u$    | Specified minimum tensile strength       |
| A        | Cross-sectional area                     |
| J        | Torsional constant                       |
| $I_{yp}$ | Moment of inertia about the Y axes       |
| $I_{zp}$ | Moment of inertia about the Z axes       |
| $I_w$    | Warping constant                         |
| $S_{yp}$ | Plastic section modulus about the Y axis |

|                 |                                                           |
|-----------------|-----------------------------------------------------------|
| $S_{zp}$        | Plastic section modulus about the Z axis                  |
| KL              | Effective length                                          |
| $C_b$           | Buckling modification factor (from all load combinations) |
| $L_b$           | Length between braced points                              |
| LST             | Limited slenderness for tension                           |
| LSC             | Limited slenderness for compression                       |
| LD              | Limited deflection                                        |
| $P_n$           | Nominal axial strength (tension/compression)              |
| $M_n$           | Nominal flexural strength (about Z/Y axis)                |
| $V_n$           | Nominal shear strength (along Z/Y axis)                   |
| P               | Design ratio in case of axial force                       |
| $M_z$           | Design ratio in case of bending about Z axis              |
| $M_y$           | Design ratio in case of bending about Y axis              |
| $V_y$           | Design ratio in case of shear along Y axis                |
| $V_z$           | Design ratio in case of shear along Z axis                |
| $(P, M_z, M_y)$ | Design ratio in case of axial force and bending action    |
| KL/r            | Design ratio in case of section slenderness               |
| $\delta$        | Design ratio in case of member deflection                 |
| OK              | Capacity is provided                                      |
| NG              | Capacity is not provided                                  |



| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

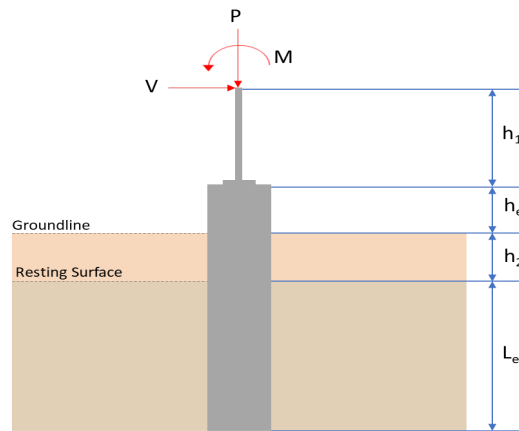

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 7.25$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 8.535  | 13.546 |
| $V_x$ (kip)    | -2.231 | -3.752 |
| $V_z$ (kip)    | 0.477  | 0.746  |
| $M_x$ (kipft)  | 2.286  | 3.601  |
| $M_z$ (kipft)  | 35.709 | 60.225 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-2.231 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.35525 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(35.709 \text{ kipft}) + ((-2.231 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.6861 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.7719 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.477 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.075955 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(2.286 \text{ kipft}) + ((0.477 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.36401 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 3.5668 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = MAX[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = MAX[(6.7719 \text{ ft}), (3.5668 \text{ ft})]$$

$$L_{e,req} = 6.772 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

**Ratio** - Embedded depth

$$Ratio = \frac{L_{e,req}}{L_e}$$

$$Ratio = \frac{(6.772 \text{ ft})}{(7.25 \text{ ft})}$$

$$Ratio = 0.93407$$

Status: **PASS**  
Ratio: **0.930**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(8.535 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.53344 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.53344 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.26672$$

Status: **PASS**  
Ratio: **0.270**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.35525 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.6861 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.6861 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (5.6861 \text{ kipft/ft})) + (4 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9735 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.6861 \text{ kipft/ft})) + (3 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (5.6861 \text{ kipft/ft})) + (2 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.27026 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.6861 \text{ kipft/ft})) + ((-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 1.0041 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.9735 \text{ ft})}{2}$$

$$p_a = 0.37301 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.27026 \text{ kip/ft}^2)}{(0.37301 \text{ kip/ft}^2)}$$

$$Ratio = 0.72455$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(1.0041 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.92335$$

Status: **PASS**  
Ratio: **0.720**

Status: **PASS**  
Ratio: **0.920**

#### Considering z-direction:

$H_o = 0.075955 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.36401 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.36401 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.075955 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.36401 \text{ kipft/ft})) + (4 \times (0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.1367 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (0.36401 \text{ kipft/ft})) + (3 \times (0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 [(3 \times (0.36401 \text{ kipft/ft})) + (2 \times (0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.062843 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.36401 \text{ kipft/ft})) + ((0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.14596 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.1367 \text{ ft})}{2}$$

$$p_a = 0.38525 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.062843 \text{ kip/ft}^2)}{(0.38525 \text{ kip/ft}^2)}$$

$$Ratio = 0.16312$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.14596 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.13422$$

Status: **PASS**  
Ratio: **0.160**

Status: **PASS**  
Ratio: **0.130**

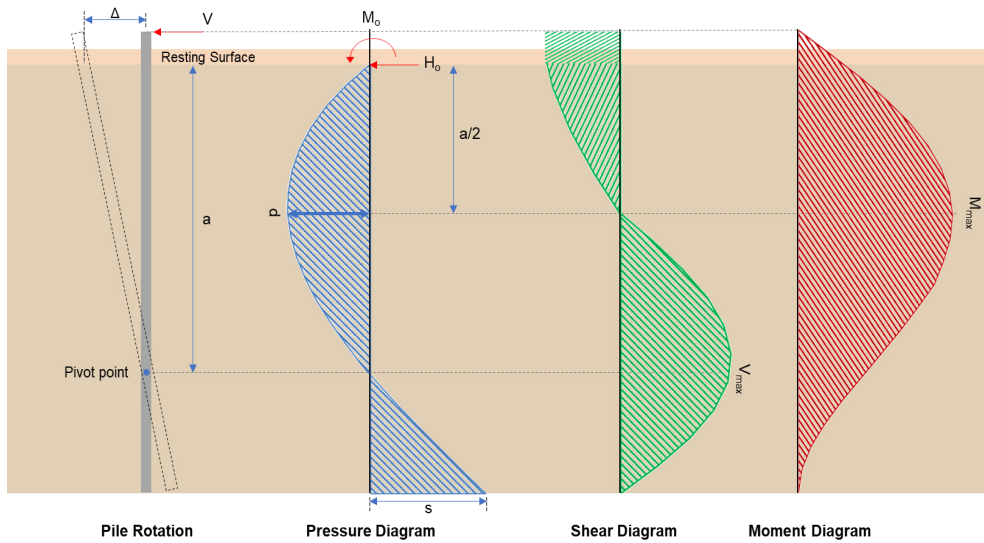

### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.752 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.59745 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(60.225 \text{ kipft}) + ((-3.752 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 9.59 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(9.59 \text{ kipft/ft})}{(-0.59745 \text{ kip/ft})}$$

$$E = 16.051 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (9.59 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.59745 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times 9.59) + (4 \times (-0.59745) \times 7.25)}$$

$$a = \frac{(6 \times (9.59 \text{ kipft/ft})) + (4 \times (-0.59745 \text{ kip/ft}) \times (7.25 \text{ ft}))}{(6 \times (9.59 \text{ kipft/ft})) + (4 \times (-0.59745 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9732 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.59745 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (16.051 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(4.9732 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (16.051 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(4.9732 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 10.942 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.59745 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(16.051 \text{ ft})}{(7.25 \text{ ft})} + \frac{(4.9732 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (16.051 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(4.9732 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (16.051 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(4.9732 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 38.087 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.746 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.11879 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(3.601 \text{ kipft}) + ((0.746 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.57341 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.57341 \text{ kipft/ft})}{(0.11879 \text{ kip/ft})}$$

$$E = 4.8271 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.57341 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (0.11879 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.57341 \text{ kipft/ft})) + (4 \times (0.11879 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.1356 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.11879 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (4.8271 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.1356 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (4.8271 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.1356 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.87508 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.11879 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(4.8271 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.1356 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (4.8271 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.1356 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (4.8271 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.1356 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 2.8637 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(13.546 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.146 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.146 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                    |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = Min[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = Min[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10: Use #3(0.375 in)</p> <p><math>s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]</math></p> <p><math>s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(13.546 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0050636</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                              | <p>Status: <b>PASS</b><br/>Ratio: <b>0.010</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p> |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 13.546 \text{ kip} \rightarrow 13546 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(13546 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120.29 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120.29 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120.29 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((120.29 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.27 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 10.942 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(10.942 \text{ kip})}{(111.27 \text{ kip})}$$

$$Ratio = 0.098337$$

**Considering z-direction:**

$V_{max} = 0.87508 \text{ kip}$  - Maximum shear force in the z-direction,  
*Ratio* - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.87508 \text{ kip})}{(111.27 \text{ kip})}$$

$$Ratio = 0.0078644$$

Status: **PASS**  
 Ratio: **0.100**

Status: **PASS**  
 Ratio: **0.010**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 38.087 \text{ kipft}$  - Maximum moment in the x-direction,

*Ratio* - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(38.087 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.15259$$

Status: **PASS**  
 Ratio: **0.150**

**Considering z-direction:**

$M_{max} = 2.8637 \text{ kipft}$  - Maximum moment in the z-direction,

*Ratio* - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(2.8637 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.011473$$

Status: **PASS**  
Ratio: **0.010**

| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

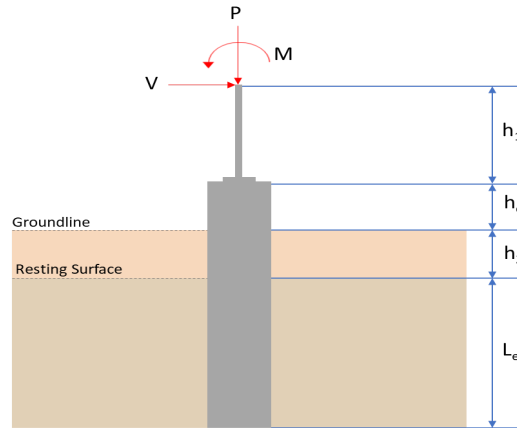

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 7.25$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 8.535  | 13.546 |
| $V_x$ (kip)    | -2.231 | -3.752 |
| $V_z$ (kip)    | -0.477 | -0.747 |
| $M_x$ (kipft)  | -2.287 | -3.603 |
| $M_z$ (kipft)  | 35.709 | 60.226 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-2.231 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.35525 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(35.709 \text{ kipft}) + ((-2.231 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.6861 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.7719 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.477 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.075955 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(2.287 \text{ kipft}) + ((-0.477 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.36417 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 2.5882 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.7719 \text{ ft}), (2.5882 \text{ ft})]$$

$$L_{e,req} = 6.772 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.25 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.772 \text{ ft})}{(7.25 \text{ ft})}$$

$$\text{Ratio} = 0.93407$$

Status: **PASS**  
Ratio: **0.930**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(8.535 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.53344 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.53344 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.26672$$

Status: **PASS**  
Ratio: **0.270**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.8125$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.35525 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.6861 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.6861 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (5.6861 \text{ kipft/ft})) + (4 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9735 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.6861 \text{ kipft/ft})) + (3 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (5.6861 \text{ kipft/ft})) + (2 \times (-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = 0.27026 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.6861 \text{ kipft/ft})) + ((-0.35525 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 1.0041 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.9735 \text{ ft})}{2}$$

$$p_a = 0.37301 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.27026 \text{ kip/ft}^2)}{(0.37301 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.72455$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(1.0041 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.92335$$

Status: **PASS**  
Ratio: **0.720**

Status: **PASS**  
Ratio: **0.920**

**Considering z-direction:**

$H_o = -0.075955 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.36417 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.36417 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.075955 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.36417 \text{ kipft/ft})) + (4 \times (-0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.1366 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.36417 \text{ kipft/ft})) + (3 \times (-0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))]^2}{(7.25 \text{ ft})^2 \times [(3 \times (0.36417 \text{ kipft/ft})) + (2 \times (-0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))]}$$

$$p = -0.061609 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.36417 \text{ kipft/ft})) + ((-0.075955 \text{ kip/ft}) \times (7.25 \text{ ft}))]}{(7.25 \text{ ft})^2}$$

$$s = 0.020281 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.1366 \text{ ft})}{2}$$

$$p_a = 0.38525 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(-0.061609 \text{ kip/ft}^2)}{(0.38525 \text{ kip/ft}^2)}$$

$$Ratio = -0.15992$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.25 \text{ ft})$$

$$p_s = 1.0875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.020281 \text{ kip/ft}^2)}{(1.0875 \text{ kip/ft}^2)}$$

$$Ratio = 0.018649$$

Status: **PASS**  
Ratio: **-0.160**

Status: **PASS**  
Ratio: **0.020**

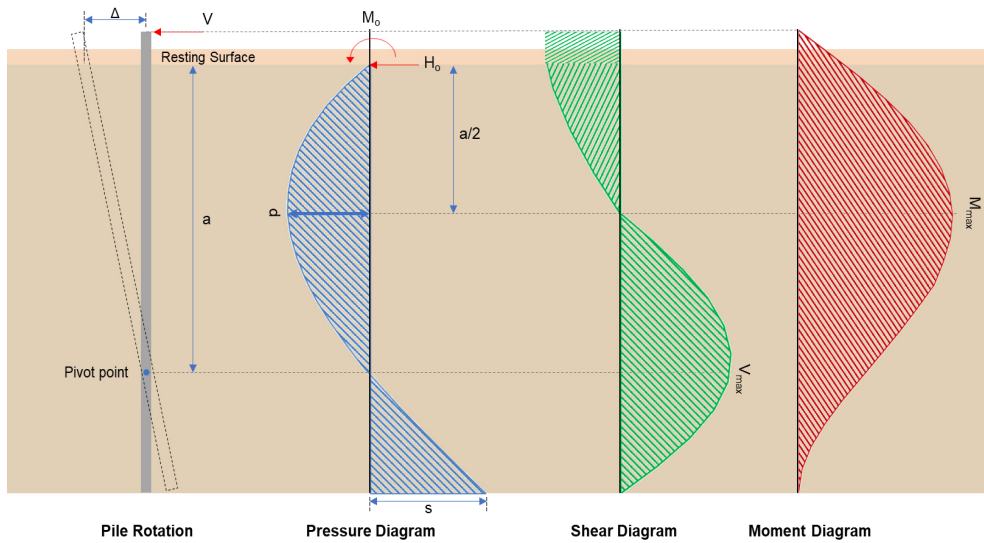

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.752 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.59745 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(60.226 \text{ kipft}) + ((-3.752 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 9.5901 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(9.5901 \text{ kipft/ft})}{(-0.59745 \text{ kip/ft})}$$

$$E = 16.052 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (9.5901 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.59745 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (9.5901 \text{ kipft/ft})) + (4 \times (-0.59745 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = \frac{(-0.59745 \text{ kip/ft}) \times (7.25 \text{ ft})}{(6 \times (9.5901 \text{ kipft/ft})) + (4 \times (-0.59745 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 4.9732 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.59745 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (16.052 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(4.9732 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (16.052 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(4.9732 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 10.942 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.59745 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(16.052 \text{ ft})}{(7.25 \text{ ft})} + \frac{(4.9732 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (16.052 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(4.9732 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (16.052 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(4.9732 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 38.087 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.747 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.11895 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(3.603 \text{ kipft}) + ((-0.747 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.57373 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.57373 \text{ kipft/ft})}{(-0.11895 \text{ kip/ft})}$$

$$E = 4.8233 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.57373 \text{ kipft/ft}) \times (7.25 \text{ ft})) + (3 \times (-0.11895 \text{ kip/ft}) \times (7.25 \text{ ft})^2)}{(6 \times (0.57373 \text{ kipft/ft})) + (4 \times (-0.11895 \text{ kip/ft}) \times (7.25 \text{ ft}))}$$

$$a = 5.1357 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.11895 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (4.8233 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.1357 \text{ ft})}{(7.25 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (4.8233 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.1357 \text{ ft})}{(7.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.87582 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.11895 \text{ kip/ft}) \times (48 \text{ in}) \times (7.25 \text{ ft})) \times \left[ \left( \frac{(4.8233 \text{ ft})}{(7.25 \text{ ft})} + \frac{(5.1357 \text{ ft})}{2 \times (7.25 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (4.8233 \text{ ft})}{(7.25 \text{ ft})} + 3 \right) \times \left( \frac{(5.1357 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (4.8233 \text{ ft})}{(7.25 \text{ ft})} + 2 \right) \times \left( \frac{(5.1357 \text{ ft})}{2 \times (7.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 2.8659 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(13.546 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.146 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.146 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                    |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]</math></p> <p><math>s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y k A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(13.546 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0050636</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>Status: <b>PASS</b><br/>Ratio: <b>0.010</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p> |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 13.546 \text{ kip} \rightarrow 13546 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(13546 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120.29 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120.29 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120.29 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((120.29 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.27 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 10.942 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(10.942 \text{ kip})}{(111.27 \text{ kip})}$$

$$Ratio = 0.098338$$

Status: **PASS**  
Ratio: **0.100**

**Considering z-direction:**

$V_{max} = 0.87582 \text{ kip}$  - Maximum shear force in the z-direction,  
Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.87582 \text{ kip})}{(111.27 \text{ kip})}$$

$$Ratio = 0.0078711$$

Status: **PASS**  
Ratio: **0.010**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 38.087 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(38.087 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.15259$$

Status: **PASS**  
Ratio: **0.150**

**Considering z-direction:**

$M_{max} = 2.8659 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(2.8659 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.011482$$

Status: **PASS**  
Ratio: **0.010**

| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

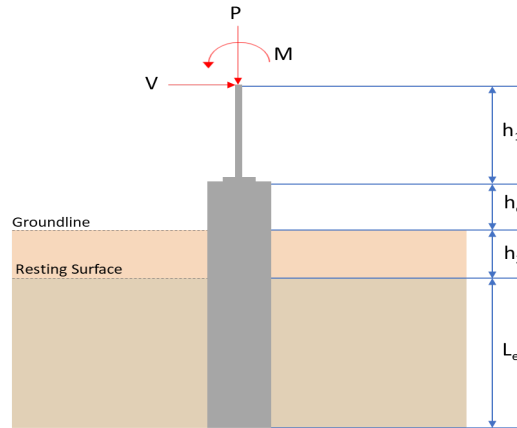

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 7.75$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 11.878 | 19.003 |
| $V_x$ (kip)    | -3.033 | -5.083 |
| $V_z$ (kip)    | -0.045 | -0.081 |
| $M_x$ (kipft)  | -0.208 | -0.379 |
| $M_z$ (kipft)  | 47.865 | 82.601 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.033 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.48296 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(47.865 \text{ kipft}) + ((-3.033 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 7.6218 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 7.3484 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.045 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0071656 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.208 \text{ kipft}) + ((-0.045 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.033121 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.2803 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(7.3484 \text{ ft}), (1.2803 \text{ ft})]$$

$$L_{e,req} = 7.348 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.75 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(7.348 \text{ ft})}{(7.75 \text{ ft})}$$

$$\text{Ratio} = 0.94813$$

Status: **PASS**  
Ratio: **0.950**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(11.878 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.74237 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.74237 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.37119$$

Status: **PASS**  
Ratio: **0.370**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.9375$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.48296 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 7.6218 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (7.6218 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (7.6218 \text{ kipft/ft})) + (4 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.326 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (7.6218 \text{ kipft/ft})) + (3 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (7.6218 \text{ kipft/ft})) + (2 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = 0.30113 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (7.6218 \text{ kipft/ft})) + ((-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 1.1489 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.326 \text{ ft})}{2}$$

$$p_a = 0.39945 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.30113 \text{ kip/ft}^2)}{(0.39945 \text{ kip/ft}^2)}$$

$$Ratio = 0.75387$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(1.1489 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$Ratio = 0.98828$$

Status: **PASS**  
Ratio: **0.750**

Status: **PASS**  
Ratio: **0.990**

#### Considering z-direction:

$H_o = -0.0071656 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.033121 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.033121 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.033121 \text{ kipft/ft})) + (4 \times (-0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.5075 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.033121 \text{ kipft/ft})) + (3 \times (-0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (0.033121 \text{ kipft/ft})) + (2 \times (-0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = -0.0012418 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.033121 \text{ kipft/ft})) + ((-0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 0.0010697 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.5075 \text{ ft})}{2}$$

$$p_a = 0.41307 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(-0.0012418 \text{ kip/ft}^2)}{(0.41307 \text{ kip/ft}^2)}$$

$$Ratio = -0.0030063$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0010697 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$Ratio = 0.00092021$$

Status: **PASS**  
Ratio: **0.000**

Status: **PASS**  
Ratio: **0.000**

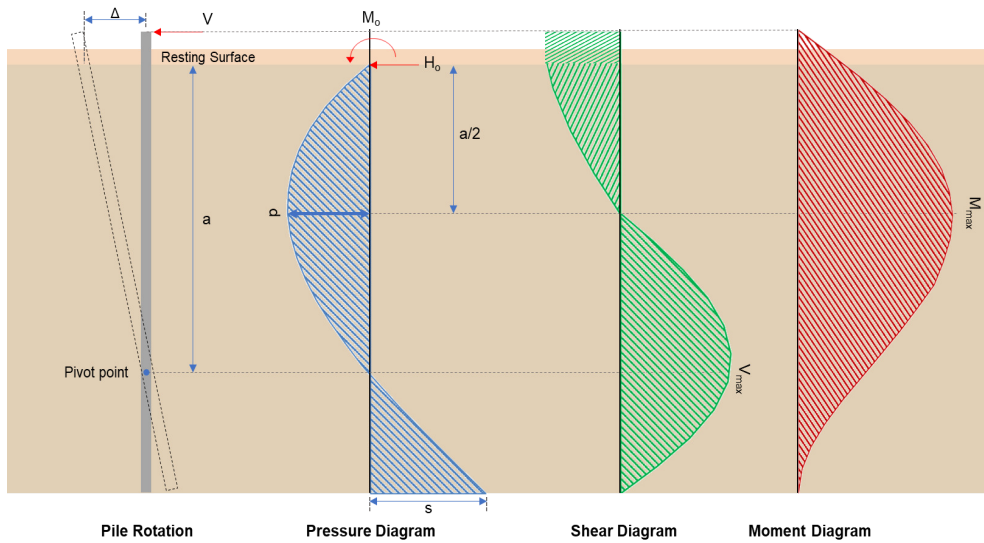

### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-5.083 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.80939 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(82.601 \text{ kipft}) + ((-5.083 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 13.153 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(13.153 \text{ kipft/ft})}{(-0.80939 \text{ kip/ft})}$$

$$E = 16.25 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (13.153 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.80939 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (13.153 \text{ kipft/ft})) + (4 \times (-0.80939 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = \frac{(-0.80939 \text{ kip/ft}) \times (48 \text{ in})}{(6 \times (13.153 \text{ kipft/ft})) + (4 \times (-0.80939 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3225 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.80939 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.3225 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.3225 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 14.151 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.80939 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[ \left( \frac{(16.25 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.3225 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.3225 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.3225 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 52.551 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.081 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.012898 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.379 \text{ kipft}) + ((-0.081 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.06035 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.06035 \text{ kipft/ft})}{(-0.012898 \text{ kip/ft})}$$

$$E = 4.679 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.06035 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.012898 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.06035 \text{ kipft/ft})) + (4 \times (-0.012898 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.5056 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.012898 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.5056 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.5056 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.089396 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.012898 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[ \left( \frac{(4.679 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.5056 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.5056 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.5056 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.31065 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(19.003 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -83.965 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-83.965 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                    |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = \text{Min spacing of reinforcement,}</math></p> $s_{rebar} = \text{Max}[1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max}[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10: Use #3(0.375 in)</p> <p><math>s_{ties}</math> - Maximum spacing of ties,</p> $s_{ties} = \text{Min}[(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min}[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                     | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$ $\phi P_N = 2675.2 \text{ kip}$ <p><i>Ratio</i> - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(19.003 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0071034$                                                                                                                                                                                                                                                                                                                                      | <p>Status: <b>PASS</b><br/>Ratio: <b>0.010</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 19.003 \text{ kip} \rightarrow 19003 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(19003 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 121.02 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (121.02 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 121.02 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((121.02 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.74 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 14.151 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(14.151 \text{ kip})}{(111.74 \text{ kip})}$$

$$Ratio = 0.12664$$

Status: **PASS**  
Ratio: **0.130**

**Considering z-direction:**

$V_{max} = 0.089396 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.089396 \text{ kip})}{(111.74 \text{ kip})}$$

$$Ratio = 0.00080001$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 52.551 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(52.551 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.21054$$

Status: **PASS**  
Ratio: **0.210**

**Considering z-direction:**

$M_{max} = 0.31065 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(0.31065 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.0012446$$

Status: **PASS**  
Ratio: **0.000**

| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

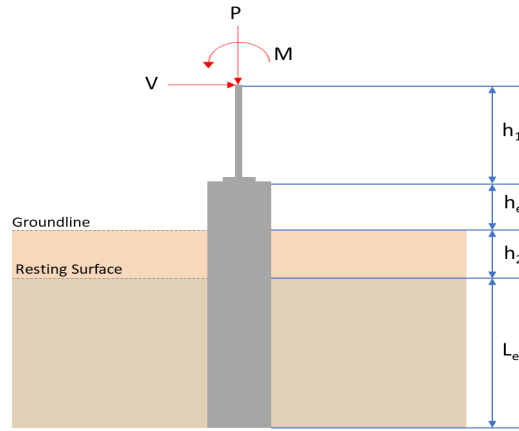

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 7.75$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label                                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|-------------------------------------------------------------|--------------------------------------------|---------------------------------------------|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 11.878 | 19.003 |
| $V_x$ (kip)    | -3.033 | -5.083 |
| $V_z$ (kip)    | 0.045  | 0.081  |
| $M_x$ (kipft)  | 0.208  | 0.379  |
| $M_z$ (kipft)  | 47.865 | 82.601 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.033 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.48296 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(47.865 \text{ kipft}) + ((-3.033 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 7.6218 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 7.3484 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.045 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0071656 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.208 \text{ kipft}) + ((0.045 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.033121 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.4872 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(7.3484 \text{ ft}), (1.4872 \text{ ft})]$$

$$L_{e,req} = 7.348 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (7.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7.75 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(7.348 \text{ ft})}{(7.75 \text{ ft})}$$

$$\text{Ratio} = 0.94813$$

Status: **PASS**  
Ratio: **0.950**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(11.878 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.74237 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.74237 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.37119$$

Status: **PASS**  
Ratio: **0.370**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.9375$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.48296 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 7.6218 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (7.6218 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (7.6218 \text{ kipft/ft})) + (4 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.326 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (7.6218 \text{ kipft/ft})) + (3 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (7.6218 \text{ kipft/ft})) + (2 \times (-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = 0.30113 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (7.6218 \text{ kipft/ft})) + ((-0.48296 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 1.1489 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.326 \text{ ft})}{2}$$

$$p_a = 0.39945 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.30113 \text{ kip/ft}^2)}{(0.39945 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.75387$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(1.1489 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.98828$$

Status: **PASS**  
Ratio: **0.750**

Status: **PASS**  
Ratio: **0.990**

#### Considering z-direction:

$H_o = 0.0071656 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.033121 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.033121 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.033121 \text{ kipft/ft})) + (4 \times (0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.5075 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.033121 \text{ kipft/ft})) + (3 \times (0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))]^2}{(7.75 \text{ ft})^2 \times [(3 \times (0.033121 \text{ kipft/ft})) + (2 \times (0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))]}$$

$$p = 0.0053081 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.033121 \text{ kipft/ft})) + ((0.0071656 \text{ kip/ft}) \times (7.75 \text{ ft}))]}{(7.75 \text{ ft})^2}$$

$$s = 0.012165 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.5075 \text{ ft})}{2}$$

$$p_a = 0.41307 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.0053081 \text{ kip/ft}^2)}{(0.41307 \text{ kip/ft}^2)}$$

$$Ratio = 0.01285$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7.75 \text{ ft})$$

$$p_s = 1.1625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.012165 \text{ kip/ft}^2)}{(1.1625 \text{ kip/ft}^2)}$$

$$Ratio = 0.010464$$

Status: **PASS**  
Ratio: **0.010**

Status: **PASS**  
Ratio: **0.010**

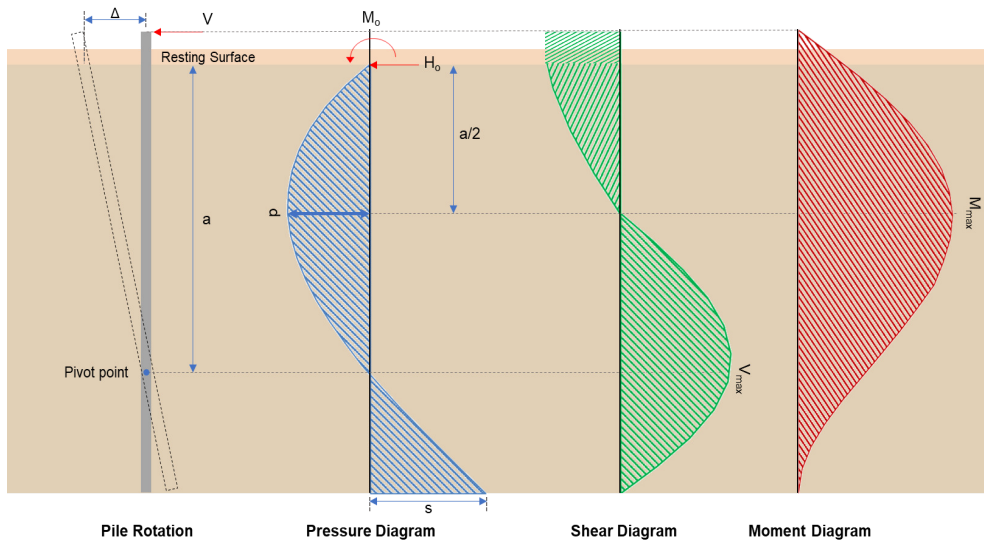

### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-5.083 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.80939 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(82.601 \text{ kipft}) + ((-5.083 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 13.153 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(13.153 \text{ kipft/ft})}{(-0.80939 \text{ kip/ft})}$$

$$E = 16.25 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (13.153 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (-0.80939 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (13.153 \text{ kipft/ft})) + (4 \times (-0.80939 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = \frac{(-0.80939 \text{ kip/ft}) \times (48 \text{ in})}{(6 \times (13.153 \text{ kipft/ft})) + (4 \times (-0.80939 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.3225 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.80939 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.3225 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.3225 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 14.151 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.80939 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[ \left( \frac{(16.25 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.3225 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.3225 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (16.25 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.3225 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 52.551 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.081 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.012898 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.379 \text{ kipft}) + ((0.081 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.06035 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.06035 \text{ kipft/ft})}{(0.012898 \text{ kip/ft})}$$

$$E = 4.679 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.06035 \text{ kipft/ft}) \times (7.75 \text{ ft})) + (3 \times (0.012898 \text{ kip/ft}) \times (7.75 \text{ ft})^2)}{(6 \times (0.06035 \text{ kipft/ft})) + (4 \times (0.012898 \text{ kip/ft}) \times (7.75 \text{ ft}))}$$

$$a = 5.5056 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.012898 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.5056 \text{ ft})}{(7.75 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.5056 \text{ ft})}{(7.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.089396 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.012898 \text{ kip/ft}) \times (48 \text{ in}) \times (7.75 \text{ ft})) \times \left[ \left( \frac{(4.679 \text{ ft})}{(7.75 \text{ ft})} + \frac{(5.5056 \text{ ft})}{2 \times (7.75 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 3 \right) \times \left( \frac{(5.5056 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (4.679 \text{ ft})}{(7.75 \text{ ft})} + 2 \right) \times \left( \frac{(5.5056 \text{ ft})}{2 \times (7.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.31065 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(19.003 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -83.965 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-83.965 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                    |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| <p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>       | <p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = \text{Max}[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = \text{Max}[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10: Use #3(0.375 in)</p> <p><math>s_{ties} = \text{Min}[(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]</math></p> <p><math>s_{ties} = \text{Min}[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b><br/>Ties: <b>#3(0.375 in) - 10 in</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p>Status: <b>PASS</b><br/>Ratio: <b>0.970</b></p> |
| <p>22.4.2.2</p>                                     | <p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_y A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(19.003 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0071034</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>Status: <b>PASS</b><br/>Ratio: <b>0.010</b></p> |
| <p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p> | <p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width,<br/><math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p> |                                                    |

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 19.003 \text{ kip} \rightarrow 19003 \text{ lbf}$ ,  $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(19003 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 121.02 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (121.02 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 121.02 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((121.02 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.74 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 14.151 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(14.151 \text{ kip})}{(111.74 \text{ kip})}$$

$$Ratio = 0.12664$$

Status: **PASS**  
Ratio: **0.130**

**Considering z-direction:**

$V_{max} = 0.089396 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.089396 \text{ kip})}{(111.74 \text{ kip})}$$

$$Ratio = 0.00080001$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 52.551 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(52.551 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.21054$$

Status: **PASS**  
Ratio: **0.210**

**Considering z-direction:**

$M_{max} = 0.31065 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(0.31065 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.0012446$$

Status: **PASS**  
Ratio: **0.000**