

Project Details



Project Name: MTSOLAR_05ACK587AF905

Date: Wed Oct 08 2025

Location: 88260 Turner Rd, Bayfield, WI 54814,
USA


Number of Modules: 20

Unique ID: 2P-22.5-6TOP-SD-45-L-4Hx5W-29CJ

Number of Poles: 2

Date Sold:

Dealer: _____

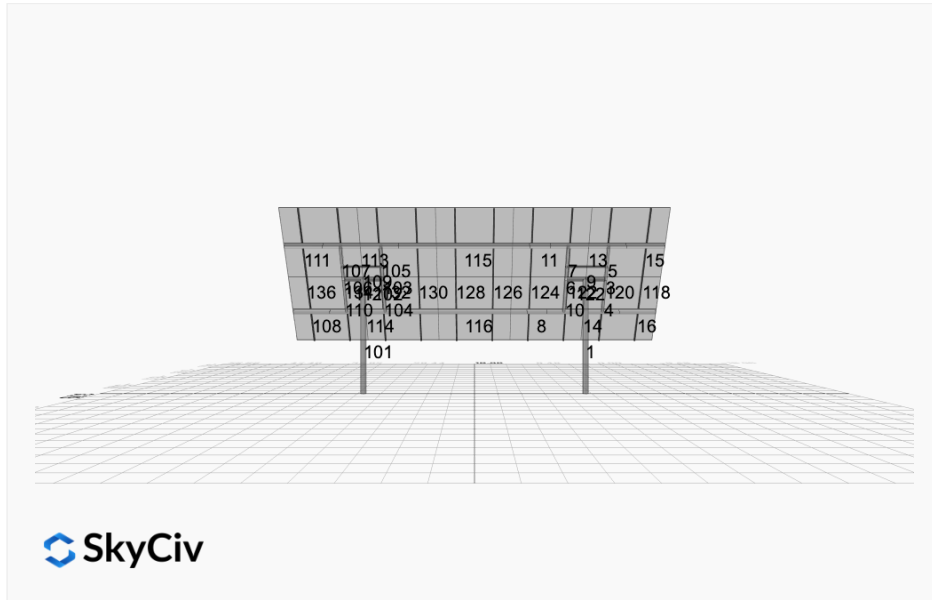

Array Dimensions N/S	15.17 ft
Array Dimensions E/W	37.92 ft
Winter Tilt Angle (Degrees)	60
Front Edge Clearance	5

MT Solar Bill of Materials (2P-22.5-6TOP-SD-45-L-4Hx5W-29CJ)

Part	Short Description	BOM Qty
MTS-PC-6	6IN Pole Cap Assembly	2
MTS-HF-SD	H-Frame Assembly-SD	2
MTS-SD-Wing-45	45IN SD Wing	4
MTS-SD-Splice-90	90IN SD Splice	4
MTS-CLAMP-HOOK-4PK	Hook Clamp	5

Rail Bill of Materials

Part	Qty
Rails (182in Long)	10x
Rail Attachment	20x
Module Mid Clamp	30x
Module End Clamp	20x
Ground Lug	5x

Site Details:



Site Address: 88260 Turner Rd, Bayfield, WI 54814, USA

Array Specification

Duty Classification:	SD
Module Width:	45.00 in
Module Length:	90.00 in
Number of Rows:	4
Number of Columns:	5
Total Number of Modules:	20
Winter Tilt Angle:	60
Front Edge Clearance:	5
Total Array Height at Tilt:	18.13 ft
Total Frame Length:	37.50 ft
Module Info/Notes:	
Array Dimensions N/S:	15.17 ft
Array Dimensions E/W:	37.92 ft
Rail Length:	182.00 in
Rail Spacing:	3.79 ft

Support Specifications

Pole Size:	6in Pipe Sch 80
Pole Length above Grade:	11.57 ft
Number of Poles:	2
Pole Spacing:	22.5 ft

Foundation Specifications

Foundation Type:	rectangular
Foundation Dimensions:	48x48 in
Foundation Depth (below grade):	8.3 ft
Foundation Volume:	132.00 ft ³

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	88260 Turner Rd, Bayfield, WI 54814, USA
Wind Speed:	99 mph

Snow Load:	60 psf
-------------------	--------

Design Disclaimer



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.




AutoDesigner Input

```
{
  "wind_speed_override": null,
  "snow_load_override": null,
  "direct_snow_load": false,
  "add_angle_brace": false,
  "product_type": "Beam",
  "designer_name": "",
  "designer_email": "craig@solarcbi.com",
  "designer_phone": "",
  "project_id": "MTSOLAR_05ACK587AF905",
  "site_address": "88260 Turner Rd, Bayfield, WI 54814, USA",
  "module_info": "",
  "module_width": 45,
  "module_length": 90,
  "number_rows": 4,
  "number_columns": 5,
  "pole_mount_section": "4_40",
  "core_pipe_width": 65,
  "core_pipe_section": "2_40",
  "adjuster_section": "2_40",
  "core_beam_height": 65,
  "core_beam_section": "HSS3x2x1/8",
  "main_pipe_section": "2_12GA",
  "pole_spacing": "15",
  "tilt_angle": 60,
  "ground_clearance": 5,
  "risk_category": "I",
  "exposure_category": "B",
  "frame_duty_override": "auto",
  "pole_override": "auto",
  "soil_type": "sand",
  "customer_foundation_override": "48_Square",
  "foundation_type": "Square",
  "foundation_size": 48,
  "check_rails": false
}
```



Design Notes:

- Deflection checks are set to L/1 due to manufacturer structural design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7-16
- Steel frame design checks are based on AISC 360-16 LRFD
- Design / analysis of fixings and connections are not carried out by this module.
- Impacts of eccentrically applied, partial or pattern loading are not considered by this module.
- Foundation Design and Sizing is approximate only

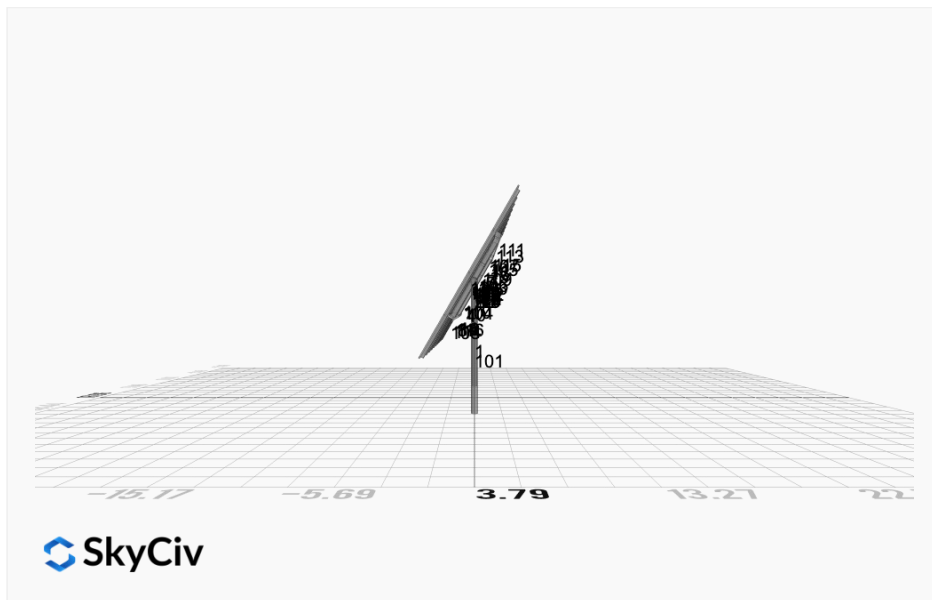
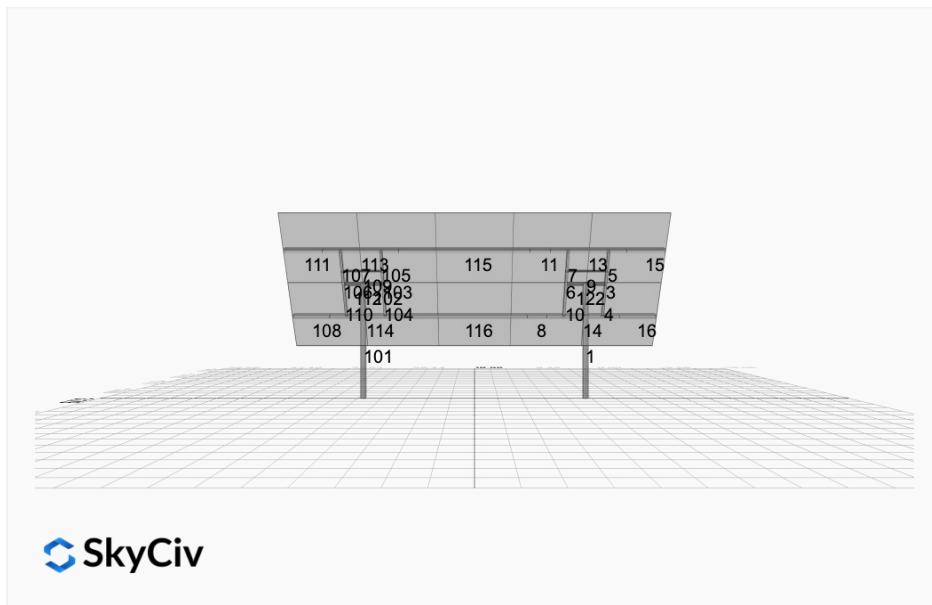


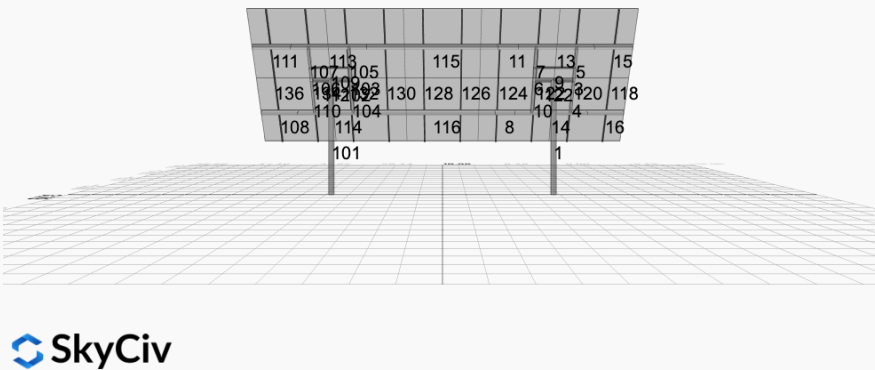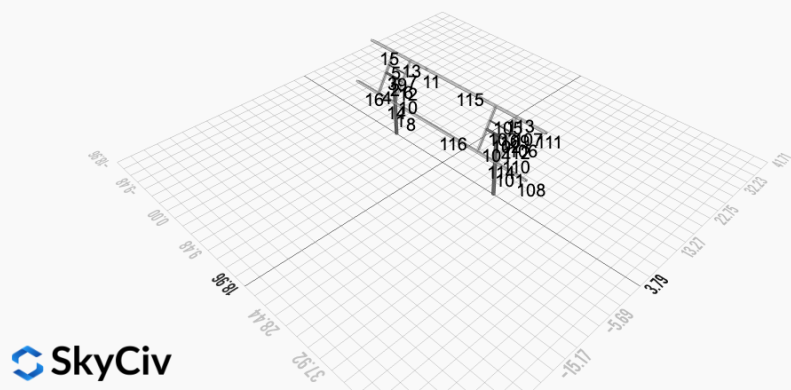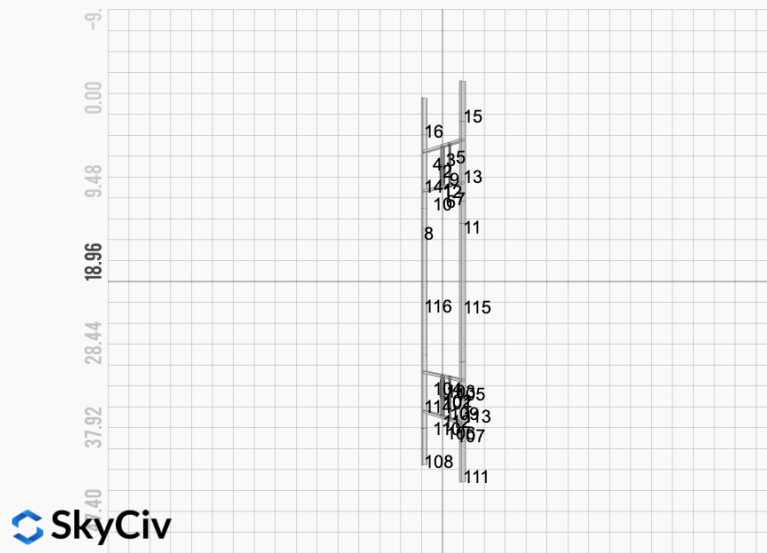

FEM Results (Envelope Worst Case)

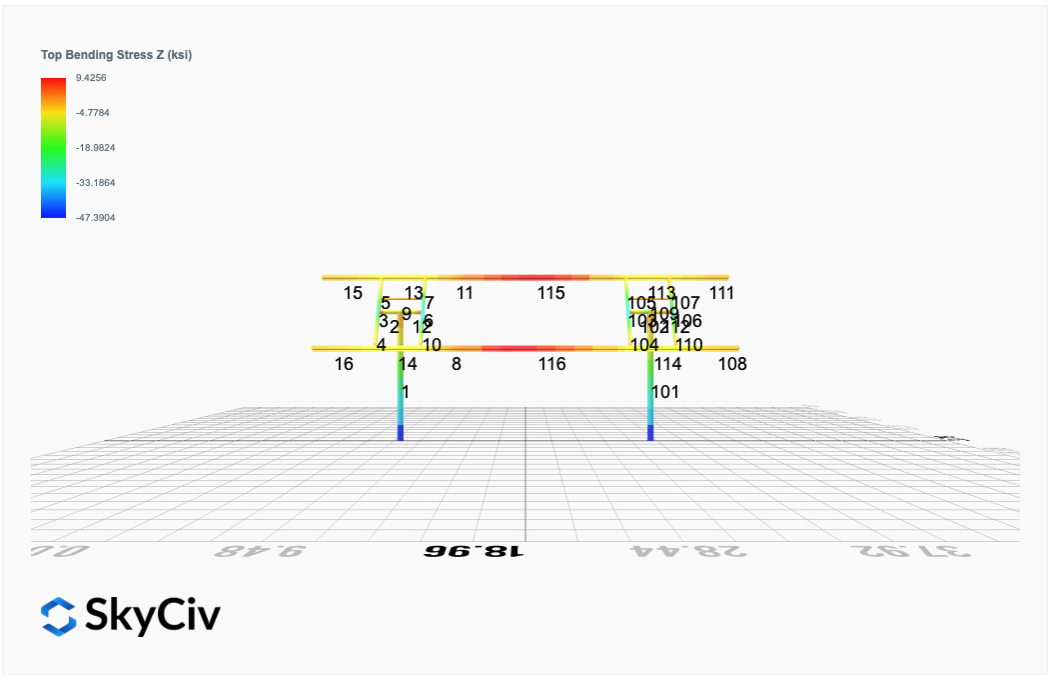
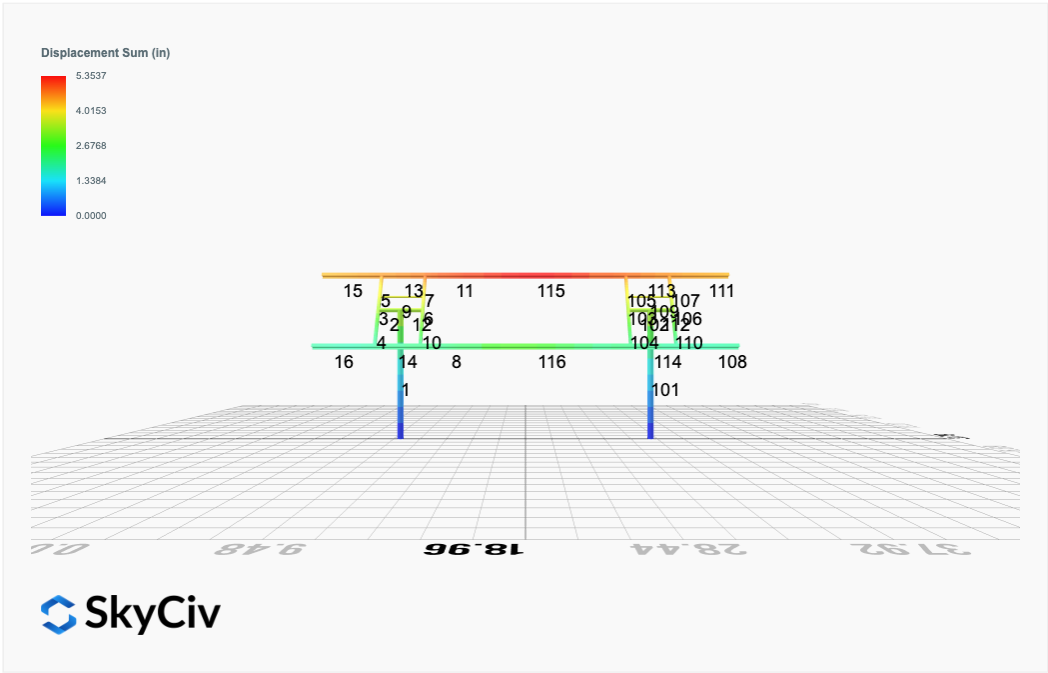


Top Bending Stress Y (ksi)

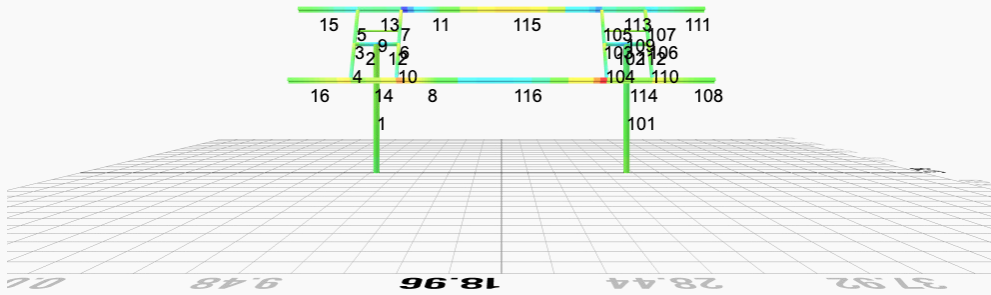



 SkyCiv

Shear Stress Y (ksi)

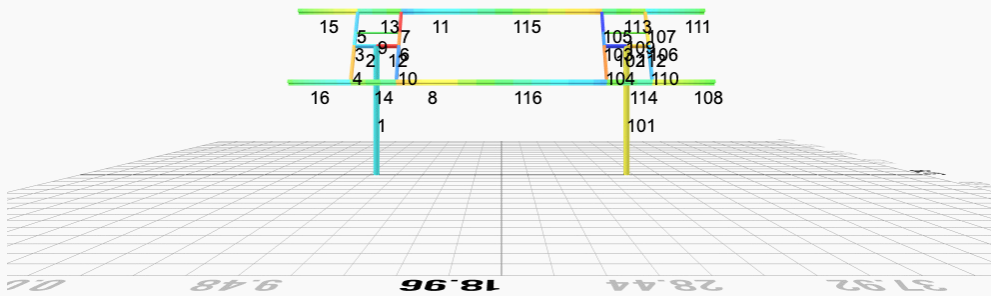

 SkyCiv

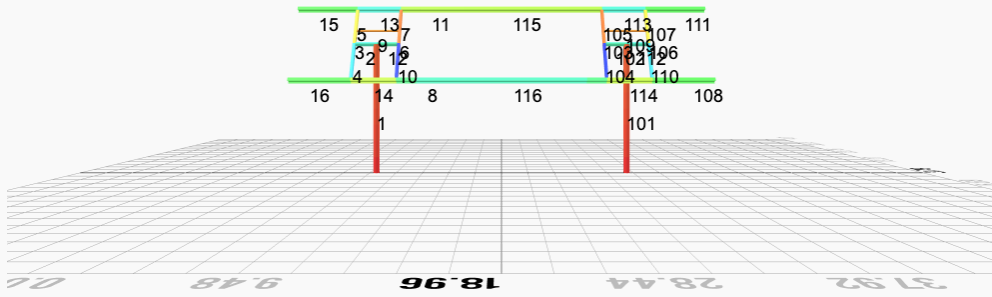

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

LRFD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. 1.4D	0.0000	2.9496	0.0888	0.3231	-0.1554	0.0240
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	0.0000	2.9973	0.0944	0.3436	-0.1653	0.0229
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	0.0000	2.5282	0.0761	0.2767	-0.1332	0.0194
ULS: 3. 1.2D + 1.6(S or Lr or R) + L	0.0000	4.0292	0.1348	0.4912	-0.2358	0.0335
ULS: 5. 1.2D + E + L + 0.2S	0.0000	2.7158	0.0834	0.3035	-0.1460	0.0207
ULS: 7. 0.9D + 1.0E	0.0000	1.8961	0.0570	0.2073	-0.0999	0.0132
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0453	5.3328	0.2865	1.0079	-1.3073	48.2725
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	0.0000	2.9973	0.0944	0.3436	-0.1653	0.0229
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0453	0.6617	-0.0972	-0.3179	0.9761	-46.9797
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	0.0000	2.9973	0.0944	0.3436	-0.1653	0.0229
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0453	4.8638	0.2682	0.9412	-1.2759	48.1324
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	0.0000	2.5282	0.0761	0.2767	-0.1332	0.0194
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0453	0.1926	-0.1156	-0.3848	1.0089	-46.8549
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	0.0000	2.5282	0.0761	0.2767	-0.1332	0.0194
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0227	5.1970	0.2307	0.8229	-0.8060	24.1482
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	0.0000	4.0292	0.1348	0.4912	-0.2358	0.0335
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0227	2.8614	0.0390	0.1602	0.3342	-23.7649
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	0.0000	4.0292	0.1348	0.4912	-0.2358	0.0335
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0227	3.6960	0.1721	0.6086	-0.7045	23.9174
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	0.0000	2.5282	0.0761	0.2767	-0.1332	0.0194
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0227	1.3604	-0.0198	-0.0544	0.4379	-23.5690
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	0.0000	2.5282	0.0761	0.2767	-0.1332	0.0194
ULS: 6. 0.9D + 1.0W_Wind downforce Case A only	-4.0453	4.2317	0.2492	0.8719	-1.2433	47.9459
ULS: 6. 0.9D + 1.0W_Wind downforce Case B only	0.0000	1.8961	0.0570	0.2073	-0.0999	0.0132
ULS: 6. 0.9D + 1.0W_Wind uplift Case A only	4.0453	-0.4394	-0.1347	-0.4543	1.0428	-46.6914
ULS: 6. 0.9D + 1.0W_Wind uplift Case B only	0.0000	1.8961	0.0570	0.2073	-0.0999	0.0132

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 2. D + L	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 3. D + (S or Lr or R)	0.0000	3.0450	0.1000	0.3641	-0.1751	0.0220
ULS: 3. D + (S or Lr or R)	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	2.8104	0.0909	0.3307	-0.1591	0.0200
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 5b. D + 0.7E	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	2.8104	0.0909	0.3307	-0.1591	0.0200
ULS: 8. 0.6D + 0.7E	0.0000	1.2641	0.0380	0.1381	-0.0666	0.0079
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.4272	3.5082	0.1786	0.6288	-0.7968	28.6592
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.4272	0.7055	-0.0517	-0.1669	0.5746	-28.1856
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8204	3.8614	0.1772	0.6293	-0.6730	21.5509
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	2.8104	0.0909	0.3307	-0.1591	0.0200
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8204	1.7594	0.0046	0.0326	0.3547	-21.2592
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	2.8104	0.0909	0.3307	-0.1591	0.0200

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8204	3.1578	0.1498	0.5291	-0.6254	21.4560
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8204	1.0558	-0.0230	-0.0676	0.4032	-21.1763
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	2.1068	0.0634	0.2304	-0.1110	0.0152
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.4272	2.6654	0.1533	0.5365	-0.7530	28.5105
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0000	1.2641	0.0380	0.1381	-0.0666	0.0079
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.4272	-0.1372	-0.0771	-0.2593	0.6195	-28.0564
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0000	1.2641	0.0380	0.1381	-0.0666	0.0079

Worst Case Reactions (LRFD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	5.3328
Shear X	4.0453
Shear Z	0.2865
Moment X	1.0079
Moment Y (Twist)	1.3073
Moment Z	48.2725

Worst Case Reactions (ASD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	3.8614
Shear X	2.4272
Shear Z	0.1786
Moment X	0.6293
Moment Y (Twist)	0.7968
Moment Z	28.6592

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

LRFD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. 1.4D	-0.0000	2.9496	-0.0888	-0.3232	0.1555	0.0240
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	-0.0000	2.9973	-0.0944	-0.3437	0.1654	0.0230
ULS: 2. 1.2D + 1.6L + 0.5(S or Lr or R)	-0.0000	2.5282	-0.0761	-0.2768	0.1333	0.0194
ULS: 3. 1.2D + 1.6(S or Lr or R) + L	-0.0000	4.0292	-0.1348	-0.4915	0.2360	0.0337
ULS: 5. 1.2D + E + L + 0.2S	-0.0000	2.7158	-0.0834	-0.3035	0.1461	0.0208
ULS: 7. 0.9D + 1.0E	-0.0000	1.8961	-0.0570	-0.2073	0.0999	0.0132
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0453	5.3328	-0.2865	-1.0084	1.3072	48.2734
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	-0.0000	2.9973	-0.0944	-0.3437	0.1654	0.0230
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0453	0.6617	0.0972	0.3181	-0.9759	-46.9804
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	-0.0000	2.9973	-0.0944	-0.3437	0.1654	0.0230
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case A only	-4.0453	4.8637	-0.2682	-0.9416	1.2758	48.1334
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind downforce Case B only	-0.0000	2.5282	-0.0761	-0.2768	0.1333	0.0194
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case A only	4.0453	0.1926	0.1156	0.3850	-1.0086	-46.8557
ULS: 4. 1.2D + W + L + 0.5(S or Lr or R)_Wind uplift Case B only	-0.0000	2.5282	-0.0761	-0.2768	0.1333	0.0194
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0227	5.1970	-0.2307	-0.8234	0.8061	24.1488
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	-0.0000	4.0292	-0.1348	-0.4915	0.2360	0.0337
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0226	2.8614	-0.0390	-0.1603	-0.3340	-23.7652
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	-0.0000	4.0292	-0.1348	-0.4915	0.2360	0.0337
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case A only	-2.0227	3.6960	-0.1721	-0.6088	0.7045	23.9179
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind downforce Case B only	-0.0000	2.5282	-0.0761	-0.2768	0.1333	0.0194
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case A only	2.0227	1.3604	0.0198	0.0545	-0.4378	-23.5694
ULS: 3. 1.2D + 1.6(S or Lr or R) + 0.5W_Wind uplift Case B only	-0.0000	2.5282	-0.0761	-0.2768	0.1333	0.0194
ULS: 6. 0.9D + 1.0W_Wind downforce Case A only	-4.0453	4.2317	-0.2492	-0.8721	1.2432	47.9466
ULS: 6. 0.9D + 1.0W_Wind downforce Case B only	-0.0000	1.8961	-0.0570	-0.2073	0.0999	0.0132
ULS: 6. 0.9D + 1.0W_Wind uplift Case A only	4.0453	-0.4394	0.1347	0.4545	-1.0426	-46.6920
ULS: 6. 0.9D + 1.0W_Wind uplift Case B only	-0.0000	1.8961	-0.0570	-0.2073	0.0999	0.0132

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 2. D + L	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 3. D + (S or Lr or R)	-0.0000	3.0450	-0.1000	-0.3643	0.1752	0.0221
ULS: 3. D + (S or Lr or R)	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	2.8104	-0.0909	-0.3308	0.1592	0.0201
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 5b. D + 0.7E	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0000	2.8104	-0.0909	-0.3308	0.1592	0.0201
ULS: 8. 0.6D + 0.7E	-0.0000	1.2641	-0.0380	-0.1381	0.0666	0.0079
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.4272	3.5082	-0.1786	-0.6290	0.7968	28.6597
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.4272	0.7055	0.0517	0.1670	-0.5745	-28.1860
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8204	3.8614	-0.1772	-0.6295	0.6730	21.5514
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0000	2.8104	-0.0909	-0.3308	0.1592	0.0201
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8204	1.7594	-0.0046	-0.0326	-0.3545	-21.2594
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0000	2.8104	-0.0909	-0.3308	0.1592	0.0201
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.8204	3.1578	-0.1498	-0.5293	0.6253	21.4563
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.8204	1.0558	0.0230	0.0677	-0.4031	-21.1766
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0000	2.1068	-0.0634	-0.2305	0.1110	0.0152
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.4272	2.6654	-0.1533	-0.5366	0.7529	28.5108
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0000	1.2641	-0.0380	-0.1381	0.0666	0.0079
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.4272	-0.1372	0.0771	0.2594	-0.6194	-28.0567
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0000	1.2641	-0.0380	-0.1381	0.0666	0.0079

Worst Case Reactions (LRFD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	5.3328
Shear X	4.0453
Shear Z	-0.2865
Moment X	-1.0084
Moment Y (Twist)	1.3072
Moment Z	48.2734

Worst Case Reactions (ASD)

Note: Downforce / downwind wind load cases are assumed to govern.

Result	Value (kip, kip-ft)
Axial	3.8614
Shear X	2.4272
Shear Z	-0.1786
Moment X	-0.6295
Moment Y (Twist)	0.7968
Moment Z	28.6597

Project Details

Design Code: AISC 360-16 LRFD
 Provision: LRFD
 Country: United States
 User Name: sales@mtsolar.us
 Project Name: MTSOLAR_05ACK587AF905
 Unit System: imperial



Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65

Section Dimensions								
ID	Name	d (in)	t_w (in)					
1	2in Pipe Sch 40	2.38	0.15					
4	4in Pipe Sch 40	4.50	0.24					
8	6in Pipe Sch 80	6.63	0.43					
ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)		
15	HSS5x3x1/8	5.00	3.00	0.12	0.12	0.12		
ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
18	W6x9	5.90	0.17	3.94	3.94	0.21	0.21	0.25

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I_{y0} (in ⁴)	I_{z0} (in ⁴)	I_w (in ⁶)	S_{y0} (in ³)	S_{z0} (in ³)

Member Design Capacity



107	79.65	74.30	10.99	6.26	29.14	16.61
108	120.60	54.44	23.36	6.45	30.09	45.74
109	48.35	43.11	2.85	2.85	14.51	14.51
110	79.65	72.84	10.99	6.26	29.14	16.61
111	120.60	54.44	23.36	6.45	30.09	45.74
112	142.83	140.22	16.17	16.17	42.85	42.85
113	120.60	84.03	19.06	6.45	30.09	45.74
114	120.60	84.03	18.98	6.45	30.09	45.74
115	120.60	48.60	10.84	6.45	30.09	45.74
116	120.60	48.60	10.83	6.45	30.09	45.74


Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.016	0.776	0.037	0.036	0.003	0.800	#13	0.206	Not Required	Pass
2	0.004	0.168	0.206	0.044	0.043	0.375	#13	0.053	Not Required	Pass
3	0.008	0.439	0.047	0.043	0.004	0.459	#13	0.044	Not Required	Pass
4	0.007	0.436	0.157	0.044	0.027	0.540	#13	0.078	Not Required	Pass
5	0.007	0.273	0.142	0.044	0.028	0.298	#13	0.073	Not Required	Pass
6	0.013	0.585	0.113	0.059	0.019	0.673	#13	0.044	Not Required	Pass
7	0.013	0.363	0.259	0.058	0.051	0.410	#13	0.073	Not Required	Pass
8	0.003	0.088	0.154	0.039	0.013	0.157	#23	0.088	Not Required	Pass
9	0.013	0.051	0.080	0.004	0.003	0.107	#13	0.198	Not Required	Pass
10	0.013	0.583	0.248	0.058	0.042	0.664	#13	0.078	Not Required	Pass
11	0.003	0.087	0.159	0.039	0.013	0.163	#21	0.088	Not Required	Pass
12	0.003	0.310	0.287	0.071	0.054	0.598	#13	0.034	Not Required	Pass
13	0.005	0.141	0.341	0.048	0.016	0.428	#21	0.265	Not Required	Pass
14	0.005	0.143	0.335	0.048	0.016	0.420	#21	0.177	Not Required	Pass
15	0.000	0.047	0.087	0.020	0.007	0.120	#21	Not Required	Not Required	Pass
16	0.000	0.047	0.087	0.020	0.007	0.120	#21	Not Required	Not Required	Pass
101	0.016	0.776	0.037	0.036	0.003	0.800	#13	0.206	Not Required	Pass
102	0.003	0.310	0.287	0.071	0.054	0.598	#13	0.034	Not Required	Pass
103	0.013	0.585	0.113	0.059	0.019	0.673	#13	0.044	Not Required	Pass
104	0.013	0.583	0.248	0.058	0.042	0.664	#13	0.078	Not Required	Pass
105	0.013	0.363	0.259	0.058	0.051	0.410	#13	0.073	Not Required	Pass
106	0.008	0.439	0.047	0.043	0.004	0.459	#13	0.044	Not Required	Pass
107	0.007	0.273	0.142	0.044	0.028	0.298	#13	0.073	Not Required	Pass
108	0.000	0.047	0.087	0.020	0.007	0.120	#21	Not Required	Not Required	Pass
109	0.013	0.051	0.080	0.004	0.003	0.107	#13	0.198	Not Required	Pass
110	0.007	0.436	0.157	0.044	0.027	0.540	#13	0.078	Not Required	Pass
111	0.000	0.047	0.087	0.020	0.007	0.120	#21	Not Required	Not Required	Pass
112	0.004	0.168	0.206	0.044	0.043	0.375	#13	0.053	Not Required	Pass
113	0.005	0.141	0.341	0.048	0.016	0.428	#21	0.177	Not Required	Pass
114	0.005	0.143	0.335	0.048	0.016	0.420	#21	0.265	Not Required	Pass
115	0.008	0.396	0.192	0.039	0.013	0.531	#13	0.557	Not Required	Pass
116	0.003	0.399	0.191	0.039	0.013	0.534	#13	0.557	Not Required	Pass

Definitions

Φ_t	Safety factor for tensile
Φ_c	Safety factor for compression

Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis
V_z	Design ratio in case of shear along Z axis
(P, M_z, M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

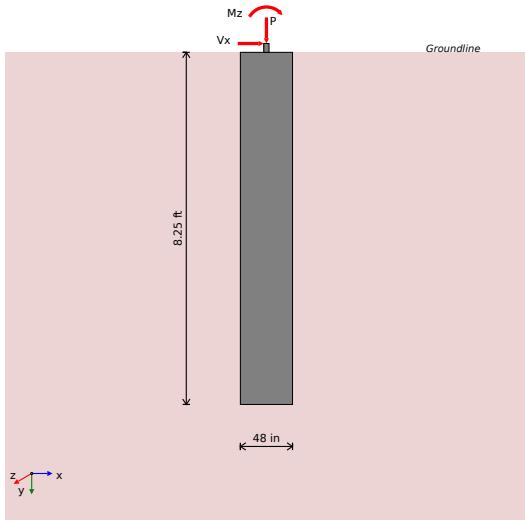REFERENCES	CALCULATIONS	RESULTS																																																																
	IBC 2018 Pile Design Powered bySkyCiv <table><tr><th>Input</th><th>Description</th></tr><tr><td>Region</td><td>American Standard</td></tr><tr><td>Concrete design code</td><td>American Concrete Institute (ACI 318:2019)</td></tr></table> Cross-section <table><tr><th>Input</th><th>Description</th><th>Value</th></tr><tr><td>Shape</td><td>Cross-sectional shape</td><td>Square</td></tr><tr><td>b</td><td>Section width</td><td>48 in</td></tr><tr><td>D</td><td>Section depth</td><td>48 in</td></tr></table> Material Properties <table><tr><th>Input</th><th>Description</th><th>Value</th></tr><tr><td>f'_{ck}</td><td>Concrete compressive strength</td><td>2.5 ksi</td></tr><tr><td>f_{yk}</td><td>Yield strength of steel</td><td>60 ksi</td></tr><tr><td>d_b</td><td>Rebar diameter</td><td>#5 (0.625) in</td></tr><tr><td>cover</td><td>Concrete cover</td><td>3 in</td></tr></table> Soil Parameters (IBC 1806) <table><tr><th>Input</th><th>Description</th><th>Value</th></tr><tr><td>Soil type</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td></td></tr><tr><td>q_a</td><td>Allowable bearing pressure</td><td>2000 psf</td></tr><tr><td>R</td><td>Allowable lateral pressure</td><td>150 psf/ft</td></tr></table> Loading <table><tr><th>Load</th><th>ASD</th><th>LRFD</th></tr><tr><td>P</td><td>3.861 kip</td><td>5.333 kip</td></tr><tr><td>V_x</td><td>2.427 kip</td><td>4.045 kip</td></tr><tr><td>V_z</td><td>-0.179 kip</td><td>-0.286 kip</td></tr><tr><td>M_x</td><td>-0.63 kip-ft</td><td>-1.008 kip-ft</td></tr><tr><td>M_z</td><td>28.66 kip-ft</td><td>48.27 kip-ft</td></tr></table> 	Input	Description	Region	American Standard	Concrete design code	American Concrete Institute (ACI 318:2019)	Input	Description	Value	Shape	Cross-sectional shape	Square	b	Section width	48 in	D	Section depth	48 in	Input	Description	Value	f'_{ck}	Concrete compressive strength	2.5 ksi	f_{yk}	Yield strength of steel	60 ksi	d_b	Rebar diameter	#5 (0.625) in	cover	Concrete cover	3 in	Input	Description	Value	Soil type	Sand, silty sand, clayey sand, silty gravel & clayey gravel		q_a	Allowable bearing pressure	2000 psf	R	Allowable lateral pressure	150 psf/ft	Load	ASD	LRFD	P	3.861 kip	5.333 kip	V _x	2.427 kip	4.045 kip	V _z	-0.179 kip	-0.286 kip	M _x	-0.63 kip-ft	-1.008 kip-ft	M _z	28.66 kip-ft	48.27 kip-ft		
Input	Description																																																																	
Region	American Standard																																																																	
Concrete design code	American Concrete Institute (ACI 318:2019)																																																																	
Input	Description	Value																																																																
Shape	Cross-sectional shape	Square																																																																
b	Section width	48 in																																																																
D	Section depth	48 in																																																																
Input	Description	Value																																																																
f'_{ck}	Concrete compressive strength	2.5 ksi																																																																
f_{yk}	Yield strength of steel	60 ksi																																																																
d_b	Rebar diameter	#5 (0.625) in																																																																
cover	Concrete cover	3 in																																																																
Input	Description	Value																																																																
Soil type	Sand, silty sand, clayey sand, silty gravel & clayey gravel																																																																	
q_a	Allowable bearing pressure	2000 psf																																																																
R	Allowable lateral pressure	150 psf/ft																																																																
Load	ASD	LRFD																																																																
P	3.861 kip	5.333 kip																																																																
V _x	2.427 kip	4.045 kip																																																																
V _z	-0.179 kip	-0.286 kip																																																																
M _x	-0.63 kip-ft	-1.008 kip-ft																																																																
M _z	28.66 kip-ft	48.27 kip-ft																																																																
REFERENCES	CALCULATIONS	RESULTS																																																																
	Required depth to resist lateral loads (ASD) Allowable lateral pressure $R = 150 \text{ psf/ft}$ Point of application of lateral load: $H = h_1 + h_2 + h_e = 0 + 0 + 0 = 0 \text{ ft}$ Considering x-direction: Lateral force per section length $H_o = \frac{V_x}{1.57 \times D} = \frac{2.427}{1.57 \times 48} = 0.386 \frac{\text{kip}}{\text{ft}}$ Moment per section length																																																																	

$$M_o = \frac{M_z + (V_x \times H)}{1.57 \times D} = \frac{28.66 + (2.427 \times 0)}{1.57 \times 48} = 4.564 \frac{\text{kip} - \text{ft}}{\text{ft}}$$

Required depth of embedment in earth:

$$L_x^3 - \left(9 \times \frac{H_o \times L_x}{R} \right) - \left(12 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$$L_{e,x} = 8.222 \text{ ft}$$

Considering z-direction:

Lateral force per section length

$$H_o = \frac{V_z}{1.57 \times b} = \frac{-0.179}{1.57 \times 48} = -0.028 \frac{\text{kip}}{\text{ft}}$$

Moment per section length

$$M_o = \frac{M_x + (V_z \times H)}{1.57 \times b} = \frac{-0.63 + (-0.179 \times 0)}{1.57 \times 48} = -0.1 \frac{\text{kip} - \text{ft}}{\text{ft}}$$

Required depth of embedment in earth:

$$L_z^3 - \left(9 \times \frac{H_o \times L_z}{R} \right) - \left(12 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$$L_{e,z} = -1.72 \text{ ft}$$

Minimum embedded depth

Depth of pile required

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}] = \text{MAX}[8.222, -1.72] = 8.222 \text{ ft}$$

Actual embedded length

$$L_e = L - h_2 - h_e = 8.25 - 0 - 0 = 8.25 \text{ ft}$$

Utilisation

$$\text{Ratio} = \frac{L_{e,req}}{L_e} = \frac{8.222}{8.25} = 0.997$$

UTILITY: 1.00

REFERENCES

CALCULATIONS

RESULTS

End-bearing Capacity (ASD)

Allowable bearing pressure

$$q_a = 2000 \text{ psf}$$

Unit weight of concrete

$$w_c = 0.15 \text{ kip/ft}^3$$

Cross-sectional area:

$$A = b \times D = 48 \times 48 = 16 \text{ ft}^2$$

End-bearing pressure:

$$q = \frac{P}{A} = \frac{3.861}{16} = 241.3 \text{ psf}$$

Utilisation

$$\text{Ratio} = \frac{q}{q_a} = \frac{241.3}{2000} = 0.121$$

UTILITY: 0.12

Lateral Soil Pressure (ASD)

Allowable lateral pressure

$$R = 150 \text{ psf/ft}$$

Length to least lateral dimension ratio:

$$\frac{L}{\text{MIN}[b, D]} = \frac{8.25}{\text{MIN}[4, 4]} = 2.063$$

L/D ratio ≤ 10 . This pile is classified as a short pile.

Considering x-direction:

Distance from resting surface to pivot point:

$$(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)$$

$$a = \frac{(6 \times M_o) + (4 \times H_o \times L_e)}{(6 \times M_o) + (4 \times H_o \times L_e)}$$

$$a = \frac{(4 \times 4.564 \times 8.25) + (3 \times 0.386 \times 8.25^2)}{(6 \times 4.564) + (4 \times 0.386 \times 8.25)} = 5.718 \text{ ft}$$

Earth pressure against the pile at a distance a/2 from the resting surface:

$$p = \frac{0.75 \times [(4 \times M_o) + (3 \times H_o \times L_e)]^2}{L_e^2 \times [(3 \times M_o) + (2 \times H_o \times L_e)]}$$

$$p = \frac{0.75 \times [(4 \times 4.564) + (3 \times 0.386 \times 8.25)]^2}{8.25^2 \times [(3 \times 4.564) + (2 \times 0.386 \times 8.25)]} = 0.425 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of a/2:

$$p_a = R \times \frac{a}{2} = 0.15 \times \frac{5.718}{2} = 0.429 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of a/2

$$\text{Ratio} = \frac{p}{p_a} = \frac{0.425}{0.429} = 0.991$$

UTILITY: 0.99

Earth pressure against the pile at distance L_e:

$$s = \frac{6 \times [(2 \times M_o) + (H_o \times L_e)]}{L_e^2} = \frac{6 \times [(2 \times 4.564) + (0.386 \times 8.25)]}{8.25^2} = 1.086 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of L_e:

$$p_s = R \times L_e = 0.15 \times 8.25 = 1.238 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of L_e

$$\text{Ratio} = \frac{s}{p_s} = \frac{1.086}{1.238} = 0.877$$

UTILITY: 0.88

Considering z-direction:

Distance from resting surface to pivot point:

$$a = \frac{(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)}{(6 \times M_o) + (4 \times H_o \times L_e)}$$

$$a = \frac{(4 \times 0.1 \times 8.25) + (3 \times 0.028 \times 8.25^2)}{(6 \times 0.1) + (4 \times 0.028 \times 8.25)} = 5.919 \text{ ft}$$

Earth pressure against the pile at a distance a/2 from the resting surface:

$$p = \frac{0.75 \times [(4 \times M_o) + (3 \times H_o \times L_e)]^2}{L_e^2 \times [(3 \times M_o) + (2 \times H_o \times L_e)]}$$

$$p = \frac{0.75 \times [(4 \times -0.1) + (3 \times -0.028 \times 8.25)]^2}{8.25^2 \times [(3 \times -0.1) + (2 \times -0.028 \times 8.25)]} = -0.017 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of a/2:

$$p_a = R \times \frac{a}{2} = 0.15 \times \frac{5.919}{2} = 0.444 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of a/2

$$\text{Ratio} = \frac{p}{p_a} = \frac{-0.017}{0.444} = -0.039$$

UTILITY: 0.04

Earth pressure against the pile at distance L_e:

$$s = \frac{6 \times [(2 \times M_o) + (H_o \times L_e)]}{L_e^2} = \frac{6 \times [(2 \times -0.1) + (-0.028 \times 8.25)]}{8.25^2} = -0.038 \frac{\text{kip}}{\text{ft}^2}$$

Allowable lateral soil pressure at a depth of L_e:

$$p_s = R \times L_e = 0.15 \times 8.25 = 1.238 \frac{\text{kip}}{\text{ft}^2}$$

Utilisation - pressure at a depth of L_e

$$Ratio = \frac{s}{p_s} = \frac{-0.038}{1.238} = -0.031$$

UTILITY: 0.03

REFERENCES

CALCULATIONS

RESULTS

Shear force and bending moment (LRFD)

Considering x-direction:

Lateral force per section length

$$H_o = \frac{V_x}{1.57 \times D} = \frac{4.045}{1.57 \times 48} = 0.644 \frac{kip}{ft}$$

Moment per section length

$$M_o = \frac{M_x + (V_x \times H)}{1.57 \times D} = \frac{48.27 + (4.045 \times 0)}{1.57 \times 48} = 7.687 \frac{kip-ft}{ft}$$

Distance from resting surface to pivot point:

$$a = \frac{(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)}{(6 \times M_o) + (4 \times H_o \times L_e)}$$

$$a = \frac{(4 \times 7.687 \times 8.25) + (3 \times 0.644 \times 8.25^2)}{(6 \times 7.687) + (4 \times 0.644 \times 8.25)} = 5.717 ft$$

Max shear force located at depth a:

$$E = \frac{M_o}{H_o} = \frac{7.687}{0.644} = 11.93 ft$$

$$V_{max,x} = (H_o \times D) \times [1 - [3 \times \left(\frac{4 \times E}{L_e} + 3\right) \times \left(\frac{a}{L_e}\right)^2] + [4 \times \left(\frac{3 \times E}{L_e} + 2\right) \times \left(\frac{a}{L_e}\right)^3]]$$

$$V_{max,x} = (0.644 \times 48) \times [1 - [3 \times \left(\frac{4 \times 11.93}{8.25} + 3\right) \times \left(\frac{5.717}{8.25}\right)^2] + [4 \times \left(\frac{3 \times 11.93}{8.25} + 2\right) \times \left(\frac{5.717}{8.25}\right)^3]]$$

$$V_{max,x} = 8.294 kip$$

Max bending moment located at a depth of a/2:

$$M_{max,x} = (H_o \times D \times L_e) \times \left[\left(\frac{E}{L_e} + \frac{a}{2 \times L_e} \right) - \left[\left(\frac{4 \times E}{L_e} + 3 \right) \times \left(\frac{a}{2 \times L_e} \right)^3 \right] + \left[\left(\frac{3 \times E}{L_e} + 2 \right) \times \left(\frac{a}{2 \times L_e} \right)^4 \right] \right]$$

$$M_{max,x} = (0.644 \times 48 \times 8.25) \times \left[\left(\frac{11.93}{8.25} + \frac{5.717}{2 \times 8.25} \right) - \left[\left(\frac{4 \times 11.93}{8.25} + 3 \right) \times \left(\frac{5.717}{2 \times 8.25} \right)^3 \right] + \left[\left(\frac{3 \times 11.93}{8.25} + 2 \right) \times \left(\frac{5.717}{2 \times 8.25} \right)^4 \right] \right]$$

$$M_{max,x} = 32.29 kip-ft$$

Considering z-direction:

Lateral force per section length

$$H_o = \frac{V_z}{1.57 \times b} = \frac{-0.286}{1.57 \times 48} = -0.046 \frac{kip}{ft}$$

Moment per section length

$$M_o = \frac{M_z + (V_z \times H)}{1.57 \times b} = \frac{-1.008 + (-0.286 \times 0)}{1.57 \times 48} = -0.161 \frac{kip-ft}{ft}$$

Distance from resting surface to pivot point:

$$a = \frac{(4 \times M_o \times L_e) + (3 \times H_o \times L_e^2)}{(6 \times M_o) + (4 \times H_o \times L_e)}$$

$$a = \frac{(4 \times 0.161 \times 8.25) + (3 \times 0.046 \times 8.25^2)}{(6 \times 0.161) + (4 \times 0.046 \times 8.25)} = 5.919 ft$$

Max shear force located at depth a:

$$E = \frac{M_o}{H_o} = \frac{-0.161}{-0.046} = 3.52 ft$$

$$V_{max,z} = (H_o \times b) \times [1 - [3 \times \left(\frac{4 \times E}{L_e} + 3\right) \times \left(\frac{a}{L_e}\right)^2] + [4 \times \left(\frac{3 \times E}{L_e} + 2\right) \times \left(\frac{a}{L_e}\right)^3]]$$

$$V_{max,z} = (-0.046 \times 48) \times [1 - 3 \times \left(\frac{4 \times 3.52}{8.25} + 3 \right) \times \left(\frac{5.919}{8.25} \right)^2] + [4 \times \left(\frac{3 \times 3.52}{8.25} + 2 \right) \times \left(\frac{5.919}{8.25} \right)^3]$$


$$V_{max,z} = 0.26 \text{ kip}$$

Max bending moment located at a depth of $a/2$:

$$M_{max,z} = (H_o \times b \times L_e) \times \left[\left(\frac{E}{L_e} + \frac{a}{2 \times L_e} \right) - \left[\left(\frac{4 \times E}{L_e} + 3 \right) \times \left(\frac{a}{2 \times L_e} \right)^3 \right] + \left[\left(\frac{3 \times E}{L_e} + 2 \right) \times \left(\frac{a}{2 \times L_e} \right)^4 \right] \right]$$

$$M_{max,z} = (-0.046 \times 48 \times 8.25) \times \left[\left(\frac{3.52}{8.25} + \frac{5.919}{2 \times 8.25} \right) - \left[\left(\frac{4 \times 3.52}{8.25} + 3 \right) \times \left(\frac{5.919}{2 \times 8.25} \right)^3 \right] + \left[\left(\frac{3 \times 3.52}{8.25} + 2 \right) \times \left(\frac{5.919}{2 \times 8.25} \right)^4 \right] \right]$$

$$M_{max,z} = 0.937 \text{ kip-ft}$$

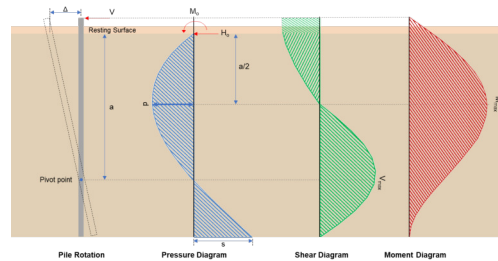

Minimum Reinforcement Check (LRFD)

Gross area of concrete:

$$A_g = b \times D = 48 \times 48 = 2304 \text{ in}^2$$

Main Reinforcement

22.4.2.2 Required reinforcement:

$$A_{st,req} = \frac{P - (0.85 \times f'_{ck} \times A_g)}{f_{yk} - (0.85 \times f'_{ck})} = \frac{5.333 - (0.85 \times 2.5 \times 2304)}{60 - (0.85 \times 2.5)} = -84.5 \text{ in}^2$$

10.6.1.1 Maximum reinforcement:

$$A_{st,max} = 0.08 \times A_g = 0.08 \times 2304 = 184.3 \text{ in}^2$$

7.6.1.1 Minimum reinforcement:

$$A_{st,min} = 0.0018 \times A_g = 0.0018 \times 2304 = 4.147 \text{ in}^2$$

Governing minimum reinforcement area:

$$(0.0018 \times A_g) \leq A_{st,req} \leq (0.08 \times A_g)$$

$$A_{min} = 4.147 \text{ in}^2$$

Minimum number of reinforcements:

$$A_{bar} = 0.307 \text{ in}^2$$

$$n_{min} = \frac{A_{min}}{A_{bar}} = \frac{4.147}{0.307} = 14$$

25.2.3 Minimum spacing:

$$s_{rebar} = MAX[1.5, 1.5 \times d_b] = MAX[1.5, (1.5 \times 0.625)] = 1.5 \text{ in}$$

Use: $n = 16$ pcs at 1.5 in minimum spacing

Total reinforcement area:

$$A_{st} = 16 \times 0.307 = 4.909 \text{ in}^2$$

Shear Reinforcement

25.7.2.2 For main reinforcement ≤ 1.41 in: Use #3(0.375 in)

Maximum spacing of shear Reinforcements:

$$s = MIN[16 \times d_b, 48 \times d_{b,ties}, MIN(b, D)] = MIN[(16 \times 0.625), (48 \times 0.375), MIN(48, 48)] = 10 \text{ in}$$

Detailing Summary

Main reinforcement	#5 (0.625 in) - 16pcs at 1.5 in min. spacing
Shear reinforcement	#3 (0.375 in) at 10 in max. spacing

Axial Compression Strength (LRFD)

22.4.2.2

Allowable axial compressive strength:

$$\phi P_N = \phi \times 0.8 \times [(0.85 \times f'_{ck} \times [A_g - A_{st}]) + (f_{yk} \times A_{st})]$$

$$\phi P_N = 0.65 \times 0.8 \times [(0.85 \times 2.5 \times [2304 - 4.909]) + (60 \times 4.909)] = 2694 \text{ kip}$$

Utilisation

$$Ratio = \frac{P}{\phi P_N} = \frac{5.333}{2694} = 0.002$$

UTILITY: 0.00

Shear Strength LRFD

Effective shear width	$b_w = 48 \text{ in}$
Effective shear depth	$d = 44.31 \text{ in}$
Shear reinforcement area	$A_v = 0.221 \text{ in}^2$
Shear reinforcement spacing	$s = 10 \text{ in}$
Concrete type factor (Normal concrete)	$\lambda = 1$
Strength reduction factor for shear	$\phi = 0.75$
Maximum shear in the x-direction	$V_{max,x} = 8.294 \text{ kip}$
Maximum shear in the z-direction	$V_{max,z} = 0.26 \text{ kip}$

22.5.5.1.1

Max shear strength of concrete:

$$V_{c,max} = 5 \times \lambda \times \sqrt{f'_{ck}} \times b_w \times d = 5 \times 1 \times \sqrt{2.5} \times 48 \times 44.31 = 531.8 \text{ kip}$$

Table 22.5.5.1

Shear strength of concrete:

$$V_{c,a} = \left(2 \times \lambda \times \sqrt{f'_{ck}} + MIN\left[\frac{P}{6 \times A_g}, (0.05 \times f'_{ck})\right] \right) \times (b_w \times d)$$

$$V_{c,a} = \left(2 \times 1 \times \sqrt{2.5} + MIN\left[\frac{5.333}{6 \times 2304}, (0.05 \times 2.5)\right] \right) \times (48 \times 44.31) = 213.5 \text{ kip}$$

Governing shear strength of concrete:

$$V_c = MIN[V_{c,max}, V_{c,a}] = MIN[531.8, 213.5] = 213.5 \text{ kip}$$

22.5.1.2

Shear strength of steel (a):

$$V_{s,a} = 8 \times \sqrt{f'_{ck}} \times b_w \times d = 8 \times \sqrt{2.5} \times 48 \times 44.31 = 850.8 \text{ kip}$$

22.5.8.5.3

Shear strength of steel (b):

$$V_{s,b} = \frac{A_v \times f_{yk} \times d}{s} = \frac{0.221 \times 60 \times 44.31}{10} = 58.73 \text{ kip}$$

Governing shear strength of steel:

$$V_s = MIN[V_{s,a}, V_{s,b}] = MIN[850.8, 58.73] = 58.73 \text{ kip}$$

22.5.1.1

Allowable shear strength:

$$\phi V_n = \phi \times (V_c + V_s) = 0.75 \times (213.5 + 58.73) = 204.2 \text{ kip}$$

$$V_{max} = MAX[8.294, 0.26] = 8.294 \text{ kip}$$

Utilisation

$$Ratio = \frac{V_{max}}{\phi V_n} = \frac{8.294}{204.2} = 0.041$$

UTILITY: 0.04

Flexural Strength (LRFD)

Concrete type factor (Normal concrete)	$\lambda = 1$
Strength reduction factor for flexure	$\phi = 0.65$
Modulus of steel reinforcement	$E_s = 200 \times 10^3 \text{ ksi}$
Maximum concrete strain	$\epsilon_c = 0.0030$
Yield strain of steel f_y/E_s	$\epsilon_y = 0.0003$
Section width	$b = 48 \text{ in}$
Distance to the compression rebar	$d_c = 3.688 \text{ in}$
Distance to the tension rebar	$d = 44.31 \text{ in}$
Total bar area	$A_s = 4.909 \text{ in}^2$
Maximum applied axial load	$P = 5.333 \text{ kip}$
Maximum moment in the x-direction	$M_{max,x} = 32.29 \text{ kip-ft}$

Maximum moment in the z-direction

$M_{max,z} = 0.937$ kip-ft

Compressive force due to concrete:

$$\beta_1 = 0.85$$

$$C_{rc} = 0.85 \times \beta_1 \times f'_c \times b \times c$$

Compressive force due to bars in compression:

$$C_{rs} = f_1 \times A_{sc}$$

$$\varepsilon_1 = (c - d_s) \times \frac{\varepsilon_c}{c}$$

$$f_1 = E_s \times \varepsilon_1 \quad (\varepsilon_1 < \varepsilon_{sy}), \quad f_1 = f_y \quad (\varepsilon_1 \geq \varepsilon_{sy})$$

Tensile force due to bars in tension:

$$T_{rs} = f_2 \times A_{st}$$

$$\varepsilon_2 = (d - c) \times \frac{\varepsilon_{cu}}{c}$$

$$f_2 = E_s \times \varepsilon_2 \quad (\varepsilon_2 < \varepsilon_{sy}), \quad f_2 = \phi_s \times f_y \quad (\varepsilon_2 \geq \varepsilon_{sy})$$


Interaction Diagram Summary

Point	Case	M_r	P_r
P1	Pure Tension	0	-265.1
P2	Pure Bending	498.4	0
P3	Balanced Failure	1303	2402
P4	Decompression	1077	2629
P5	Compression Limit	982	2694
P6	Pure Compression	0	2694

Uniaxial Bending Check

$$M_f = \text{MAX}[32.29, 0.937] = 32.29 \text{ kip-ft}$$

Interaction Diagram

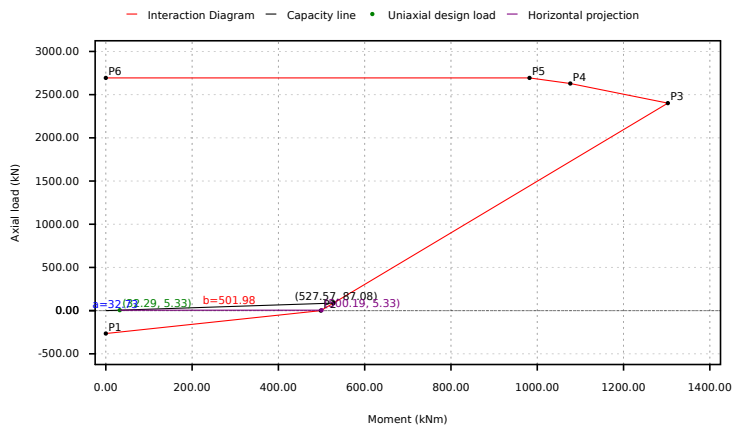

Segment	Signed Distance
P1 - P2	223.6
P2 - P3	443.7
P3 - P4	2591
P4 - P5	2754
P5 - P6	2688
Status	PASS: Point lies inside the curve

Utilisation

$$\text{Ratio} = \frac{a}{a+b} = \frac{32.73}{32.73+502} = 0.061$$

UTILITY: 0.06

Biaxial Bending Check

Maximum moment in the x-direction

$M_{max,x} = 32.29$ kip-ft

Maximum moment in the z-direction

$M_{max,z} = 0.937$ kip-ft

Nominal uniaxial moment strength about the x-axis

$M_{nox} = 500.2$ kip-ft

Nominal uniaxial moment strength about the z-axis

$M_{noz} = 500.2$ kip-ft

Interaction exponent

$\alpha = 1$

Bresler (1960)	According to Bresler (method B): $\left(\frac{M_{max,x}}{M_{nom}}\right)^{\alpha} + \left(\frac{M_{max,z}}{M_{nom}}\right)^{\alpha} = 1.0$ $\left(\frac{32.29}{500.2}\right)^1 + \left(\frac{0.937}{500.2}\right)^1 = 0.066$	UTILITY: 0.07
----------------	---	--------------------------

REFERENCES	CALCULATIONS	RESULTS																														
	Results Summary <table><tr><th>Result Name</th><th>Results</th></tr><tr><td colspan="2">PILE DETAILS</td></tr><tr><td>Length of the pile</td><td>8.25 ft</td></tr><tr><td>Dimensions</td><td>48 x 48 in</td></tr><tr><td>Main bar reinforcement</td><td>#5-16pcs at 1.5 in min.</td></tr><tr><td>Shear reinforcement</td><td>#3 at 10 in max.</td></tr><tr><td colspan="2">UTILISATIONS</td></tr><tr><td>Required depth</td><td>1.00</td></tr><tr><td>End-bearing capacity</td><td>0.12</td></tr><tr><td>P_a</td><td>0.99</td></tr><tr><td>P_s</td><td>0.88</td></tr><tr><td>Axial compression strength</td><td>0.00</td></tr><tr><td>Shear strength</td><td>0.04</td></tr><tr><td>Uniaxial bending strength</td><td>0.06</td></tr><tr><td>Biaxial bending strength</td><td>0.07</td></tr></table>	Result Name	Results	PILE DETAILS		Length of the pile	8.25 ft	Dimensions	48 x 48 in	Main bar reinforcement	#5-16pcs at 1.5 in min.	Shear reinforcement	#3 at 10 in max.	UTILISATIONS		Required depth	1.00	End-bearing capacity	0.12	P _a	0.99	P _s	0.88	Axial compression strength	0.00	Shear strength	0.04	Uniaxial bending strength	0.06	Biaxial bending strength	0.07	
Result Name	Results																															
PILE DETAILS																																
Length of the pile	8.25 ft																															
Dimensions	48 x 48 in																															
Main bar reinforcement	#5-16pcs at 1.5 in min.																															
Shear reinforcement	#3 at 10 in max.																															
UTILISATIONS																																
Required depth	1.00																															
End-bearing capacity	0.12																															
P _a	0.99																															
P _s	0.88																															
Axial compression strength	0.00																															
Shear strength	0.04																															
Uniaxial bending strength	0.06																															
Biaxial bending strength	0.07																															