

# Your Project Calculations



Project Name: MTSOLAR\_9GDH6H68LK5D

S3D Model Link:

[https://platform.skyciv.com/structural?preload\\_name=MTSOLAR\\_9GDH6H68LK5D&preload\\_path=Shared%20Enterprise%20Folder/MT\\_Solar\\_Projects/5\\_2023](https://platform.skyciv.com/structural?preload_name=MTSOLAR_9GDH6H68LK5D&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/5_2023)

Public Model Link:

[https://platform.skyciv.com/structural-viewer?project\\_id=sajsHkewS2yta457AslqPXEEtGF8BcPbAwOuzNixHI26nXRfDtA6aMRVAgpSMdk](https://platform.skyciv.com/structural-viewer?project_id=sajsHkewS2yta457AslqPXEEtGF8BcPbAwOuzNixHI26nXRfDtA6aMRVAgpSMdk)

## Array Specification

|                                    |                                  |
|------------------------------------|----------------------------------|
| <b>Product:</b>                    | Beam                             |
| <b>Unique ID:</b>                  | 4P-22.5-8TOP-XD-45-L-4Hx15W-KKEG |
| <b>Duty Classification:</b>        | XD                               |
| <b>Module Width:</b>               | 40.00 in                         |
| <b>Module Length:</b>              | 65.00in                          |
| <b>Number of Rows:</b>             | 4                                |
| <b>Number of Columns:</b>          | 15                               |
| <b>Total Number of Modules:</b>    | 60                               |
| <b>Desired Tilt Angle:</b>         | 40                               |
| <b>Front Edge Clearance:</b>       | 5                                |
| <b>Total Array Height at Tilt:</b> | 13.62 ft                         |
| <b>Total Frame Length:</b>         | 82.50 ft                         |
| <b>Frame Weight:</b>               | 4138 lbs                         |
| <b>Array Dimensions N/S:</b>       | 13.50 ft                         |
| <b>Array Dimensions E/W:</b>       | 82.50 ft                         |
| <b>Rail Length:</b>                | 162.00 in                        |
| <b>Rail Spacing:</b>               | 2.71 ft                          |
| <b>Rail Check:</b>                 | Not Checked                      |

## Support Specifications


|                                 |                 |
|---------------------------------|-----------------|
| <b>Pole Size:</b>               | 8in Pipe Sch 40 |
| <b>Pole Length above Grade:</b> | 9.34 ft         |
| <b>Number of Poles:</b>         | 4               |
| <b>Pole Spacing:</b>            | 22.5 ft         |

## Foundation Specifications

|  |  |
|--|--|
| <b>Foundation Type:</b>                | Square   |
| <b>Foundation Dimensions:</b>          | 48 x 48 in   |
| <b>Foundation Depth (below grade):</b> | Pile 1: 6.75 ft<br>Pile 2: 7.00 ft<br>Pile 3: 7.00 ft<br>Pile 4: 6.75 ft |
| <b>Foundation Volume:</b>              | 16.296 y <sup>3</sup>  |
| <b>Foundation Result:</b>              | PASSED   |
| <b>Mount Twist:</b>                    | 1.320971 kip   |

## Site Info

|                                   |  |
|-----------------------------------|--|
| <b>Risk Category:</b>             | I  |
| <b>Exposure:</b>                  | C  |
| <b>Soil Classification:</b>       | sand   |
| <b>Site Location:</b>             | 1915 Little Cone Ranch Rd, Colorado 81320, USA |
| <b>Wind Speed:</b>                | 120 mph  |
| <b>Snow Load:</b>                 | 60 psf   |
| <b>Design Uplift Pressure:</b>    | Multiple pressures                             |
| <b>Design Downforce Pressure:</b> | Multiple pressures                             |
| <b>Design Snow Pressure:</b>      | 0.019793 ksf                                   |

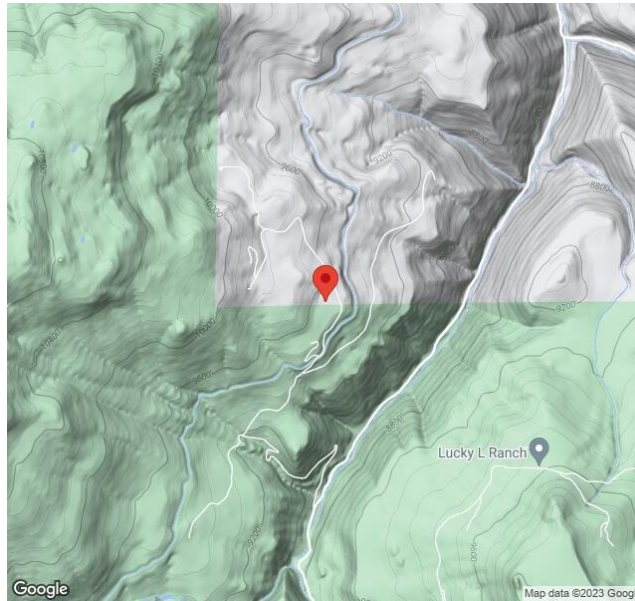

### Design Disclaimer

This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.

### AutoDesigner Input

```
{
  "product_type": "Beam",
  "project_id": "MTSOLAR_9GDH6H68LK5D",
  "site_address": "1915 Little Cone Ranch Rd, Colorado 81320, USA",
  "module_width": 40,
  "module_length": 65,
  "number_rows": 4,
  "number_columns": 15,
  "pole_mount_section": "4_40",
  "core_pipe_width": 65,
  "core_pipe_section": "2_40",
  "adjuster_section": "2_40",
  "core_beam_height": 65,
  "core_beam_section": "HSS3X2x1/8",
  "main_pipe_section": "2_12GA",
  "pole_spacing": 15,
  "tilt_angle": 40,
  "ground_clearance": 5,
  "risk_category": "I",
  "exposure_category": "C",
  "frame_duty_override": "auto",
  "pole_override": "auto",
  "soil_type": "sand",
  "foundation_type": "Square",
  "foundation_size": 48,
  "check_rails": false,
  "wind_speed_override": 120,
  "snow_load_override": 60,
  "direct_snow_load": false
}
```


### Design Notes:

- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Design and Sizing is approximate only









 SkyCiv


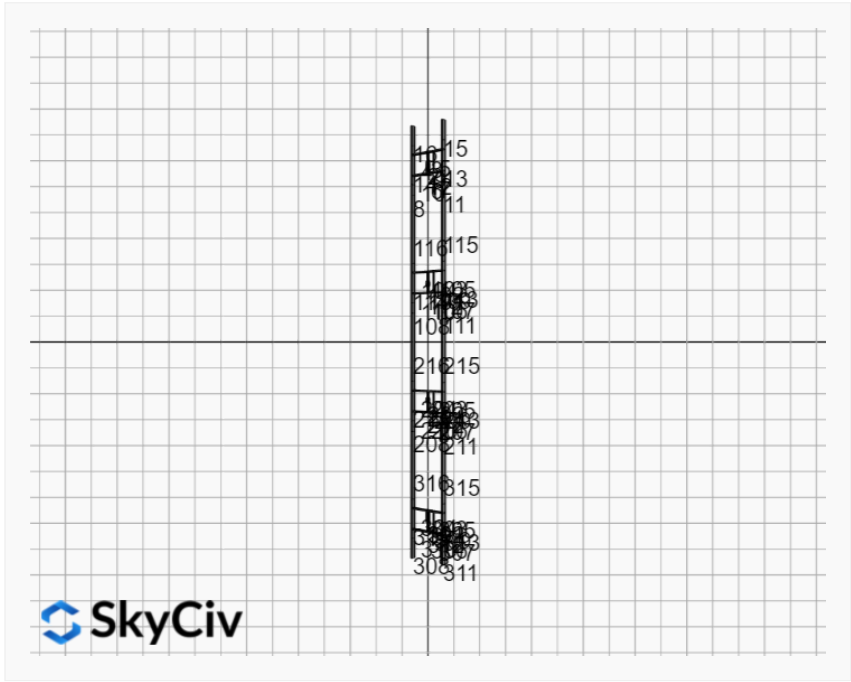


 SkyCiv

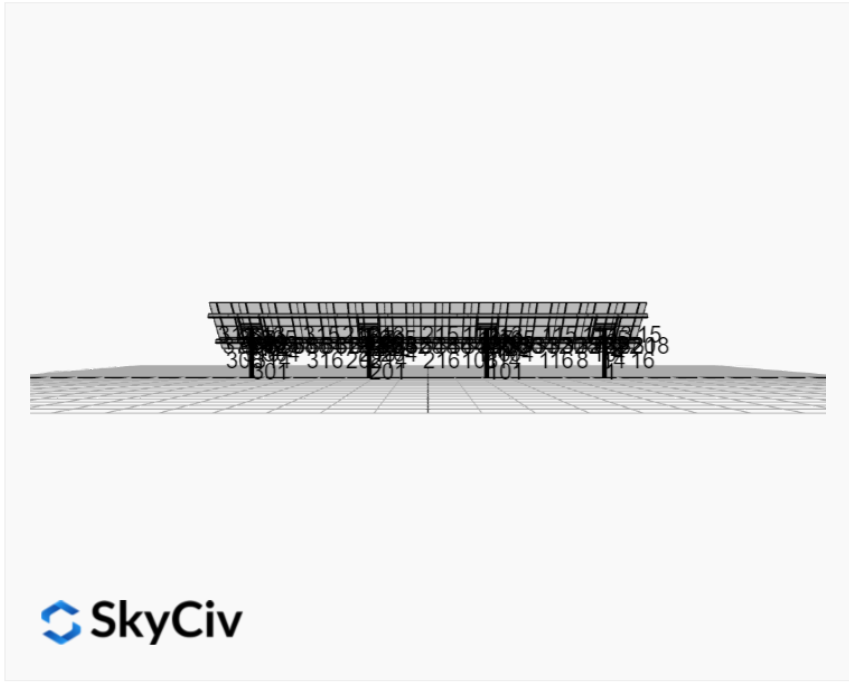
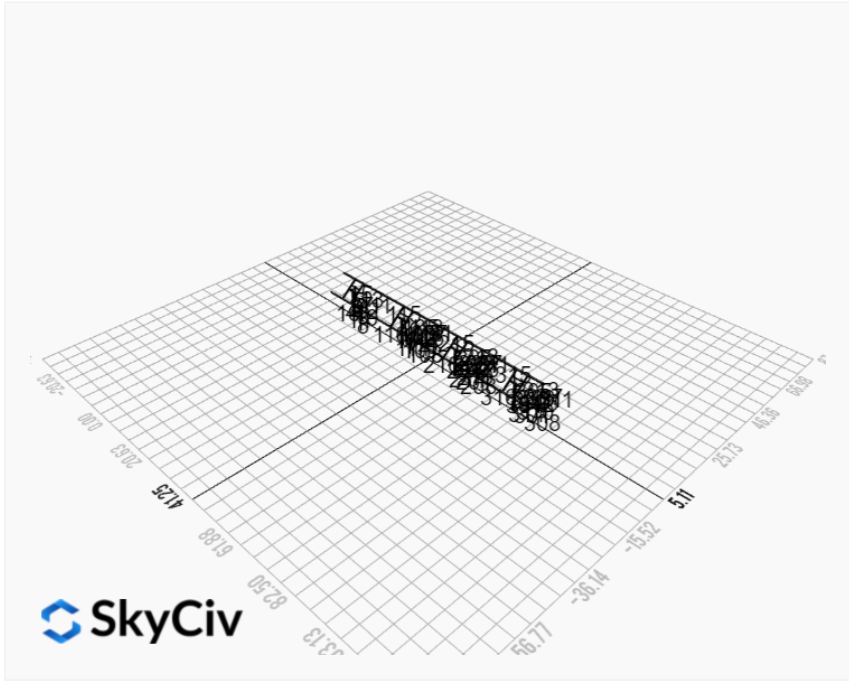


## FEM Results (Envelope Worst Case for each member)

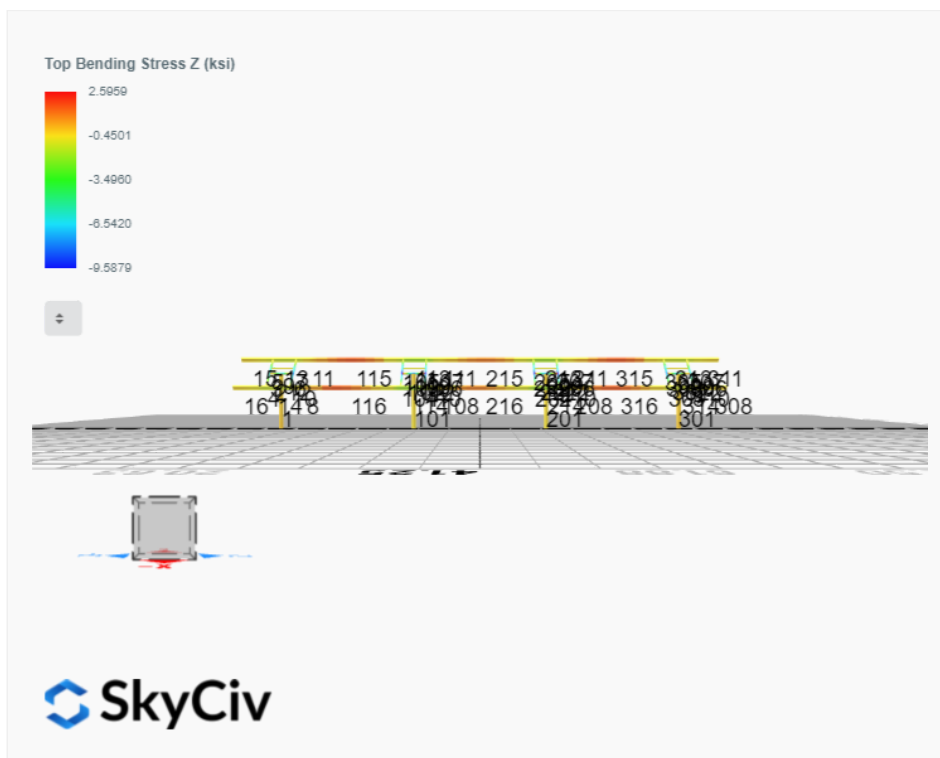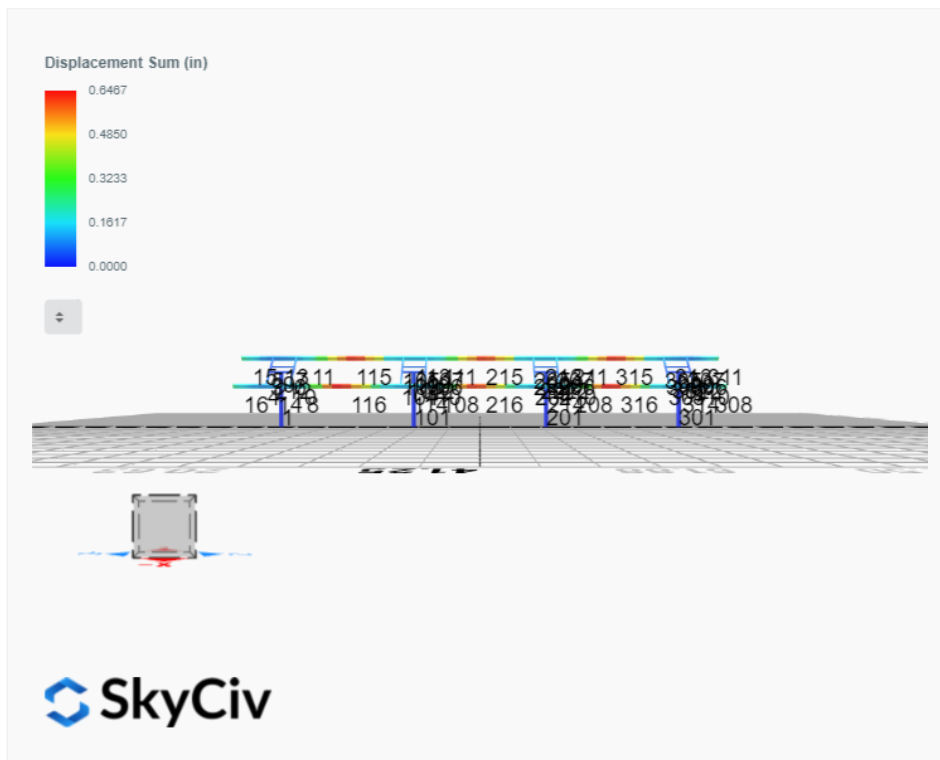

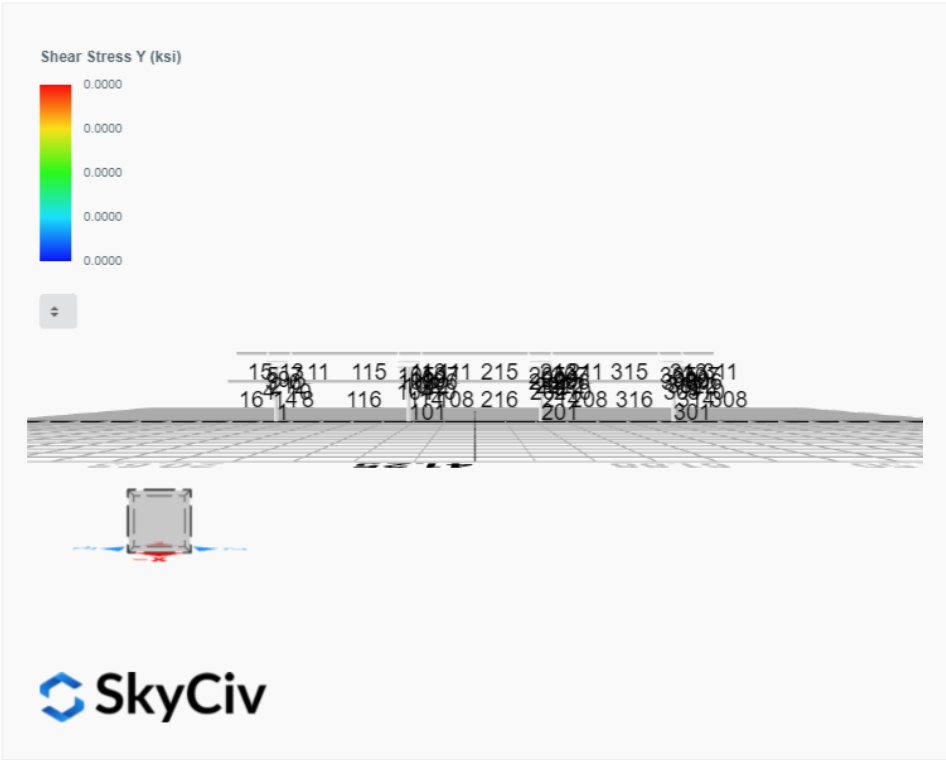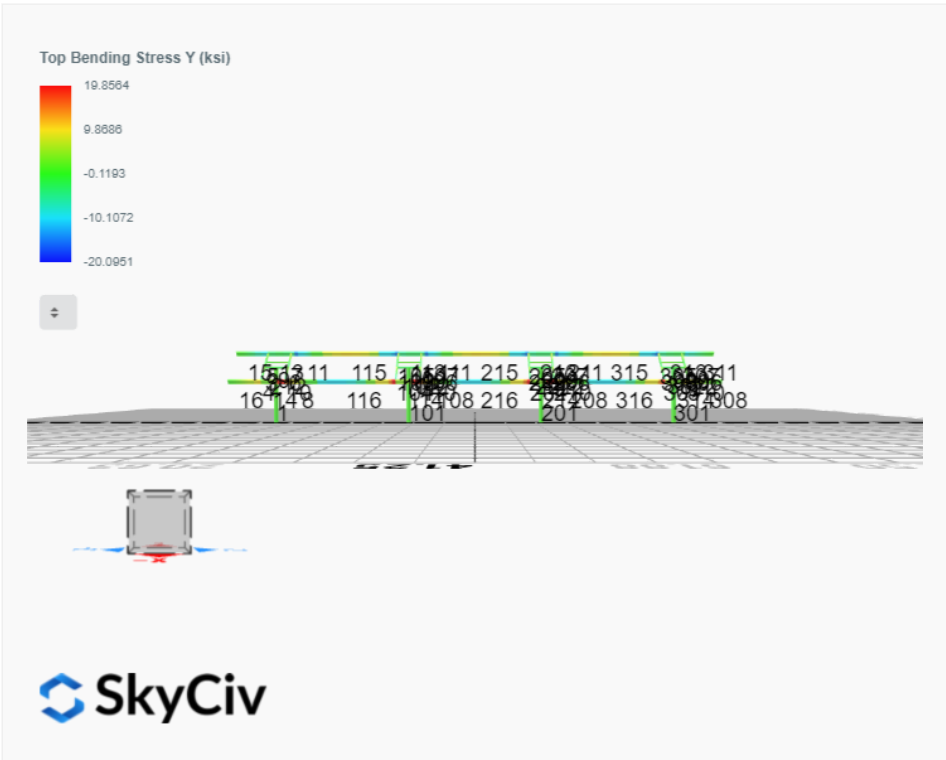

Axial Stress (ksi)

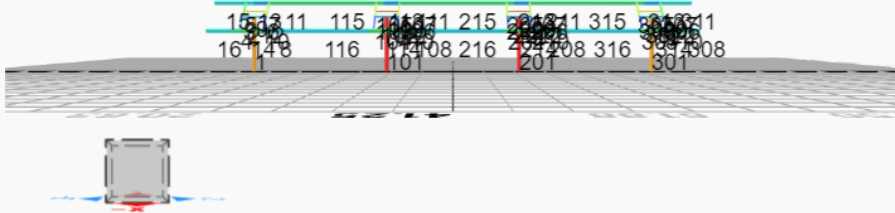

 SkyCiv

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name  | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 1. D   | 0.0222  | 2.1784  | 0.0653  | 0.1677  | -0.0394 | -0.1708  |
| ULS: 2. D + L   | 0.0222  | 2.1784  | 0.0653  | 0.1677  | -0.0394 | -0.1708  |
| ULS: 3. D + (S or Lr or R)  | 0.0733  | 5.9522  | 0.2164  | 0.5577  | -0.1310 | -0.6125  |
| ULS: 3. D + (S or Lr or R)  | 0.0222  | 2.1784  | 0.0653  | 0.1677  | -0.0394 | -0.1708  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0605  | 5.0087  | 0.1786  | 0.4602  | -0.1081 | -0.5021  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0222  | 2.1784  | 0.0653  | 0.1677  | -0.0394 | -0.1708  |
| ULS: 5b. D + 0.7E   | 0.0222  | 2.1784  | 0.0653  | 0.1677  | -0.0394 | -0.1708  |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | 0.0605  | 5.0087  | 0.1786  | 0.4602  | -0.1081 | -0.5021  |
| ULS: 8. 0.6D + 0.7E   | 0.0133  | 1.3071  | 0.0392  | 0.1006  | -0.0236 | -0.1025  |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -3.3764 | 6.2035  | 0.3008  | 0.7252  | -0.7720 | 32.9599  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -3.3764 | 6.2035  | 0.3008  | 0.7252  | -0.7720 | 32.9599  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 2.7274  | -1.0270 | -0.1166 | -0.2623 | 0.5270  | -25.0129 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 2.3342  | -0.5529 | -0.1094 | -0.2447 | 0.5096  | -29.4000 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.4884 | 8.0275  | 0.3552  | 0.8783  | -0.6576 | 24.3459  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.4884 | 8.0275  | 0.3552  | 0.8783  | -0.6576 | 24.3459  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.0894  | 2.6046  | 0.0422  | 0.1376  | 0.3167  | -19.1337 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.7946  | 2.9602  | 0.0476  | 0.1508  | 0.3037  | -22.4240 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.5268 | 5.1972  | 0.2419  | 0.5858  | -0.5889 | 24.6773  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.5268 | 5.1972  | 0.2419  | 0.5858  | -0.5889 | 24.6773  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.0511  | -0.2257 | -0.0711 | -0.1548 | 0.3854  | -18.8024 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.7562  | 0.1299  | -0.0657 | -0.1416 | 0.3724  | -22.0927 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -3.3853 | 5.3321  | 0.2747  | 0.6581  | -0.7563 | 33.0283  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -3.3853 | 5.3321  | 0.2747  | 0.6581  | -0.7563 | 33.0283  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 2.7186  | -1.8984 | -0.1427 | -0.3294 | 0.5428  | -24.9446 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 2.3254  | -1.4243 | -0.1355 | -0.3118 | 0.5254  | -29.3317 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 12.0069             |
| Shear X          | -5.6643             |
| Shear Z          | 0.5491              |
| Moment X         | 1.3320              |
| Moment Y (Twist) | 1.3198              |
| Moment Z         | 55.3790             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.0275              |
| Shear X          | -3.3853             |
| Shear Z          | 0.3552              |
| Moment X         | 0.8783              |
| Moment Y (Twist) | 0.7720              |
| Moment Z         | 33.0283             |

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

| Name                                   | Fx      | Fy     | Fz      | Mx      | My     | Mz     |
|--|---------|--------|---------|---------|--------|--------|
| ULS: 1. D                              | -0.0222 | 2.5680 | -0.0051 | -0.0132 | 0.0154 | 0.2247 |
| ULS: 2. D + L                          | -0.0222 | 2.5680 | -0.0051 | -0.0132 | 0.0154 | 0.2247 |
| ULS: 3. D + (S or Lr or R)             | -0.0733 | 7.2380 | -0.0167 | -0.0435 | 0.0508 | 0.7043 |
| ULS: 3. D + (S or Lr or R)             | -0.0222 | 2.5680 | -0.0051 | -0.0132 | 0.0154 | 0.2247 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0605 | 6.0705 | -0.0138 | -0.0359 | 0.0420 | 0.5844 |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R) | -0.0222 | 2.5680 | -0.0051 | -0.0132 | 0.0154 | 0.2247 |
| ULS: 5b. D + 0.7E                      | -0.0222 | 2.5680 | -0.0051 | -0.0132 | 0.0154 | 0.2247 |

| Name  | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | -0.0605 | 6.0705  | -0.0138 | -0.0359 | 0.0420  | 0.5844   |
| ULS: 8. 0.6D + 0.7E   | -0.0133 | 1.5408  | -0.0030 | -0.0079 | 0.0092  | 0.1348   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -4.2399 | 7.6197  | -0.0006 | -0.0069 | -0.0209 | 41.0343  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -4.2399 | 7.6197  | -0.0006 | -0.0069 | -0.0209 | 41.0343  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 3.3427  | -1.4607 | -0.0056 | -0.0112 | 0.0339  | -30.2864 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 2.8196  | -0.8428 | -0.0170 | -0.0384 | 0.0719  | -35.2951 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.2238 | 9.8592  | -0.0105 | -0.0312 | 0.0147  | 31.1916  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -3.2238 | 9.8592  | -0.0105 | -0.0312 | 0.0147  | 31.1916  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.4632  | 3.0490  | -0.0142 | -0.0344 | 0.0559  | -22.2990 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 2.0709  | 3.5123  | -0.0227 | -0.0548 | 0.0844  | -26.0555 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.1855 | 6.3567  | -0.0017 | -0.0085 | -0.0119 | 30.8319  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -3.1855 | 6.3567  | -0.0017 | -0.0085 | -0.0119 | 30.8319  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.5015  | -0.4535 | -0.0055 | -0.0117 | 0.0293  | -22.6586 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 2.1092  | 0.0099  | -0.0140 | -0.0321 | 0.0578  | -26.4151 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -4.2310 | 6.5925  | 0.0014  | -0.0016 | -0.0271 | 40.9444  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -4.2310 | 6.5925  | 0.0014  | -0.0016 | -0.0271 | 40.9444  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 3.3516  | -2.4878 | -0.0036 | -0.0059 | 0.0278  | -30.3763 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 2.8285  | -1.8700 | -0.0150 | -0.0331 | 0.0658  | -35.3850 |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 14.7627             |
| Shear X          | -7.0804             |
| Shear Z          | -0.0361             |
| Moment X         | -0.0886             |
| Moment Y (Twist) | 0.1348              |
| Moment Z         | 69.3680             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 9.8592              |
| Shear X          | -4.2399             |
| Shear Z          | -0.0227             |
| Moment X         | -0.0548             |
| Moment Y (Twist) | 0.0844              |
| Moment Z         | 41.0343             |

### Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

#### ASD Load Combination Results

| Name  | Fx      | Fy      | Fz     | Mx     | My      | Mz       |
|---|---------|---------|--------|--------|---------|----------|
| ULS: 1. D   | -0.0222 | 2.5680  | 0.0051 | 0.0132 | -0.0153 | 0.2247   |
| ULS: 2. D + L   | -0.0222 | 2.5680  | 0.0051 | 0.0132 | -0.0153 | 0.2247   |
| ULS: 3. D + (S or Lr or R)  | -0.0733 | 7.2380  | 0.0167 | 0.0433 | -0.0504 | 0.7042   |
| ULS: 3. D + (S or Lr or R)  | -0.0222 | 2.5680  | 0.0051 | 0.0132 | -0.0153 | 0.2247   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | -0.0605 | 6.0705  | 0.0138 | 0.0358 | -0.0417 | 0.5844   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | -0.0222 | 2.5680  | 0.0051 | 0.0132 | -0.0153 | 0.2247   |
| ULS: 5b. D + 0.7E   | -0.0222 | 2.5680  | 0.0051 | 0.0132 | -0.0153 | 0.2247   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | -0.0605 | 6.0705  | 0.0138 | 0.0358 | -0.0417 | 0.5844   |
| ULS: 8. 0.6D + 0.7E   | -0.0133 | 1.5408  | 0.0030 | 0.0079 | -0.0092 | 0.1348   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -4.2399 | 7.6197  | 0.0006 | 0.0069 | 0.0210  | 41.0343  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -4.2399 | 7.6197  | 0.0006 | 0.0069 | 0.0210  | 41.0343  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 3.3427  | -1.4607 | 0.0056 | 0.0112 | -0.0339 | -30.2864 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 2.8196  | -0.8428 | 0.0170 | 0.0384 | -0.0719 | -35.2951 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.2238 | 9.8592  | 0.0105 | 0.0311 | -0.0144 | 31.1916  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -3.2238 | 9.8592  | 0.0105 | 0.0311 | -0.0144 | 31.1916  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.4632  | 3.0490  | 0.0142 | 0.0343 | -0.0556 | -22.2990 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 2.0709  | 3.5123  | 0.0227 | 0.0547 | -0.0841 | -26.0555 |

| Name  | Fx      | Fy      | Fz      | Mx     | My      | Mz       |
|---|---------|---------|---------|--------|---------|----------|
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -3.1855 | 6.3567  | 0.0017  | 0.0085 | 0.0119  | 30.8319  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -3.1855 | 6.3567  | 0.0017  | 0.0085 | 0.0119  | 30.8319  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.5015  | -0.4535 | 0.0055  | 0.0117 | -0.0292 | -22.6586 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 2.1092  | 0.0099  | 0.0140  | 0.0321 | -0.0577 | -26.4151 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -4.2310 | 6.5925  | -0.0014 | 0.0016 | 0.0271  | 40.9444  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -4.2310 | 6.5925  | -0.0014 | 0.0016 | 0.0271  | 40.9444  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 3.3516  | -2.4878 | 0.0036  | 0.0059 | -0.0278 | -30.3763 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 2.8285  | -1.8700 | 0.0150  | 0.0331 | -0.0657 | -35.3850 |

#### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 14.7628             |
| Shear X          | -7.0804             |
| Shear Z          | 0.0362              |
| Moment X         | 0.0888              |
| Moment Y (Twist) | 0.1348              |
| Moment Z         | 69.3681             |

#### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 9.8592              |
| Shear X          | -4.2399             |
| Shear Z          | 0.0227              |
| Moment X         | 0.0547              |
| Moment Y (Twist) | 0.0841              |
| Moment Z         | 41.0343             |

#### Reaction Forces for Foundation 4 (Node ID#301), (kip, kip-ft)

##### ASD Load Combination Results

| Name  | Fx      | Fy      | Fz      | Mx      | My      | Mz       |
|---|---------|---------|---------|---------|---------|----------|
| ULS: 1. D   | 0.0222  | 2.1784  | -0.0653 | -0.1678 | 0.0394  | -0.1708  |
| ULS: 2. D + L   | 0.0222  | 2.1784  | -0.0653 | -0.1678 | 0.0394  | -0.1708  |
| ULS: 3. D + (S or Lr or R)  | 0.0732  | 5.9521  | -0.2164 | -0.5582 | 0.1313  | -0.6123  |
| ULS: 3. D + (S or Lr or R)  | 0.0222  | 2.1784  | -0.0653 | -0.1678 | 0.0394  | -0.1708  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0605  | 5.0087  | -0.1786 | -0.4606 | 0.1083  | -0.5020  |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0222  | 2.1784  | -0.0653 | -0.1678 | 0.0394  | -0.1708  |
| ULS: 5b. D + 0.7E   | 0.0222  | 2.1784  | -0.0653 | -0.1678 | 0.0394  | -0.1708  |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | 0.0605  | 5.0087  | -0.1786 | -0.4606 | 0.1083  | -0.5020  |
| ULS: 8. 0.6D + 0.7E   | 0.0133  | 1.3071  | -0.0392 | -0.1007 | 0.0237  | -0.1025  |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -3.3764 | 6.2035  | -0.3008 | -0.7252 | 0.7721  | 32.9600  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | -3.3764 | 6.2035  | -0.3008 | -0.7252 | 0.7721  | 32.9600  |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 2.7274  | -1.0270 | 0.1166  | 0.2623  | -0.5270 | -25.0129 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 2.3342  | -0.5529 | 0.1094  | 0.2447  | -0.5096 | -29.4000 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.4884 | 8.0275  | -0.3553 | -0.8787 | 0.6578  | 24.3461  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.4884 | 8.0275  | -0.3553 | -0.8787 | 0.6578  | 24.3461  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.0894  | 2.6046  | -0.0422 | -0.1380 | -0.3165 | -19.1335 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.7945  | 2.9602  | -0.0476 | -0.1512 | -0.3034 | -22.4239 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -2.5268 | 5.1972  | -0.2419 | -0.5859 | 0.5889  | 24.6773  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | -2.5268 | 5.1972  | -0.2419 | -0.5859 | 0.5889  | 24.6773  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 2.0511  | -0.2257 | 0.0711  | 0.1548  | -0.3854 | -18.8023 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 1.7562  | 0.1299  | 0.0657  | 0.1416  | -0.3723 | -22.0927 |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -3.3853 | 5.3321  | -0.2747 | -0.6581 | 0.7563  | 33.0283  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | -3.3853 | 5.3321  | -0.2747 | -0.6581 | 0.7563  | 33.0283  |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 2.7186  | -1.8984 | 0.1427  | 0.3294  | -0.5428 | -24.9446 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 2.3254  | -1.4243 | 0.1355  | 0.3118  | -0.5254 | -29.3317 |

#### Worst Case Reactions LRFD

#### Worst Case Reactions ASD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module. Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 12.0068             |
| Shear X          | -5.6643             |
| Shear Z          | -0.5491             |
| Moment X         | -1.3331             |
| Moment Y (Twist) | 1.3210              |
| Moment Z         | 55.3804             |

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module. Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 8.0275              |
| Shear X          | -3.3853             |
| Shear Z          | -0.3553             |
| Moment X         | -0.8787             |
| Moment Y (Twist) | 0.7721              |
| Moment Z         | 33.0283             |

## Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States  
 User Name: sales@mtsolar.us  
 Unit System: imperial



## Design Input Information

| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |             |             |
|------------------|---------|-------------|-------------|
| ID               | E (ksi) | $F_y$ (ksi) | $F_u$ (ksi) |
| 1                | 29000   | 50          | 65          |

### Section Dimensions



| ID | Name             | d (in) | $t_w$ (in) |  |  |  |  |
|----|------------------|--------|------------|--|--|--|--|
| 3  | 2in Pipe Sch 120 | 2.38   | 0.25       |  |  |  |  |
| 6  | 4in Pipe Sch 120 | 4.50   | 0.44       |  |  |  |  |
| 9  | 8in Pipe Sch 40  | 8.63   | 0.32       |  |  |  |  |



| ID | Name       | d (in) | b (in) | $t_w$ (in) | $t_b$ (in) | r (in) |  |
|----|------------|--------|--------|------------|------------|--------|--|
| 17 | HSS5x3x1/4 | 5.00   | 3.00   | 0.23       | 0.23       | 0.23   |  |



| ID | Name   | d (in) | $t_w$ (in) | $b_t$ (in) | $b_b$ (in) | $t_t$ (in) | $t_b$ (in) | r (in) |
|----|--------|--------|------------|------------|------------|------------|------------|--------|
| 20 | W10x12 | 9.87   | 0.19       | 3.96       | 3.96       | 0.21       | 0.21       | 0.30   |

### Section Properties

| ID | Name             | A (in <sup>2</sup> ) | J (in <sup>4</sup> ) | $I_{yp}$ (in <sup>4</sup> ) | $I_{zp}$ (in <sup>4</sup> ) | $I_w$ (in <sup>6</sup> ) | $S_{yp}$ (in <sup>3</sup> ) | $S_{zp}$ (in <sup>3</sup> ) |
|----|------------------|----------------------|----------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------|-----------------------------|
| 3  | 2in Pipe Sch 120 | 1.67                 | 1.91                 | 0.96                        | 0.96                        | 0.00                     | 1.13                        | 1.13                        |
| 6  | 4in Pipe Sch 120 | 5.58                 | 23.29                | 11.64                       | 11.64                       | 0.00                     | 7.24                        | 7.24                        |
| 9  | 8in Pipe Sch 40  | 8.40                 | 144.98               | 72.49                       | 72.49                       | 0.00                     | 22.21                       | 22.21                       |



|     |    |           |           |           |   |             |             |   |
|-----|----|-----------|-----------|-----------|---|-------------|-------------|---|
| 108 | 20 | 1.33      | 1.33      | 2.0<br>5  | 2.23,2.23,2.23,2.23,2.23,2.23,2.23,2.23,2.23,1.84,2.23,2.23,2.23,1.77,2.23,2.23,2.22,2.24,2.23,2.23,2.23,1.96,2.23,2.23,2.23,1.88           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 109 | 3  | 2.60      | 2.60      | 4.0<br>0  | -   | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 110 | 17 | 2.44      | 2.44      | 3.7<br>5  | 1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.67,1.66,1.75,1.67,1.67,1.66,1.64,1.67,1.67,1.68,1.67,1.67,1.67,1.65,1.79,1.67,1.67,1.66,1.65           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 111 | 20 | 1.33      | 1.33      | 2.0<br>5  | 2.25,2.25,2.25,2.25,2.25,2.25,2.34,2.34,2.12,2.12,2.35,2.35,2.18,2.14,2.30,2.30,1.89,1.47,2.33,2.33,2.12,2.12,2.36,2.36,2.25,2.14           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 112 | 6  | 1.30      | 1.30      | 2.0<br>0  | -   | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 113 | 20 | 4.88      | 4.00      | 7.5<br>0  | 1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.05,1.06,1.04,1.04,1.05,1.05,1.04,1.04,1.03,1.02,1.04,1.04,1.05,1.06,1.04,1.04,1.05,1.05           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 114 | 20 | 4.88      | 4.00      | 7.5<br>0  | 1.03,1.03,1.03,1.03,1.03,1.03,1.04,1.04,1.04,1.53,1.04,1.04,1.04,1.04,1.04,1.04,1.03,1.03,1.04,1.04,2.51,1.04,1.04,1.04,1.04                | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 115 | 20 | 8.42      | 8.42      | 12.<br>95 | 1.17,1.17,1.17,1.17,1.17,1.17,1.15,1.15,1.13,1.13,1.15,1.15,1.14,1.14,1.15,1.15,1.20,1.29,1.15,1.15,1.13,1.13,1.14,1.14,1.14,1.14           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 116 | 20 | 8.42      | 8.42      | 12.<br>95 | 1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.14,1.17,1.17,1.17,1.22,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.17,1.14,1.17,1.17,1.17,1.20 | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 201 | 9  | 19.6<br>1 | 19.6<br>1 | 9.3<br>4  | -   | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 202 | 6  | 1.30      | 1.30      | 2.0<br>0  | -   | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 203 | 17 | 0.92      | 0.92      | 1.4<br>2  | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 204 | 17 | 2.44      | 2.44      | 3.7<br>5  | 1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.67,1.66,1.75,1.67,1.67,1.66,1.64,1.67,1.67,1.68,1.67,1.67,1.67,1.65,1.79,1.67,1.67,1.66,1.65           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 205 | 17 | 1.52      | 1.52      | 2.3<br>3  | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.67           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 206 | 17 | 0.92      | 0.92      | 1.4<br>2  | 1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.19,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 207 | 17 | 1.52      | 1.52      | 2.3<br>3  | 1.68,1.67,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.67           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 208 | 20 | 1.33      | 1.33      | 2.0<br>5  | 2.32,2.32,2.32,2.31,2.32,2.32,2.32,2.32,2.33,1.40,2.32,2.32,2.32,2.07,2.32,2.32,2.30,2.34,2.32,2.32,2.33,1.47,2.32,2.32,2.32,2.21           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 209 | 3  | 2.60      | 2.60      | 4.0<br>0  | -   | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 210 | 17 | 2.44      | 2.44      | 3.7<br>5  | 1.69,1.68,1.69,1.67,1.68,1.69,1.67,1.67,1.66,1.75,1.67,1.67,1.66,1.64,1.67,1.67,1.68,1.67,1.67,1.67,1.65,1.78,1.67,1.67,1.66,1.65           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 211 | 20 | 1.33      | 1.33      | 2.0<br>5  | 2.35,2.35,2.35,2.35,2.35,2.35,2.11,2.11,1.98,1.98,2.11,2.11,2.09,2.08,2.14,2.14,2.21,1.61,2.12,2.12,1.97,1.98,2.11,2.11,2.09,2.09           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 212 | 6  | 1.30      | 1.30      | 2.0<br>0  | -   | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 213 | 20 | 4.88      | 4.00      | 7.5<br>0  | 1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.04,1.05,1.06,1.04,1.04,1.05,1.05,1.04,1.04,1.03,1.02,1.04,1.04,1.05,1.06,1.04,1.04,1.05,1.05           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 214 | 20 | 4.88      | 4.00      | 7.5<br>0  | 1.03,1.03,1.03,1.03,1.03,1.03,1.04,1.04,1.04,1.53,1.04,1.04,1.04,1.04,1.04,1.04,1.03,1.03,1.04,1.04,2.52,1.04,1.04,1.04,1.04                | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 215 | 20 | 8.42      | 8.42      | 12.<br>95 | 1.18,1.18,1.18,1.18,1.18,1.18,1.16,1.16,1.14,1.14,1.16,1.16,1.15,1.15,1.17,1.17,1.21,1.98,1.16,1.16,1.14,1.14,1.16,1.16,1.15,1.15           | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 216 | 20 | 8.42      | 8.42      | 12.<br>95 | 1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.12,1.18,1.18,1.18,1.23,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.13,1.18,1.18,1.18,1.21                | 3<br>0<br>0 | 2<br>0<br>0 | 1 |
| 301 | 9  | 19.6<br>1 | 19.6<br>1 | 9.3<br>4  | -   | 3<br>0<br>0 | 2<br>0<br>0 | 1 |



|     |        |        |       |       |        |        |
|-----|--------|--------|-------|-------|--------|--------|
| 103 | 151.65 | 150.70 | 20.17 | 14.14 | 54.12  | 28.95  |
| 104 | 151.65 | 145.15 | 20.17 | 14.14 | 54.12  | 28.95  |
| 105 | 151.65 | 149.10 | 20.17 | 14.14 | 54.12  | 28.95  |
| 106 | 151.65 | 150.70 | 20.17 | 14.14 | 54.12  | 28.95  |
| 107 | 151.65 | 149.10 | 20.17 | 14.14 | 54.12  | 28.95  |
| 108 | 159.30 | 142.47 | 46.90 | 6.46  | 56.26  | 44.91  |
| 109 | 75.10  | 66.32  | 4.25  | 4.25  | 22.53  | 22.53  |
| 110 | 151.65 | 145.15 | 20.17 | 14.14 | 54.12  | 28.95  |
| 111 | 159.30 | 142.47 | 46.90 | 6.46  | 56.26  | 44.91  |
| 112 | 251.01 | 248.88 | 27.16 | 27.16 | 75.30  | 75.30  |
| 113 | 159.30 | 116.35 | 31.17 | 6.46  | 56.26  | 44.91  |
| 114 | 159.30 | 116.35 | 31.48 | 6.46  | 56.26  | 44.91  |
| 115 | 159.30 | 48.27  | 15.01 | 6.46  | 56.26  | 44.91  |
| 116 | 159.30 | 48.27  | 15.14 | 6.46  | 56.26  | 44.91  |
| 201 | 377.97 | 236.42 | 83.29 | 83.29 | 113.39 | 113.39 |
| 202 | 251.01 | 248.88 | 27.16 | 27.16 | 75.30  | 75.30  |
| 203 | 151.65 | 150.70 | 20.17 | 14.14 | 54.12  | 28.95  |
| 204 | 151.65 | 145.15 | 20.17 | 14.14 | 54.12  | 28.95  |
| 205 | 151.65 | 149.10 | 20.17 | 14.14 | 54.12  | 28.95  |
| 206 | 151.65 | 150.70 | 20.17 | 14.14 | 54.12  | 28.95  |
| 207 | 151.65 | 149.10 | 20.17 | 14.14 | 54.12  | 28.95  |
| 208 | 159.30 | 142.47 | 46.90 | 6.46  | 56.26  | 44.91  |
| 209 | 75.10  | 66.32  | 4.25  | 4.25  | 22.53  | 22.53  |
| 210 | 151.65 | 145.15 | 20.17 | 14.14 | 54.12  | 28.95  |
| 211 | 159.30 | 142.47 | 46.90 | 6.46  | 56.26  | 44.91  |
| 212 | 251.01 | 248.88 | 27.16 | 27.16 | 75.30  | 75.30  |
| 213 | 159.30 | 116.35 | 31.17 | 6.46  | 56.26  | 44.91  |
| 214 | 159.30 | 116.35 | 31.48 | 6.46  | 56.26  | 44.91  |
| 215 | 159.30 | 48.27  | 15.14 | 6.46  | 56.26  | 44.91  |
| 216 | 159.30 | 48.27  | 14.88 | 6.46  | 56.26  | 44.91  |
| 301 | 377.97 | 236.42 | 83.29 | 83.29 | 113.39 | 113.39 |
| 302 | 251.01 | 248.88 | 27.16 | 27.16 | 75.30  | 75.30  |
| 303 | 151.65 | 150.70 | 20.17 | 14.14 | 54.12  | 28.95  |
| 304 | 151.65 | 145.15 | 20.17 | 14.14 | 54.12  | 28.95  |
| 305 | 151.65 | 149.10 | 20.17 | 14.14 | 54.12  | 28.95  |
| 306 | 151.65 | 150.70 | 20.17 | 14.14 | 54.12  | 28.95  |
| 307 | 151.65 | 149.10 | 20.17 | 14.14 | 54.12  | 28.95  |
| 308 | 159.30 | 55.15  | 46.90 | 6.46  | 56.26  | 44.91  |
| 309 | 75.10  | 66.32  | 4.25  | 4.25  | 22.53  | 22.53  |
| 310 | 151.65 | 145.15 | 20.17 | 14.14 | 54.12  | 28.95  |
| 311 | 159.30 | 55.15  | 46.90 | 6.46  | 56.26  | 44.91  |
| 312 | 251.01 | 229.64 | 27.16 | 27.16 | 75.30  | 75.30  |
| 313 | 159.30 | 116.35 | 33.01 | 6.46  | 56.26  | 44.91  |
| 314 | 159.30 | 116.35 | 33.62 | 6.46  | 56.26  | 44.91  |
| 315 | 159.30 | 48.27  | 14.74 | 6.46  | 56.26  | 44.91  |
| 316 | 159.30 | 48.27  | 14.61 | 6.46  | 56.26  | 44.91  |

## Design Ratio

| Member ID | P     | M <sub>z</sub> | M <sub>y</sub> | V <sub>y</sub> | V <sub>z</sub> | (P,M <sub>z</sub> ,M <sub>y</sub> ) | Worst LC | KL/r  | φ            | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|-------|--------------|--------|
| 1         | 0.051 | 0.665          | 0.045          | 0.050          | 0.005          | 0.705                               | #13      | 0.401 | Not Required | Pass   |
| 2         | 0.005 | 0.274          | 0.177          | 0.065          | 0.035          | 0.440                               | #13      | 0.116 | Not Required | Pass   |
| 3         | 0.007 | 0.500          | 0.042          | 0.049          | 0.009          | 0.504                               | #13      | 0.046 | Not Required | Pass   |
| 4         | 0.006 | 0.477          | 0.124          | 0.047          | 0.021          | 0.541                               | #13      | 0.082 | Not Required | Pass   |


|     |       |       |       |       |       |       |     |              |              |      |
|-----|-------|-------|-------|-------|-------|-------|-----|--------------|--------------|------|
| 4   | 0.000 | 0.472 | 0.134 | 0.047 | 0.031 | 0.341 | #13 | 0.082        | Not Required | Pass |
| 5   | 0.007 | 0.310 | 0.121 | 0.049 | 0.033 | 0.321 | #13 | 0.076        | Not Required | Pass |
| 6   | 0.011 | 0.642 | 0.089 | 0.065 | 0.017 | 0.695 | #13 | 0.046        | Not Required | Pass |
| 7   | 0.011 | 0.398 | 0.226 | 0.063 | 0.058 | 0.428 | #13 | 0.076        | Not Required | Pass |
| 8   | 0.003 | 0.083 | 0.282 | 0.038 | 0.023 | 0.286 | #24 | 0.102        | Not Required | Pass |
| 9   | 0.018 | 0.053 | 0.080 | 0.003 | 0.004 | 0.125 | #13 | 0.206        | Not Required | Pass |
| 10  | 0.012 | 0.586 | 0.212 | 0.058 | 0.045 | 0.645 | #21 | 0.082        | Not Required | Pass |
| 11  | 0.005 | 0.080 | 0.292 | 0.042 | 0.023 | 0.298 | #24 | 0.102        | Not Required | Pass |
| 12  | 0.003 | 0.404 | 0.226 | 0.090 | 0.041 | 0.627 | #13 | 0.054        | Not Required | Pass |
| 13  | 0.007 | 0.178 | 0.611 | 0.052 | 0.029 | 0.728 | #21 | 0.306        | Not Required | Pass |
| 14  | 0.008 | 0.162 | 0.599 | 0.048 | 0.029 | 0.692 | #21 | 0.204        | Not Required | Pass |
| 15  | 0.000 | 0.049 | 0.152 | 0.022 | 0.012 | 0.196 | #21 | Not Required | Not Required | Pass |
| 16  | 0.000 | 0.047 | 0.152 | 0.021 | 0.012 | 0.194 | #21 | Not Required | Not Required | Pass |
| 101 | 0.062 | 0.833 | 0.003 | 0.062 | 0.000 | 0.862 | #13 | 0.401        | Not Required | Pass |
| 102 | 0.005 | 0.424 | 0.255 | 0.096 | 0.047 | 0.671 | #13 | 0.036        | Not Required | Pass |
| 103 | 0.011 | 0.701 | 0.054 | 0.070 | 0.001 | 0.732 | #13 | 0.046        | Not Required | Pass |
| 104 | 0.011 | 0.676 | 0.221 | 0.067 | 0.046 | 0.755 | #21 | 0.082        | Not Required | Pass |
| 105 | 0.011 | 0.435 | 0.232 | 0.069 | 0.061 | 0.466 | #13 | 0.076        | Not Required | Pass |
| 106 | 0.011 | 0.708 | 0.054 | 0.071 | 0.002 | 0.736 | #13 | 0.046        | Not Required | Pass |
| 107 | 0.011 | 0.440 | 0.228 | 0.070 | 0.060 | 0.470 | #13 | 0.076        | Not Required | Pass |
| 108 | 0.004 | 0.065 | 0.278 | 0.041 | 0.023 | 0.338 | #21 | 0.102        | Not Required | Pass |
| 109 | 0.026 | 0.055 | 0.053 | 0.001 | 0.000 | 0.112 | #13 | 0.206        | Not Required | Pass |
| 110 | 0.011 | 0.668 | 0.217 | 0.067 | 0.046 | 0.745 | #21 | 0.082        | Not Required | Pass |
| 111 | 0.005 | 0.053 | 0.287 | 0.044 | 0.023 | 0.341 | #21 | 0.102        | Not Required | Pass |
| 112 | 0.005 | 0.420 | 0.256 | 0.095 | 0.047 | 0.672 | #13 | 0.036        | Not Required | Pass |
| 113 | 0.007 | 0.248 | 0.618 | 0.056 | 0.029 | 0.821 | #21 | 0.306        | Not Required | Pass |
| 114 | 0.009 | 0.269 | 0.609 | 0.054 | 0.029 | 0.824 | #21 | 0.306        | Not Required | Pass |
| 115 | 0.016 | 0.521 | 0.328 | 0.045 | 0.023 | 0.801 | #21 | 0.644        | Not Required | Pass |
| 116 | 0.006 | 0.486 | 0.324 | 0.045 | 0.024 | 0.762 | #21 | 0.644        | Not Required | Pass |
| 201 | 0.062 | 0.833 | 0.003 | 0.062 | 0.000 | 0.862 | #13 | 0.401        | Not Required | Pass |
| 202 | 0.005 | 0.420 | 0.256 | 0.095 | 0.047 | 0.672 | #13 | 0.036        | Not Required | Pass |
| 203 | 0.011 | 0.708 | 0.054 | 0.071 | 0.002 | 0.736 | #13 | 0.046        | Not Required | Pass |
| 204 | 0.011 | 0.668 | 0.217 | 0.067 | 0.046 | 0.745 | #21 | 0.082        | Not Required | Pass |
| 205 | 0.011 | 0.440 | 0.228 | 0.070 | 0.060 | 0.470 | #13 | 0.076        | Not Required | Pass |
| 206 | 0.011 | 0.701 | 0.054 | 0.070 | 0.001 | 0.732 | #13 | 0.046        | Not Required | Pass |
| 207 | 0.011 | 0.435 | 0.232 | 0.069 | 0.061 | 0.466 | #13 | 0.076        | Not Required | Pass |
| 208 | 0.003 | 0.056 | 0.290 | 0.045 | 0.024 | 0.341 | #21 | 0.102        | Not Required | Pass |
| 209 | 0.026 | 0.055 | 0.053 | 0.001 | 0.000 | 0.112 | #13 | 0.206        | Not Required | Pass |
| 210 | 0.011 | 0.676 | 0.221 | 0.067 | 0.046 | 0.755 | #21 | 0.082        | Not Required | Pass |
| 211 | 0.005 | 0.058 | 0.298 | 0.045 | 0.023 | 0.341 | #21 | 0.102        | Not Required | Pass |
| 212 | 0.005 | 0.424 | 0.255 | 0.096 | 0.047 | 0.671 | #13 | 0.036        | Not Required | Pass |
| 213 | 0.007 | 0.248 | 0.619 | 0.056 | 0.029 | 0.822 | #21 | 0.306        | Not Required | Pass |
| 214 | 0.009 | 0.269 | 0.609 | 0.054 | 0.029 | 0.823 | #21 | 0.306        | Not Required | Pass |
| 215 | 0.015 | 0.428 | 0.328 | 0.044 | 0.023 | 0.703 | #21 | 0.644        | Not Required | Pass |
| 216 | 0.006 | 0.360 | 0.323 | 0.041 | 0.023 | 0.649 | #21 | 0.644        | Not Required | Pass |
| 301 | 0.051 | 0.665 | 0.045 | 0.050 | 0.005 | 0.705 | #13 | 0.401        | Not Required | Pass |
| 302 | 0.003 | 0.404 | 0.226 | 0.090 | 0.041 | 0.627 | #13 | 0.054        | Not Required | Pass |
| 303 | 0.011 | 0.642 | 0.089 | 0.065 | 0.017 | 0.695 | #13 | 0.046        | Not Required | Pass |
| 304 | 0.012 | 0.586 | 0.212 | 0.058 | 0.045 | 0.645 | #21 | 0.082        | Not Required | Pass |
| 305 | 0.011 | 0.398 | 0.226 | 0.063 | 0.058 | 0.428 | #13 | 0.076        | Not Required | Pass |
| 306 | 0.007 | 0.500 | 0.042 | 0.049 | 0.009 | 0.504 | #13 | 0.046        | Not Required | Pass |
| 307 | 0.007 | 0.310 | 0.121 | 0.049 | 0.033 | 0.321 | #13 | 0.076        | Not Required | Pass |
| 308 | 0.000 | 0.047 | 0.152 | 0.021 | 0.012 | 0.194 | #21 | Not Required | Not Required | Pass |
| 309 | 0.018 | 0.053 | 0.080 | 0.003 | 0.004 | 0.125 | #13 | 0.206        | Not Required | Pass |

|     |       |       |       |       |       |       |     |              |              |      |
|-----|-------|-------|-------|-------|-------|-------|-----|--------------|--------------|------|
| 310 | 0.006 | 0.472 | 0.134 | 0.047 | 0.031 | 0.541 | #13 | 0.082        | Not Required | Pass |
| 311 | 0.000 | 0.049 | 0.152 | 0.022 | 0.012 | 0.196 | #21 | Not Required | Not Required | Pass |
| 312 | 0.005 | 0.274 | 0.177 | 0.065 | 0.035 | 0.440 | #13 | 0.116        | Not Required | Pass |
| 313 | 0.007 | 0.178 | 0.611 | 0.052 | 0.029 | 0.727 | #21 | 0.204        | Not Required | Pass |
| 314 | 0.008 | 0.162 | 0.599 | 0.048 | 0.029 | 0.692 | #21 | 0.306        | Not Required | Pass |
| 315 | 0.016 | 0.540 | 0.328 | 0.042 | 0.023 | 0.803 | #21 | 0.644        | Not Required | Pass |
| 316 | 0.006 | 0.506 | 0.322 | 0.038 | 0.023 | 0.773 | #21 | 0.644        | Not Required | Pass |

## Definitions

|                     |   |
|---------------------|---|
| $\Phi_t$            | Safety factor for tensile                                 |
| $\Phi_c$            | Safety factor for compression                             |
| $\Phi_b$            | Safety factor for flexure                                 |
| $\Phi_v$            | Safety factor for shear                                   |
| E                   | Modulus of elasticity                                     |
| $F_y$               | Specified minimum yield stress                            |
| $F_u$               | Specified minimum tensile strength                        |
| A                   | Cross-sectional area                                      |
| J                   | Torsional constant  |
| $I_{yp}$            | Moment of inertia about the Y axes                        |
| $I_{zp}$            | Moment of inertia about the Z axes                        |
| $I_w$               | Warping constant  |
| $S_{yp}$            | Plastic section modulus about the Y axis                  |
| $S_{zp}$            | Plastic section modulus about the Z axis                  |
| KL                  | Effective length  |
| $C_b$               | Buckling modification factor (from all load combinations) |
| $L_b$               | Length between braced points                              |
| LST                 | Limited slenderness for tension                           |
| LSC                 | Limited slenderness for compression                       |
| LD                  | Limited deflection  |
| $P_n$               | Nominal axial strength (tension/compression)              |
| $M_n$               | Nominal flexural strength (about Z/Y axis)                |
| $V_n$               | Nominal shear strength (along Z/Y axis)                   |
| P                   | Design ratio in case of axial force                       |
| $M_z$               | Design ratio in case of bending about Z axis              |
| $M_y$               | Design ratio in case of bending about Y axis              |
| $V_y$               | Design ratio in case of shear along Y axis                |
| $V_z$               | Design ratio in case of shear along Z axis                |
| (P, $M_z$ , $M_y$ ) | Design ratio in case of axial force and bending action    |
| KL/r                | Design ratio in case of section slenderness               |
| $\delta$            | Design ratio in case of member deflection                 |
| OK                  | Capacity is provided                                      |
| NG                  | Capacity is not provided                                  |

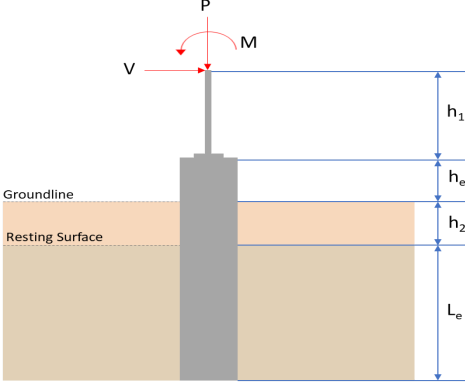

| REFERENCES     | CALCULATIONS  | RESULTS                                    |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
|----------------|---|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|--------|-------------|--------|--------|-------------|-------|-------|---------------|-------|-------|---------------|--------|--------|--|
|                | <p><b>SkyCiv Foundation Design</b><br/>Pile Foundation</p> <p><b>Design Information :</b><br/>Design code : IBC 2021 (International Building Code)<br/>Unit System : Imperial</p>   |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
|                | <p><b>Pile Input</b></p>  <p><b>Geometry</b><br/>Pile shape: rectangular<br/><math>b = 48</math> in - Pile width<br/><math>D = 48</math> in - Pile depth<br/><math>L = 6.75</math> ft - Total pile length<br/><math>h_1 = 0</math> ft - Lateral load height from the top of the pile,<br/><math>h_2 = 0</math> ft - Depth to resting surface<br/><math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1193"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>8.028</td> <td>12.007</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-3.385</td> <td>-5.664</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>0.355</td> <td>0.549</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>0.878</td> <td>1.332</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>33.028</td> <td>55.379</td> </tr> </tbody> </table> <p><b>Material Properties</b><br/><math>f'_{ck} = 3</math> ksi - Concrete strength,</p> | Layer                                      | Label                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | $P$ (kip) | 8.028 | 12.007 | $V_x$ (kip) | -3.385 | -5.664 | $V_z$ (kip) | 0.355 | 0.549 | $M_x$ (kipft) | 0.878 | 1.332 | $M_z$ (kipft) | 33.028 | 55.379 |  |
| Layer          | Label   | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel   | 2000.000                                   | 150.000                                     |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| Load Component | ASD   | LRFD                                       |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $P$ (kip)      | 8.028   | 12.007                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $V_x$ (kip)    | -3.385  | -5.664                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $V_z$ (kip)    | 0.355   | 0.549                                      |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $M_x$ (kipft)  | 0.878   | 1.332                                      |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $M_z$ (kipft)  | 33.028  | 55.379                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
|                | <p><b>Required depth to resist lateral loads (ASD)</b><br/><math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b><br/><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-3.385 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.53901 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$  |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |

$$M_o = \frac{(33.028 \text{ kipft}) + ((-3.385 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.2592 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.0755 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.355 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.056529 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.878 \text{ kipft}) + ((0.355 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.13981 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 2.7352 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.0755 \text{ ft}), (2.7352 \text{ ft})]$$

$$L_{e,req} = 6.075 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (6.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 6.75 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.075 \text{ ft})}{(6.75 \text{ ft})}$$

$$\text{Ratio} = 0.9$$

Status: **PASS**  
Ratio: **0.900**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(8.028 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.50175 \text{ kip/ft}^2$$

$$q = 0.50175 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.50175 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.25088$$

Status: **PASS**  
Ratio: **0.250**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.6875$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.53901 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.2592 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.2592 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (5.2592 \text{ kipft/ft})) + (4 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.6775 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.2592 \text{ kipft/ft})) + (3 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 \times [(3 \times (5.2592 \text{ kipft/ft})) + (2 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = 0.19839 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.2592 \text{ kipft/ft})) + ((-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = 0.90603 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.6775 \text{ ft})}{2}$$

$$p_a = 0.35082 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.19839 \text{ kip/ft}^2)}{(0.35082 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.5655$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,

Status: **PASS**  
Ratio: **0.570**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.90603 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.89484$$

Status: **PASS**  
Ratio: **0.890**

#### Considering z-direction:

$H_o = 0.056529 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.13981 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.13981 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (0.056529 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.13981 \text{ kipft/ft})) + (4 \times (0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.863 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (0.13981 \text{ kipft/ft})) + (3 \times (0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 [(3 \times (0.13981 \text{ kipft/ft})) + (2 \times (0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = 0.040415 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 [(2 \times (0.13981 \text{ kipft/ft})) + ((0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = 0.08707 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.863 \text{ ft})}{2}$$

$$p_a = 0.36472 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.040415 \text{ kip/ft}^2)}{(0.36472 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.11081$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**  
Ratio: **0.110**

$$Ratio = \frac{(0.08707 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$Ratio = 0.085995$$

Status: **PASS**  
Ratio: **0.090**

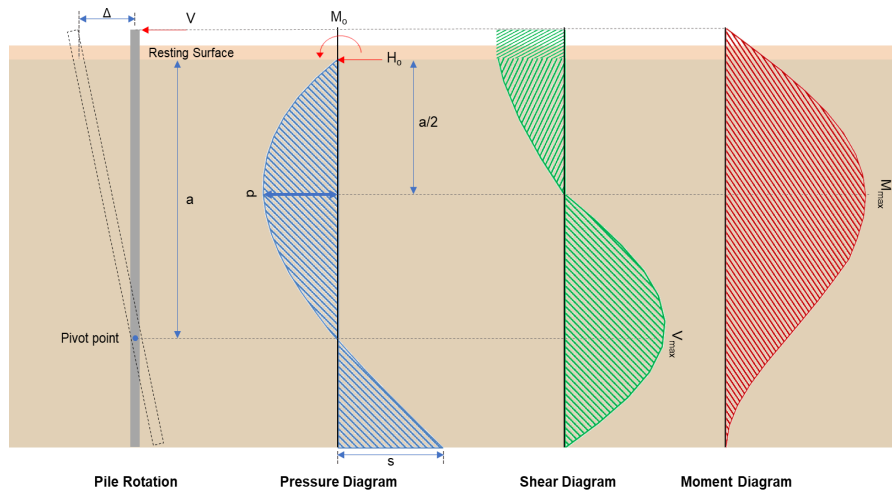

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-5.664 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.90191 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(55.379 \text{ kipft}) + ((-5.664 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 8.8183 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(8.8183 \text{ kipft/ft})}{(-0.90191 \text{ kip/ft})}$$

$$E = 9.7774 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (8.8183 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.90191 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (8.8183 \text{ kipft/ft})) + (4 \times (-0.90191 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.6773 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.90191 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (9.7774 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.6773 \text{ ft})}{(6.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (9.7774 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.6773 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 11.626 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-0.90191 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(9.7774 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.6773 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (9.7774 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.6773 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (9.7774 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.6773 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 37.031 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.549 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.08742 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(1.332 \text{ kipft}) + ((0.549 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.2121 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.2121 \text{ kipft/ft})}{(0.08742 \text{ kip/ft})}$$

$$E = 2.4262 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.2121 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (0.08742 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.2121 \text{ kipft/ft})) + (4 \times (0.08742 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.8655 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 + 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.08742 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.4262 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.8655 \text{ ft})}{(6.75 \text{ ft})} \right)^2 + 4 \times \left( \frac{3 \times (2.4262 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.8655 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.45658 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((0.08742 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(2.4262 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.8655 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.4262 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.8655 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (2.4262 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.8655 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 1.3313 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(12.007 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -101.86 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-101.86 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: 14 - #5 (0.625 in)

Status: **PASS**  
Ratio: **0.970**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(12.007 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0037717$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 12.007 \text{ kip} \rightarrow 12007 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(12007 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 131.4 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (131.4 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 131.4 \text{ kip}$$

|                 |   |   |
|-----------------|---|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yties} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((131.4 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.49 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 11.626 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(11.626 \text{ kip})}{(118.49 \text{ kip})}$ $\text{Ratio} = 0.098116$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.45658 \text{ kip}</math> - Maximum shear force in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.45658 \text{ kip})}{(118.49 \text{ kip})}$ $\text{Ratio} = 0.0038534$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.100</b></p> <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
|                 | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$  |   |

|                  |   |   |
|------------------|---|---|
| <p>14.5.2.1b</p> | <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p><b>Considering x-direction:</b><br/> <math>M_{max} = 37.031\text{kipft}</math> - Maximum moment in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(37.031\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.13543$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.140</b></p> |
|                  | <p><b>Considering z-direction:</b><br/> <math>M_{max} = 1.3313\text{kipft}</math> - Maximum moment in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(1.3313\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.0048691$  | <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
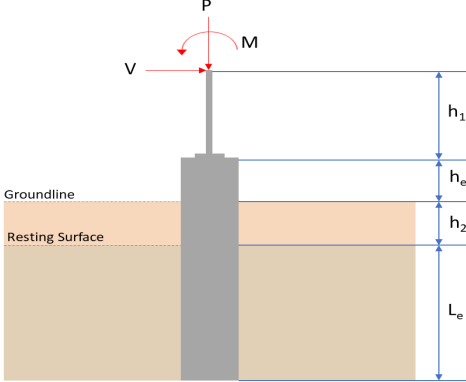
| REFERENCES     | CALCULATIONS  | RESULTS                                    |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
|----------------|---|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|--------|-------------|--------|--------|-------------|--------|--------|---------------|--------|--------|---------------|--------|--------|--|
|                | <p><b>SkyCiv Foundation Design</b><br/>Pile Foundation</p> <p><b>Design Information :</b><br/>Design code : IBC 2021 (International Building Code)<br/>Unit System : Imperial</p>   |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
|                | <p><b>Pile Input</b></p>  <p><b>Geometry</b><br/>Pile shape: rectangular<br/><math>b = 48</math> in - Pile width<br/><math>D = 48</math> in - Pile depth<br/><math>L = 6.75</math> ft - Total pile length<br/><math>h_1 = 0</math> ft - Lateral load height from the top of the pile,<br/><math>h_2 = 0</math> ft - Depth to resting surface<br/><math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>8.028</td> <td>12.007</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-3.385</td> <td>-5.664</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>-0.355</td> <td>-0.549</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>-0.879</td> <td>-1.333</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>33.028</td> <td>55.380</td> </tr> </tbody> </table> <p><b>Material Properties</b><br/><math>f'_{ck} = 3</math> ksi - Concrete strength,</p> | Layer                                      | Label                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | $P$ (kip) | 8.028 | 12.007 | $V_x$ (kip) | -3.385 | -5.664 | $V_z$ (kip) | -0.355 | -0.549 | $M_x$ (kipft) | -0.879 | -1.333 | $M_z$ (kipft) | 33.028 | 55.380 |  |
| Layer          | Label   | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel   | 2000.000                                   | 150.000                                     |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| Load Component | ASD   | LRFD                                       |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $P$ (kip)      | 8.028   | 12.007                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $V_x$ (kip)    | -3.385  | -5.664                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $V_z$ (kip)    | -0.355  | -0.549                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $M_x$ (kipft)  | -0.879  | -1.333                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $M_z$ (kipft)  | 33.028  | 55.380                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
|                | <p><b>Required depth to resist lateral loads (ASD)</b><br/><math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b><br/><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-3.385 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.53901 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$  |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |

$$M_o = \frac{(33.028 \text{ kipft}) + ((-3.385 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.2592 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.0755 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.355 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.056529 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.879 \text{ kipft}) + ((-0.355 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.13997 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.7422 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.0755 \text{ ft}), (1.7422 \text{ ft})]$$

$$L_{e,req} = 6.075 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (6.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 6.75 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.075 \text{ ft})}{(6.75 \text{ ft})}$$

$$\text{Ratio} = 0.9$$

Status: **PASS**  
Ratio: **0.900**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(8.028 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.50175 \text{ kip/ft}^2$$

$$q = 0.50175 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.50175 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.25088$$

Status: **PASS**  
Ratio: **0.250**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.6875$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.53901 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.2592 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.2592 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (5.2592 \text{ kipft/ft})) + (4 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.6775 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.2592 \text{ kipft/ft})) + (3 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 \times [(3 \times (5.2592 \text{ kipft/ft})) + (2 \times (-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = 0.19839 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.2592 \text{ kipft/ft})) + ((-0.53901 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = 0.90603 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.6775 \text{ ft})}{2}$$

$$p_a = 0.35082 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.19839 \text{ kip/ft}^2)}{(0.35082 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.5655$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,

Status: **PASS**  
Ratio: **0.570**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.90603 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.89484$$

Status: **PASS**  
Ratio: **0.890**

**Considering z-direction:**

$H_o = -0.056529 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.13997 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.13997 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.056529 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.13997 \text{ kipft/ft})) + (4 \times (-0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.8628 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (0.13997 \text{ kipft/ft})) + (3 \times (-0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 [(3 \times (0.13997 \text{ kipft/ft})) + (2 \times (-0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = -0.016403 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 [(2 \times (0.13997 \text{ kipft/ft})) + ((-0.056529 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = -0.013384 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.8628 \text{ ft})}{2}$$

$$p_a = 0.36471 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(-0.016403 \text{ kip/ft}^2)}{(0.36471 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.044976$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**  
Ratio: **-0.040**

$$\text{Ratio} = \frac{(-0.013384 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.013218$$

Status: **PASS**  
Ratio: **-0.010**

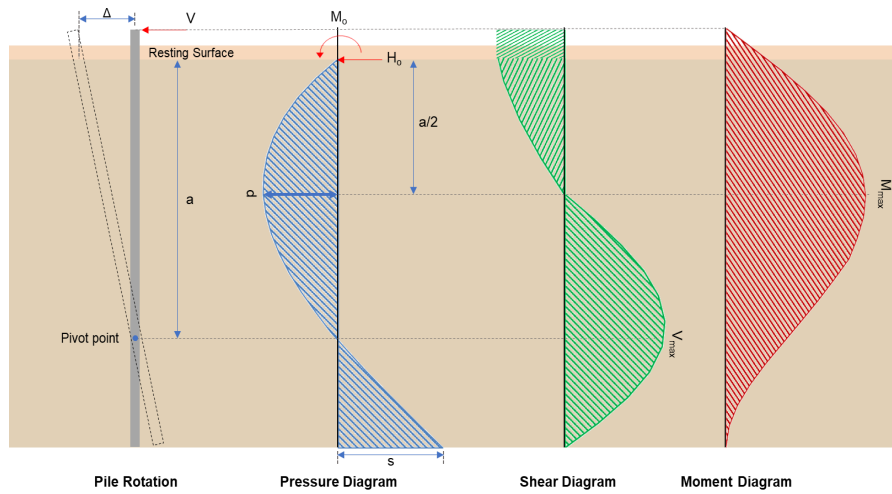

### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-5.664 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.90191 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(55.38 \text{ kipft}) + ((-5.664 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 8.8185 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(8.8185 \text{ kipft/ft})}{(-0.90191 \text{ kip/ft})}$$

$$E = 9.7775 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (8.8185 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.90191 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (8.8185 \text{ kipft/ft})) + (4 \times (-0.90191 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.6773 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.90191 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (9.7775 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.6773 \text{ ft})}{(6.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (9.7775 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.6773 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 11.626 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.90191 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(9.7775 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.6773 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (9.7775 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.6773 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (9.7775 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.6773 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 37.031 \text{ kipft}$$

**Shear force and Bending moment (z-direction, LRFD)**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.549 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.08742 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(1.333 \text{ kipft}) + ((-0.549 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.21226 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.21226 \text{ kipft/ft})}{(-0.08742 \text{ kip/ft})}$$

$$E = 2.4281 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.21226 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.08742 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.21226 \text{ kipft/ft})) + (4 \times (-0.08742 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.8654 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.08742 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.4281 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.8654 \text{ ft})}{(6.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (2.4281 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.8654 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.45675 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.08742 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(2.4281 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.8654 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.4281 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.8654 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (2.4281 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.8654 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 1.3319 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(12.007 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -101.86 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-101.86 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: 14 - #5 (0.625 in)

Status: **PASS**  
Ratio: **0.970**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(12.007 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0037717$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 12.007 \text{ kip} \rightarrow 12007 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(12007 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 131.4 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (131.4 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 131.4 \text{ kip}$$

|                 |   |   |
|-----------------|---|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yties} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((131.4 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.49 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 11.626 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(11.626 \text{ kip})}{(118.49 \text{ kip})}$ $\text{Ratio} = 0.098117$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.45675 \text{ kip}</math> - Maximum shear force in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.45675 \text{ kip})}{(118.49 \text{ kip})}$ $\text{Ratio} = 0.0038548$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.100</b></p> <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
|                 | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$  |   |

|                  |   |   |
|------------------|---|---|
| <p>14.5.2.1b</p> | <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/> Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p><b>Considering x-direction:</b><br/> <math>M_{max} = 37.031\text{kipft}</math> - Maximum moment in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(37.031\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.13544$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.140</b></p> |
|                  | <p><b>Considering z-direction:</b><br/> <math>M_{max} = 1.3319\text{kipft}</math> - Maximum moment in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(1.3319\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.0048711$  | <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
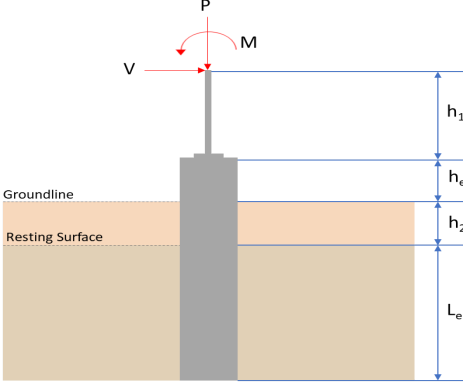
| REFERENCES     | CALCULATIONS   | RESULTS                                    |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
|----------------|--|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|--------|-------------|--------|--------|-------------|--------|--------|---------------|--------|--------|---------------|--------|--------|--|
|                | <p><b>SkyCiv Foundation Design</b><br/>Pile Foundation</p> <p><b>Design Information :</b><br/>Design code : IBC 2021 (International Building Code)<br/>Unit System : Imperial</p>  |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
|                | <p><b>Pile Input</b></p>  <p><b>Geometry</b><br/>Pile shape: rectangular<br/><math>b = 48</math> in - Pile width<br/><math>D = 48</math> in - Pile depth<br/><math>L = 7</math> ft - Total pile length<br/><math>h_1 = 0</math> ft - Lateral load height from the top of the pile,<br/><math>h_2 = 0</math> ft - Depth to resting surface<br/><math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1285 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>9.859</td> <td>14.763</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-4.240</td> <td>-7.080</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>-0.023</td> <td>-0.036</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>-0.055</td> <td>-0.089</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>41.034</td> <td>69.368</td> </tr> </tbody> </table> <p><b>Material Properties</b><br/><math>f'_{ck} = 3</math> ksi - Concrete strength,</p> | Layer                                      | Label                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | $P$ (kip) | 9.859 | 14.763 | $V_x$ (kip) | -4.240 | -7.080 | $V_z$ (kip) | -0.023 | -0.036 | $M_x$ (kipft) | -0.055 | -0.089 | $M_z$ (kipft) | 41.034 | 69.368 |  |
| Layer          | Label  | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel  | 2000.000                                   | 150.000                                     |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| Load Component | ASD  | LRFD                                       |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $P$ (kip)      | 9.859  | 14.763                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $V_x$ (kip)    | -4.240   | -7.080                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $V_z$ (kip)    | -0.023   | -0.036                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $M_x$ (kipft)  | -0.055   | -0.089                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
| $M_z$ (kipft)  | 41.034   | 69.368                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |
|                | <p><b>Required depth to resist lateral loads (ASD)</b><br/><math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b><br/><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.24 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.67516 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$  |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |        |        |               |        |        |               |        |        |  |

$$M_o = \frac{(41.034 \text{ kipft}) + ((-4.24 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.5341 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.4081 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.023 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0036624 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.055 \text{ kipft}) + ((-0.023 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.008758 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.80609 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.4081 \text{ ft}), (0.80609 \text{ ft})]$$

$$L_{e,req} = 6.408 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_c - h_2$$

$$L_e = (7 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.408 \text{ ft})}{(7 \text{ ft})}$$

$$\text{Ratio} = 0.91543$$

Status: **PASS**  
Ratio: **0.920**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(9.859 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.6161875 \text{ kip/ft}^2$$

$$q = 0.01019 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.61619 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.30809$$

Status: **PASS**  
Ratio: **0.310**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.75$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.67516 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 6.5341 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.5341 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (6.5341 \text{ kipft/ft})) + (4 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 4.8564 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (6.5341 \text{ kipft/ft})) + (3 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))]^2}{(7 \text{ ft})^2 \times [(3 \times (6.5341 \text{ kipft/ft})) + (2 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))]}$$

$$p = 0.21563 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (6.5341 \text{ kipft/ft})) + ((-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))]}{(7 \text{ ft})^2}$$

$$s = 1.0215 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.8564 \text{ ft})}{2}$$

$$p_a = 0.36423 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.21563 \text{ kip/ft}^2)}{(0.36423 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59202$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,

Status: **PASS**  
Ratio: **0.590**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7 \text{ ft})$$

$$p_s = 1.05 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(1.0215 \text{ kip/ft}^2)}{(1.05 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.97283$$

Status: **PASS**  
Ratio: **0.970**

**Considering z-direction:**

$H_o = -0.0036624 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.008758 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.008758 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-0.0036624 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (0.008758 \text{ kipft/ft})) + (4 \times (-0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 5.0524 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.008758 \text{ kipft/ft})) + (3 \times (-0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))]^2}{(7 \text{ ft})^2 \times [(3 \times (0.008758 \text{ kipft/ft})) + (2 \times (-0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))]}$$

$$p = -0.0010738 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.008758 \text{ kipft/ft})) + ((-0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))]}{(7 \text{ ft})^2}$$

$$s = -0.00099441 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(5.0524 \text{ ft})}{2}$$

$$p_a = 0.37893 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(-0.0010738 \text{ kip/ft}^2)}{(0.37893 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.0028338$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7 \text{ ft})$$

$$p_s = 1.05 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**  
Ratio: **0.000**

$$Ratio = \frac{(-0.0009441 \text{ kip/ft}^2)}{(1.05 \text{ kip/ft}^2)}$$

$$Ratio = -0.00094706$$

Status: **PASS**  
Ratio: **0.000**

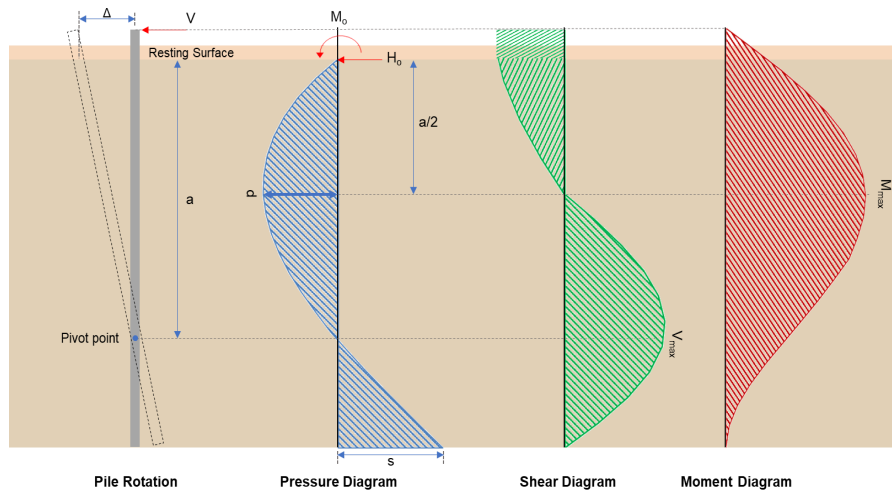

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.08 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.1274 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_x H)}{1.57 D}$$

$$M_o = \frac{(69.368 \text{ kipft}) + ((-7.08 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 11.046 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(11.046 \text{ kipft/ft})}{(-1.1274 \text{ kip/ft})}$$

$$E = 9.7977 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_c) + (3 H_o L_c^2)}{(6 M_o) + (4 H_o L_c)}$$

$$a = \frac{(4 \times (11.046 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-1.1274 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (11.046 \text{ kipft/ft})) + (4 \times (-1.1274 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 4.8549 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_c} + 3 \right) \left( \frac{a}{L_c} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_c} + 2 \right) \left( \frac{a}{L_c} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1274 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(4.8549 \text{ ft})}{(7 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(4.8549 \text{ ft})}{(7 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 14.142 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-1.1274 \text{ kip/ft}) \times (48 \text{ in}) \times (7 \text{ ft})) \times \left[ \left( \frac{(9.7977 \text{ ft})}{(7 \text{ ft})} + \frac{(4.8549 \text{ ft})}{2 \times (7 \text{ ft})} \right) - \left[ \left( \frac{4 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(4.8549 \text{ ft})}{2 \times (7 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(4.8549 \text{ ft})}{2 \times (7 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 46.641 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.036 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0057325 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.089 \text{ kipft}) + ((-0.036 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.014172 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.014172 \text{ kipft/ft})}{(-0.0057325 \text{ kip/ft})}$$

$$E = 2.4722 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.014172 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-0.0057325 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (0.014172 \text{ kipft/ft})) + (4 \times (-0.0057325 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 5.048 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 + 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0057325 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(5.048 \text{ ft})}{(7 \text{ ft})} \right)^2 + 4 \times \left( \frac{3 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(5.048 \text{ ft})}{(7 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.02969 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-0.0057325 \text{ kip/ft}) \times (48 \text{ in}) \times (7 \text{ ft})) \times \left[ \left( \frac{(2.4722 \text{ ft})}{(7 \text{ ft})} + \frac{(5.048 \text{ ft})}{2 \times (7 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(5.048 \text{ ft})}{2 \times (7 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(5.048 \text{ ft})}{2 \times (7 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 0.089661 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(14.763 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -101.77 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-101.77 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2

Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1

$s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(14.763 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0046375$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 14.763 \text{ kip} \rightarrow 14763 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(14763 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 131.76 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (131.76 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 131.76 \text{ kip}$$

|                 |   |   |
|-----------------|---|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((131.76 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.73 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 14.142 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(14.142 \text{ kip})}{(118.73 \text{ kip})}$ $\text{Ratio} = 0.11912$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.02969 \text{ kip}</math> - Maximum shear force in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.02969 \text{ kip})}{(118.73 \text{ kip})}$ $\text{Ratio} = 0.00025007$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.120</b></p> <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
|                 | <p><b>Flexural Strength (ACI 318-19, LFRD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$  |   |

|                  |   |   |
|------------------|---|---|
| <p>14.5.2.1b</p> | <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/>         Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p><b>Considering x-direction:</b><br/> <math>M_{max} = 46.641\text{kipft}</math> - Maximum moment in the x-direction,<br/>         Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(46.641\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.17058$ | <p>Status: <b>PASS</b><br/>         Ratio: <b>0.170</b></p> |
|                  | <p><b>Considering z-direction:</b><br/> <math>M_{max} = 0.089661\text{kipft}</math> - Maximum moment in the z-direction,<br/>         Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.089661\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.00032792$   | <p>Status: <b>PASS</b><br/>         Ratio: <b>0.000</b></p> |
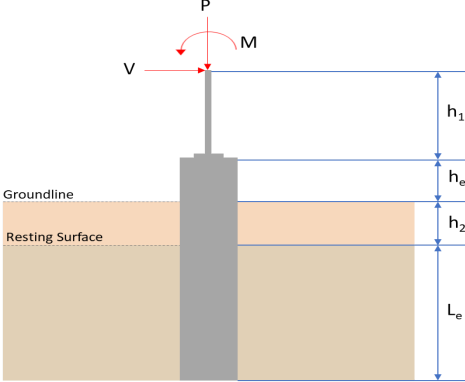
| REFERENCES     | CALCULATIONS   | RESULTS                                    |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
|----------------|--|--|---|--|---|---|---|----------|---------|----------------|-----|------|-----------|-------|--------|-------------|--------|--------|-------------|-------|-------|---------------|-------|-------|---------------|--------|--------|--|
|                | <p><b>SkyCiv Foundation Design</b><br/>Pile Foundation</p> <p><b>Design Information :</b><br/>Design code : IBC 2021 (International Building Code)<br/>Unit System : Imperial</p>  |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
|                | <p><b>Pile Input</b></p>  <p><b>Geometry</b></p> <p>Pile shape: rectangular<br/> <math>b = 48</math> in - Pile width<br/> <math>D = 48</math> in - Pile depth<br/> <math>L = 7</math> ft - Total pile length<br/> <math>h_1 = 0</math> ft - Lateral load height from the top of the pile,<br/> <math>h_2 = 0</math> ft - Depth to resting surface<br/> <math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1193"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>9.859</td> <td>14.763</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-4.240</td> <td>-7.080</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>0.023</td> <td>0.036</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>0.055</td> <td>0.089</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>41.034</td> <td>69.368</td> </tr> </tbody> </table> <p><b>Material Properties</b></p> <p><math>f'_{ck} = 3</math> ksi - Concrete strength,</p> | Layer                                      | Label                                       | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) | 1 | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000 | 150.000 | Load Component | ASD | LRFD | $P$ (kip) | 9.859 | 14.763 | $V_x$ (kip) | -4.240 | -7.080 | $V_z$ (kip) | 0.023 | 0.036 | $M_x$ (kipft) | 0.055 | 0.089 | $M_z$ (kipft) | 41.034 | 69.368 |  |
| Layer          | Label  | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| 1              | Sand, silty sand, clayey sand, silty gravel & clayey gravel  | 2000.000                                   | 150.000                                     |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| Load Component | ASD  | LRFD                                       |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $P$ (kip)      | 9.859  | 14.763                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $V_x$ (kip)    | -4.240   | -7.080                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $V_z$ (kip)    | 0.023  | 0.036                                      |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $M_x$ (kipft)  | 0.055  | 0.089                                      |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
| $M_z$ (kipft)  | 41.034   | 69.368                                     |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |
|                | <p><b>Required depth to resist lateral loads (ASD)</b></p> <p><math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b></p> <p><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-4.24 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.67516 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$  |  |   |  |   |   |   |          |         |                |     |      |           |       |        |             |        |        |             |       |       |               |       |       |               |        |        |  |

$$M_o = \frac{(41.034 \text{ kipft}) + ((-4.24 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.5341 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 6.4081 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.023 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0036624 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.055 \text{ kipft}) + ((0.023 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.008758 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.97044 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(6.4081 \text{ ft}), (0.97044 \text{ ft})]$$

$$L_{e,req} = 6.408 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_c - h_2$$

$$L_e = (7 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 7 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(6.408 \text{ ft})}{(7 \text{ ft})}$$

$$\text{Ratio} = 0.91543$$

Status: **PASS**  
Ratio: **0.920**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(9.859 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.61619 \text{ kip/ft}^2$$

$$q = 0.01019 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.61619 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.30809$$

Status: **PASS**  
Ratio: **0.310**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.75$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.67516 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 6.5341 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.5341 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (6.5341 \text{ kipft/ft})) + (4 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 4.8564 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (6.5341 \text{ kipft/ft})) + (3 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))]^2}{(7 \text{ ft})^2 \times [(3 \times (6.5341 \text{ kipft/ft})) + (2 \times (-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))]}$$

$$p = 0.21563 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (6.5341 \text{ kipft/ft})) + ((-0.67516 \text{ kip/ft}) \times (7 \text{ ft}))]}{(7 \text{ ft})^2}$$

$$s = 1.0215 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.8564 \text{ ft})}{2}$$

$$p_a = 0.36423 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.21563 \text{ kip/ft}^2)}{(0.36423 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59202$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,


Status: **PASS**  
Ratio: **0.590**

|  |   |  |
|--|---|--|
|  | $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7 \text{ ft})$ $p_s = 1.05 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(1.0215 \text{ kip/ft}^2)}{(1.05 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.97283$  | Status: <b>PASS</b><br>Ratio: <b>0.970</b> |
|  | <p><b>Considering z-direction:</b></p> <p><math>H_o = 0.0036624 \text{ kip/ft}</math> - Lateral force per length of pile,<br/> <math>M_o = 0.008758 \text{ kipft/ft}</math> - Overturning moment per length of pile,<br/> <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.008758 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (0.0036624 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (0.008758 \text{ kipft/ft})) + (4 \times (0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))}$ $a = 5.0524 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.008758 \text{ kipft/ft})) + (3 \times (0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))]^2}{(7 \text{ ft})^2 \times [(3 \times (0.008758 \text{ kipft/ft})) + (2 \times (0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))]}$ $p = 0.0024734 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.008758 \text{ kipft/ft})) + ((0.0036624 \text{ kip/ft}) \times (7 \text{ ft}))]}{(7 \text{ ft})^2}$ $s = 0.005284 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(5.0524 \text{ ft})}{2}$ $p_a = 0.37893 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.0024734 \text{ kip/ft}^2)}{(0.37893 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.0065273$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (7 \text{ ft})$ $p_s = 1.05 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ | Status: <b>PASS</b><br>Ratio: <b>0.010</b> |

$$Ratio = \frac{(0.005284 \text{ kip/ft}^2)}{(1.05 \text{ kip/ft}^2)}$$

$$Ratio = 0.0050324$$

Status: **PASS**  
Ratio: **0.010**

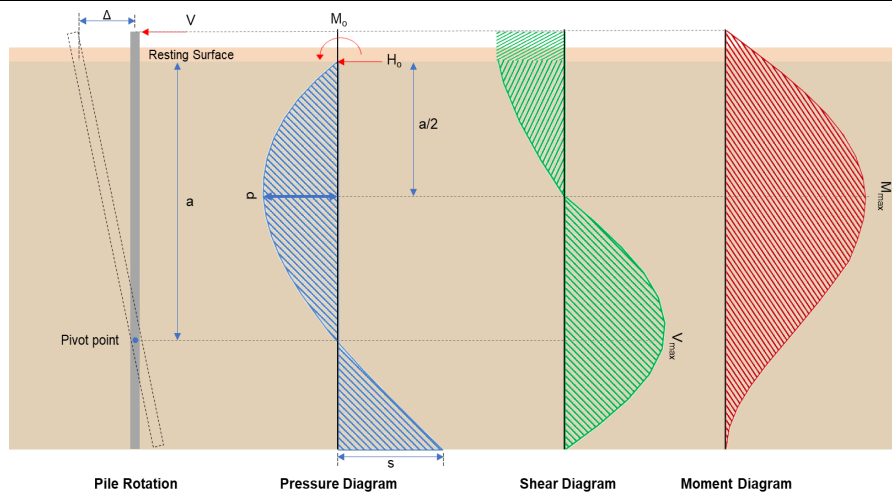

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-7.08 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.1274 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(69.368 \text{ kipft}) + ((-7.08 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 11.046 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(11.046 \text{ kipft/ft})}{(-1.1274 \text{ kip/ft})}$$

$$E = 9.7977 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (11.046 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-1.1274 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (11.046 \text{ kipft/ft})) + (4 \times (-1.1274 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 4.8549 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1274 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(4.8549 \text{ ft})}{(7 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(4.8549 \text{ ft})}{(7 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 14.142 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-1.1274 \text{ kip/ft}) \times (48 \text{ in}) \times (7 \text{ ft})) \times \left[ \left( \frac{(9.7977 \text{ ft})}{(7 \text{ ft})} + \frac{(4.8549 \text{ ft})}{2 \times (7 \text{ ft})} \right) - \left[ \left( \frac{4 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(4.8549 \text{ ft})}{2 \times (7 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (9.7977 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(4.8549 \text{ ft})}{2 \times (7 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 46.641 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.036 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0057325 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.089 \text{ kipft}) + ((0.036 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.014172 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.014172 \text{ kipft/ft})}{(0.0057325 \text{ kip/ft})}$$

$$E = 2.4722 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.014172 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (0.0057325 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (0.014172 \text{ kipft/ft})) + (4 \times (0.0057325 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 5.048 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 + 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0057325 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(5.048 \text{ ft})}{(7 \text{ ft})} \right)^2 + 4 \times \left( \frac{3 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(5.048 \text{ ft})}{(7 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.02969 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((0.0057325 \text{ kip/ft}) \times (48 \text{ in}) \times (7 \text{ ft})) \times \left[ \left( \frac{(2.4722 \text{ ft})}{(7 \text{ ft})} + \frac{(5.048 \text{ ft})}{2 \times (7 \text{ ft})} \right) - \left[ \left( \frac{4 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left( \frac{(5.048 \text{ ft})}{2 \times (7 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (2.4722 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left( \frac{(5.048 \text{ ft})}{2 \times (7 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 0.089661 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(14.763 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -101.77 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-101.77 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(14.763 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0046375$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 14.763 \text{ kip} \rightarrow 14763 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(14763 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 131.76 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (131.76 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 131.76 \text{ kip}$$

|                 |   |   |
|-----------------|---|---|
| <p>22.5.1.2</p> | <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,<br/> <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((131.76 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.73 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 14.142 \text{ kip}</math> - Maximum shear force in the x-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(14.142 \text{ kip})}{(118.73 \text{ kip})}$ $\text{Ratio} = 0.11912$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.02969 \text{ kip}</math> - Maximum shear force in the z-direction,<br/> Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.02969 \text{ kip})}{(118.73 \text{ kip})}$ $\text{Ratio} = 0.00025007$ | <p>Status: <b>PASS</b><br/> Ratio: <b>0.120</b></p> <p>Status: <b>PASS</b><br/> Ratio: <b>0.000</b></p> |
|                 | <p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$  |   |

|                  |   |   |
|------------------|---|---|
| <p>14.5.2.1b</p> | <p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),<br/>         Allowable flexural strength:<br/> <math>M_n</math> shall be the lesser of:<br/> <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore,<br/> <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p><b>Considering x-direction:</b><br/> <math>M_{max} = 46.641\text{kipft}</math> - Maximum moment in the x-direction,<br/>         Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(46.641\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.17058$ | <p>Status: <b>PASS</b><br/>         Ratio: <b>0.170</b></p> |
|                  | <p><b>Considering z-direction:</b><br/> <math>M_{max} = 0.089661\text{kipft}</math> - Maximum moment in the z-direction,<br/>         Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.089661\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.00032792$   | <p>Status: <b>PASS</b><br/>         Ratio: <b>0.000</b></p> |