

# Your Project Calculations



Project Name: Frederickson\_Res\_23

S3D Model Link:

[https://platform.skyciv.com/structural?preload\\_name=Frederickson\\_Res\\_23&preload\\_path=Shared%20Enterprise%20Folder/MT\\_Solar\\_Projects/4\\_2023](https://platform.skyciv.com/structural?preload_name=Frederickson_Res_23&preload_path=Shared%20Enterprise%20Folder/MT_Solar_Projects/4_2023)

Public Model Link:

[https://platform.skyciv.com/structural-viewer?project\\_id=ReUQjCH5wDcU6WEyIBIPuWHCmrPU1xxzBCedStErfFHsg1p4HhBsgtAVC4nTP7Ww](https://platform.skyciv.com/structural-viewer?project_id=ReUQjCH5wDcU6WEyIBIPuWHCmrPU1xxzBCedStErfFHsg1p4HhBsgtAVC4nTP7Ww)

## Array Specification

<b>Product:</b>	Beam
<b>Unique ID:</b>	4P-19.75-6TOP-SD-45-L-3Hx10W-5LKJ
<b>Duty Classification:</b>	SD
<b>Module Width:</b>	44.65 in
<b>Module Length:</b>	89.53in
<b>Number of Rows:</b>	3
<b>Number of Columns:</b>	10
<b>Total Number of Modules:</b>	30
<b>Desired Tilt Angle:</b>	35
<b>Front Edge Clearance:</b>	3
<b>Total Array Height at Tilt:</b>	9.44 ft
<b>Total Frame Length:</b>	74.25 ft
<b>Frame Weight:</b>	2421 lbs
<b>Array Dimensions N/S:</b>	11.29 ft
<b>Array Dimensions E/W:</b>	75.44 ft
<b>Rail Length:</b>	135.45 in
<b>Rail Spacing:</b>	3.73 ft
<b>Rail Check:</b>	Not Checked

## Support Specifications

<b>Pole Size:</b>	6in Pipe Sch 40
<b>Pole Length above Grade:</b>	6.24 ft
<b>Number of Poles:</b>	4
<b>Pole Spacing:</b>	19.75 ft

## Foundation Specifications

<b>Foundation Type:</b>	Square
<b>Foundation Dimensions:</b>	48 x 48 in
<b>Foundation Depth (below grade):</b>	Pile 1: 5.00 ft Pile 2: 5.25 ft Pile 3: 5.25 ft Pile 4: 5.00 ft
<b>Foundation Volume:</b>	12.148 y <sup>3</sup>
<b>Foundation Result:</b>	PASSED

## Site Info

<b>Risk Category:</b>	I
<b>Exposure:</b>	C
<b>Soil Classification:</b>	sand
<b>Site Location:</b>	6604 Canal Rd, Manhattan, MT 59741, USA
<b>Wind Speed:</b>	100 mph
<b>Snow Load:</b>	33 psf
<b>Design Uplift Pressure:</b>	Multiple pressures
<b>Design Downforce Pressure:</b>	Multiple pressures
<b>Design Snow Pressure:</b>	0.010404 ksf



### Design Disclaimer


This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.


### AutoDesigner Input

```
{
  "wind_speed_override": null,
  "snow_load_override": null,
  "direct_snow_load": false,
  "product_type": "Beam",
  "project_id": "Frederickson_Res_23",
  "site_address": "6604 Canal Rd, Manhattan, MT 59741, USA",
  "module_width": 44.65,
  "module_length": 89.53,
  "number_rows": 3,
  "number_columns": 10,
  "pole_mount_section": "4_40",
  "core_pipe_width": 65,
  "core_pipe_section": "2_40",
  "adjuster_section": "2_40",
  "core_beam_height": 65,
  "core_beam_section": "HSS3x2x1/8",
  "main_pipe_section": "2_12GA",
  "pole_spacing": 15,
  "tilt_angle": 35,
  "ground_clearance": 3,
  "risk_category": "I",
  "exposure_category": "C",
  "frame_duty_override": "auto",
  "pole_override": "auto",
  "soil_type": "sand",
  "foundation_type": "Square",
  "foundation_size": 48,
  "check_rails": false
}
```


### Design Notes:

- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Design and Sizing is approximate only

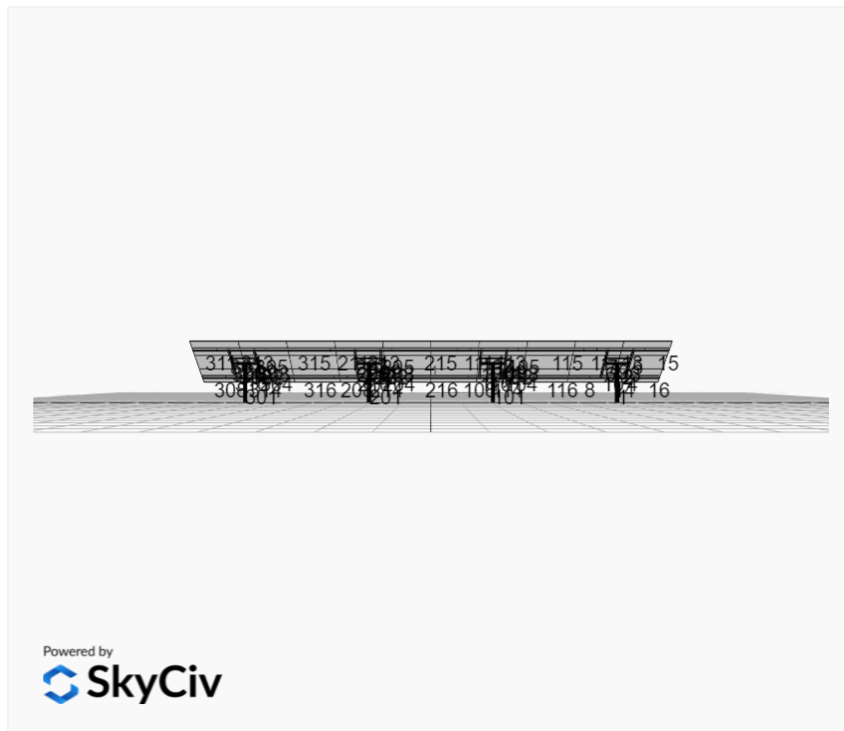





Powered by  
 SkyCiv


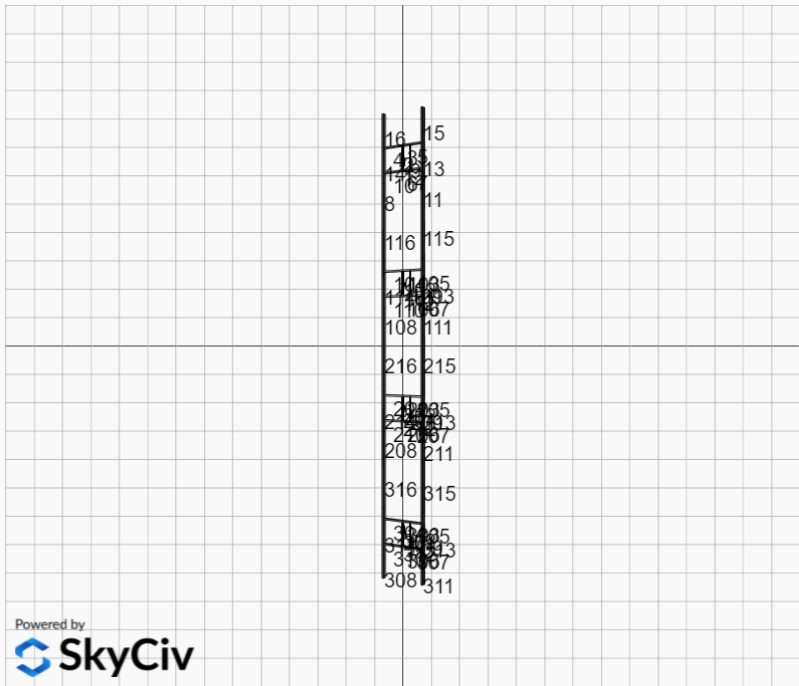



Powered by  
 SkyCiv



## FEM Results (Envelope Worst Case for each member)

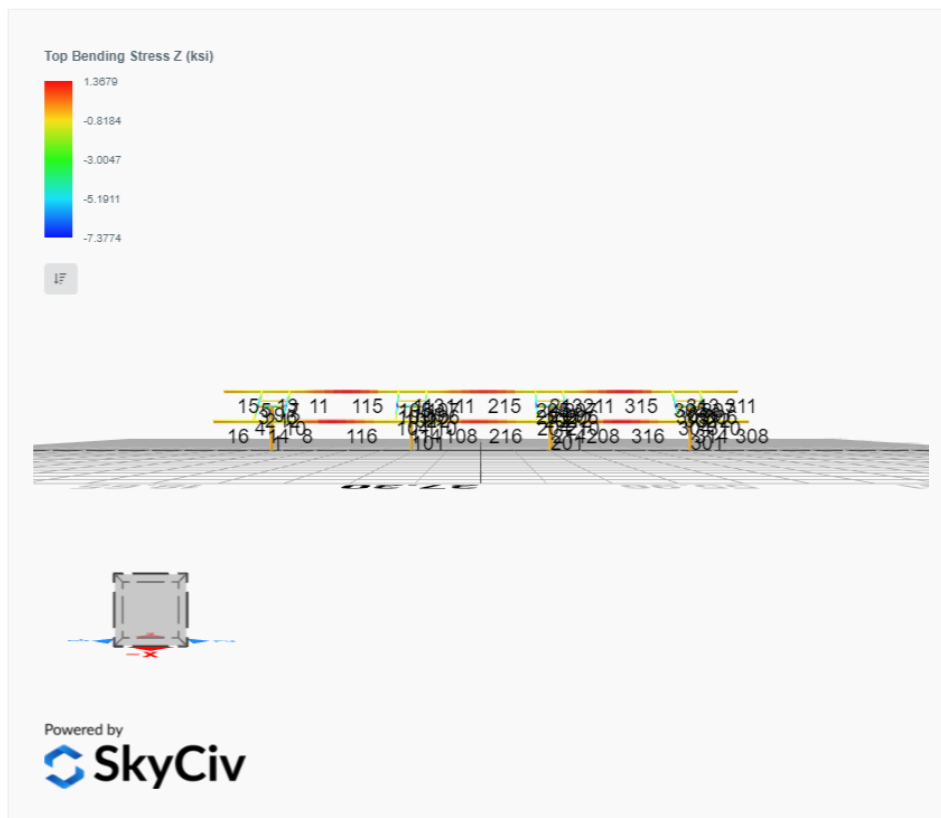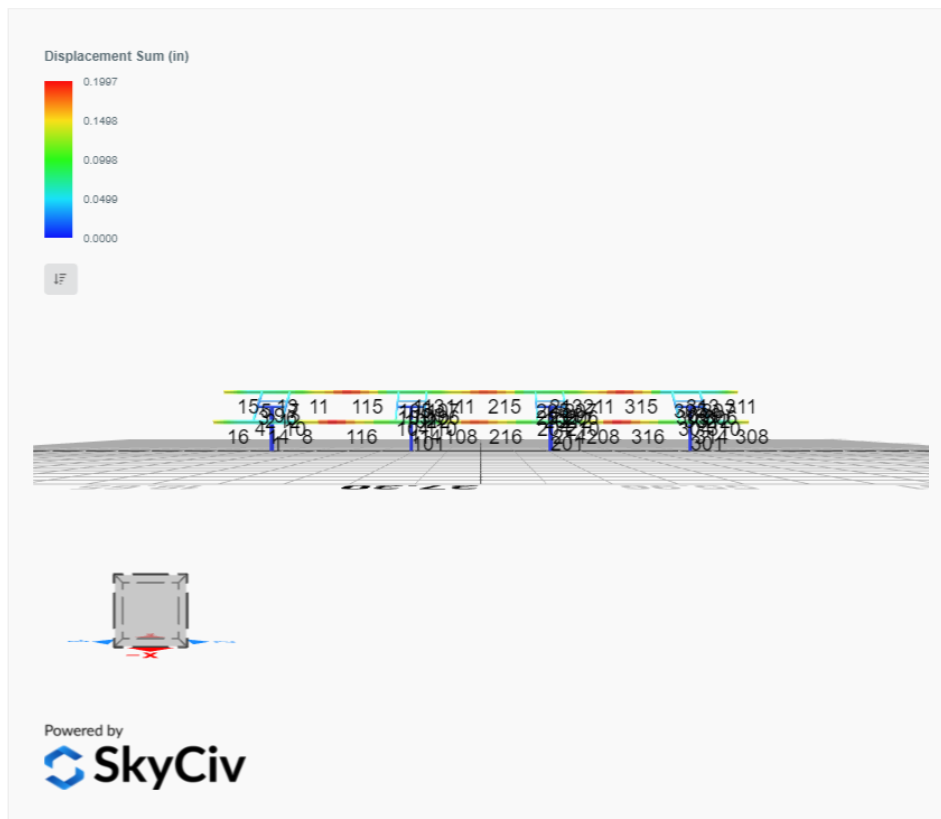

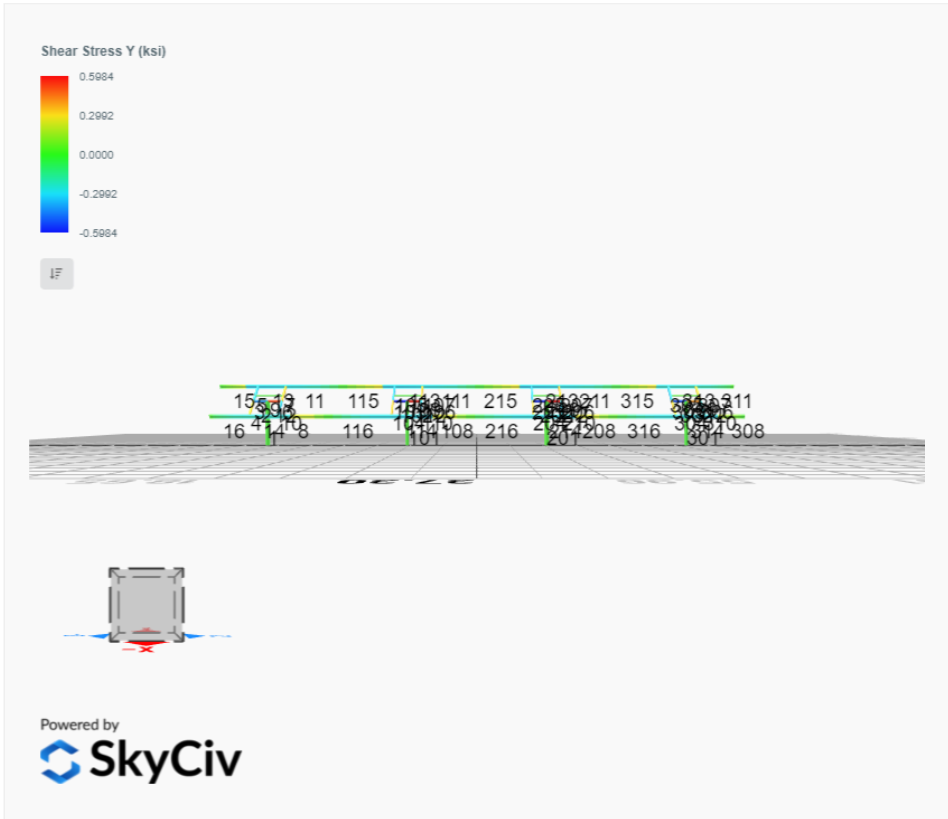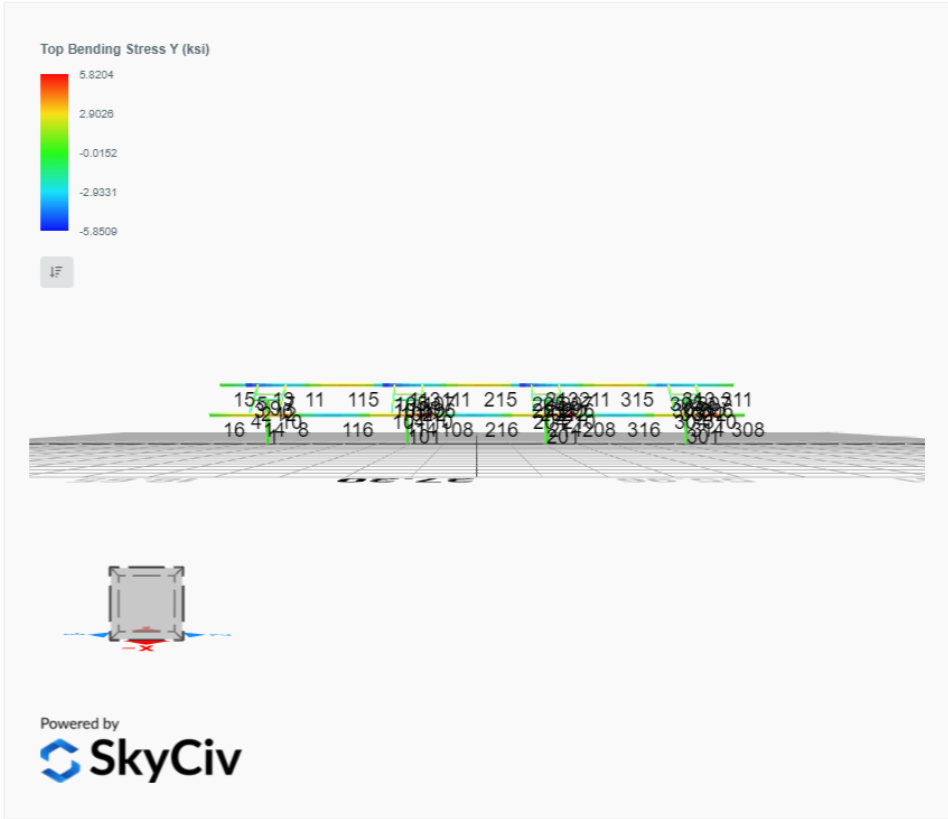

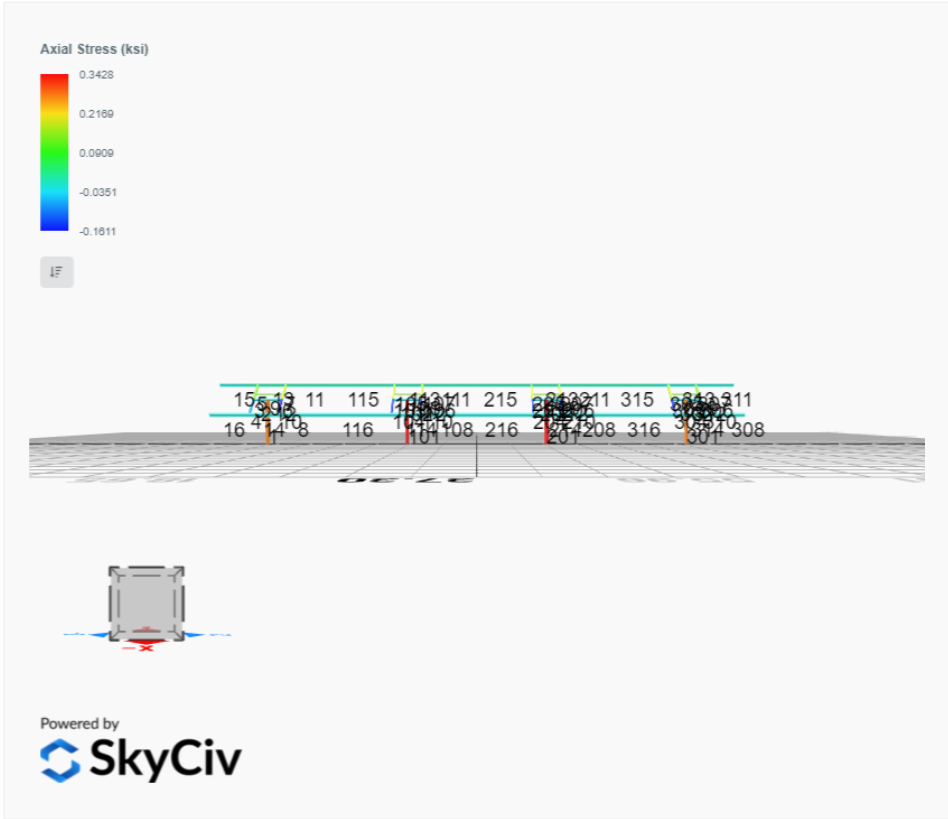

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0066	1.5109	0.0376	0.0516	-0.0135	-0.0202
ULS: 2. D + L	0.0066	1.5109	0.0376	0.0516	-0.0135	-0.0202
ULS: 3. D + (S or Lr or R)	0.0153	3.1687	0.0880	0.1210	-0.0319	-0.0676
ULS: 3. D + (S or Lr or R)	0.0066	1.5109	0.0376	0.0516	-0.0135	-0.0202
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0131	2.7542	0.0754	0.1036	-0.0273	-0.0557
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0066	1.5109	0.0376	0.0516	-0.0135	-0.0202
ULS: 5b. D + 0.7E	0.0066	1.5109	0.0376	0.0516	-0.0135	-0.0202
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0131	2.7542	0.0754	0.1036	-0.0273	-0.0557
ULS: 8. 0.6D + 0.7E	0.0039	0.9065	0.0226	0.0310	-0.0081	-0.0121
ULS: 5a. D + 0.6W_Wind downforce Case A only	-1.9203	4.2506	0.1398	0.1708	-0.2137	12.3737
ULS: 5a. D + 0.6W_Wind downforce Case B only	-1.9203	4.2506	0.1398	0.1708	-0.2137	12.3737
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.6318	-0.8007	-0.0473	-0.0475	0.1531	-10.1054
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.3672	-0.4168	-0.0406	-0.0390	0.1447	-13.9700
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.4320	4.8090	0.1520	0.1930	-0.1774	9.2397
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.4320	4.8090	0.1520	0.1930	-0.1774	9.2397
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.2321	1.0205	0.0117	0.0293	0.0977	-7.6197
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.0336	1.3085	0.0167	0.0357	0.0914	-10.5181
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.4386	3.5657	0.1142	0.1410	-0.1637	9.2752
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.4386	3.5657	0.1142	0.1410	-0.1637	9.2752
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.2255	-0.2228	-0.0261	-0.0227	0.1115	-7.5841
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.0271	0.0651	-0.0211	-0.0163	0.1052	-10.4826
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-1.9229	3.6463	0.1247	0.1501	-0.2083	12.3817
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-1.9229	3.6463	0.1247	0.1501	-0.2083	12.3817
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.6292	-1.4051	-0.0624	-0.0681	0.1585	-10.0974
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.3646	-1.0212	-0.0557	-0.0597	0.1501	-13.9620

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value
Axial	7.2081
Shear X	-3.2114
Shear Z	0.2414
Moment X	0.2962
Moment Z	23.4834

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value
Axial	4.8090
Shear X	-1.9229
Shear Z	0.1520
Moment X	0.1930
Moment Z	13.9700

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0066	1.7026	-0.0036	-0.0049	0.0062	0.0582
ULS: 2. D + L	-0.0066	1.7026	-0.0036	-0.0049	0.0062	0.0582
ULS: 3. D + (S or Lr or R)	-0.0153	3.6161	-0.0085	-0.0115	0.0145	0.1166
ULS: 3. D + (S or Lr or R)	-0.0066	1.7026	-0.0036	-0.0049	0.0062	0.0582
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0131	3.1377	-0.0073	-0.0099	0.0124	0.1020
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0066	1.7026	-0.0036	-0.0049	0.0062	0.0582
ULS: 5b. D + 0.7E	-0.0066	1.7026	-0.0036	-0.0049	0.0062	0.0582
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0131	3.1377	-0.0073	-0.0099	0.0124	0.1020

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 8. 0.6D + 0.7E	-0.0039	1.0216	-0.0022	-0.0030	0.0037	0.0349
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.2289	4.8884	-0.0106	-0.0156	0.0097	14.2721
ULS: 5a. D + 0.6W_Wind downforce Case B only	-2.2289	4.8884	-0.0106	-0.0156	0.0097	14.2721
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.8690	-0.9855	0.0026	0.0044	0.0020	-11.4849
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.5501	-0.5361	-0.0028	-0.0016	0.0158	-15.7715
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.6799	5.5271	-0.0125	-0.0178	0.0151	10.7624
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.6799	5.5271	-0.0125	-0.0178	0.0151	10.7624
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3935	1.1216	-0.0027	-0.0029	0.0093	-8.5553
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1544	1.4587	-0.0067	-0.0074	0.0196	-11.7703
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.6733	4.0920	-0.0088	-0.0129	0.0089	10.7186
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.6733	4.0920	-0.0088	-0.0129	0.0089	10.7186
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.4001	-0.3135	0.0010	0.0021	0.0030	-8.5991
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1610	0.0236	-0.0030	-0.0025	0.0134	-11.8141
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.2262	4.2074	-0.0091	-0.0136	0.0073	14.2488
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-2.2262	4.2074	-0.0091	-0.0136	0.0073	14.2488
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.8716	-1.6666	0.0040	0.0064	-0.0005	-11.5082
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.5528	-1.2172	-0.0013	0.0003	0.0133	-15.7947

#### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value
Axial	8.3096
Shear X	-3.7159
Shear Z	-0.0182
Moment X	-0.0268
Moment Z	26.5167

#### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value
Axial	5.5271
Shear X	-2.2289
Shear Z	-0.0125
Moment X	-0.0178
Moment Z	15.7947

### Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

#### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0066	1.7026	0.0036	0.0049	-0.0062	0.0582
ULS: 2. D + L	-0.0066	1.7026	0.0036	0.0049	-0.0062	0.0582
ULS: 3. D + (S or Lr or R)	-0.0153	3.6161	0.0085	0.0115	-0.0145	0.1166
ULS: 3. D + (S or Lr or R)	-0.0066	1.7026	0.0036	0.0049	-0.0062	0.0582
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0131	3.1377	0.0073	0.0099	-0.0124	0.1020
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0066	1.7026	0.0036	0.0049	-0.0062	0.0582
ULS: 5b. D + 0.7E	-0.0066	1.7026	0.0036	0.0049	-0.0062	0.0582
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0131	3.1377	0.0073	0.0099	-0.0124	0.1020
ULS: 8. 0.6D + 0.7E	-0.0039	1.0216	0.0022	0.0030	-0.0037	0.0349
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.2289	4.8884	0.0106	0.0156	-0.0097	14.2721
ULS: 5a. D + 0.6W_Wind downforce Case B only	-2.2289	4.8884	0.0106	0.0156	-0.0097	14.2721
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.8690	-0.9855	-0.0026	-0.0044	-0.0020	-11.4849
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.5501	-0.5361	0.0028	0.0016	-0.0158	-15.7715
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.6799	5.5271	0.0125	0.0178	-0.0151	10.7624
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.6799	5.5271	0.0125	0.0178	-0.0151	10.7624
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.3935	1.1216	0.0027	0.0029	-0.0092	-8.5553
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1544	1.4587	0.0067	0.0074	-0.0196	-11.7703
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.6733	4.0920	0.0088	0.0129	-0.0088	10.7186
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.6733	4.0920	0.0088	0.0129	-0.0088	10.7186

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.4001	-0.3135	-0.0010	-0.0021	-0.0030	-8.5991
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.1610	0.0236	0.0030	0.0025	-0.0134	-11.8141
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.2262	4.2074	0.0091	0.0136	-0.0073	14.2488
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-2.2262	4.2074	0.0091	0.0136	-0.0073	14.2488
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.8716	-1.6666	-0.0040	-0.0064	0.0005	-11.5082
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.5528	-1.2172	0.0013	-0.0003	-0.0133	-15.7947

#### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value
Axial	8.3096
Shear X	-3.7159
Shear Z	0.0182
Moment X	0.0268
Moment Z	26.5167

#### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value
Axial	5.5271
Shear X	-2.2289
Shear Z	0.0125
Moment X	0.0178
Moment Z	15.7947

### Reaction Forces for Foundation 4 (Node ID#301), (kip, kip-ft)

#### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0066	1.5109	-0.0376	-0.0516	0.0135	-0.0202
ULS: 2. D + L	0.0066	1.5109	-0.0376	-0.0516	0.0135	-0.0202
ULS: 3. D + (S or Lr or R)	0.0153	3.1687	-0.0880	-0.1210	0.0319	-0.0676
ULS: 3. D + (S or Lr or R)	0.0066	1.5109	-0.0376	-0.0516	0.0135	-0.0202
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0131	2.7542	-0.0754	-0.1036	0.0273	-0.0557
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0066	1.5109	-0.0376	-0.0516	0.0135	-0.0202
ULS: 5b. D + 0.7E	0.0066	1.5109	-0.0376	-0.0516	0.0135	-0.0202
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0131	2.7542	-0.0754	-0.1036	0.0273	-0.0557
ULS: 8. 0.6D + 0.7E	0.0039	0.9065	-0.0226	-0.0310	0.0081	-0.0121
ULS: 5a. D + 0.6W_Wind downforce Case A only	-1.9203	4.2506	-0.1398	-0.1708	0.2137	12.3737
ULS: 5a. D + 0.6W_Wind downforce Case B only	-1.9203	4.2506	-0.1398	-0.1708	0.2137	12.3737
ULS: 5a. D + 0.6W_Wind uplift Case A only	1.6318	-0.8007	0.0473	0.0475	-0.1531	-10.1054
ULS: 5a. D + 0.6W_Wind uplift Case B only	1.3672	-0.4168	0.0406	0.0390	-0.1447	-13.9700
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.4320	4.8090	-0.1520	-0.1930	0.1774	9.2397
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.4320	4.8090	-0.1520	-0.1930	0.1774	9.2397
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.2321	1.0205	-0.0117	-0.0293	-0.0977	-7.6196
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.0336	1.3085	-0.0167	-0.0357	-0.0914	-10.5181
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.4386	3.5657	-0.1142	-0.1410	0.1637	9.2752
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-1.4386	3.5657	-0.1142	-0.1410	0.1637	9.2752
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.2255	-0.2228	0.0261	0.0227	-0.1115	-7.5841
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	1.0271	0.0651	0.0211	0.0163	-0.1052	-10.4826
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-1.9229	3.6463	-0.1247	-0.1501	0.2083	12.3817
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-1.9229	3.6463	-0.1247	-0.1501	0.2083	12.3817
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	1.6292	-1.4051	0.0624	0.0681	-0.1585	-10.0974
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	1.3646	-1.0212	0.0557	0.0597	-0.1501	-13.9620

#### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

#### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value
Axial	7.2081
Shear X	-3.2114
Shear Z	-0.2414
Moment X	-0.2961
Moment Z	23.4838

Result	Value
Axial	4.8090
Shear X	-1.9229
Shear Z	-0.1520
Moment X	-0.1930
Moment Z	13.9700

## Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States  
 User Name: sales@mtsolar.us  
 Unit System: imperial



## Design Input Information

Design Factors			
$\Phi_t$	$\Phi_c$	$\Phi_b$	$\Phi_v$
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	$F_y$ (ksi)	$F_u$ (ksi)
1	29000	50	65

### Section Dimensions



ID	Name	d (in)	$t_w$ (in)				
1	2in Pipe Sch 40	2.38	0.15				
4	4in Pipe Sch 40	4.50	0.24				
7	6in Pipe Sch 40	6.63	0.28				



ID	Name	d (in)	b (in)	$t_w$ (in)	$t_b$ (in)	r (in)	
15	HSS5x3x1/8	5.00	3.00	0.12	0.12	0.12	



ID	Name	d (in)	$t_w$ (in)	$b_t$ (in)	$b_b$ (in)	$t_t$ (in)	$t_b$ (in)	r (in)
18	W6x9	5.90	0.17	3.94	3.94	0.21	0.21	0.25

### Section Properties

ID	Name	A (in <sup>2</sup> )	J (in <sup>4</sup> )	$I_{yp}$ (in <sup>4</sup> )	$I_{zp}$ (in <sup>4</sup> )	$I_w$ (in <sup>6</sup> )	$S_{yp}$ (in <sup>3</sup> )	$S_{zp}$ (in <sup>3</sup> )
1	2in Pipe Sch 40	1.07	1.33	0.67	0.67	0.00	0.76	0.76
4	4in Pipe Sch 40	3.17	14.47	7.23	7.23	0.00	4.31	4.31
7	6in Pipe Sch 40	5.58	56.28	28.14	28.14	0.00	11.28	11.28



24	18	1.14	1.14	1.75	1.44,1.44,1.44,1.44,1.44,1.44,1.44,1.44,1.44,1.44,1.57,1.44,1.44,1.44,1.33,1.44,1.44,1.45,1.45,1.44,1.44,1.43,1.49,1.44,1.44,1.44,1.38	300	200	1
25	18	2.60	2.60	4.00	1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.09,1.10,1.11,1.09,1.09,1.09,1.10,1.09,1.09,1.08,1.05,1.09,1.09,1.10,1.11,1.09,1.09,1.09,1.10	300	200	1
26	18	1.14	1.14	1.75	1.44,1.44,1.44,1.44,1.44,1.44,1.46,1.46,1.47,1.48,1.46,1.46,1.46,1.47,1.45,1.45,1.41,1.25,1.46,1.46,1.48,1.48,1.46,1.46,1.46,1.47	300	200	1
27	18	2.60	2.60	4.00	1.08,1.08,1.08,1.08,1.08,1.08,1.08,1.08,1.09,1.08,1.08,1.08,1.09,1.03,1.08,1.08,1.08,1.09,1.08,1.08,1.09,1.16,1.08,1.08,1.09,1.05	300	200	1
28	18	1.14	1.14	1.75	1.47,1.47,1.47,1.47,1.47,1.47,1.46,1.46,1.46,1.97,1.46,1.46,1.46,1.30,1.46,1.46,1.48,1.48,1.46,1.46,1.45,1.59,1.46,1.46,1.46,1.36	300	200	1
29	18	2.60	2.60	4.00	1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.17,1.16,1.16,1.16,1.17,1.16,1.16,1.17,1.09,1.16,1.16,1.16,1.17,1.16,1.16,1.17	300	200	1
30	18	1.14	1.14	1.75	1.59,1.59,1.59,1.59,1.59,1.59,1.57,1.57,1.56,1.52,1.57,1.57,1.57,1.53,1.58,1.58,1.63,1.36,1.57,1.57,1.55,1.51,1.57,1.57,1.57,1.53	300	200	1
31	18	2.60	2.60	4.00	1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.54,1.16,1.16,1.16,1.14,1.16,1.16,1.15,1.17,1.16,1.16,1.17,1.27,1.16,1.16,1.16,1.10	300	200	1
32	18	1.14	1.14	1.75	1.30,1.30	300	200	1
101	7	13.10	13.10	6.24	-	300	200	1
102	4	1.30	1.30	2.00	-	300	200	1
103	15	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.18,1.18,1.18,1.17,1.18,1.18,1.18,1.19,1.22,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18	300	200	1
104	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.72,1.67,1.67,1.66,1.61,1.67,1.67,1.68,1.67,1.67,1.67,1.65,1.71,1.67,1.67,1.66,1.64	300	200	1
105	15	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.71,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.67	300	200	1
106	15	0.92	0.92	1.42	1.19,1.18,1.19,1.18,1.18,1.19,1.18,1.18,1.17,1.18,1.18,1.18,1.18,1.18,1.18,1.18,1.19,1.22,1.18,1.18,1.17,1.17,1.18,1.18,1.18,1.18	300	200	1
107	15	1.52	1.52	2.33	1.68,1.67,1.68,1.67,1.67,1.68,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.66,1.67,1.67,1.68,1.73,1.67,1.67,1.66,1.66,1.67,1.67,1.66,1.67	300	200	1
108	18	1.33	1.33	2.05	2.09,2.09,2.09,2.09,2.09,2.09,2.10,2.10,2.10,1.81,2.10,2.10,2.10,2.09,2.10,2.10,2.09,2.09,2.10,2.10,2.10,2.06,2.10,2.10,2.10,2.33	300	200	1
109	1	2.60	2.60	4.00	-	300	200	1
110	15	2.44	2.44	3.75	1.68,1.68,1.68,1.67,1.68,1.68,1.67,1.67,1.66,1.71,1.67,1.67,1.66,1.60,1.67,1.67,1.69,1.67,1.67,1.67,1.65,1.70,1.67,1.67,1.66,1.64	300	200	1
111	18	1.33	1.33	2.05	2.09,2.09,2.09,2.09,2.09,2.09,2.08,2.08,2.07,2.07,2.08,2.08,2.08,2.07,2.09,2.09,2.23,1.51,2.08,2.08,2.07,2.07,2.08,2.08,2.08,2.07	300	200	1
112	4	1.30	1.30	2.00	-	300	200	1
113	18	1.14	1.14	1.75	1.44,1.44,1.44,1.44,1.44,1.44,1.46,1.46,1.47,1.48,1.46,1.46,1.46,1.47,1.45,1.45,1.41,1.25,1.46,1.46,1.48,1.48,1.46,1.46,1.46,1.47	300	200	1
114	18	1.14	1.14	1.75	1.47,1.47,1.47,1.47,1.47,1.47,1.46,1.46,1.46,1.96,1.46,1.46,1.46,1.30,1.46,1.46,1.48,1.48,1.46,1.46,1.45,1.59,1.46,1.46,1.46,1.36	300	200	1
115	18	6.63	6.63	10.20	1.16,1.16,1.16,1.16,1.16,1.16,1.15,1.15,1.14,1.14,1.15,1.15,1.15,1.14,1.15,1.15,1.18,1.58,1.15,1.15,1.14,1.14,1.15,1.15,1.14	300	200	1
116	18	6.63	6.63	10.20	1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.16,1.12,1.16,1.16,1.16,1.35,1.16,1.16,1.15,1.15,1.16,1.16,1.16,1.12,1.16,1.16,1.16,1.23	300	200	1
201	7	13.10	13.10	6.24	-	300	200	1





108	120.60	117.88	23.36	6.45	30.09	45.74
109	48.35	43.11	2.85	2.85	14.51	14.51
110	79.65	72.01	10.99	4.60	29.14	16.61
111	120.60	117.88	23.36	6.45	30.09	45.74
112	142.83	141.72	16.17	16.17	42.85	42.85
113	120.60	118.62	23.36	6.45	30.09	45.74
114	120.60	118.62	23.36	6.45	30.09	45.74
115	120.60	68.63	15.57	6.45	30.09	45.74
116	120.60	68.63	15.30	6.45	30.09	45.74
201	251.16	175.54	42.30	42.30	75.35	75.35
202	142.83	141.72	16.17	16.17	42.85	42.85
203	79.65	74.02	10.99	4.60	29.14	16.61
204	79.65	72.01	10.99	4.60	29.14	16.61
205	79.65	73.44	10.99	4.60	29.14	16.61
206	79.65	74.02	10.99	4.60	29.14	16.61
207	79.65	73.44	10.99	4.60	29.14	16.61
208	120.60	117.88	23.36	6.45	30.09	45.74
209	48.35	43.11	2.85	2.85	14.51	14.51
210	79.65	72.01	10.99	4.60	29.14	16.61
211	120.60	117.88	23.36	6.45	30.09	45.74
212	142.83	141.72	16.17	16.17	42.85	42.85
213	120.60	118.62	23.36	6.45	30.09	45.74
214	120.60	118.62	23.36	6.45	30.09	45.74
215	120.60	68.63	15.71	6.45	30.09	45.74
216	120.60	68.63	15.44	6.45	30.09	45.74
301	251.16	175.54	42.30	42.30	75.35	75.35
302	142.83	141.72	16.17	16.17	42.85	42.85
303	79.65	74.02	10.99	4.60	29.14	16.61
304	79.65	72.01	10.99	4.60	29.14	16.61
305	79.65	73.44	10.99	4.60	29.14	16.61
306	79.65	74.02	10.99	4.60	29.14	16.61
307	79.65	73.44	10.99	4.60	29.14	16.61
308	120.60	54.44	23.36	6.45	30.09	45.74
309	48.35	43.11	2.85	2.85	14.51	14.51
310	79.65	72.01	10.99	4.60	29.14	16.61
311	120.60	54.44	23.36	6.45	30.09	45.74
312	142.83	141.72	16.17	16.17	42.85	42.85
313	120.60	118.62	23.36	6.45	30.09	45.74
314	120.60	118.62	23.36	6.45	30.09	45.74
315	120.60	68.63	15.30	6.45	30.09	45.74
316	120.60	68.63	14.89	6.45	30.09	45.74

## Design Ratio

Member ID	P	M <sub>z</sub>	M <sub>y</sub>	V <sub>y</sub>	V <sub>z</sub>	(P,M <sub>z</sub> ,M <sub>y</sub> )	Worst LC	KL/r	δ	Status
1	0.041	0.555	0.028	0.043	0.003	0.559	#32	0.350	Not Required	Pass
2	0.002	0.342	0.189	0.076	0.036	0.532	#13	0.034	Not Required	Pass
3	0.008	0.614	0.056	0.061	0.004	0.636	#13	0.044	Not Required	Pass
4	0.007	0.598	0.172	0.060	0.022	0.693	#13	0.078	Not Required	Pass
5	0.007	0.380	0.155	0.061	0.022	0.391	#13	0.073	Not Required	Pass
6	0.009	0.695	0.119	0.071	0.015	0.775	#13	0.044	Not Required	Pass
7	0.010	0.431	0.225	0.070	0.033	0.469	#13	0.073	Not Required	Pass
8	0.001	0.080	0.080	0.042	0.009	0.105	#13	0.088	Not Required	Pass


9	0.007	0.061	0.061	0.002	0.002	0.123	#13	0.198	Not Required	Pass
10	0.009	0.668	0.210	0.067	0.026	0.716	#13	0.078	Not Required	Pass
11	0.002	0.078	0.082	0.044	0.009	0.100	#13	0.088	Not Required	Pass
12	0.001	0.417	0.211	0.089	0.039	0.628	#13	0.052	Not Required	Pass
13	0.002	0.131	0.215	0.057	0.012	0.315	#21	0.075	Not Required	Pass
14	0.000	0.139	0.162	0.039	0.008	0.277	#21	Not Required	Not Required	Pass
15	0.000	0.066	0.075	0.027	0.006	0.130	#21	Not Required	Not Required	Pass
16	0.000	0.065	0.075	0.027	0.006	0.129	#21	Not Required	Not Required	Pass
17	0.003	0.157	0.056	0.019	0.003	0.193	#13	0.115	Not Required	Pass
18	0.000	0.143	0.162	0.040	0.008	0.279	#21	Not Required	Not Required	Pass
19	0.003	0.154	0.072	0.019	0.004	0.184	#21	0.172	Not Required	Pass
20	0.001	0.120	0.212	0.055	0.012	0.304	#21	0.075	Not Required	Pass
21	0.003	0.166	0.058	0.015	0.003	0.198	#13	0.115	Not Required	Pass
22	0.002	0.151	0.215	0.059	0.012	0.342	#21	0.075	Not Required	Pass
23	0.004	0.171	0.065	0.015	0.003	0.210	#13	0.172	Not Required	Pass
24	0.001	0.155	0.209	0.056	0.012	0.338	#21	0.075	Not Required	Pass
25	0.003	0.166	0.058	0.015	0.003	0.198	#13	0.115	Not Required	Pass
26	0.002	0.155	0.211	0.058	0.012	0.340	#21	0.075	Not Required	Pass
27	0.004	0.171	0.065	0.015	0.003	0.210	#13	0.172	Not Required	Pass
28	0.001	0.156	0.214	0.058	0.012	0.343	#21	0.075	Not Required	Pass
29	0.003	0.157	0.056	0.019	0.003	0.193	#13	0.115	Not Required	Pass
30	0.002	0.131	0.215	0.057	0.012	0.315	#21	0.075	Not Required	Pass
31	0.003	0.154	0.072	0.019	0.004	0.184	#21	0.172	Not Required	Pass
32	0.000	0.139	0.162	0.039	0.008	0.277	#21	Not Required	Not Required	Pass
101	0.047	0.627	0.002	0.049	0.000	0.630	#32	0.350	Not Required	Pass
102	0.002	0.442	0.233	0.096	0.043	0.675	#13	0.034	Not Required	Pass
103	0.010	0.755	0.095	0.076	0.010	0.815	#13	0.044	Not Required	Pass
104	0.009	0.743	0.209	0.075	0.026	0.828	#13	0.078	Not Required	Pass
105	0.009	0.469	0.220	0.076	0.032	0.500	#13	0.073	Not Required	Pass
106	0.010	0.754	0.093	0.076	0.010	0.807	#13	0.044	Not Required	Pass
107	0.009	0.468	0.215	0.076	0.031	0.497	#13	0.073	Not Required	Pass
108	0.001	0.054	0.078	0.044	0.009	0.113	#21	0.088	Not Required	Pass
109	0.008	0.065	0.052	0.001	0.000	0.119	#13	0.198	Not Required	Pass
110	0.009	0.734	0.208	0.074	0.026	0.820	#13	0.078	Not Required	Pass
111	0.002	0.059	0.079	0.045	0.009	0.114	#21	0.088	Not Required	Pass
112	0.002	0.436	0.232	0.095	0.043	0.668	#13	0.034	Not Required	Pass
113	0.002	0.155	0.211	0.058	0.012	0.340	#21	0.075	Not Required	Pass
114	0.001	0.156	0.214	0.058	0.012	0.343	#21	0.075	Not Required	Pass
115	0.003	0.223	0.122	0.046	0.009	0.307	#21	0.439	Not Required	Pass
116	0.002	0.218	0.123	0.046	0.009	0.303	#21	0.439	Not Required	Pass
201	0.047	0.627	0.002	0.049	0.000	0.630	#32	0.350	Not Required	Pass
202	0.002	0.436	0.232	0.095	0.043	0.668	#13	0.034	Not Required	Pass
203	0.010	0.754	0.093	0.076	0.010	0.807	#13	0.044	Not Required	Pass
204	0.009	0.734	0.208	0.074	0.026	0.820	#13	0.078	Not Required	Pass
205	0.009	0.468	0.215	0.076	0.031	0.497	#13	0.073	Not Required	Pass
206	0.010	0.755	0.095	0.076	0.010	0.815	#13	0.044	Not Required	Pass
207	0.009	0.469	0.220	0.076	0.032	0.500	#13	0.073	Not Required	Pass
208	0.001	0.062	0.082	0.046	0.009	0.114	#21	0.088	Not Required	Pass
209	0.008	0.065	0.052	0.001	0.000	0.119	#13	0.198	Not Required	Pass
210	0.009	0.743	0.209	0.075	0.026	0.828	#13	0.078	Not Required	Pass
211	0.002	0.068	0.083	0.046	0.009	0.113	#21	0.088	Not Required	Pass
212	0.002	0.442	0.233	0.096	0.043	0.675	#13	0.034	Not Required	Pass
213	0.002	0.151	0.215	0.059	0.012	0.342	#21	0.075	Not Required	Pass
214	0.001	0.155	0.209	0.056	0.012	0.338	#21	0.075	Not Required	Pass

215	0.003	0.202	0.122	0.045	0.009	0.288	#21	0.439	Not Required	Pass
216	0.002	0.191	0.122	0.044	0.009	0.281	#21	0.439	Not Required	Pass
301	0.041	0.555	0.028	0.043	0.003	0.559	#32	0.350	Not Required	Pass
302	0.001	0.417	0.211	0.089	0.039	0.628	#13	0.052	Not Required	Pass
303	0.009	0.695	0.119	0.071	0.015	0.775	#13	0.044	Not Required	Pass
304	0.009	0.668	0.210	0.067	0.026	0.716	#13	0.078	Not Required	Pass
305	0.010	0.431	0.225	0.070	0.033	0.469	#13	0.073	Not Required	Pass
306	0.008	0.614	0.056	0.061	0.004	0.636	#13	0.044	Not Required	Pass
307	0.007	0.380	0.155	0.061	0.022	0.391	#13	0.073	Not Required	Pass
308	0.000	0.065	0.075	0.027	0.006	0.129	#21	Not Required	Not Required	Pass
309	0.007	0.061	0.061	0.002	0.002	0.123	#13	0.198	Not Required	Pass
310	0.007	0.598	0.172	0.060	0.022	0.693	#13	0.078	Not Required	Pass
311	0.000	0.066	0.075	0.027	0.006	0.130	#21	Not Required	Not Required	Pass
312	0.002	0.342	0.189	0.076	0.036	0.532	#13	0.034	Not Required	Pass
313	0.000	0.143	0.162	0.040	0.008	0.279	#21	Not Required	Not Required	Pass
314	0.001	0.120	0.212	0.055	0.012	0.304	#21	0.075	Not Required	Pass
315	0.003	0.230	0.122	0.044	0.009	0.309	#21	0.439	Not Required	Pass
316	0.002	0.224	0.123	0.042	0.009	0.308	#21	0.439	Not Required	Pass

## Definitions

$\Phi_t$	Safety factor for tensile
$\Phi_c$	Safety factor for compression
$\Phi_b$	Safety factor for flexure
$\Phi_v$	Safety factor for shear
E	Modulus of elasticity
$F_y$	Specified minimum yield stress
$F_u$	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
$I_{yp}$	Moment of inertia about the Y axes
$I_{zp}$	Moment of inertia about the Z axes
$I_w$	Warping constant
$S_{yp}$	Plastic section modulus about the Y axis
$S_{zp}$	Plastic section modulus about the Z axis
KL	Effective length
$C_b$	Buckling modification factor (from all load combinations)
$L_b$	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
$P_n$	Nominal axial strength (tension/compression)
$M_n$	Nominal flexural strength (about Z/Y axis)
$V_n$	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
$M_z$	Design ratio in case of bending about Z axis
$M_y$	Design ratio in case of bending about Y axis
$V_y$	Design ratio in case of shear along Y axis
$V_z$	Design ratio in case of shear along Z axis
$(P, M_z, M_y)$	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
$\delta$	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

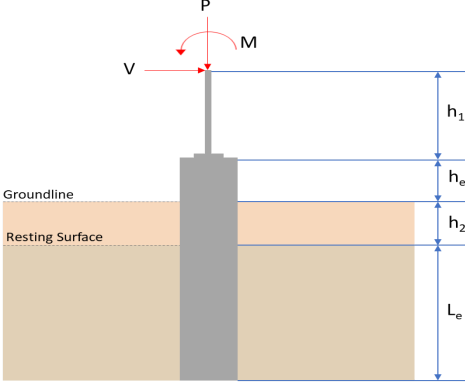

REFERENCES	CALCULATIONS	RESULTS																										
	<p><b>SkyCiv Foundation Design</b> Pile Foundation</p> <p><b>Design Information :</b> Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p><b>Pile Input</b></p>  <p><b>Geometry</b> Pile shape: rectangular <math>b = 48</math> in - Pile width <math>D = 48</math> in - Pile depth <math>L = 5</math> ft - Total pile length <math>h_1 = 0</math> ft - Lateral load height from the top of the pile, <math>h_2 = 0</math> ft - Depth to resting surface <math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>4.809</td> <td>7.208</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-1.923</td> <td>-3.211</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>0.152</td> <td>0.241</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>0.193</td> <td>0.296</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>13.970</td> <td>23.483</td> </tr> </tbody> </table> <p><b>Material Properties</b> <math>f'_{ck} = 3</math> ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	$P$ (kip)	4.809	7.208	$V_x$ (kip)	-1.923	-3.211	$V_z$ (kip)	0.152	0.241	$M_x$ (kipft)	0.193	0.296	$M_z$ (kipft)	13.970	23.483	
Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
$P$ (kip)	4.809	7.208																										
$V_x$ (kip)	-1.923	-3.211																										
$V_z$ (kip)	0.152	0.241																										
$M_x$ (kipft)	0.193	0.296																										
$M_z$ (kipft)	13.970	23.483																										
	<p><b>Required depth to resist lateral loads (ASD)</b> <math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b> <math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-1.923 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.30621 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(13.97 \text{ kipft}) + ((-1.923 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.2245 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.5521 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.152 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.024204 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.193 \text{ kipft}) + ((0.152 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.030732 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.7019 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.5521 \text{ ft}), (1.7019 \text{ ft})]$$

$$L_{e,req} = 4.552 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_c - h_2$$

$$L_e = (5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.552 \text{ ft})}{(5 \text{ ft})}$$

$$\text{Ratio} = 0.9104$$

Status: **PASS**  
Ratio: **0.910**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(4.809 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.30056 \text{ kip/ft}^2$$

$$q = 0.30056 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.30056 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.15028$$

Status: **PASS**  
Ratio: **0.150**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.25$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.30621 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 2.2245 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.2245 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (2.2245 \text{ kipft/ft})) + (4 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.4644 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (2.2245 \text{ kipft/ft})) + (3 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 \times [(3 \times (2.2245 \text{ kipft/ft})) + (2 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))]}$$

$$p = 0.15395 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (2.2245 \text{ kipft/ft})) + ((-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$$

$$s = 0.70032 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.4644 \text{ ft})}{2}$$

$$p_a = 0.25983 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.15395 \text{ kip/ft}^2)}{(0.25983 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59249$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,


Status: **PASS**  
Ratio: **0.590**

	$p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$ $p_s = 0.75 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(0.70032 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.93376$	<p>Status: <b>PASS</b> Ratio: <b>0.930</b></p>
	<p><b>Considering z-direction:</b></p> <p><math>H_o = 0.024204 \text{ kip/ft}</math> - Lateral force per length of pile,  <math>M_o = 0.030732 \text{ kipft/ft}</math> - Overturning moment per length of pile,  <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.030732 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (0.024204 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.030732 \text{ kipft/ft})) + (4 \times (0.024204 \text{ kip/ft}) \times (5 \text{ ft}))}$ $a = 3.6351 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.030732 \text{ kipft/ft})) + (3 \times (0.024204 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 \times [(3 \times (0.030732 \text{ kipft/ft})) + (2 \times (0.024204 \text{ kip/ft}) \times (5 \text{ ft}))]}$ $p = 0.021199 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.030732 \text{ kipft/ft})) + ((0.024204 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$ $s = 0.043796 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(3.6351 \text{ ft})}{2}$ $p_a = 0.27263 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(0.021199 \text{ kip/ft}^2)}{(0.27263 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.077758$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$ $p_s = 0.75 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$	<p>Status: <b>PASS</b> Ratio: <b>0.080</b></p>

$$\text{Ratio} = \frac{(0.043796 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.058395$$

Status: **PASS**  
Ratio: **0.060**

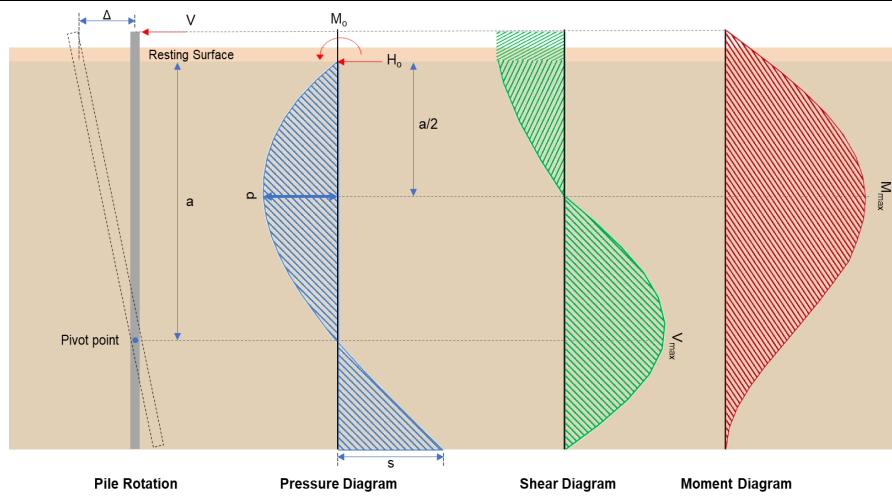

#### Shear force and Bending moment (x-direction, LRF)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-3.211 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.51131 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_e + (V_e H)}{1.57 D}$$

$$M_o = \frac{(23.483 \text{ kipft}) + ((-3.211 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 3.7393 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(3.7393 \text{ kipft/ft})}{(-0.51131 \text{ kip/ft})}$$

$$E = 7.3133 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (3.7393 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.51131 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (3.7393 \text{ kipft/ft})) + (4 \times (-0.51131 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.4638 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.51131 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.3133 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.4638 \text{ ft})}{(5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.3133 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.4638 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 6.6419 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-0.51131 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(7.3133 \text{ ft})}{(5 \text{ ft})} + \frac{(3.4638 \text{ ft})}{2 \times (5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.3133 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.4638 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (7.3133 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.4638 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 15.678 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.241 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.038376 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.296 \text{ kipft}) + ((0.241 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.047134 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.047134 \text{ kipft/ft})}{(0.038376 \text{ kip/ft})}$$

$$E = 1.2282 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.047134 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (0.038376 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.047134 \text{ kipft/ft})) + (4 \times (0.038376 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.6378 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 + 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.038376 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.6378 \text{ ft})}{(5 \text{ ft})} \right)^2 + 4 \times \left( \frac{3 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.6378 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.17011 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((0.038376 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(1.2282 \text{ ft})}{(5 \text{ ft})} + \frac{(3.6378 \text{ ft})}{2 \times (5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.6378 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.6378 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 0.35738 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(7.208 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102.03 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102.03 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.208 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0022642$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 7.208 \text{ kip} \rightarrow 7208 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7208 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.76 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.76 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.76 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,  <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.76 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.07 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 6.6419 \text{ kip}</math> - Maximum shear force in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(6.6419 \text{ kip})}{(118.07 \text{ kip})}$ $\text{Ratio} = 0.056253$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.17011 \text{ kip}</math> - Maximum shear force in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.17011 \text{ kip})}{(118.07 \text{ kip})}$ $\text{Ratio} = 0.0014407$	<p>Status: <b>PASS</b>  Ratio: <b>0.060</b></p> <p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>
	<p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),  Allowable flexural strength:  <math>M_n</math> shall be the lesser of:  <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore,  <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p><b>Considering x-direction:</b>  <math>M_{max} = 15.678\text{kipft}</math> - Maximum moment in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(15.678\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.057341$	<p>Status: <b>PASS</b>  Ratio: <b>0.060</b></p>
	<p><b>Considering z-direction:</b>  <math>M_{max} = 0.35738\text{kipft}</math> - Maximum moment in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.35738\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.001307$	<p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>

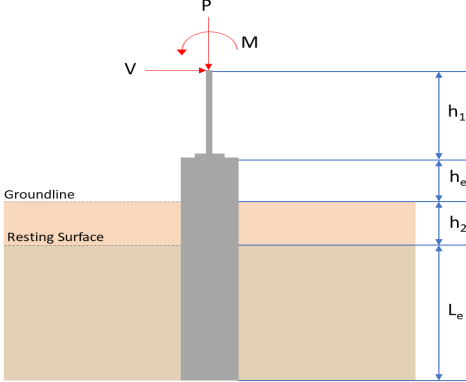REFERENCES	CALCULATIONS	RESULTS																										
	<p><b>SkyCiv Foundation Design</b> Pile Foundation</p> <p><b>Design Information :</b> Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p><b>Pile Input</b></p>  <p><b>Geometry</b></p> <p>Pile shape: rectangular  <math>b = 48</math> in - Pile width  <math>D = 48</math> in - Pile depth  <math>L = 5</math> ft - Total pile length  <math>h_1 = 0</math> ft - Lateral load height from the top of the pile,  <math>h_2 = 0</math> ft - Depth to resting surface  <math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1288 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>4.809</td> <td>7.208</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-1.923</td> <td>-3.211</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>-0.152</td> <td>-0.241</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>-0.193</td> <td>-0.296</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>13.970</td> <td>23.484</td> </tr> </tbody> </table> <p><b>Material Properties</b></p> <p><math>f'_{ck} = 3</math> ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	$P$ (kip)	4.809	7.208	$V_x$ (kip)	-1.923	-3.211	$V_z$ (kip)	-0.152	-0.241	$M_x$ (kipft)	-0.193	-0.296	$M_z$ (kipft)	13.970	23.484	
Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
$P$ (kip)	4.809	7.208																										
$V_x$ (kip)	-1.923	-3.211																										
$V_z$ (kip)	-0.152	-0.241																										
$M_x$ (kipft)	-0.193	-0.296																										
$M_z$ (kipft)	13.970	23.484																										
	<p><b>Required depth to resist lateral loads (ASD)</b></p> <p><math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b></p> <p><math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-1.923 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.30621 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(13.97 \text{ kipft}) + ((-1.923 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.2245 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.5521 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.152 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.024204 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.193 \text{ kipft}) + ((-0.152 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.030732 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 1.0014 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.5521 \text{ ft}), (1.0014 \text{ ft})]$$

$$L_{e,req} = 4.552 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_c - h_2$$

$$L_e = (5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.552 \text{ ft})}{(5 \text{ ft})}$$

$$\text{Ratio} = 0.9104$$

Status: **PASS**  
Ratio: **0.910**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(4.809 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.30056 \text{ kip/ft}^2$$

$$q = 0.30056 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.30056 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.15028$$

Status: **PASS**  
Ratio: **0.150**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.25$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.30621 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 2.2245 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.2245 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (2.2245 \text{ kipft/ft})) + (4 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.4644 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (2.2245 \text{ kipft/ft})) + (3 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 \times [(3 \times (2.2245 \text{ kipft/ft})) + (2 \times (-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))]}$$

$$p = 0.15395 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (2.2245 \text{ kipft/ft})) + ((-0.30621 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$$

$$s = 0.70032 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.4644 \text{ ft})}{2}$$

$$p_a = 0.25983 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.15395 \text{ kip/ft}^2)}{(0.25983 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59249$$

$p_a$  - Allowable lateral soil pressure at depth  $L_e$ ,


Status: **PASS**  
Ratio: **0.590**

	$p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$ $p_s = 0.75 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(0.70032 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.93376$	<p>Status: <b>PASS</b> Ratio: <b>0.930</b></p>
	<p><b>Considering z-direction:</b></p> <p><math>H_o = -0.024204 \text{ kip/ft}</math> - Lateral force per length of pile,  <math>M_o = 0.030732 \text{ kipft/ft}</math> - Overturning moment per length of pile,  <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.030732 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.024204 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.030732 \text{ kipft/ft})) + (4 \times (-0.024204 \text{ kip/ft}) \times (5 \text{ ft}))}$ $a = 3.6351 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.030732 \text{ kipft/ft})) + (3 \times (-0.024204 \text{ kip/ft}) \times (5 \text{ ft}))]^2}{(5 \text{ ft})^2 \times [(3 \times (0.030732 \text{ kipft/ft})) + (2 \times (-0.024204 \text{ kip/ft}) \times (5 \text{ ft}))]}$ $p = -0.011544 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.030732 \text{ kipft/ft})) + ((-0.024204 \text{ kip/ft}) \times (5 \text{ ft}))]}{(5 \text{ ft})^2}$ $s = -0.014293 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(3.6351 \text{ ft})}{2}$ $p_a = 0.27263 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(-0.011544 \text{ kip/ft}^2)}{(0.27263 \text{ kip/ft}^2)}$ $\text{Ratio} = -0.042345$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5 \text{ ft})$ $p_s = 0.75 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$	<p>Status: <b>PASS</b> Ratio: <b>-0.040</b></p>

$$\text{Ratio} = \frac{(-0.014293 \text{ kip/ft}^2)}{(0.75 \text{ kip/ft}^2)}$$

$$\text{Ratio} = -0.019057$$

Status: **PASS**  
Ratio: **-0.020**

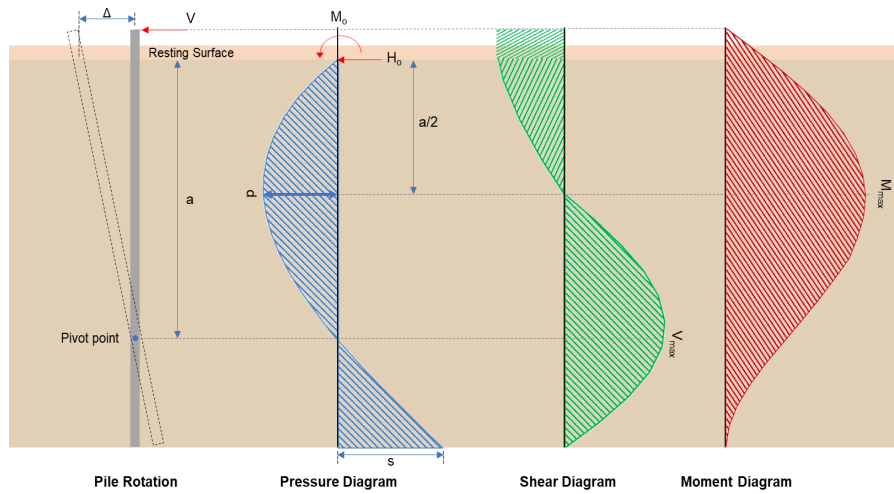

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-3.211 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.51131 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(23.484 \text{ kipft}) + ((-3.211 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 3.7395 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(3.7395 \text{ kipft/ft})}{(-0.51131 \text{ kip/ft})}$$

$$E = 7.3136 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (3.7395 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.51131 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (3.7395 \text{ kipft/ft})) + (4 \times (-0.51131 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.4638 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.51131 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.3136 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.4638 \text{ ft})}{(5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.3136 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.4638 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 6.6422 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.51131 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(7.3136 \text{ ft})}{(5 \text{ ft})} + \frac{(3.4638 \text{ ft})}{2 \times (5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.3136 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.4638 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (7.3136 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.4638 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 15.679 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.241 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.038376 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.296 \text{ kipft}) + ((-0.241 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.047134 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.047134 \text{ kipft/ft})}{(-0.038376 \text{ kip/ft})}$$

$$E = 1.2282 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.047134 \text{ kipft/ft}) \times (5 \text{ ft})) + (3 \times (-0.038376 \text{ kip/ft}) \times (5 \text{ ft})^2)}{(6 \times (0.047134 \text{ kipft/ft})) + (4 \times (-0.038376 \text{ kip/ft}) \times (5 \text{ ft}))}$$

$$a = 3.6378 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.038376 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.6378 \text{ ft})}{(5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.6378 \text{ ft})}{(5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.17011 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.038376 \text{ kip/ft}) \times (48 \text{ in}) \times (5 \text{ ft})) \times \left[ \left( \frac{(1.2282 \text{ ft})}{(5 \text{ ft})} + \frac{(3.6378 \text{ ft})}{2 \times (5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 3 \right) \times \left( \frac{(3.6378 \text{ ft})}{2 \times (5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (1.2282 \text{ ft})}{(5 \text{ ft})} + 2 \right) \times \left( \frac{(3.6378 \text{ ft})}{2 \times (5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.35738 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(7.208 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -102.03 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-102.03 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(7.208 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0022642$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 7.208 \text{ kip} \rightarrow 7208 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(7208 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.76 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.76 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.76 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,  <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.76 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.07 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 6.6422 \text{ kip}</math> - Maximum shear force in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(6.6422 \text{ kip})}{(118.07 \text{ kip})}$ $\text{Ratio} = 0.056255$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.17011 \text{ kip}</math> - Maximum shear force in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.17011 \text{ kip})}{(118.07 \text{ kip})}$ $\text{Ratio} = 0.0014407$	<p>Status: <b>PASS</b>  Ratio: <b>0.060</b></p> <p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>
	<p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),  Allowable flexural strength:  <math>M_n</math> shall be the lesser of:  <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3 \text{ksi}} \times 18432.001 \text{in}^3$ $\phi M_{n,1} = 273.423 \text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3 \text{ksi}) \times (18432 \text{in}^3)$ $\phi M_{n,2} = 2545.9 \text{kipft}$ <p>Therefore,  <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42 \text{kipft}), (2545.9 \text{kipft})]$ $\phi M_n = 273.42 \text{kipft}$ <p><b>Considering x-direction:</b>  <math>M_{max} = 15.679 \text{kipft}</math> - Maximum moment in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(15.679 \text{kipft})}{(273.42 \text{kipft})}$ $\text{Ratio} = 0.057343$	<p>Status: <b>PASS</b>  Ratio: <b>0.060</b></p>
	<p><b>Considering z-direction:</b>  <math>M_{max} = 0.35738 \text{kipft}</math> - Maximum moment in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.35738 \text{kipft})}{(273.42 \text{kipft})}$ $\text{Ratio} = 0.001307$	<p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>

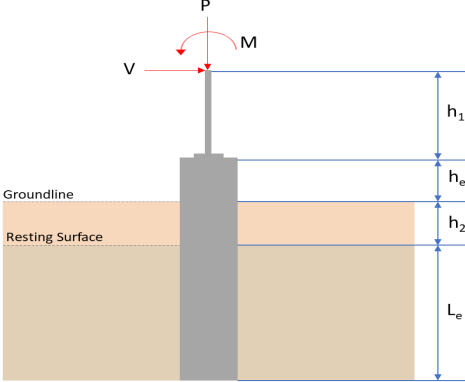REFERENCES	CALCULATIONS	RESULTS																										
	<p><b>SkyCiv Foundation Design</b> Pile Foundation</p> <p><b>Design Information :</b> Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p><b>Pile Input</b></p>  <p><b>Geometry</b> Pile shape: rectangular <math>b = 48</math> in - Pile width <math>D = 48</math> in - Pile depth <math>L = 5.25</math> ft - Total pile length <math>h_1 = 0</math> ft - Lateral load height from the top of the pile, <math>h_2 = 0</math> ft - Depth to resting surface <math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1288 935 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>5.527</td> <td>8.310</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-2.229</td> <td>-3.716</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>-0.013</td> <td>-0.018</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>-0.018</td> <td>-0.027</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>15.795</td> <td>26.517</td> </tr> </tbody> </table> <p><b>Material Properties</b> <math>f'_{ck} = 3</math> ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	$P$ (kip)	5.527	8.310	$V_x$ (kip)	-2.229	-3.716	$V_z$ (kip)	-0.013	-0.018	$M_x$ (kipft)	-0.018	-0.027	$M_z$ (kipft)	15.795	26.517	
Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
$P$ (kip)	5.527	8.310																										
$V_x$ (kip)	-2.229	-3.716																										
$V_z$ (kip)	-0.013	-0.018																										
$M_x$ (kipft)	-0.018	-0.027																										
$M_z$ (kipft)	15.795	26.517																										
	<p><b>Required depth to resist lateral loads (ASD)</b> <math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b> <math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-2.229 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.35494 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(15.795 \text{ kipft}) + ((-2.229 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.5151 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 4.6689 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.013 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0020701 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.018 \text{ kipft}) + ((-0.013 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0028662 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.54503 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.6689 \text{ ft}), (0.54503 \text{ ft})]$$

$$L_{e,req} = 4.669 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (5.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5.25 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.669 \text{ ft})}{(5.25 \text{ ft})}$$

$$\text{Ratio} = 0.88933$$

Status: **PASS**  
Ratio: **0.890**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(5.527 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.34544 \text{ kip/ft}^2$$

$$q = 0.34544 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.34544 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.17272$$

Status: **PASS**  
Ratio: **0.170**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.3125$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.35494 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 2.5151 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.5151 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (2.5151 \text{ kipft/ft})) + (4 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))}$$

$$a = 3.6446 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (2.5151 \text{ kipft/ft})) + (3 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))]^2}{(5.25 \text{ ft})^2 \times [(3 \times (2.5151 \text{ kipft/ft})) + (2 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))]}$$

$$p = 0.1424 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (2.5151 \text{ kipft/ft})) + ((-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))]}{(5.25 \text{ ft})^2}$$

$$s = 0.68938 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.6446 \text{ ft})}{2}$$

$$p_a = 0.27335 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.1424 \text{ kip/ft}^2)}{(0.27335 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.52095$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,


Status: **PASS**  
Ratio: **0.520**

	$p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.25 \text{ ft})$ $p_s = 0.7875 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$ $\text{Ratio} = \frac{(0.68938 \text{ kip/ft}^2)}{(0.7875 \text{ kip/ft}^2)}$ $\text{Ratio} = 0.8754$	Status: <b>PASS</b> Ratio: <b>0.880</b>
	<p><b>Considering z-direction:</b></p> <p><math>H_o = -0.0020701 \text{ kip/ft}</math> - Lateral force per length of pile,  <math>M_o = 0.0028662 \text{ kipft/ft}</math> - Overturning moment per length of pile,  <math>a</math> - Distance from resting surface to pivot point,</p> $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.0028662 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (-0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (0.0028662 \text{ kipft/ft})) + (4 \times (-0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))}$ $a = 3.8135 \text{ ft}$ <p><math>p</math> - Earth pressure against the pile at distance <math>a/2</math> from resting surface,</p> $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.0028662 \text{ kipft/ft})) + (3 \times (-0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))]^2}{(5.25 \text{ ft})^2 \times [(3 \times (0.0028662 \text{ kipft/ft})) + (2 \times (-0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))]}$ $p = -0.00092555 \text{ kip/ft}^2$ <p><math>s</math> - Earth pressure against the pile at distance <math>L_e</math>,</p> $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.0028662 \text{ kipft/ft})) + ((-0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))]}{(5.25 \text{ ft})^2}$ $s = -0.0011179 \text{ kip/ft}^2$ <p><b>Check lateral soil pressure capacity:</b></p> <p><math>p_a</math> - Allowable lateral soil pressure at depth <math>a/2</math>,</p> $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(3.8135 \text{ ft})}{2}$ $p_a = 0.28601 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{p}{p_a}$ $\text{Ratio} = \frac{(-0.00092555 \text{ kip/ft}^2)}{(0.28601 \text{ kip/ft}^2)}$ $\text{Ratio} = -0.003236$ <p><math>p_s</math> - Allowable lateral soil pressure at depth <math>L_e</math>,</p> $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (5.25 \text{ ft})$ $p_s = 0.7875 \text{ kip/ft}^2$ <p>Ratio - Lateral soil capacity</p> $\text{Ratio} = \frac{s}{p_s}$	Status: <b>PASS</b> Ratio: <b>0.000</b>

$$Ratio = \frac{(-0.0011179 \text{ kip/ft}^2)}{(0.7875 \text{ kip/ft}^2)}$$

$$Ratio = -0.0014196$$

Status: **PASS**  
Ratio: **0.000**

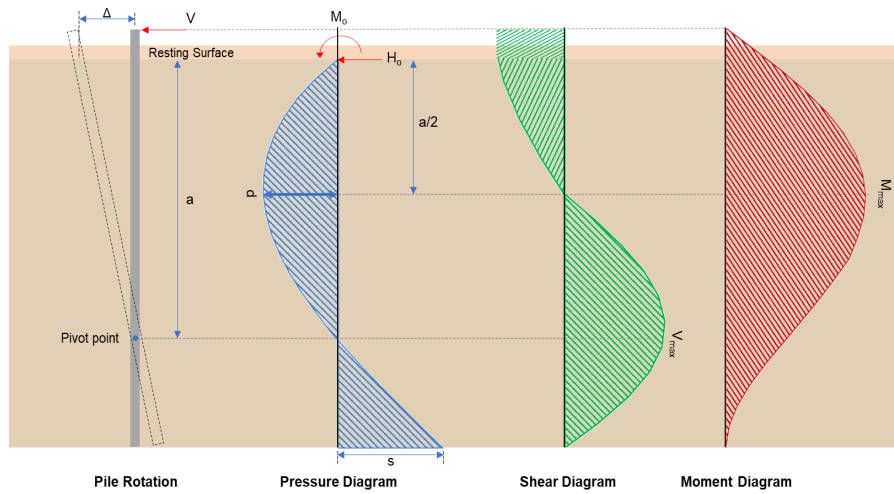

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-3.716 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.59172 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_e + (V_e H)}{1.57 D}$$

$$M_o = \frac{(26.517 \text{ kipft}) + ((-3.716 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 4.2225 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(4.2225 \text{ kipft/ft})}{(-0.59172 \text{ kip/ft})}$$

$$E = 7.1359 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (4.2225 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (-0.59172 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (4.2225 \text{ kipft/ft})) + (4 \times (-0.59172 \text{ kip/ft}) \times (5.25 \text{ ft}))}$$

$$a = 3.644 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.59172 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.644 \text{ ft})}{(5.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.644 \text{ ft})}{(5.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 7.2534 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-0.59172 \text{ kip/ft}) \times (48 \text{ in}) \times (5.25 \text{ ft})) \times \left[ \left( \frac{(7.1359 \text{ ft})}{(5.25 \text{ ft})} + \frac{(3.644 \text{ ft})}{2 \times (5.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.644 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.644 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 17.916 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.018 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0028662 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.027 \text{ kipft}) + ((-0.018 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0042994 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0042994 \text{ kipft/ft})}{(-0.0028662 \text{ kip/ft})}$$

$$E = 1.5 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0042994 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (-0.0028662 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (0.0042994 \text{ kipft/ft})) + (4 \times (-0.0028662 \text{ kip/ft}) \times (5.25 \text{ ft}))}$$

$$a = 3.8062 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 + 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0028662 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.8062 \text{ ft})}{(5.25 \text{ ft})} \right)^2 + 4 \times \left( \frac{3 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.8062 \text{ ft})}{(5.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.013501 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right] \right]$$

$$M_{max} = ((-0.0028662 \text{ kip/ft}) \times (48 \text{ in}) \times (5.25 \text{ ft})) \times \left[ \left( \frac{(1.5 \text{ ft})}{(5.25 \text{ ft})} + \frac{(3.8062 \text{ ft})}{2 \times (5.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.8062 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.8062 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^4 \right] \right] \right]$$

$$M_{max} = 0.030108 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(8.31 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -101.99 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-101.99 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2

Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1

$s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(8.31 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0026104$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 8.31 \text{ kip} \rightarrow 8310 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(8310 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.9 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete


$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.9 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.9 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,  <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yties} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.9 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.17 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 7.2534 \text{ kip}</math> - Maximum shear force in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(7.2534 \text{ kip})}{(118.17 \text{ kip})}$ $\text{Ratio} = 0.061383$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.013501 \text{ kip}</math> - Maximum shear force in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.013501 \text{ kip})}{(118.17 \text{ kip})}$ $\text{Ratio} = 0.00011425$	<p>Status: <b>PASS</b>  Ratio: <b>0.060</b></p> <p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>
	<p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),  Allowable flexural strength:  <math>M_n</math> shall be the lesser of:  <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3\text{ksi}} \times 18432.001\text{in}^3$ $\phi M_{n,1} = 273.423\text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3\text{ksi}) \times (18432\text{in}^3)$ $\phi M_{n,2} = 2545.9\text{kipft}$ <p>Therefore,  <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42\text{kipft}), (2545.9\text{kipft})]$ $\phi M_n = 273.42\text{kipft}$ <p><b>Considering x-direction:</b>  <math>M_{max} = 17.916\text{kipft}</math> - Maximum moment in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(17.916\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.065524$	<p>Status: <b>PASS</b>  Ratio: <b>0.070</b></p>
	<p><b>Considering z-direction:</b>  <math>M_{max} = 0.030108\text{kipft}</math> - Maximum moment in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.030108\text{kipft})}{(273.42\text{kipft})}$ $\text{Ratio} = 0.00011011$	<p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>

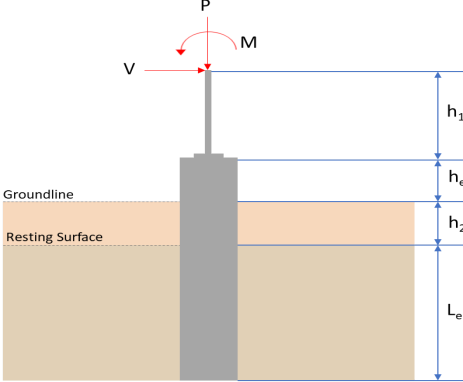REFERENCES	CALCULATIONS	RESULTS																										
	<p><b>SkyCiv Foundation Design</b> Pile Foundation</p> <p><b>Design Information :</b> Design code : IBC 2021 (International Building Code) Unit System : Imperial</p>																											
	<p><b>Pile Input</b></p>  <p><b>Geometry</b> Pile shape: rectangular <math>b = 48</math> in - Pile width <math>D = 48</math> in - Pile depth <math>L = 5.25</math> ft - Total pile length <math>h_1 = 0</math> ft - Lateral load height from the top of the pile, <math>h_2 = 0</math> ft - Depth to resting surface <math>h_e = 0</math> ft - Length of pile above the ground</p> <p><b>Tabulation of Soil Parameters</b></p> <table border="1" data-bbox="416 1102 1193 1191"> <thead> <tr> <th>Layer</th> <th>Label</th> <th>Allowable Bearing Pressure (<math>q_a</math>) (psf)</th> <th>Allowable Lateral Pressure (<math>R</math>) (psf/ft)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Sand, silty sand, clayey sand, silty gravel &amp; clayey gravel</td> <td>2000.000</td> <td>150.000</td> </tr> </tbody> </table> <p><b>Tabulation of Loads</b></p> <table border="1" data-bbox="676 1285 933 1458"> <thead> <tr> <th>Load Component</th> <th>ASD</th> <th>LRFD</th> </tr> </thead> <tbody> <tr> <td><math>P</math> (kip)</td> <td>5.527</td> <td>8.310</td> </tr> <tr> <td><math>V_x</math> (kip)</td> <td>-2.229</td> <td>-3.716</td> </tr> <tr> <td><math>V_z</math> (kip)</td> <td>0.013</td> <td>0.018</td> </tr> <tr> <td><math>M_x</math> (kipft)</td> <td>0.018</td> <td>0.027</td> </tr> <tr> <td><math>M_z</math> (kipft)</td> <td>15.795</td> <td>26.517</td> </tr> </tbody> </table> <p><b>Material Properties</b> <math>f'_{ck} = 3</math> ksi - Concrete strength,</p>	Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	$P$ (kip)	5.527	8.310	$V_x$ (kip)	-2.229	-3.716	$V_z$ (kip)	0.013	0.018	$M_x$ (kipft)	0.018	0.027	$M_z$ (kipft)	15.795	26.517	
Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
$P$ (kip)	5.527	8.310																										
$V_x$ (kip)	-2.229	-3.716																										
$V_z$ (kip)	0.013	0.018																										
$M_x$ (kipft)	0.018	0.027																										
$M_z$ (kipft)	15.795	26.517																										
	<p><b>Required depth to resist lateral loads (ASD)</b> <math>H</math> - Point of application of the lateral load</p> $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ <p><b>Considering x-direction:</b> <math>H_o</math> - Lateral force per length of pile,</p> $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-2.229 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.35494 \text{ kip/ft}$ <p><math>M_o</math> - Moment per length of pile,</p> $M_o = \frac{M_z + (V_x H)}{1.57 D}$																											

$$M_o = \frac{(15.795 \text{ kipft}) + ((-2.229 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.5151 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x}$  = 4.6689 ft - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.013 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0020701 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.018 \text{ kipft}) + ((0.013 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0028662 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,z}$  = 0.6797 ft - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(4.6689 \text{ ft}), (0.6797 \text{ ft})]$$

$$L_{e,req} = 4.669 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (5.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5.25 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(4.669 \text{ ft})}{(5.25 \text{ ft})}$$

$$\text{Ratio} = 0.88933$$

Status: **PASS**  
Ratio: **0.890**

**End-bearing Capacity (ASD)**

A - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

q - End-bearing pressure

$$q = \frac{P_c}{A}$$

$$q = \frac{(5.527 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.34544 \text{ kip/ft}^2$$

$$q = 0.34544 \text{ kip/ft}$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$Ratio = \frac{q}{q_a}$$

$$Ratio = \frac{(0.34544 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$Ratio = 0.17272$$

Status: **PASS**  
Ratio: **0.170**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5.25 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.3125$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.35494 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 2.5151 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.5151 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (2.5151 \text{ kipft/ft})) + (4 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))}$$

$$a = 3.6446 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (2.5151 \text{ kipft/ft})) + (3 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))]^2}{(5.25 \text{ ft})^2 \times [(3 \times (2.5151 \text{ kipft/ft})) + (2 \times (-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))]}$$

$$p = 0.1424 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (2.5151 \text{ kipft/ft})) + ((-0.35494 \text{ kip/ft}) \times (5.25 \text{ ft}))]}{(5.25 \text{ ft})^2}$$

$$s = 0.68938 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.6446 \text{ ft})}{2}$$

$$p_a = 0.27335 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.1424 \text{ kip/ft}^2)}{(0.27335 \text{ kip/ft}^2)}$$

$$Ratio = 0.52095$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

Status: **PASS**  
Ratio: **0.520**

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5.25 \text{ ft})$$

$$p_s = 0.7875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.68938 \text{ kip/ft}^2)}{(0.7875 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.8754$$

Status: **PASS**  
Ratio: **0.880**

**Considering z-direction:**

$H_o = 0.0020701 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.0028662 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0028662 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (0.0028662 \text{ kipft/ft})) + (4 \times (0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))}$$

$$a = 3.8135 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.0028662 \text{ kipft/ft})) + (3 \times (0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))]^2}{(5.25 \text{ ft})^2 \times [(3 \times (0.0028662 \text{ kipft/ft})) + (2 \times (0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))]}$$

$$p = 0.0017421 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0028662 \text{ kipft/ft})) + ((0.0020701 \text{ kip/ft}) \times (5.25 \text{ ft}))]}{(5.25 \text{ ft})^2}$$

$$s = 0.0036137 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.8135 \text{ ft})}{2}$$

$$p_a = 0.28601 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.0017421 \text{ kip/ft}^2)}{(0.28601 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.0060909$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5.25 \text{ ft})$$

$$p_s = 0.7875 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity


$$\text{Ratio} = \frac{s}{p_s}$$

Status: **PASS**  
Ratio: **0.010**

$$Ratio = \frac{(0.0036137 \text{ kip/ft}^2)}{(0.7875 \text{ kip/ft}^2)}$$

$$Ratio = 0.0045888$$

Status: **PASS**  
Ratio: **0.000**

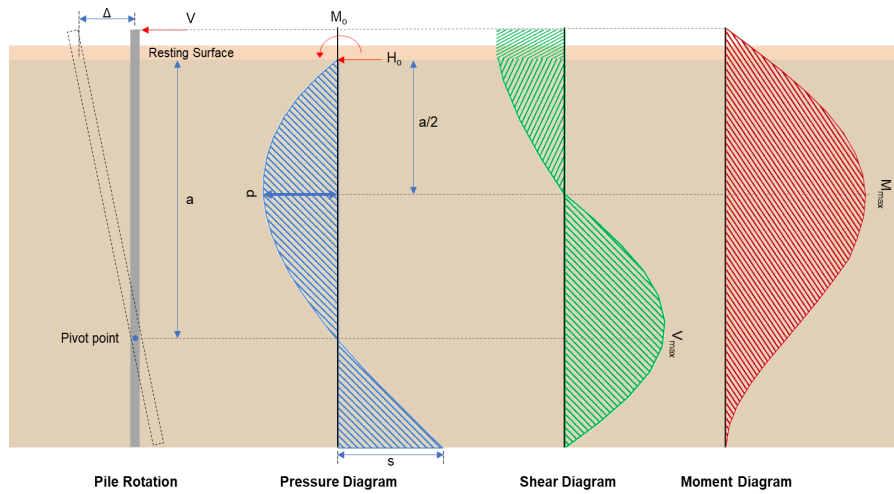

#### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_e}{1.57 D}$$

$$H_o = \frac{(-3.716 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.59172 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_e + (V_e H)}{1.57 D}$$

$$M_o = \frac{(26.517 \text{ kipft}) + ((-3.716 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 4.2225 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(4.2225 \text{ kipft/ft})}{(-0.59172 \text{ kip/ft})}$$

$$E = 7.1359 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (4.2225 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (-0.59172 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (4.2225 \text{ kipft/ft})) + (4 \times (-0.59172 \text{ kip/ft}) \times (5.25 \text{ ft}))}$$

$$a = 3.644 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.59172 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.644 \text{ ft})}{(5.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.644 \text{ ft})}{(5.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 7.2534 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.59172 \text{ kip/ft}) \times (48 \text{ in}) \times (5.25 \text{ ft})) \times \left[ \left( \frac{(7.1359 \text{ ft})}{(5.25 \text{ ft})} + \frac{(3.644 \text{ ft})}{2 \times (5.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.644 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (7.1359 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.644 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 17.916 \text{ kipft}$$

### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.018 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0028662 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.027 \text{ kipft}) + ((0.018 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0042994 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0042994 \text{ kipft/ft})}{(0.0028662 \text{ kip/ft})}$$

$$E = 1.5 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0042994 \text{ kipft/ft}) \times (5.25 \text{ ft})) + (3 \times (0.0028662 \text{ kip/ft}) \times (5.25 \text{ ft})^2)}{(6 \times (0.0042994 \text{ kipft/ft})) + (4 \times (0.0028662 \text{ kip/ft}) \times (5.25 \text{ ft}))}$$

$$a = 3.8062 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0028662 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.8062 \text{ ft})}{(5.25 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.8062 \text{ ft})}{(5.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.013501 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.0028662 \text{ kip/ft}) \times (48 \text{ in}) \times (5.25 \text{ ft})) \times \left[ \left( \frac{(1.5 \text{ ft})}{(5.25 \text{ ft})} + \frac{(3.8062 \text{ ft})}{2 \times (5.25 \text{ ft})} \right) - \left[ \left( \frac{4 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 3 \right) \times \left( \frac{(3.8062 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (1.5 \text{ ft})}{(5.25 \text{ ft})} + 2 \right) \times \left( \frac{(3.8062 \text{ ft})}{2 \times (5.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.030108 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 3 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(8.31 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (3 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (3 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -101.99 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-101.99 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

Status: **PASS**  
Ratio: **0.970**

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

$$s_{rebar} = \text{Max} [1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

#### Ties:

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10: Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = \text{Min} [(16 d_{bar}), (48 d_{ties}), \text{Min} (D, b)]$$

$$s_{ties} = \text{Min} [(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min} ((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

#### Summary:

Main reinforcement: **14 - #5 (0.625 in)**

Ties: #3(0.375 in) - 10 in

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2

$\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (3 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 3183.4 \text{ kip}$$

Ratio - Capacity

$$\text{Ratio} = \frac{P}{\phi P_N}$$

$$\text{Ratio} = \frac{(8.31 \text{ kip})}{(3183.4 \text{ kip})}$$

$$\text{Ratio} = 0.0026104$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

22.5.2.2

$b_w = 48 \text{ in}$  - Effective width,  
 $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3

$\lambda_s$  - size effect modification factor

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

22.5.5.1.1

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 324.49 \text{ kip}$$

22.5.5.1.1(a)

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  $P = 8.31 \text{ kip} \rightarrow 8310 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + \frac{(8310 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 130.9 \text{ kip}$$

22.5.5.1.2

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(3000 \text{ psi})} + (0.05 \times (3000 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 406.27 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(324.49 \text{ kip}), (130.9 \text{ kip}), (406.27 \text{ kip})]$$

$$V_c = 130.9 \text{ kip}$$

<p>22.5.1.2</p>	<p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 3 \text{ ksi} \rightarrow 3000 \text{ psi}</math>,  <math>V_{s,a}</math> - Shear strength of steel (a)</p> $V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(3000 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 807.65 \text{ kip}$ <p><math>A_v</math> - Ties rebar area,</p> $A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$ <p>22.5.8.5.3 <math>V_{s,b}</math> - Shear strength of steel (b)</p> $V_{s,b} = \frac{2 A_v f_{yt} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$ <p><math>V_s</math> - Governing shear strength of steel</p> $V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(807.65 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$ <p>22.5.1.1 <math>\phi V_n</math> - Allowable shear strength</p> $\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((130.9 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 118.17 \text{ kip}$ <p><b>Considering x-direction:</b></p> <p><math>V_{max} = 7.2534 \text{ kip}</math> - Maximum shear force in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(7.2534 \text{ kip})}{(118.17 \text{ kip})}$ $\text{Ratio} = 0.061383$ <p><b>Considering z-direction:</b></p> <p><math>V_{max} = 0.013501 \text{ kip}</math> - Maximum shear force in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{V_{max}}{\phi V_n}$ $\text{Ratio} = \frac{(0.013501 \text{ kip})}{(118.17 \text{ kip})}$ $\text{Ratio} = 0.00011425$	<p>Status: <b>PASS</b>  Ratio: <b>0.060</b></p> <p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>
	<p><b>Flexural Strength (ACI 318-19, LRFD)</b></p> <p><math>S_m</math> - Section modulus</p> $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$	

<p>14.5.2.1b</p>	<p><math>\lambda = 1</math> - Concrete modification factor (Normal concrete),  Allowable flexural strength:  <math>M_n</math> shall be the lesser of:  <math>\phi M_{n,1}</math></p> $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{3 \text{ksi}} \times 18432.001 \text{in}^3$ $\phi M_{n,1} = 273.423 \text{kipft}$ <p><math>\phi M_{n,2}</math></p> $\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (3 \text{ksi}) \times (18432 \text{in}^3)$ $\phi M_{n,2} = 2545.9 \text{kipft}$ <p>Therefore,  <math>\phi M_n</math> - Allowable flexural strength,</p> $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(273.42 \text{kipft}), (2545.9 \text{kipft})]$ $\phi M_n = 273.42 \text{kipft}$ <p><b>Considering x-direction:</b>  <math>M_{max} = 17.916 \text{kipft}</math> - Maximum moment in the x-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(17.916 \text{kipft})}{(273.42 \text{kipft})}$ $\text{Ratio} = 0.065524$	<p>Status: <b>PASS</b>  Ratio: <b>0.070</b></p>
	<p><b>Considering z-direction:</b>  <math>M_{max} = 0.030108 \text{kipft}</math> - Maximum moment in the z-direction,  Ratio - Capacity</p> $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(0.030108 \text{kipft})}{(273.42 \text{kipft})}$ $\text{Ratio} = 0.00011011$	<p>Status: <b>PASS</b>  Ratio: <b>0.000</b></p>