


**Project Name:** MTSOLAR- Lombard, A      **Date:** Mon Aug 25 2025  
**Location:** 706 Vots Dr, Fairplay, CO 80440, USA      **Number of Modules:** 12  
**Unique ID:** 1P-0-6TOP-XD-57-L-4Hx3W-629F      **Number of Poles:** 1  
**Dealer:** \_\_\_\_\_      **Date Sold:** \_\_\_\_\_

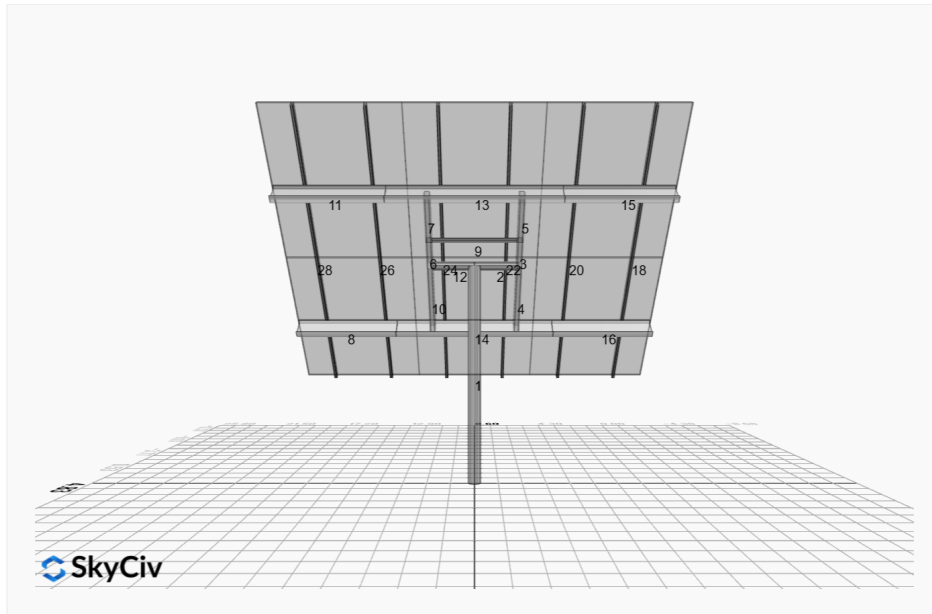

|                             |          |
|-----------------------------|----------|
| <b>Array Dimensions N/S</b> | 15.03 ft |
| <b>Array Dimensions E/W</b> | 17.20 ft |
| <b>Winter Tilt Angle</b>    | 50       |
| <b>Front Edge Clearance</b> | 4 ft     |

### MT Solar Bill of Materials (1P-0-6TOP-XD-57-L-4Hx3W-629F)

| Part               | Short Description     | BOM Qty |
|--------------------|-----------------------|---------|
| MTS-PC-6           | 6IN Pole Cap Assembly | 1       |
| MTS-HF-XD          | H-Frame Assembly-XD   | 1       |
| MTS-XD-Wing-57     | 57IN XD Wing          | 4       |
| MTS-CLAMP-HOOK-4PK | Hook Clamp            | 3       |

### Rail Bill of Materials

| Part             | Qty |
|------------------|-----|
| Rails (180in)    | 6   |
| Rail Attachment  | 12  |
| Module Mid Clamp | 18  |
| Module End Clamp | 12  |
| Ground Lug       | 3   |

## Site Details:



**Site Address:** 706 Vots Dr, Fairplay, CO 80440, USA

### Array Specification

|                                    |                        |
|------------------------------------|------------------------|
| <b>Duty Classification:</b>        | XD                     |
| <b>Module Width:</b>               | 44.60 in               |
| <b>Module Length:</b>              | 67.80in                |
| <b>Number of Rows:</b>             | 4                      |
| <b>Number of Columns:</b>          | 3                      |
| <b>Total Number of Modules:</b>    | 12                     |
| <b>Winter Tilt Angle:</b>          | 50                     |
| <b>Front Edge Clearance:</b>       | 4                      |
| <b>Total Array Height at Tilt:</b> | 15.52 ft               |
| <b>Total Frame Length:</b>         | 17.00 ft               |
| <b>Module Info/Notes:</b>          | Hyundai HiN-T440NF(BK) |
| <b>Array Dimensions N/S:</b>       | 15.03 ft               |
| <b>Array Dimensions E/W:</b>       | 17.20 ft               |
| <b>Rail Length:</b>                | 180.40 in              |
| <b>Rail Spacing:</b>               | 2.87 ft                |

### Support Specifications

|                                 |                 |
|---------------------------------|-----------------|
| <b>Pole Size:</b>               | 6in Pipe Sch 40 |
| <b>Pole Length above Grade:</b> | 9.76 ft         |
| <b>Number of Poles:</b>         | 1               |
| <b>Pole Spacing:</b>            | 0               |

### Foundation Specifications

|  |                      |
|--|----------------------|
| <b>Foundation Type:</b>                | Square               |
| <b>Foundation Dimensions:</b>          | 48 x 48 in           |
| <b>Foundation Depth (below grade):</b> | Pile 1: 5.50 ft      |
| <b>Foundation Volume:</b>              | 3.259 y <sup>3</sup> |

### Site Info

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Risk Category:</b>       | I                                    |
| <b>Exposure:</b>            | C                                    |
| <b>Soil Classification:</b> | sand                                 |
| <b>Site Location:</b>       | 706 Vots Dr, Fairplay, CO 80440, USA |
| <b>Wind Speed:</b>          | 105 mph                              |
| <b>Snow Load:</b>           | 139 psf                              |

### **Design Disclaimer**



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.




## AutoDesigner Input

```
{ "product_type": "Beam", "designer_name": "Kelly Nary", "designer_email": "kelly.nary@coloradomountainsolar.com", "designer_phone": "7193950191", "project_id": "MTSOLAR- Lombard, A", "site_address": "706 Vots Dr, Fairplay, CO 80440, USA", "module_info": "Hyundai HiN-T440NF(BK)", "module_width": 44.6, "module_length": 67.8, "number_rows": 4, "number_columns": 3, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": "15", "tilt_angle": 50, "ground_clearance": 4, "risk_category": "I", "exposure_category": "C", "frame_duty_override": "auto", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "48_Square", "foundation_type": "Square", "foundation_size": 48, "check_rails": false, "wind_speed_override": 105, "snow_load_override": 139, "direct_snow_load": false, "add_angle_brace": false }
```



## Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

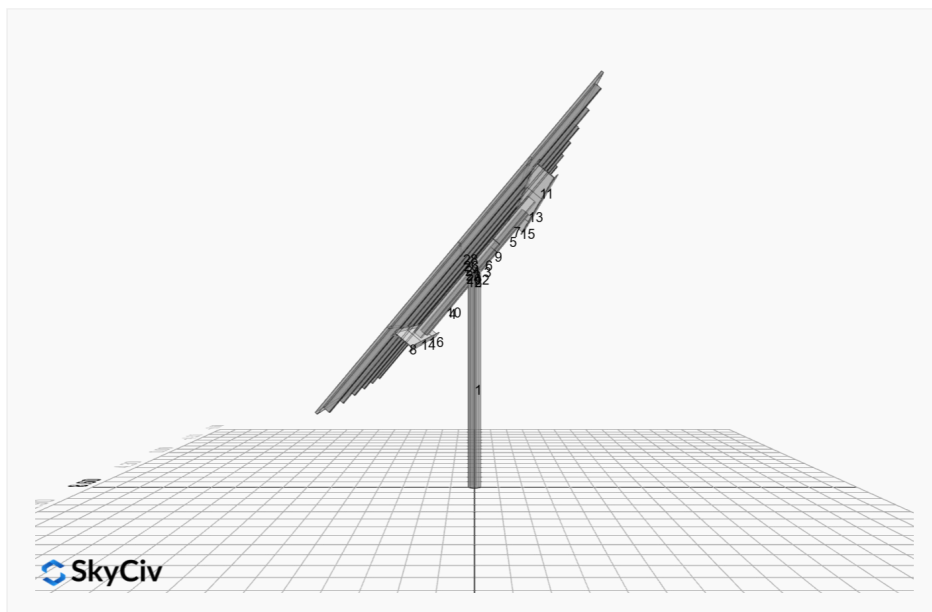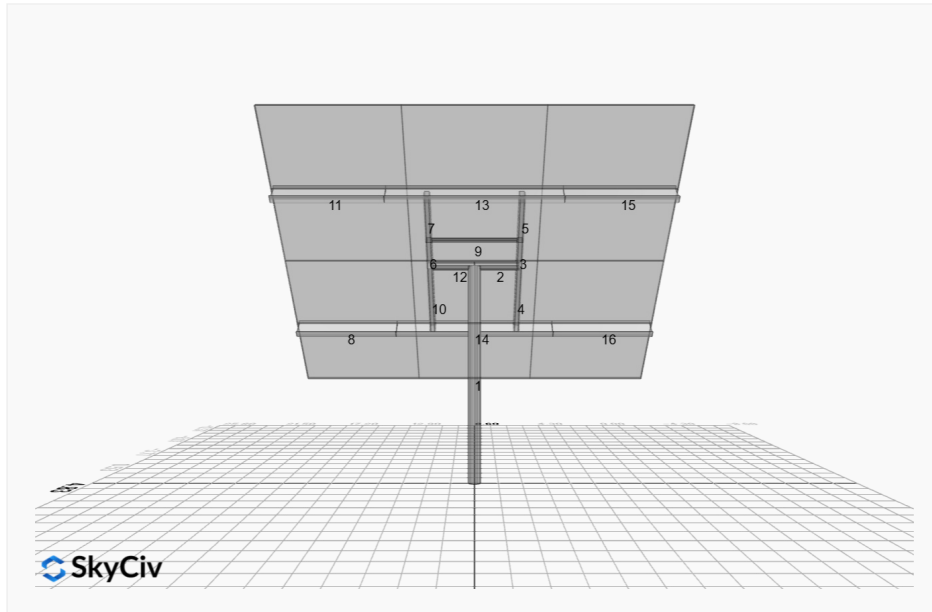


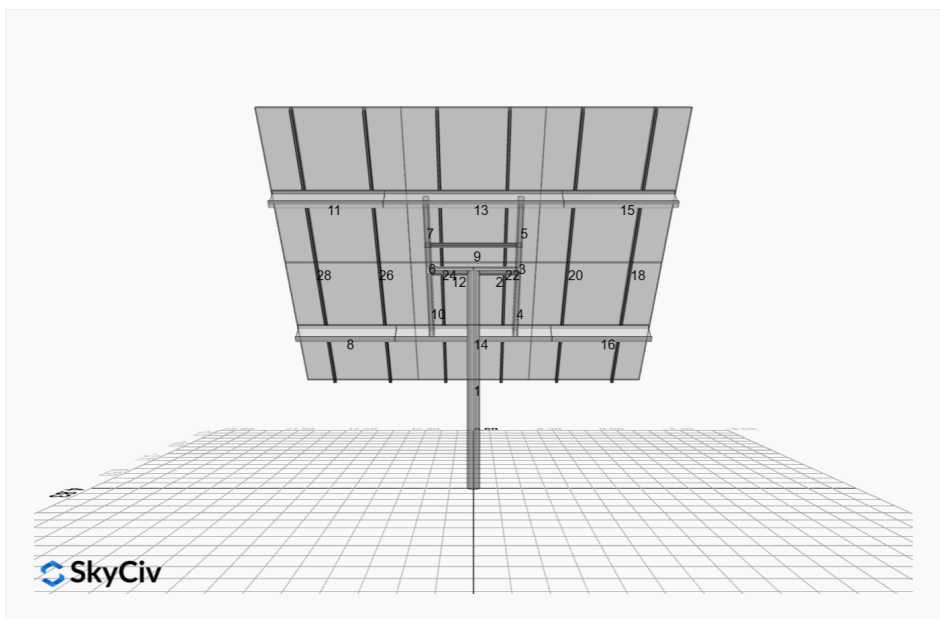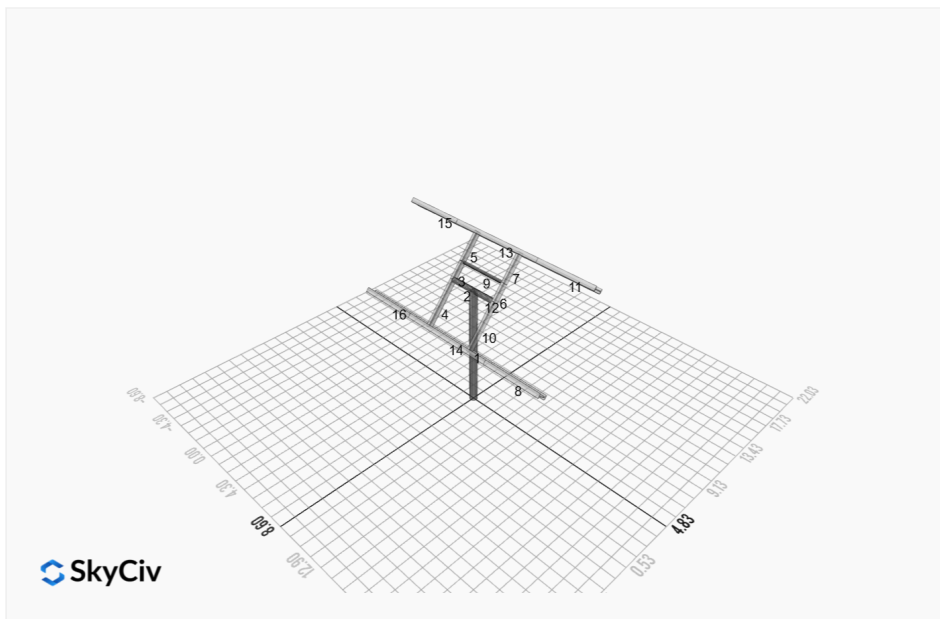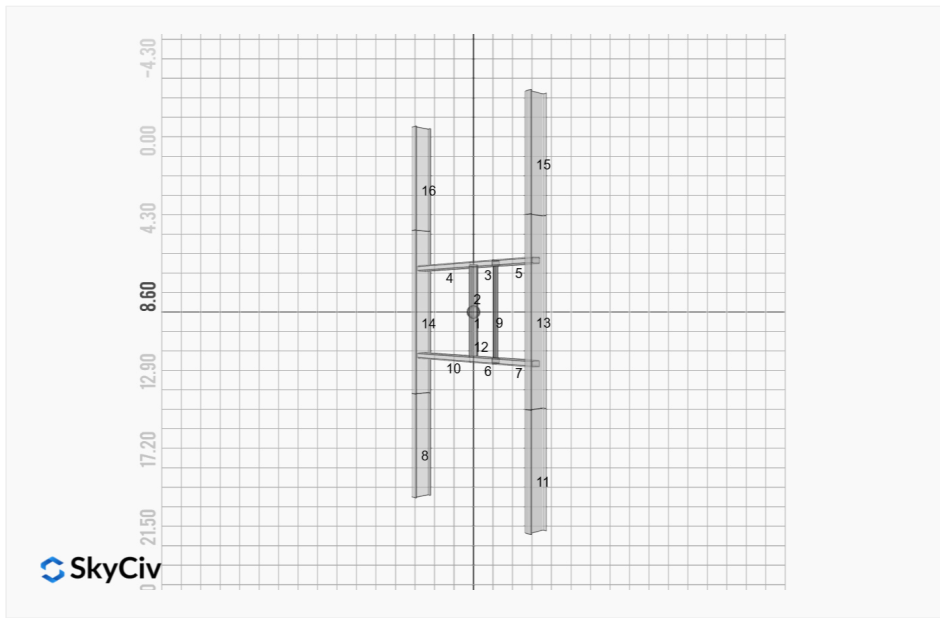

# FEM Results (Envelope Worst Case for each member)

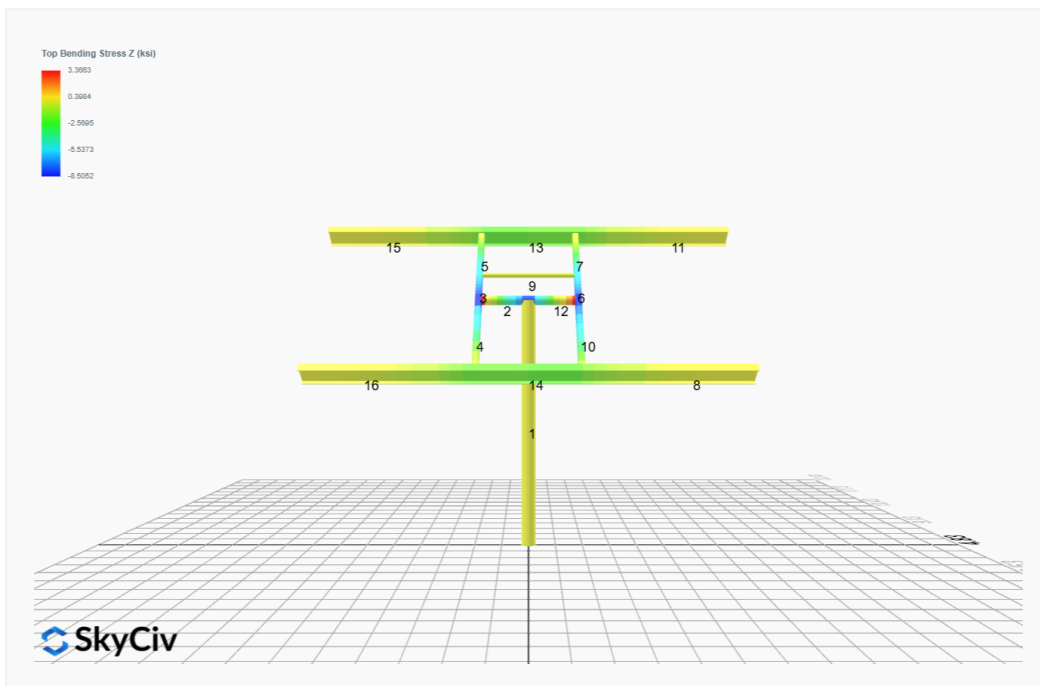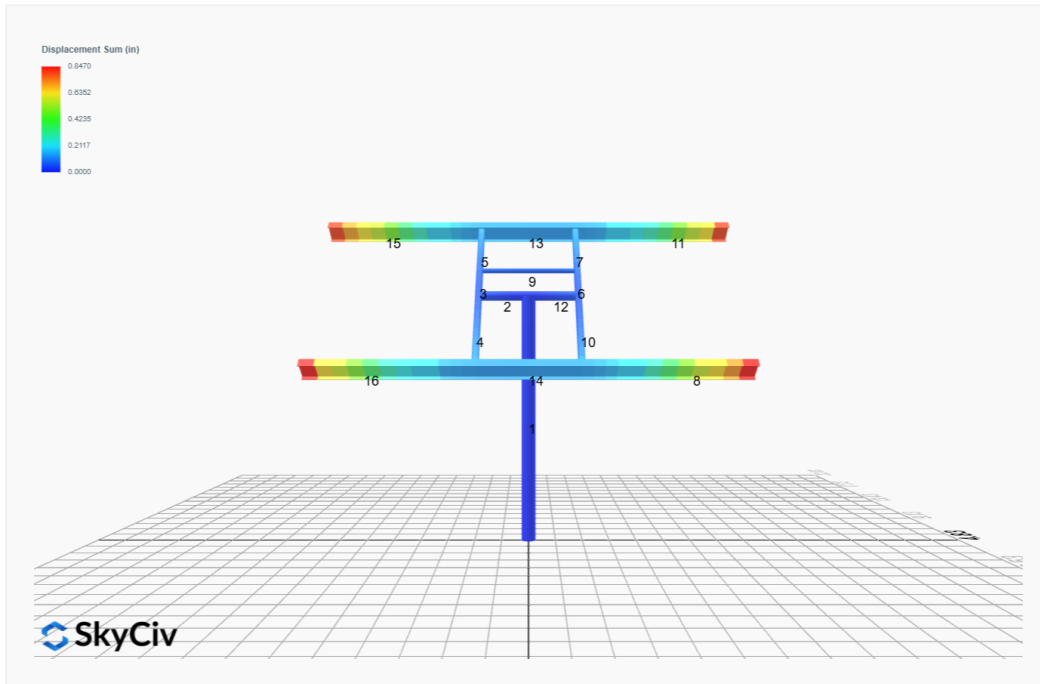

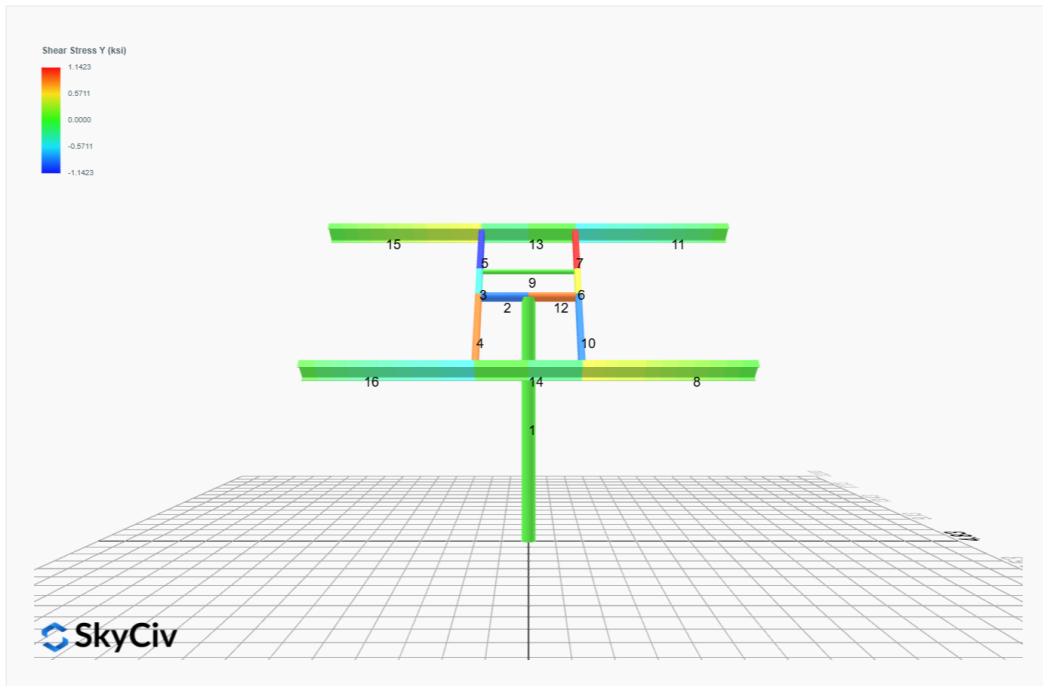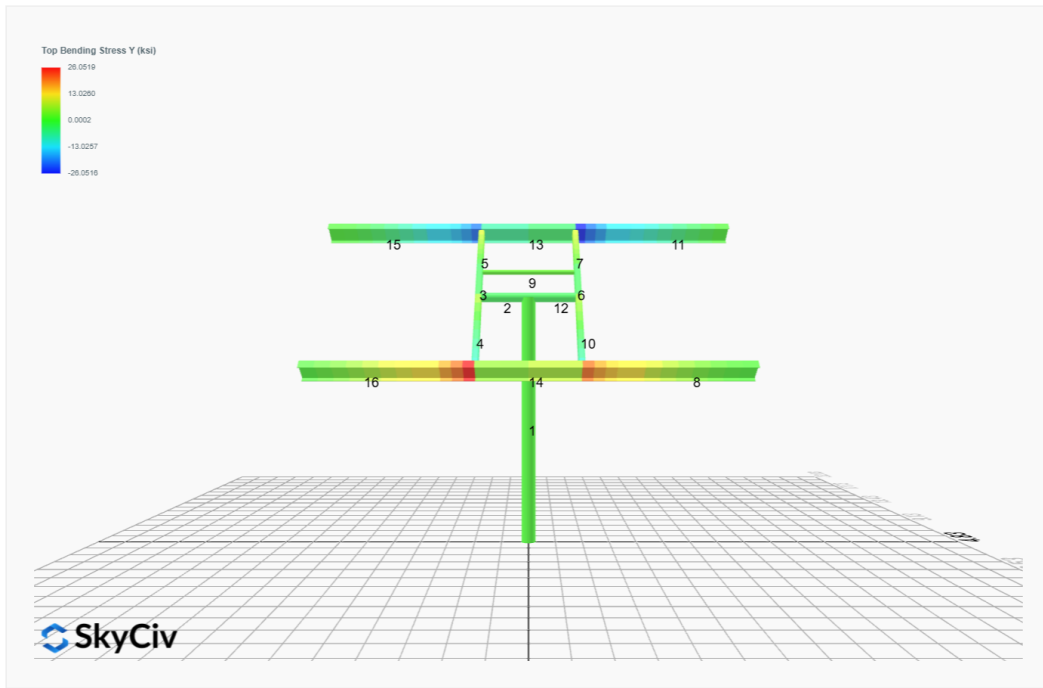

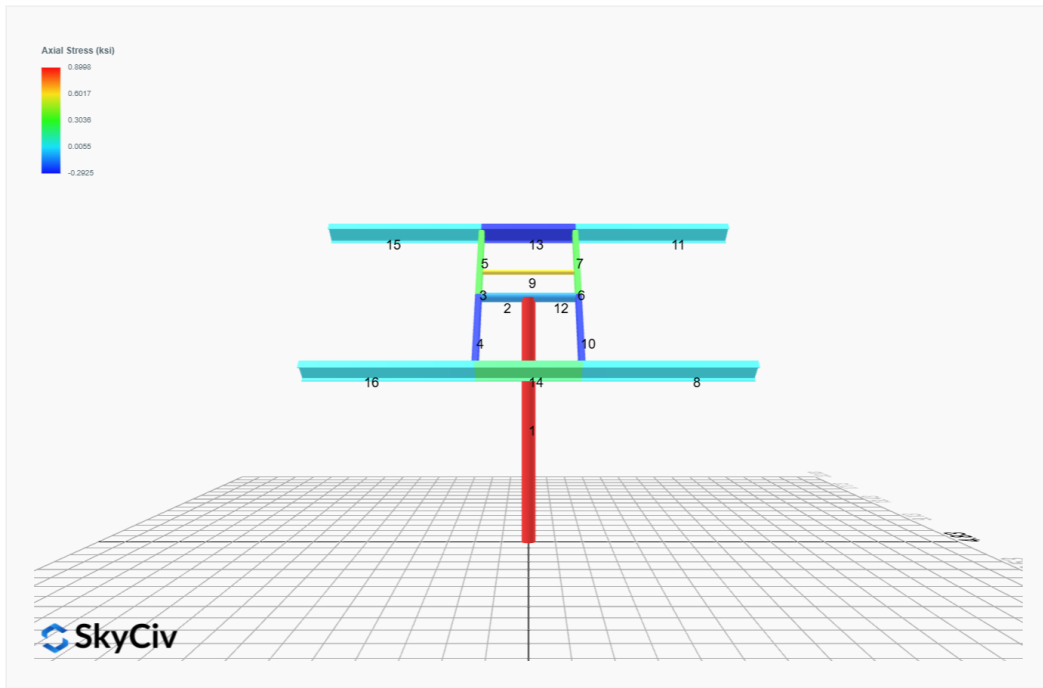

## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

| Name  | Fx      | Fy      | Fz     | Mx     | My      | Mz       |
|---|---------|---------|--------|--------|---------|----------|
| ULS: 1. D   | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 2. D + L   | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 3. D + (S or Lr or R)  | 0.0000  | 7.1018  | 0.0000 | 0.0000 | -0.0000 | 0.0490   |
| ULS: 3. D + (S or Lr or R)  | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0000  | 5.8463  | 0.0000 | 0.0000 | -0.0000 | 0.0424   |
| ULS: 4. D + 0.75L + 0.75(S or Lr or R)  | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 5b. D + 0.7E   | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S   | 0.0000  | 5.8463  | 0.0000 | 0.0000 | -0.0000 | 0.0424   |
| ULS: 8. 0.6D + 0.7E   | 0.0000  | 1.2479  | 0.0000 | 0.0000 | -0.0000 | 0.0135   |
| ULS: 5a. D + 0.6W_Wind downforce Case A only                                    | -1.7278 | 3.5296  | 0.0000 | 0.0000 | -0.0000 | 17.1147  |
| ULS: 5a. D + 0.6W_Wind downforce Case B only                                    | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 5a. D + 0.6W_Wind uplift Case A only                                       | 1.7278  | 0.6301  | 0.0000 | 0.0000 | -0.0000 | -16.6131 |
| ULS: 5a. D + 0.6W_Wind uplift Case B only                                       | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.2959 | 6.9336  | 0.0000 | 0.0000 | -0.0000 | 12.8615  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0000  | 5.8463  | 0.0000 | 0.0000 | -0.0000 | 0.0424   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.2959  | 4.7589  | 0.0000 | 0.0000 | -0.0000 | -12.4343 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.0000  | 5.8463  | 0.0000 | 0.0000 | -0.0000 | 0.0424   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only | -1.2959 | 3.1672  | 0.0000 | 0.0000 | -0.0000 | 12.8416  |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only    | 1.2959  | 0.9925  | 0.0000 | 0.0000 | -0.0000 | -12.4542 |
| ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only    | 0.0000  | 2.0798  | 0.0000 | 0.0000 | -0.0000 | 0.0226   |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case A only                                  | -1.7278 | 2.6977  | 0.0000 | 0.0000 | -0.0000 | 17.1056  |
| ULS: 7. 0.6D + 0.6W_Wind downforce Case B only                                  | 0.0000  | 1.2479  | 0.0000 | 0.0000 | -0.0000 | 0.0135   |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case A only                                     | 1.7278  | -0.2019 | 0.0000 | 0.0000 | -0.0000 | -16.6221 |
| ULS: 7. 0.6D + 0.6W_Wind uplift Case B only                                     | 0.0000  | 1.2479  | 0.0000 | 0.0000 | -0.0000 | 0.0135   |

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 11.7390             |
| Shear X          | -2.8797             |
| Shear Z          | 0.0000              |
| Moment X         | 0.0000              |
| Moment Y (Twist) | 0.0000              |
| Moment Z         | 29.4085             |

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

| Result           | Value (kip, kip-ft) |
|------------------|---------------------|
| Axial            | 7.1018              |
| Shear X          | -1.7278             |
| Shear Z          | 0.0000              |
| Moment X         | 0.0000              |
| Moment Y (Twist) | 0.0000              |
| Moment Z         | 17.1147             |

## Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States  
 User Name: sales@mtsolar.us  
 Unit System: imperial




## Design Input Information


| Design Factors |          |          |          |
|----------------|----------|----------|----------|
| $\Phi_t$       | $\Phi_c$ | $\Phi_b$ | $\Phi_v$ |
| 0.9            | 0.9      | 0.9      | 0.9      |

| Design Materials |         |                      |                      |
|------------------|---------|----------------------|----------------------|
| ID               | E (ksi) | F <sub>y</sub> (ksi) | F <sub>u</sub> (ksi) |
| 1                | 29000   | 50                   | 65                   |


### Section Dimensions



| ID | Name             | d (in) | t <sub>w</sub> (in) |  |  |  |  |
|----|------------------|--------|---------------------|--|--|--|--|
| 3  | 2in Pipe Sch 120 | 2.38   | 0.25                |  |  |  |  |
| 6  | 4in Pipe Sch 120 | 4.50   | 0.44                |  |  |  |  |
| 7  | 6in Pipe Sch 40  | 6.63   | 0.28                |  |  |  |  |



| ID | Name       | d (in) | b (in) | t <sub>w</sub> (in) | t <sub>b</sub> (in) | r (in) |  |
|----|------------|--------|--------|---------------------|---------------------|--------|--|
| 17 | HSS5x3x1/4 | 5.00   | 3.00   | 0.23                | 0.23                | 0.23   |  |



| ID | Name   | d (in) | t <sub>w</sub> (in) | b <sub>t</sub> (in) | b <sub>b</sub> (in) | t <sub>t</sub> (in) | t <sub>b</sub> (in) | r (in) |
|----|--------|--------|---------------------|---------------------|---------------------|---------------------|---------------------|--------|
| 20 | W10x12 | 9.87   | 0.19                | 3.96                | 3.96                | 0.21                | 0.21                | 0.30   |

### Section Properties

| ID | Name | A (in <sup>2</sup> ) | J (in <sup>4</sup> ) | I <sub>yp</sub> (in <sup>4</sup> ) | I <sub>zp</sub> (in <sup>4</sup> ) | I <sub>w</sub> (in <sup>6</sup> ) | S <sub>yp</sub> (in <sup>3</sup> ) | S <sub>zp</sub> (in <sup>3</sup> ) |
|----|------|----------------------|----------------------|------------------------------------|------------------------------------|-----------------------------------|------------------------------------|------------------------------------|
|    |      |                      |                      |                                    |                                    |                                   |                                    |                                    |



|    |        |       |       |      |       |       |
|----|--------|-------|-------|------|-------|-------|
| 15 | 159.30 | 34.37 | 46.90 | 6.46 | 56.26 | 44.91 |
| 16 | 159.30 | 34.37 | 46.90 | 6.46 | 56.26 | 44.91 |

## Design Ratio

| Member ID | P     | M <sub>z</sub> | M <sub>y</sub> | V <sub>y</sub> | V <sub>z</sub> | (P,M <sub>z</sub> ,M <sub>y</sub> ) | Worst LC | KL/r         | δ            | Status |
|-----------|-------|----------------|----------------|----------------|----------------|-------------------------------------|----------|--------------|--------------|--------|
| 1         | 0.112 | 0.695          | 0.000          | 0.038          | 0.000          | 0.731                               | #13      | 0.548        | Not Required | Pass   |
| 2         | 0.006 | 0.308          | 0.119          | 0.076          | 0.019          | 0.414                               | #21      | 0.036        | Not Required | Pass   |
| 3         | 0.013 | 0.396          | 0.065          | 0.039          | 0.001          | 0.467                               | #21      | 0.046        | Not Required | Pass   |
| 4         | 0.013 | 0.392          | 0.264          | 0.039          | 0.056          | 0.562                               | #21      | 0.082        | Not Required | Pass   |
| 5         | 0.013 | 0.246          | 0.272          | 0.039          | 0.071          | 0.319                               | #21      | 0.076        | Not Required | Pass   |
| 6         | 0.013 | 0.396          | 0.065          | 0.039          | 0.001          | 0.468                               | #21      | 0.046        | Not Required | Pass   |
| 7         | 0.013 | 0.246          | 0.272          | 0.039          | 0.071          | 0.319                               | #21      | 0.076        | Not Required | Pass   |
| 8         | 0.000 | 0.059          | 0.393          | 0.021          | 0.024          | 0.452                               | #21      | Not Required | Not Required | Pass   |
| 9         | 0.031 | 0.018          | 0.044          | 0.001          | 0.000          | 0.075                               | #21      | 0.206        | Not Required | Pass   |
| 10        | 0.013 | 0.392          | 0.264          | 0.039          | 0.056          | 0.562                               | #21      | 0.082        | Not Required | Pass   |
| 11        | 0.000 | 0.059          | 0.393          | 0.021          | 0.024          | 0.452                               | #21      | Not Required | Not Required | Pass   |
| 12        | 0.006 | 0.308          | 0.119          | 0.076          | 0.019          | 0.414                               | #21      | 0.036        | Not Required | Pass   |
| 13        | 0.013 | 0.175          | 0.736          | 0.028          | 0.033          | 0.899                               | #21      | 0.204        | Not Required | Pass   |
| 14        | 0.017 | 0.177          | 0.736          | 0.028          | 0.033          | 0.899                               | #21      | 0.306        | Not Required | Pass   |
| 15        | 0.000 | 0.059          | 0.393          | 0.021          | 0.024          | 0.452                               | #21      | Not Required | Not Required | Pass   |
| 16        | 0.000 | 0.059          | 0.393          | 0.021          | 0.024          | 0.452                               | #21      | Not Required | Not Required | Pass   |

## Definitions

|                                     |   |
|-------------------------------------|---|
| Φ <sub>t</sub>                      | Safety factor for tensile                                 |
| Φ <sub>c</sub>                      | Safety factor for compression                             |
| Φ <sub>b</sub>                      | Safety factor for flexure                                 |
| Φ <sub>v</sub>                      | Safety factor for shear                                   |
| E                                   | Modulus of elasticity                                     |
| F <sub>y</sub>                      | Specified minimum yield stress                            |
| F <sub>u</sub>                      | Specified minimum tensile strength                        |
| A                                   | Cross-sectional area                                      |
| J                                   | Torsional constant  |
| I <sub>yp</sub>                     | Moment of inertia about the Y axes                        |
| I <sub>zp</sub>                     | Moment of inertia about the Z axes                        |
| I <sub>w</sub>                      | Warping constant  |
| S <sub>yp</sub>                     | Plastic section modulus about the Y axis                  |
| S <sub>zp</sub>                     | Plastic section modulus about the Z axis                  |
| KL                                  | Effective length  |
| C <sub>b</sub>                      | Buckling modification factor (from all load combinations) |
| L <sub>b</sub>                      | Length between braced points                              |
| LST                                 | Limited slenderness for tension                           |
| LSC                                 | Limited slenderness for compression                       |
| LD                                  | Limited deflection  |
| P <sub>n</sub>                      | Nominal axial strength (tension/compression)              |
| M <sub>n</sub>                      | Nominal flexural strength (about Z/Y axis)                |
| V <sub>n</sub>                      | Nominal shear strength (along Z/Y axis)                   |
| P                                   | Design ratio in case of axial force                       |
| M <sub>z</sub>                      | Design ratio in case of bending about Z axis              |
| M <sub>y</sub>                      | Design ratio in case of bending about Y axis              |
| V <sub>y</sub>                      | Design ratio in case of shear along Y axis                |
| V <sub>z</sub>                      | Design ratio in case of shear along Z axis                |
| (P,M <sub>z</sub> ,M <sub>y</sub> ) | Design ratio in case of axial force and bending action    |
| KL/r                                | Design ratio in case of section slenderness               |
| δ                                   | Design ratio in case of member deflection                 |
| OK                                  | Capacity is provided                                      |
| NG                                  | Capacity is not provided                                  |



| REFERENCES | CALCULATIONS | RESULTS |
|------------|--------------|---------|
|------------|--------------|---------|


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

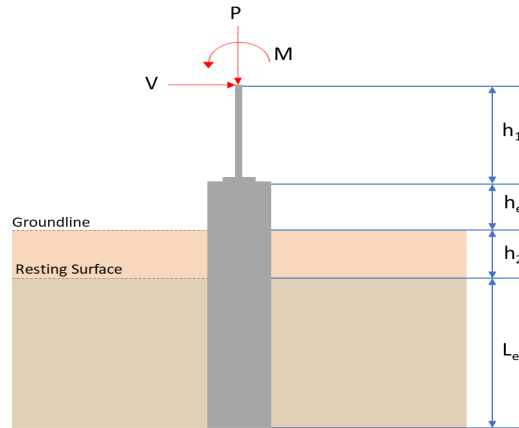

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 5.5$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

| Layer | Label   | Allowable Bearing Pressure ( $q_a$ ) (psf) | Allowable Lateral Pressure ( $R$ ) (psf/ft) |
|-------|---|--|---|
| 1     | Sand, silty sand, clayey sand, silty gravel & clayey gravel | 2000.000                                   | 150.000                                     |

### Tabulation of Loads

| Load Component | ASD    | LRFD   |
|----------------|--------|--------|
| $P$ (kip)      | 7.102  | 11.739 |
| $V_x$ (kip)    | -1.728 | -2.880 |
| $V_z$ (kip)    | 0.000  | 0.000  |
| $M_x$ (kipft)  | 0.000  | 0.000  |
| $M_z$ (kipft)  | 17.115 | 29.408 |

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-1.728 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.27516 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(17.115 \text{ kipft}) + ((-1.728 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 2.7253 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$$

Solving the cubic equation:

$L_{e,x} = 5.1124 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$L_{e,z} = 0 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(5.1124 \text{ ft}), (0 \text{ ft})]$$

$$L_{e,req} = 5.112 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (5.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 5.5 \text{ ft}$$

*Ratio* - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(5.112 \text{ ft})}{(5.5 \text{ ft})}$$

$$\text{Ratio} = 0.92945$$

Status: **PASS**  
Ratio: **0.930**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(7.102 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.44388 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

*Ratio* - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.44388 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.22194$$

Status: **PASS**  
Ratio: **0.220**

Czerniak

### Lateral Soil Pressure (ASD):

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(5.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.375$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.27516 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 2.7253 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (2.7253 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.27516 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (2.7253 \text{ kipft/ft})) + (4 \times (-0.27516 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.7905 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (2.7253 \text{ kipft/ft})) + (3 \times (-0.27516 \text{ kip/ft}) \times (5.5 \text{ ft}))]^2}{(5.5 \text{ ft})^2 \times [(3 \times (2.7253 \text{ kipft/ft})) + (2 \times (-0.27516 \text{ kip/ft}) \times (5.5 \text{ ft}))]}$$

$$p = 0.19483 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (2.7253 \text{ kipft/ft})) + ((-0.27516 \text{ kip/ft}) \times (5.5 \text{ ft}))]}{(5.5 \text{ ft})^2}$$

$$s = 0.78094 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(3.7905 \text{ ft})}{2}$$

$$p_a = 0.28429 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.19483 \text{ kip/ft}^2)}{(0.28429 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.68534$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (5.5 \text{ ft})$$


$$p_s = 0.825 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$

$$\text{Ratio} = \frac{(0.78094 \text{ kip/ft}^2)}{(0.825 \text{ kip/ft}^2)}$$

Status: **PASS**  
Ratio: **0.690**

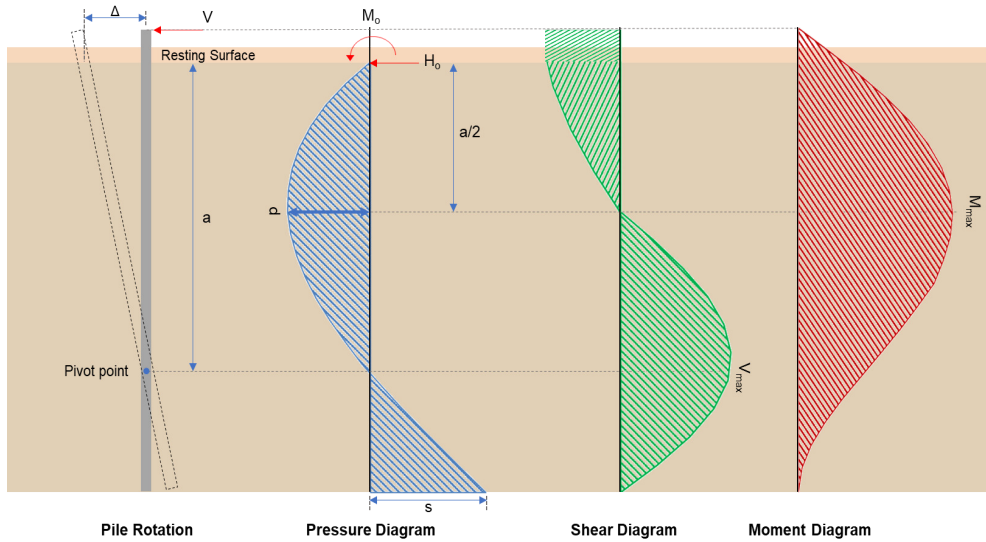

**Shear force and Bending moment (x-direction, LRFD)**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-2.88 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.4586 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(29.408 \text{ kipft}) + ((-2.88 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 4.6828 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(4.6828 \text{ kipft/ft})}{(-0.4586 \text{ kip/ft})}$$

$$E = 10.211 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (4.6828 \text{ kipft/ft}) \times (5.5 \text{ ft})) + (3 \times (-0.4586 \text{ kip/ft}) \times (5.5 \text{ ft})^2)}{(6 \times (4.6828 \text{ kipft/ft})) + (4 \times (-0.4586 \text{ kip/ft}) \times (5.5 \text{ ft}))}$$

$$a = 3.7878 \text{ ft}$$

$V_{max}$  - Max shear force located at depth  $a$ ,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.4586 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (10.211 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.7878 \text{ ft})}{(5.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (10.211 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.7878 \text{ ft})}{(5.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 1.200 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4 E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 + \left[ \left( \frac{3 E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.4586 \text{ kip/ft}) \times (48 \text{ in}) \times (5.5 \text{ ft})) \times \left[ \left( \frac{(10.211 \text{ ft})}{(5.5 \text{ ft})} + \frac{(3.7878 \text{ ft})}{2 \times (5.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (10.211 \text{ ft})}{(5.5 \text{ ft})} + 3 \right) \times \left( \frac{(3.7878 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^3 + \left[ \left( \frac{3 \times (10.211 \text{ ft})}{(5.5 \text{ ft})} + 2 \right) \times \left( \frac{(3.7878 \text{ ft})}{2 \times (5.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 18.984 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,  
 $f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,  
 $\phi = 0.65$  - Reduction factor for axial strength,  
 $\alpha = 0.8$  - Alpha factor for axial strength,  
 $A_g = 2304 \text{ in}^2$  - Gross area of concrete,

Table 22.4.2.1

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

22.4.2.2, 10.6.1.1

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\left( \frac{11.739 \text{ kip}}{(0.65) \times (0.8)} \right) - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.206 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.206 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

$$\text{Ratio} = 0.96556$$

25.2.3

$s_{rebar}$  - Minimum spacing of reinforcement,

$$s_{rebar} = \text{Max} [1.5, (1.5 d_{bar})]$$

Status: **PASS**  
Ratio: **0.970**

$$s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$$

$$s_{rebar} = 1.5 \text{ in}$$

**Ties:**

25.7.2.2 Since longitudinal reinforcement is  $\leq$  No. 10 $\emptyset$ : Use #3(0.375 in)

25.7.2.1  $s_{ties}$  - Maximum spacing of ties,

$$s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$$

$$s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]$$

$$s_{ties} = 10 \text{ in}$$

**Summary:**

Main reinforcement: **14 - #5 (0.625 in)**

Ties: **#3(0.375 in) - 10 in**

**Axial Compression Strength (ACI 318-19, LRFD)**

22.4.2.2  $\phi P_N$  - Allowable axial compressive strength

$$\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$$

$$\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$$

$$\phi P_N = 2675.2 \text{ kip}$$

Ratio - Capacity

$$Ratio = \frac{P}{\phi P_N}$$

$$Ratio = \frac{(11.739 \text{ kip})}{(2675.2 \text{ kip})}$$

$$Ratio = 0.0043881$$

Status: **PASS**  
Ratio: **0.000**

**Shear Strength (ACI 318-19, LRFD)**

**Parameters:**

$b_w = 48 \text{ in}$  - Effective width,

22.5.2.2  $d$  - Effective depth

$$d = 0.80 D$$

$$d = 0.80 \times (48 \text{ in})$$

$$d = 38.4 \text{ in}$$

22.5.5.1.3  $\lambda_s$  - size effect modification factor

$$\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$$

$$\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$$

$$\lambda_s = 0.64282$$

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,

22.5.5.1.1  $V_{c,max}$  - Max shear strength of concrete

$$V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$$

$$V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,max} = 296.21 \text{ kip}$$

The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 11.739 \text{ kip} \rightarrow 11739 \text{ lbf}$ ,

22.5.5.1.1(a)  $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(11739 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120.05 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120.05 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120.05 \text{ kip}$$

22.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((120.05 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.11 \text{ kip}$$

**Considering x-direction:**

$V_{max} = 7.2367 \text{ kip}$  - Maximum shear force in the x-direction,  
 Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$\text{Ratio} = \frac{(7.2367 \text{ kip})}{(111.11 \text{ kip})}$$

$$\text{Ratio} = 0.065129$$

Status: **PASS**  
 Ratio: **0.070**

**Flexural Strength (ACI 318-19, LRFD)** $S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

 $\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

 $M_n$  shall be the lesser of: $\phi M_{n,1}$ 

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{2.5 \text{ ksi}} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

 $\phi M_{n,2}$ 

$$\phi M_{n,2} = \phi \times 0.85 \times f'_c \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

 $\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:** $M_{max} = 18.984 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(18.984 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.076058$$

Status: **PASS**  
Ratio: **0.080**