


# Project Details



**Project Name:** MTSOLAR\_E71ADH44F85E Mebane South  
**Date:** Mon Dec 09 2024  
**Location:** G78J+FX Bakersfield, CA, USA  
**Number of Modules:** 55  
**Unique ID:** 4P-19.75-8TOP-HD-57-L-5Hx11W-HB09  
**Number of Poles:** 4  
**Date Sold:**  
**Dealer:** \_\_\_\_\_

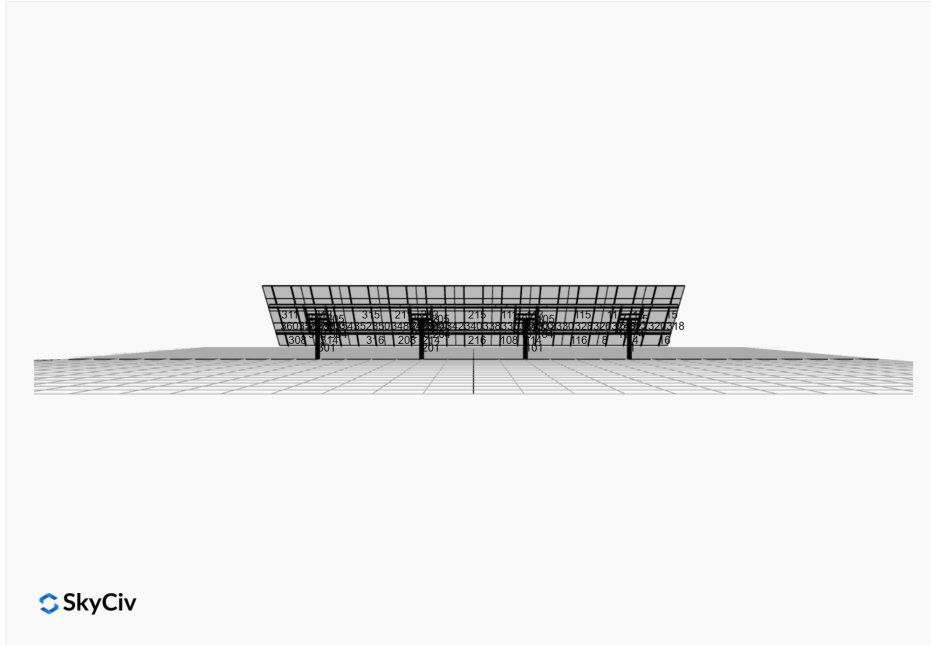

<b>Array Dimensions N/S</b>	17.40 ft
<b>Array Dimensions E/W</b>	76.99 ft
<b>Winter Tilt Angle</b>	40
<b>Front Edge Clearance</b>	2 ft


## MT Solar Bill of Materials (4P-19.75-8TOP-HD-57-L-5Hx11W-HB09)

Part	Short Description	BOM Qty
MTS-PC-8	8IN Pole Cap Assembly	4
MTS-HF-HD	H-Frame Assembly-HD	4
MTS-HD-Wing-57	57IN HD Wing	4
MTS-HD-Splice-90	90IN HD Splice	6
MTS-HD-Splice-57	57IN HD Splice	6
MTS-CLAMP-ANGLE-4PK	Angle Clamp	11

## Rail Bill of Materials

Part	Qty
Rails (206in)	22
Rail Attachment	88
Module Mid Clamp	88
Module End Clamp	44
Ground Lug	11

## Site Details:

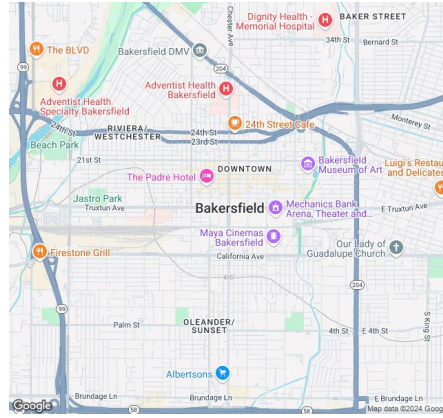

**Site Address:** G78J+FX Bakersfield, CA, USA

### Array Specification

<b>Duty Classification:</b>	HD
<b>Module Width:</b>	41.26 in
<b>Module Length:</b>	82.99in
<b>Number of Rows:</b>	5
<b>Number of Columns:</b>	11
<b>Total Number of Modules:</b>	55
<b>Winter Tilt Angle:</b>	40
<b>Front Edge Clearance:</b>	2
<b>Total Array Height at Tilt:</b>	13.18 ft
<b>Total Frame Length:</b>	76.25 ft
<b>Frame Weight:</b>	4329 lbs
<b>Array Dimensions N/S:</b>	17.40 ft
<b>Array Dimensions E/W:</b>	76.99 ft
<b>Rail Length:</b>	208.80 in
<b>Rail Spacing:</b>	3.50 ft

### Support Specifications

<b>Pole Size:</b>	8in Pipe Sch 40
<b>Pole Length above Grade:</b>	7.59 ft
<b>Number of Poles:</b>	4
<b>Pole Spacing:</b>	19.75 ft

### Foundation Specifications

<b>Foundation Type:</b>	Square
<b>Foundation Dimensions:</b>	48 x 48 in
<b>Foundation Depth (below grade):</b>	Pile 1: 6.50 ft Pile 2: 6.75 ft Pile 3: 6.75 ft Pile 4: 6.50 ft
<b>Foundation Volume:</b>	15.704 y <sup>3</sup>

### Site Info

<b>Risk Category:</b>	I
<b>Exposure:</b>	C
<b>Soil Classification:</b>	sand
<b>Site Location:</b>	G78J+FX Bakersfield, CA, USA
<b>Wind Speed:</b>	110 mph

**Snow Load:**

15 psf

### **Design Disclaimer**



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.




## AutoDesigner Input

```
{ "wind_speed_override": 110, "snow_load_override": 15, "direct_snow_load": false, "add_angle_brace": false, "product_type": "Beam", "designer_name": "ISC", "designer_email": "t.bublik@iscpv.com", "designer_phone": "", "project_id": "MTSOLAR_E71ADH44F85E Mebane South", "site_address": "G78J+FX Bakersfield, CA, USA", "module_width": 41.26, "module_length": 82.99, "number_rows": 5, "number_columns": 11, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": 15, "tilt_angle": 40, "ground_clearance": 2, "risk_category": "I", "exposure_category": "C", "frame_duty_override": "auto", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "48_Square", "foundation_type": "Square", "foundation_size": 48, "check_rails": false }
```



### Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

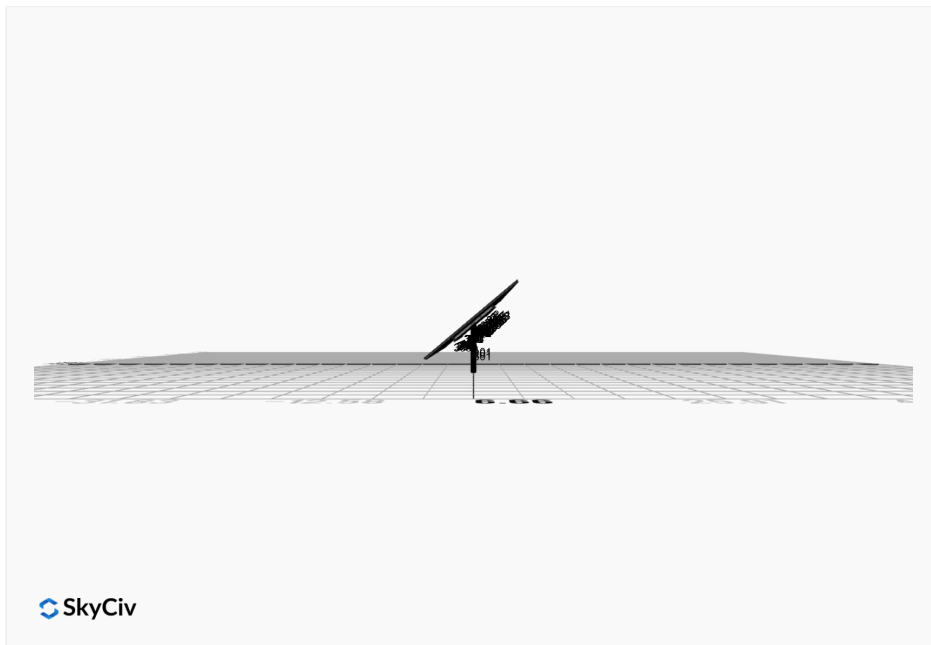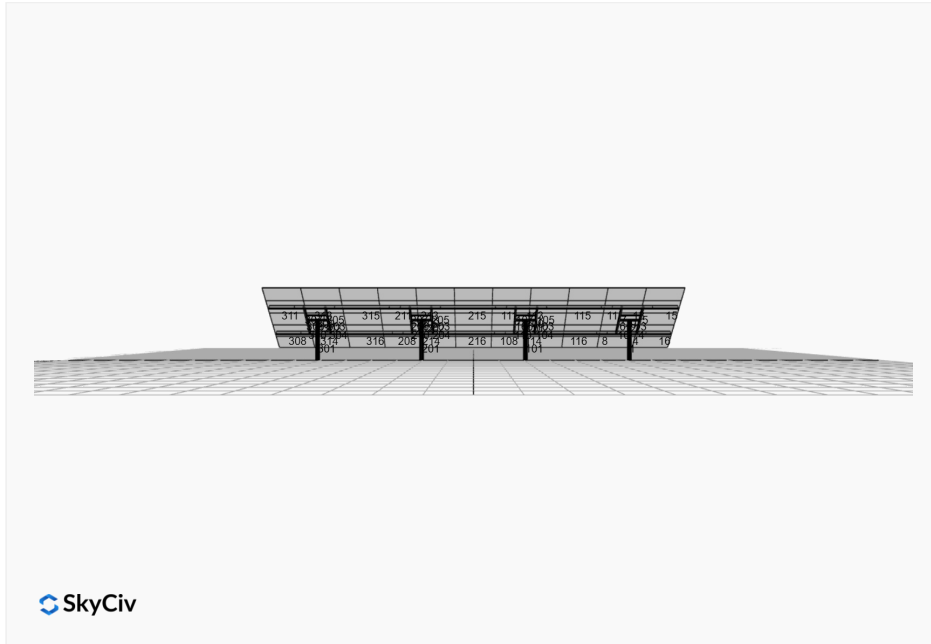

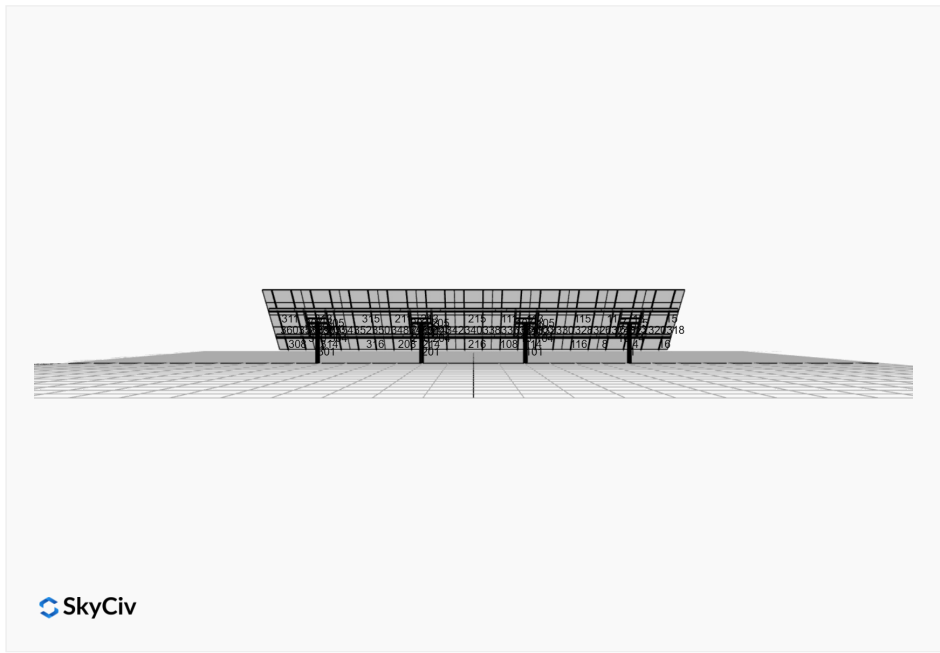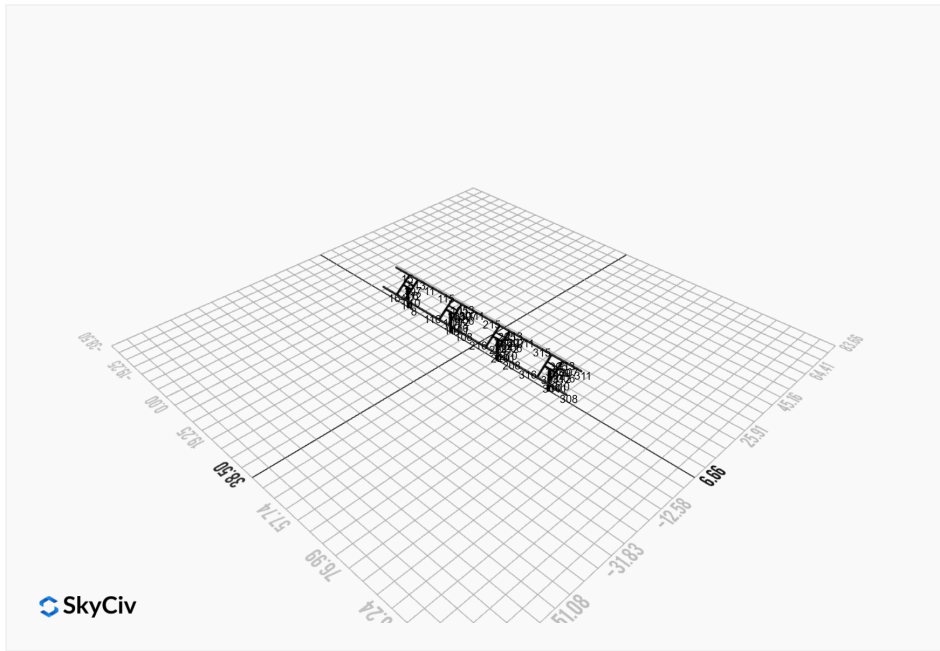
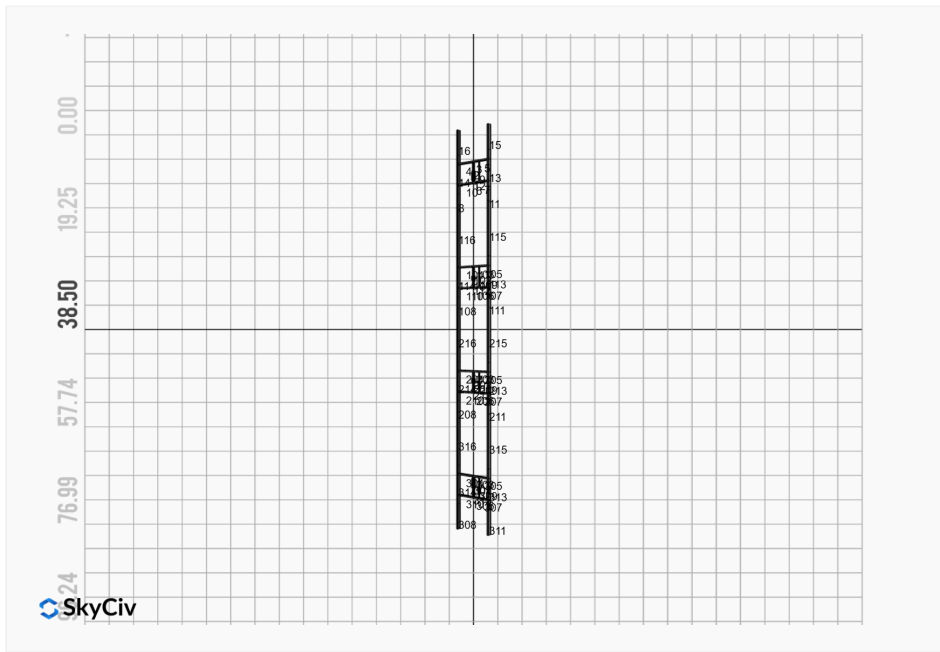


# FEM Results (Envelope Worst Case for each member)

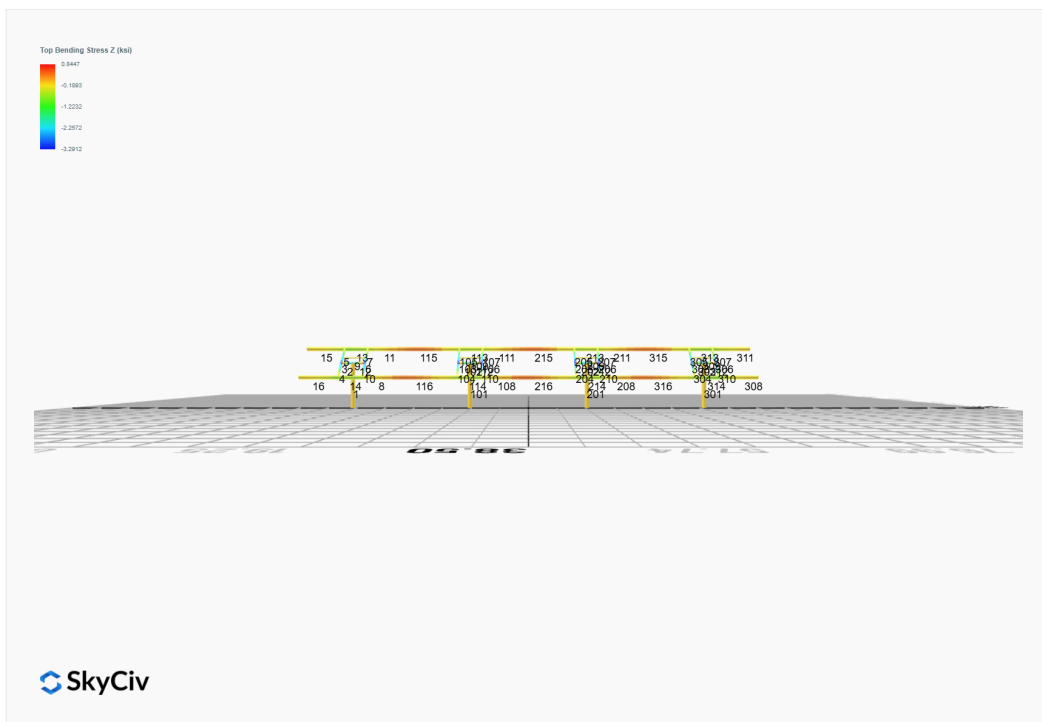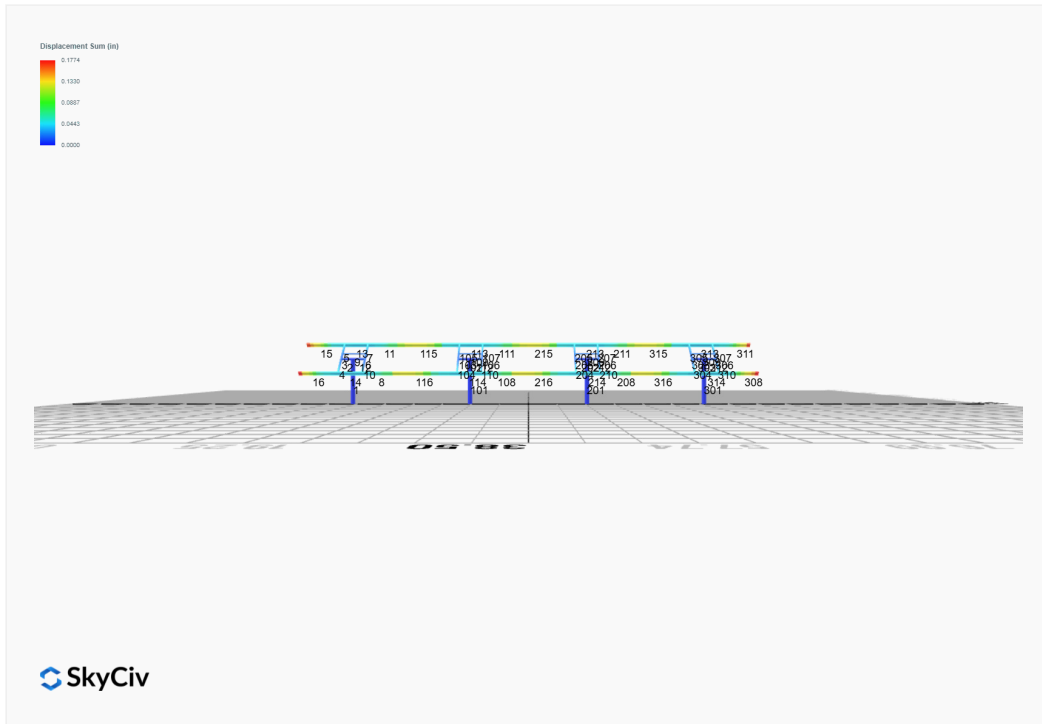




SkyCiv



SkyCiv



## Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0052	2.2555	-0.0008	0.0047	0.0465	0.0621
ULS: 2. D + L	-0.0052	2.2555	-0.0008	0.0047	0.0465	0.0621
ULS: 3. D + (S or Lr or R)	-0.0085	3.4716	-0.0012	0.0082	0.0772	0.0885
ULS: 3. D + (S or Lr or R)	-0.0052	2.2555	-0.0008	0.0047	0.0465	0.0621
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0077	3.1676	-0.0011	0.0073	0.0696	0.0819
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0052	2.2555	-0.0008	0.0047	0.0465	0.0621
ULS: 5b. D + 0.7E	-0.0052	2.2555	-0.0008	0.0047	0.0465	0.0621
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0077	3.1676	-0.0011	0.0073	0.0696	0.0819
ULS: 8. 0.6D + 0.7E	-0.0031	1.3533	-0.0005	0.0028	0.0279	0.0373
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.5001	7.6052	-0.0199	-0.0204	0.1017	35.6368
ULS: 5a. D + 0.6W_Wind downforce Case B only	-4.5001	7.6052	-0.0199	-0.0204	0.1017	35.6368
ULS: 5a. D + 0.6W_Wind uplift Case A only	3.5765	-2.0077	0.0152	0.0257	-0.0009	-26.5164
ULS: 5a. D + 0.6W_Wind uplift Case B only	3.0397	-1.3660	0.0086	0.0176	0.0231	-33.0441
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.3789	7.1798	-0.0154	-0.0115	0.1110	26.7630
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.3789	7.1798	-0.0154	-0.0115	0.1110	26.7630
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.6785	-0.0299	0.0109	0.0230	0.0340	-19.8520
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.2759	0.4515	0.0059	0.0170	0.0520	-24.7478
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.3764	6.2678	-0.0151	-0.0141	0.0879	26.7431
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.3764	6.2678	-0.0151	-0.0141	0.0879	26.7431
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.6811	-0.9419	0.0112	0.0204	0.0110	-19.8718
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.2785	-0.4606	0.0063	0.0144	0.0290	-24.7676
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.4980	6.7030	-0.0196	-0.0223	0.0831	35.6120
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-4.4980	6.7030	-0.0196	-0.0223	0.0831	35.6120
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	3.5785	-2.9099	0.0155	0.0238	-0.0195	-26.5413
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	3.0417	-2.2682	0.0089	0.0157	0.0045	-33.0690

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	12.2308
Shear X	-7.4996
Shear Z	-0.0329
Moment X	0.0422
Moment Y (Twist)	0.1627
Moment Z	59.7142

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.6052
Shear X	-4.5001
Shear Z	-0.0199
Moment X	0.0257
Moment Y (Twist)	0.1110
Moment Z	35.6368

## Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0052	2.3793	0.0029	0.0043	-0.0103	-0.0122
ULS: 2. D + L	0.0052	2.3793	0.0029	0.0043	-0.0103	-0.0122
ULS: 3. D + (S or Lr or R)	0.0085	3.6779	0.0048	0.0072	-0.0172	-0.0346
ULS: 3. D + (S or Lr or R)	0.0052	2.3793	0.0029	0.0043	-0.0103	-0.0122
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0077	3.3532	0.0043	0.0064	-0.0155	-0.0290

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0052	2.3793	0.0029	0.0043	-0.0103	-0.0122
ULS: 5b. D + 0.7E	0.0052	2.3793	0.0029	0.0043	-0.0103	-0.0122
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0077	3.3532	0.0043	0.0064	-0.0155	-0.0290
ULS: 8. 0.6D + 0.7E	0.0031	1.4276	0.0017	0.0026	-0.0062	-0.0073
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.7538	8.0580	0.0249	0.0330	-0.0879	37.6007
ULS: 5a. D + 0.6W_Wind downforce Case B only	-4.7538	8.0580	0.0249	0.0330	-0.0879	37.6007
ULS: 5a. D + 0.6W_Wind uplift Case A only	3.7988	-2.1469	-0.0140	-0.0177	0.0489	-28.0941
ULS: 5a. D + 0.6W_Wind uplift Case B only	3.2223	-1.4620	-0.0142	-0.0177	0.0517	-34.9138
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.5615	7.6122	0.0209	0.0280	-0.0736	28.1806
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.5615	7.6122	0.0209	0.0280	-0.0736	28.1806
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.8529	-0.0414	-0.0083	-0.0101	0.0290	-21.0904
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.4206	0.4723	-0.0085	-0.0100	0.0311	-26.2052
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.5640	6.6383	0.0194	0.0258	-0.0685	28.1975
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.5640	6.6383	0.0194	0.0258	-0.0685	28.1975
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.8504	-1.0154	-0.0097	-0.0122	0.0341	-21.0736
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.4180	-0.5016	-0.0099	-0.0122	0.0362	-26.1884
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.7558	7.1062	0.0238	0.0313	-0.0838	37.6055
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-4.7558	7.1062	0.0238	0.0313	-0.0838	37.6055
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	3.7967	-3.0986	-0.0151	-0.0195	0.0531	-28.0892
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	3.2203	-2.4137	-0.0153	-0.0194	0.0558	-34.9089

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	12.9688
Shear X	-7.9315
Shear Z	0.0414
Moment X	0.0547
Moment Y (Twist)	0.1457
Moment Z	63.0308

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	8.0580
Shear X	-4.7558
Shear Z	0.0249
Moment X	0.0330
Moment Y (Twist)	0.0879
Moment Z	37.6055

### Reaction Forces for Foundation 3 (Node ID#201), (kip, kip-ft)

#### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0052	2.3793	-0.0029	-0.0043	0.0103	-0.0122
ULS: 2. D + L	0.0052	2.3793	-0.0029	-0.0043	0.0103	-0.0122
ULS: 3. D + (S or Lr or R)	0.0085	3.6779	-0.0048	-0.0071	0.0172	-0.0346
ULS: 3. D + (S or Lr or R)	0.0052	2.3793	-0.0029	-0.0043	0.0103	-0.0122
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0077	3.3532	-0.0043	-0.0064	0.0155	-0.0290
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0052	2.3793	-0.0029	-0.0043	0.0103	-0.0122
ULS: 5b. D + 0.7E	0.0052	2.3793	-0.0029	-0.0043	0.0103	-0.0122
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0077	3.3532	-0.0043	-0.0064	0.0155	-0.0290
ULS: 8. 0.6D + 0.7E	0.0031	1.4276	-0.0017	-0.0026	0.0062	-0.0073
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.7538	8.0580	-0.0249	-0.0330	0.0879	37.6007
ULS: 5a. D + 0.6W_Wind downforce Case B only	-4.7538	8.0580	-0.0249	-0.0330	0.0879	37.6007
ULS: 5a. D + 0.6W_Wind uplift Case A only	3.7988	-2.1469	0.0140	0.0178	-0.0489	-28.0941
ULS: 5a. D + 0.6W_Wind uplift Case B only	3.2223	-1.4620	0.0142	0.0177	-0.0517	-34.9138

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.5615	7.6122	-0.0209	-0.0280	0.0737	28.1806
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.5615	7.6122	-0.0209	-0.0280	0.0737	28.1806
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.8529	-0.0414	0.0083	0.0101	-0.0290	-21.0904
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.4206	0.4723	0.0085	0.0101	-0.0310	-26.2052
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.5640	6.6383	-0.0194	-0.0258	0.0685	28.1975
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.5640	6.6383	-0.0194	-0.0258	0.0685	28.1975
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.8504	-1.0154	0.0097	0.0122	-0.0341	-21.0736
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.4180	-0.5016	0.0099	0.0122	-0.0362	-26.1884
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.7558	7.1062	-0.0238	-0.0313	0.0838	37.6055
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-4.7558	7.1062	-0.0238	-0.0313	0.0838	37.6055
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	3.7967	-3.0986	0.0151	0.0195	-0.0531	-28.0892
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	3.2203	-2.4137	0.0153	0.0194	-0.0558	-34.9089

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	12.9688
Shear X	-7.9315
Shear Z	-0.0414
Moment X	-0.0545
Moment Y (Twist)	0.1459
Moment Z	63.0307

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	8.0580
Shear X	-4.7558
Shear Z	-0.0249
Moment X	-0.0330
Moment Y (Twist)	0.0879
Moment Z	37.6055

### Reaction Forces for Foundation 4 (Node ID#301), (kip, kip-ft)

#### ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0052	2.2555	0.0008	-0.0047	-0.0465	0.0621
ULS: 2. D + L	-0.0052	2.2555	0.0008	-0.0047	-0.0465	0.0621
ULS: 3. D + (S or Lr or R)	-0.0085	3.4716	0.0012	-0.0082	-0.0772	0.0885
ULS: 3. D + (S or Lr or R)	-0.0052	2.2555	0.0008	-0.0047	-0.0465	0.0621
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0077	3.1676	0.0011	-0.0073	-0.0695	0.0819
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0052	2.2555	0.0008	-0.0047	-0.0465	0.0621
ULS: 5b. D + 0.7E	-0.0052	2.2555	0.0008	-0.0047	-0.0465	0.0621
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0077	3.1676	0.0011	-0.0073	-0.0695	0.0819
ULS: 8. 0.6D + 0.7E	-0.0031	1.3533	0.0005	-0.0028	-0.0279	0.0373
ULS: 5a. D + 0.6W_Wind downforce Case A only	-4.5001	7.6052	0.0199	0.0204	-0.1017	35.6368
ULS: 5a. D + 0.6W_Wind downforce Case B only	-4.5001	7.6052	0.0199	0.0204	-0.1017	35.6368
ULS: 5a. D + 0.6W_Wind uplift Case A only	3.5765	-2.0077	-0.0152	-0.0257	0.0009	-26.5164
ULS: 5a. D + 0.6W_Wind uplift Case B only	3.0397	-1.3660	-0.0086	-0.0176	-0.0231	-33.0441
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.3789	7.1798	0.0154	0.0115	-0.1109	26.7630
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.3789	7.1798	0.0154	0.0115	-0.1109	26.7630
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.6785	-0.0299	-0.0109	-0.0230	-0.0340	-19.8520
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.2759	0.4515	-0.0059	-0.0170	-0.0520	-24.7478
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-3.3764	6.2678	0.0151	0.0141	-0.0879	26.7432
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-3.3764	6.2678	0.0151	0.0141	-0.0879	26.7432
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	2.6811	-0.9419	-0.0112	-0.0204	-0.0110	-19.8718
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	2.2785	-0.4606	-0.0063	-0.0144	-0.0290	-24.7676

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-4.4980	6.7030	0.0196	0.0223	-0.0831	35.6120
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-4.4980	6.7030	0.0196	0.0223	-0.0831	35.6120
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	3.5785	-2.9099	-0.0155	-0.0238	0.0195	-26.5413
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	3.0417	-2.2682	-0.0089	-0.0157	-0.0045	-33.0690

### Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.  
 Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	12.2309
Shear X	-7.4997
Shear Z	0.0329
Moment X	-0.0424
Moment Y (Twist)	0.1625
Moment Z	59.7148

### Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.  
 Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	7.6052
Shear X	-4.5001
Shear Z	0.0199
Moment X	-0.0257
Moment Y (Twist)	0.1109
Moment Z	35.6368

# Project Details

Design Code: AISC 360-16 LRFD  
 Provision: LRFD  
 Country: United States



User Name: sales@mtsolar.us  
 Project Name: MTSOLAR\_E71ADH44F85E Mebane South  
 Unit System: imperial

## Design Input Information

Design Factors			
$\Phi_t$	$\Phi_c$	$\Phi_b$	$\Phi_v$
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	$F_y$ (ksi)	$F_u$ (ksi)
1	29000	50	65

**Section Dimensions**

ID	Name	d (in)	$t_w$ (in)				
2	2in Pipe Sch 80	2.38	0.22				
5	4in Pipe Sch 80	4.50	0.34				
9	8in Pipe Sch 40	8.63	0.32				

ID	Name	d (in)	b (in)	$t_w$ (in)	$t_b$ (in)	r (in)	
16	HSS5x3x3/16	5.00	3.00	0.17	0.17	0.17	

ID	Name	d (in)	$t_w$ (in)	$b_t$ (in)	$b_b$ (in)	$t_t$ (in)	$t_b$ (in)	r (in)
19	W8x10	7.89	0.17	3.94	3.94	0.20	0.20	0.30

Section Properties								
ID	Name	A (in <sup>2</sup> )	J (in <sup>4</sup> )	$I_{y0}$ (in <sup>4</sup> )	$I_{z0}$ (in <sup>4</sup> )	$I_w$ (in <sup>6</sup> )	$S_{y0}$ (in <sup>3</sup> )	$S_{z0}$ (in <sup>3</sup> )







212	198.33	196.72	21.95	21.95	59.50	59.50
213	133.20	85.85	23.79	6.12	40.24	43.62
214	133.20	85.85	23.73	6.12	40.24	43.62
215	133.20	69.16	17.64	6.12	40.24	43.62
216	133.20	69.16	17.68	6.12	40.24	43.62
301	377.97	277.19	83.29	83.29	113.39	113.39
302	198.33	196.72	21.95	21.95	59.50	59.50
303	116.10	115.41	15.79	11.10	42.08	23.28
304	116.10	111.33	15.79	11.10	42.08	23.28
305	116.10	114.23	15.79	11.10	42.08	23.28
306	116.10	115.41	15.79	11.10	42.08	23.28
307	116.10	114.23	15.79	11.10	42.08	23.28
308	133.20	32.95	32.87	6.12	40.24	43.62
309	66.48	58.89	3.82	3.82	19.94	19.94
310	116.10	111.33	15.79	11.10	42.08	23.28
311	133.20	32.95	32.87	6.12	40.24	43.62
312	198.33	196.72	21.95	21.95	59.50	59.50
313	133.20	85.85	24.96	6.12	40.24	43.62
314	133.20	85.85	23.50	6.12	40.24	43.62
315	133.20	69.16	18.11	6.12	40.24	43.62
316	133.20	69.16	17.61	6.12	40.24	43.62

## Design Ratio

Member ID	P	M <sub>z</sub>	M <sub>y</sub>	V <sub>y</sub>	V <sub>z</sub>	(P,M <sub>z</sub> ,M <sub>y</sub> )	Worst LC	KL/r	δ	Status
1	0.044	0.717	0.003	0.066	0.000	0.739	#13	0.326	Not Required	Pass
2	0.002	0.476	0.330	0.101	0.064	0.806	#13	0.035	Not Required	Pass
3	0.006	0.857	0.033	0.086	0.004	0.884	#13	0.045	Not Required	Pass
4	0.006	0.803	0.101	0.081	0.021	0.846	#13	0.080	Not Required	Pass
5	0.006	0.532	0.105	0.085	0.026	0.549	#13	0.074	Not Required	Pass
6	0.006	0.850	0.037	0.085	0.004	0.876	#13	0.045	Not Required	Pass
7	0.006	0.528	0.106	0.085	0.027	0.547	#13	0.074	Not Required	Pass
8	0.000	0.061	0.091	0.056	0.010	0.125	#21	0.095	Not Required	Pass
9	0.009	0.072	0.063	0.001	0.000	0.139	#13	0.204	Not Required	Pass
10	0.006	0.790	0.102	0.079	0.022	0.841	#13	0.080	Not Required	Pass
11	0.000	0.063	0.093	0.060	0.010	0.129	#21	0.095	Not Required	Pass
12	0.002	0.466	0.322	0.100	0.062	0.789	#13	0.035	Not Required	Pass
13	0.005	0.343	0.249	0.077	0.013	0.493	#13	0.286	Not Required	Pass
14	0.006	0.327	0.249	0.072	0.013	0.473	#13	0.190	Not Required	Pass
15	0.000	0.132	0.133	0.045	0.008	0.222	#13	Not Required	Not Required	Pass
16	0.000	0.124	0.133	0.043	0.008	0.214	#21	Not Required	Not Required	Pass
101	0.047	0.757	0.003	0.070	0.000	0.781	#13	0.326	Not Required	Pass
102	0.002	0.489	0.337	0.106	0.066	0.827	#13	0.035	Not Required	Pass
103	0.007	0.896	0.040	0.090	0.006	0.925	#13	0.045	Not Required	Pass
104	0.006	0.842	0.100	0.084	0.022	0.893	#13	0.080	Not Required	Pass
105	0.006	0.556	0.102	0.089	0.025	0.574	#13	0.074	Not Required	Pass
106	0.006	0.911	0.040	0.091	0.006	0.941	#13	0.045	Not Required	Pass
107	0.006	0.565	0.102	0.091	0.026	0.584	#13	0.074	Not Required	Pass
108	0.000	0.074	0.089	0.055	0.010	0.116	#21	0.095	Not Required	Pass
109	0.008	0.071	0.064	0.001	0.000	0.137	#13	0.204	Not Required	Pass
110	0.006	0.857	0.033	0.086	0.004	0.884	#13	0.045	Not Required	Pass

110	0.000	0.032	0.090	0.000	0.021	0.097	#13	0.000	Not Required	Pass
111	0.000	0.080	0.091	0.059	0.010	0.118	#21	0.095	Not Required	Pass
112	0.002	0.501	0.344	0.108	0.067	0.846	#13	0.035	Not Required	Pass
113	0.004	0.279	0.237	0.075	0.013	0.416	#13	0.286	Not Required	Pass
114	0.006	0.273	0.236	0.071	0.013	0.405	#13	0.286	Not Required	Pass
115	0.000	0.307	0.131	0.057	0.010	0.396	#13	0.473	Not Required	Pass
116	0.000	0.287	0.132	0.054	0.010	0.377	#13	0.473	Not Required	Pass
201	0.047	0.757	0.003	0.070	0.000	0.781	#13	0.326	Not Required	Pass
202	0.002	0.501	0.344	0.108	0.067	0.846	#13	0.035	Not Required	Pass
203	0.006	0.911	0.040	0.091	0.006	0.941	#13	0.045	Not Required	Pass
204	0.006	0.852	0.098	0.086	0.021	0.897	#13	0.080	Not Required	Pass
205	0.006	0.565	0.102	0.091	0.026	0.584	#13	0.074	Not Required	Pass
206	0.007	0.896	0.040	0.090	0.006	0.925	#13	0.045	Not Required	Pass
207	0.006	0.556	0.102	0.089	0.025	0.574	#13	0.074	Not Required	Pass
208	0.000	0.070	0.091	0.054	0.010	0.119	#21	0.095	Not Required	Pass
209	0.008	0.071	0.064	0.001	0.000	0.137	#13	0.204	Not Required	Pass
210	0.006	0.842	0.100	0.084	0.022	0.893	#13	0.080	Not Required	Pass
211	0.000	0.076	0.092	0.057	0.010	0.120	#21	0.095	Not Required	Pass
212	0.002	0.489	0.337	0.106	0.066	0.827	#13	0.035	Not Required	Pass
213	0.004	0.279	0.237	0.075	0.013	0.415	#13	0.286	Not Required	Pass
214	0.006	0.273	0.236	0.071	0.013	0.406	#13	0.286	Not Required	Pass
215	0.000	0.328	0.130	0.059	0.010	0.416	#13	0.473	Not Required	Pass
216	0.000	0.304	0.132	0.055	0.010	0.393	#13	0.473	Not Required	Pass
301	0.044	0.717	0.003	0.066	0.000	0.739	#13	0.326	Not Required	Pass
302	0.002	0.466	0.322	0.100	0.062	0.789	#13	0.035	Not Required	Pass
303	0.006	0.850	0.037	0.085	0.004	0.876	#13	0.045	Not Required	Pass
304	0.006	0.790	0.102	0.079	0.022	0.841	#13	0.080	Not Required	Pass
305	0.006	0.528	0.106	0.085	0.027	0.547	#13	0.074	Not Required	Pass
306	0.006	0.857	0.033	0.086	0.004	0.884	#13	0.045	Not Required	Pass
307	0.006	0.532	0.105	0.085	0.026	0.549	#13	0.074	Not Required	Pass
308	0.000	0.124	0.133	0.043	0.008	0.214	#21	Not Required	Not Required	Pass
309	0.009	0.072	0.063	0.001	0.000	0.139	#13	0.204	Not Required	Pass
310	0.006	0.803	0.101	0.081	0.021	0.846	#13	0.080	Not Required	Pass
311	0.000	0.132	0.133	0.045	0.008	0.222	#13	Not Required	Not Required	Pass
312	0.002	0.476	0.330	0.101	0.064	0.806	#13	0.035	Not Required	Pass
313	0.005	0.343	0.249	0.077	0.013	0.493	#13	0.190	Not Required	Pass
314	0.006	0.327	0.249	0.072	0.013	0.473	#13	0.286	Not Required	Pass
315	0.000	0.302	0.130	0.060	0.010	0.390	#13	0.473	Not Required	Pass
316	0.000	0.284	0.132	0.056	0.010	0.373	#13	0.473	Not Required	Pass

## Definitions

$\Phi_t$	Safety factor for tensile
$\Phi_c$	Safety factor for compression
$\Phi_b$	Safety factor for flexure
$\Phi_v$	Safety factor for shear
E	Modulus of elasticity
$F_y$	Specified minimum yield stress
$F_u$	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
$I_{yp}$	Moment of inertia about the Y axes
$I_{zp}$	Moment of inertia about the Z axes
$I_w$	Warping constant
$S_{yp}$	Plastic section modulus about the Y axis

$S_{zp}$	Plastic section modulus about the Z axis
KL	Effective length
$C_b$	Buckling modification factor (from all load combinations)
$L_b$	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
$P_n$	Nominal axial strength (tension/compression)
$M_n$	Nominal flexural strength (about Z/Y axis)
$V_n$	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
$M_z$	Design ratio in case of bending about Z axis
$M_y$	Design ratio in case of bending about Y axis
$V_y$	Design ratio in case of shear along Y axis
$V_z$	Design ratio in case of shear along Z axis
$(P, M_z, M_y)$	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
$\delta$	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided



REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

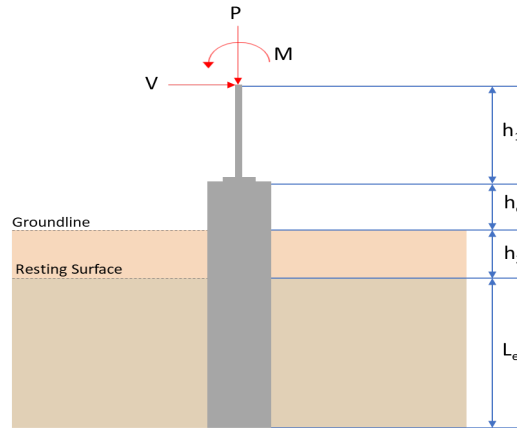

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 6.5$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

### Tabulation of Loads

Load Component	ASD	LRFD
$P$ (kip)	7.605	12.231
$V_x$ (kip)	-4.500	-7.500
$V_z$ (kip)	-0.020	-0.033
$M_x$ (kipft)	0.026	0.042
$M_z$ (kipft)	35.637	59.714

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-4.5 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.71656 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(35.637 \text{ kipft}) + ((-4.5 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.6747 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 5.8655 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.02 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0031847 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.026 \text{ kipft}) + ((-0.02 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0041401 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.60057 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(5.8655 \text{ ft}), (0.60057 \text{ ft})]$$

$$L_{e,req} = 5.865 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (6.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 6.5 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(5.865 \text{ ft})}{(6.5 \text{ ft})}$$

$$\text{Ratio} = 0.90231$$

Status: **PASS**  
Ratio: **0.900**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(7.605 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.47531 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.47531 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.23766$$

Status: **PASS**  
Ratio: **0.240**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.625$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.71656 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.6747 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.6747 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (5.6747 \text{ kipft/ft})) + (4 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.5249 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.6747 \text{ kipft/ft})) + (3 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))]^2}{(6.5 \text{ ft})^2 \times [(3 \times (5.6747 \text{ kipft/ft})) + (2 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))]}$$

$$p = 0.17533 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.6747 \text{ kipft/ft})) + ((-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))]}{(6.5 \text{ ft})^2}$$

$$s = 0.9503 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.5249 \text{ ft})}{2}$$

$$p_a = 0.33937 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.17533 \text{ kip/ft}^2)}{(0.33937 \text{ kip/ft}^2)}$$

$$Ratio = 0.51664$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.5 \text{ ft})$$

$$p_s = 0.975 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.9503 \text{ kip/ft}^2)}{(0.975 \text{ kip/ft}^2)}$$

$$Ratio = 0.97467$$

Status: **PASS**  
Ratio: **0.520**

Status: **PASS**  
Ratio: **0.970**

#### Considering z-direction:

$H_o = -0.0031847 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.0041401 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0041401 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (0.0041401 \text{ kipft/ft})) + (4 \times (-0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.75 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (0.0041401 \text{ kipft/ft})) + (3 \times (-0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))]^2}{(6.5 \text{ ft})^2 [(3 \times (0.0041401 \text{ kipft/ft})) + (2 \times (-0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))]}$$

$$p = -0.0012704 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 [(2 \times (0.0041401 \text{ kipft/ft})) + ((-0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))]}{(6.5 \text{ ft})^2}$$

$$s = -0.0017638 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.75 \text{ ft})}{2}$$

$$p_a = 0.35625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(-0.0012704 \text{ kip/ft}^2)}{(0.35625 \text{ kip/ft}^2)}$$

$$Ratio = -0.003566$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.5 \text{ ft})$$

$$p_s = 0.975 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(-0.0017638 \text{ kip/ft}^2)}{(0.975 \text{ kip/ft}^2)}$$

$$Ratio = -0.0018091$$

Status: **PASS**  
Ratio: **0.000**

Status: **PASS**  
Ratio: **0.000**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.5 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.1943 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(59.714 \text{ kipft}) + ((-7.5 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 9.5086 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(9.5086 \text{ kipft/ft})}{(-1.1943 \text{ kip/ft})}$$

$$E = 7.9619 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (9.5086 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-1.1943 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (9.5086 \text{ kipft/ft})) + (4 \times (-1.1943 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = \frac{(6 \times (9.5086 \text{ kipft/ft})) + (4 \times (-1.1943 \text{ kip/ft}) \times (6.5 \text{ ft}))}{}$$

$$a = 4.5242 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1943 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.9619 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.5242 \text{ ft})}{(6.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.9619 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.5242 \text{ ft})}{(6.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 13.505 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.1943 \text{ kip/ft}) \times (48 \text{ in}) \times (6.5 \text{ ft})) \times \left[ \left( \frac{(7.9619 \text{ ft})}{(6.5 \text{ ft})} + \frac{(4.5242 \text{ ft})}{2 \times (6.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.9619 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.5242 \text{ ft})}{(2 \times (6.5 \text{ ft}))} \right)^3 \right] + \left[ \left( \frac{3 \times (7.9619 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.5242 \text{ ft})}{(2 \times (6.5 \text{ ft}))} \right)^4 \right] \right]$$

$$M_{max} = 41.086 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.033 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0052548 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.042 \text{ kipft}) + ((-0.033 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0066879 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0066879 \text{ kipft/ft})}{(-0.0052548 \text{ kip/ft})}$$

$$E = 1.2727 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0066879 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-0.0052548 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (0.0066879 \text{ kipft/ft})) + (4 \times (-0.0052548 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.752 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0052548 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.752 \text{ ft})}{(6.5 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.752 \text{ ft})}{(6.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.021483 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.0052548 \text{ kip/ft}) \times (48 \text{ in}) \times (6.5 \text{ ft})) \times \left[ \left( \frac{(1.2727 \text{ ft})}{(6.5 \text{ ft})} + \frac{(4.752 \text{ ft})}{2 \times (6.5 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.752 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.752 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.057759 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\left( \frac{12.231 \text{ kip}}{(0.65) \times (0.8)} \right) - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.19 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.19 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = \text{Min spacing of reinforcement,}</math></p> $s_{rebar} = \text{Max}[1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max}[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10: Use #3(0.375 in)</p> <p><math>s_{ties}</math> - Maximum spacing of ties,</p> $s_{ties} = \text{Min}[(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min}[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b> Ties: <b>#3(0.375 in) - 10 in</b></p>	<p>Status: <b>PASS</b> Ratio: <b>0.970</b></p>
<p>22.4.2.2</p>	<p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$ $\phi P_N = 2675.2 \text{ kip}$ <p><i>Ratio</i> - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(12.231 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.004572$	<p>Status: <b>PASS</b> Ratio: <b>0.000</b></p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width, <math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 12.231 \text{ kip} \rightarrow 12231 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(12231 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120.12 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120.12 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120.12 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((120.12 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.16 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 13.505 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(13.505 \text{ kip})}{(111.16 \text{ kip})}$$

$$Ratio = 0.1215$$

Status: **PASS**  
Ratio: **0.120**

**Considering z-direction:**

$V_{max} = 0.021483 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.021483 \text{ kip})}{(111.16 \text{ kip})}$$

$$Ratio = 0.00019326$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 41.086 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(41.086 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.16461$$

Status: **PASS**  
Ratio: **0.160**

**Considering z-direction:**

$M_{max} = 0.057759 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(0.057759 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.0002314$$

Status: **PASS**  
Ratio: **0.000**

REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

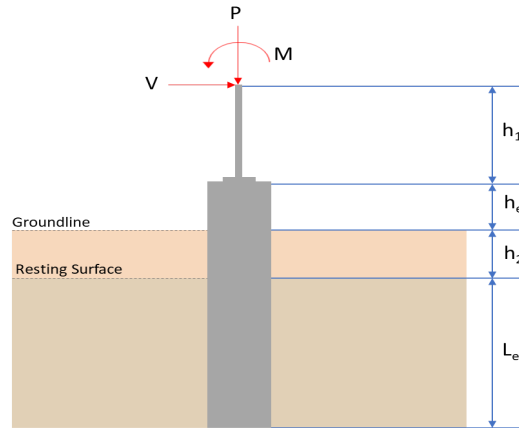

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 6.5$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

### Tabulation of Loads

Load Component	ASD	LRFD
$P$ (kip)	7.605	12.231
$V_x$ (kip)	-4.500	-7.500
$V_z$ (kip)	0.020	0.033
$M_x$ (kipft)	-0.026	-0.042
$M_z$ (kipft)	35.637	59.715

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-4.5 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.71656 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(35.637 \text{ kipft}) + ((-4.5 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.6747 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_e^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 5.8655 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.02 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0031847 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.026 \text{ kipft}) + ((0.02 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0041401 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_e^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.78333 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(5.8655 \text{ ft}), (0.78333 \text{ ft})]$$

$$L_{e,req} = 5.865 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (6.5 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 6.5 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(5.865 \text{ ft})}{(6.5 \text{ ft})}$$

$$\text{Ratio} = 0.90231$$

Status: **PASS**  
Ratio: **0.900**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(7.605 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.47531 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.47531 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.23766$$

Status: **PASS**  
Ratio: **0.240**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6.5 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.625$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.71656 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.6747 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.6747 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (5.6747 \text{ kipft/ft})) + (4 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.5249 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.6747 \text{ kipft/ft})) + (3 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))]^2}{(6.5 \text{ ft})^2 \times [(3 \times (5.6747 \text{ kipft/ft})) + (2 \times (-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))]}$$

$$p = 0.17533 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.6747 \text{ kipft/ft})) + ((-0.71656 \text{ kip/ft}) \times (6.5 \text{ ft}))]}{(6.5 \text{ ft})^2}$$

$$s = 0.9503 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.5249 \text{ ft})}{2}$$

$$p_a = 0.33937 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.17533 \text{ kip/ft}^2)}{(0.33937 \text{ kip/ft}^2)}$$

$$Ratio = 0.51664$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.5 \text{ ft})$$

$$p_s = 0.975 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.9503 \text{ kip/ft}^2)}{(0.975 \text{ kip/ft}^2)}$$

$$Ratio = 0.97467$$

Status: **PASS**  
Ratio: **0.520**

Status: **PASS**  
Ratio: **0.970**

#### Considering z-direction:

$H_o = 0.0031847 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.0041401 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0041401 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (0.0041401 \text{ kipft/ft})) + (4 \times (0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.75 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 [(4 \times (0.0041401 \text{ kipft/ft})) + (3 \times (0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))]^2}{(6.5 \text{ ft})^2 [(3 \times (0.0041401 \text{ kipft/ft})) + (2 \times (0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))]}$$

$$p = 0.0020409 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0041401 \text{ kipft/ft})) + ((0.0031847 \text{ kip/ft}) \times (6.5 \text{ ft}))]}{(6.5 \text{ ft})^2}$$

$$s = 0.0041156 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.75 \text{ ft})}{2}$$

$$p_a = 0.35625 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.0020409 \text{ kip/ft}^2)}{(0.35625 \text{ kip/ft}^2)}$$

$$Ratio = 0.0057287$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.5 \text{ ft})$$

$$p_s = 0.975 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0041156 \text{ kip/ft}^2)}{(0.975 \text{ kip/ft}^2)}$$

$$Ratio = 0.0042212$$

Status: **PASS**  
Ratio: **0.010**

Status: **PASS**  
Ratio: **0.000**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.5 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.1943 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(59.715 \text{ kipft}) + ((-7.5 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 9.5088 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(9.5088 \text{ kipft/ft})}{(-1.1943 \text{ kip/ft})}$$

$$E = 7.962 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (9.5088 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (-1.1943 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (9.5088 \text{ kipft/ft})) + (4 \times (-1.1943 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = \frac{(6 \times (9.5088 \text{ kipft/ft})) + (4 \times (-1.1943 \text{ kip/ft}) \times (6.5 \text{ ft}))}{}$$

$$a = 4.5242 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.1943 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.962 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.5242 \text{ ft})}{(6.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.962 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.5242 \text{ ft})}{(6.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 13.505 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.1943 \text{ kip/ft}) \times (48 \text{ in}) \times (6.5 \text{ ft})) \times \left[ \left( \frac{(7.962 \text{ ft})}{(6.5 \text{ ft})} + \frac{(4.5242 \text{ ft})}{2 \times (6.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.962 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.5242 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (7.962 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.5242 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 41.087 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.033 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0052548 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.042 \text{ kipft}) + ((0.033 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0066879 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0066879 \text{ kipft/ft})}{(0.0052548 \text{ kip/ft})}$$

$$E = 1.2727 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0066879 \text{ kipft/ft}) \times (6.5 \text{ ft})) + (3 \times (0.0052548 \text{ kip/ft}) \times (6.5 \text{ ft})^2)}{(6 \times (0.0066879 \text{ kipft/ft})) + (4 \times (0.0052548 \text{ kip/ft}) \times (6.5 \text{ ft}))}$$

$$a = 4.752 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0052548 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.752 \text{ ft})}{(6.5 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.752 \text{ ft})}{(6.5 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.021483 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o b L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.0052548 \text{ kip/ft}) \times (48 \text{ in}) \times (6.5 \text{ ft})) \times \left[ \left( \frac{(1.2727 \text{ ft})}{(6.5 \text{ ft})} + \frac{(4.752 \text{ ft})}{2 \times (6.5 \text{ ft})} \right) - \left[ \left( \frac{4 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 3 \right) \times \left( \frac{(4.752 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (1.2727 \text{ ft})}{(6.5 \text{ ft})} + 2 \right) \times \left( \frac{(4.752 \text{ ft})}{2 \times (6.5 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.057759 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\left( \frac{12.231 \text{ kip}}{(0.65) \times (0.8)} \right) - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.19 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.19 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = \text{Min spacing of reinforcement,}</math></p> $s_{rebar} = \text{Max}[1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max}[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties}</math> - Maximum spacing of ties,</p> $s_{ties} = \text{Min}[(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min}[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b> Ties: <b>#3(0.375 in) - 10 in</b></p>	<p>Status: <b>PASS</b> Ratio: <b>0.970</b></p>
<p>22.4.2.2</p>	<p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$ $\phi P_N = 2675.2 \text{ kip}$ <p><i>Ratio</i> - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(12.231 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.004572$	<p>Status: <b>PASS</b> Ratio: <b>0.000</b></p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width, <math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 12.231 \text{ kip} \rightarrow 12231 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(12231 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120.12 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120.12 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120.12 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((120.12 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.16 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 13.505 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(13.505 \text{ kip})}{(111.16 \text{ kip})}$$

$$Ratio = 0.1215$$

Status: **PASS**  
Ratio: **0.120**

**Considering z-direction:**

$V_{max} = 0.021483 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.021483 \text{ kip})}{(111.16 \text{ kip})}$$

$$Ratio = 0.00019326$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 41.087 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(41.087 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.16461$$

Status: **PASS**  
Ratio: **0.160**

**Considering z-direction:**

$M_{max} = 0.057759 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(0.057759 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.0002314$$

Status: **PASS**  
Ratio: **0.000**

REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

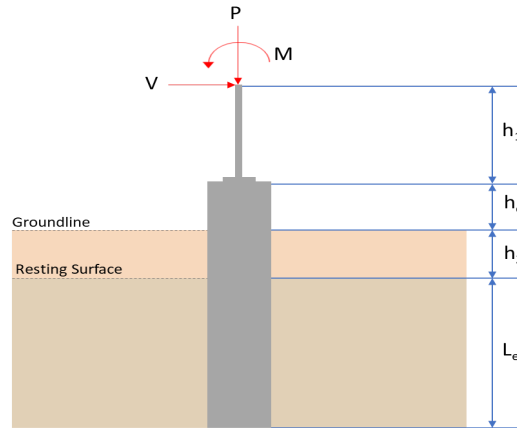

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 6.75$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

### Tabulation of Loads

Load Component	ASD	LRFD
$P$ (kip)	8.058	12.969
$V_x$ (kip)	-4.756	-7.932
$V_z$ (kip)	0.025	0.041
$M_x$ (kipft)	0.033	0.055
$M_z$ (kipft)	37.606	63.031

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-4.756 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.75732 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(37.606 \text{ kipft}) + ((-4.756 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.9882 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 5.9371 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.025 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0039809 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.033 \text{ kipft}) + ((0.025 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0052548 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.85456 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(5.9371 \text{ ft}), (0.85456 \text{ ft})]$$

$$L_{e,req} = 5.937 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (6.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 6.75 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(5.937 \text{ ft})}{(6.75 \text{ ft})}$$

$$\text{Ratio} = 0.87956$$

Status: **PASS**  
Ratio: **0.880**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(8.058 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.50362 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.50362 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.25181$$

Status: **PASS**  
Ratio: **0.250**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.6875$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.75732 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.9882 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.9882 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (5.9882 \text{ kipft/ft})) + (4 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.704 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.9882 \text{ kipft/ft})) + (3 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 \times [(3 \times (5.9882 \text{ kipft/ft})) + (2 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = 0.1579 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.9882 \text{ kipft/ft})) + ((-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = 0.90397 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.704 \text{ ft})}{2}$$

$$p_a = 0.3528 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.1579 \text{ kip/ft}^2)}{(0.3528 \text{ kip/ft}^2)}$$

$$Ratio = 0.44756$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.90397 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$Ratio = 0.89281$$

Status: **PASS**  
Ratio: **0.450**

Status: **PASS**  
Ratio: **0.890**

#### Considering z-direction:

$H_o = 0.0039809 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.0052548 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0052548 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.0052548 \text{ kipft/ft})) + (4 \times (0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.9349 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.0052548 \text{ kipft/ft})) + (3 \times (0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 \times [(3 \times (0.0052548 \text{ kipft/ft})) + (2 \times (0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = 0.0024462 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0052548 \text{ kipft/ft})) + ((0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = 0.0049225 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.9349 \text{ ft})}{2}$$

$$p_a = 0.37012 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.0024462 \text{ kip/ft}^2)}{(0.37012 \text{ kip/ft}^2)}$$

$$Ratio = 0.0066092$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.0049225 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$Ratio = 0.0048618$$

Status: **PASS**  
Ratio: **0.010**

Status: **PASS**  
Ratio: **0.000**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.932 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.2631 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(63.031 \text{ kipft}) + ((-7.932 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 10.037 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(10.037 \text{ kipft/ft})}{(-1.2631 \text{ kip/ft})}$$

$$E = 7.9464 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (10.037 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-1.2631 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times 10.037) + (4 \times (-1.2631) \times 6.75)}$$

$$a = \frac{(-1.2631 \text{ kip/ft}) \times (48 \text{ in}) + (4 \times (-1.2631 \text{ kip/ft}) \times (6.75 \text{ ft}))}{(6 \times (10.037 \text{ kipft/ft})) + (4 \times (-1.2631 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.7034 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.2631 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.7034 \text{ ft})}{(6.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.7034 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 13.858 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.2631 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(7.9464 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.7034 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.7034 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.7034 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 43.69 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.041 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.0065287 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.055 \text{ kipft}) + ((0.041 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.008758 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.008758 \text{ kipft/ft})}{(0.0065287 \text{ kip/ft})}$$

$$E = 1.3415 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.008758 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (0.0065287 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.008758 \text{ kipft/ft})) + (4 \times (0.0065287 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.9333 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.0065287 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.3415 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.9333 \text{ ft})}{(6.75 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (1.3415 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.9333 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.026823 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.0065287 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(1.3415 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.9333 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (1.3415 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.9333 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (1.3415 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.9333 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.074964 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(12.969 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.165 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.165 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 d_{bar})]</math></p> <p><math>s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]</math></p> <p><math>s_{rebar} = 1.5 \text{ in}</math></p> <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]</math></p> <p><math>s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]</math></p> <p><math>s_{ties} = 10 \text{ in}</math></p> <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b> Ties: <b>#3(0.375 in) - 10 in</b></p>	<p>Status: <b>PASS</b> Ratio: <b>0.970</b></p>
<p>22.4.2.2</p>	<p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> <p style="text-align: center;"><math>\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]</math></p> <p style="text-align: center;"><math>\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]</math></p> <p style="text-align: center;"><math>\phi P_N = 2675.2 \text{ kip}</math></p> <p>Ratio - Capacity</p> <p style="text-align: center;"><math>Ratio = \frac{P}{\phi P_N}</math></p> <p style="text-align: center;"><math>Ratio = \frac{(12.969 \text{ kip})}{(2675.2 \text{ kip})}</math></p> <p style="text-align: center;"><math>Ratio = 0.0048479</math></p>	<p>Status: <b>PASS</b> Ratio: <b>0.000</b></p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width, <math>d</math> - Effective depth</p> <p style="text-align: center;"><math>d = 0.80 D</math></p> <p style="text-align: center;"><math>d = 0.80 \times (48 \text{ in})</math></p> <p style="text-align: center;"><math>d = 38.4 \text{ in}</math></p> <p><math>\lambda_s</math> - size effect modification factor</p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = MIN \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]</math></p> <p style="text-align: center;"><math>\lambda_s = 0.64282</math></p> <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> <p style="text-align: center;"><math>V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d</math></p> <p style="text-align: center;"><math>V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})</math></p>	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 12.969 \text{ kip} \rightarrow 12969 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(12969 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120.21 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120.21 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120.21 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((120.21 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.22 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 13.858 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(13.858 \text{ kip})}{(111.22 \text{ kip})}$$

$$Ratio = 0.1246$$

Status: **PASS**  
Ratio: **0.120**

**Considering z-direction:**

$V_{max} = 0.026823 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.026823 \text{ kip})}{(111.22 \text{ kip})}$$

$$Ratio = 0.00024117$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 43.69 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(43.69 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.17504$$

Status: **PASS**  
Ratio: **0.180**

**Considering z-direction:**

$M_{max} = 0.074964 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.074964 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.00030034$$

Status: **PASS**  
Ratio: **0.000**

REFERENCES	CALCULATIONS	RESULTS
------------	--------------	---------


## SkyCiv Foundation Design

Pile Foundation

### Design Information :

Design code : IBC 2021 (International Building Code)  
Unit System : Imperial

### Pile Input

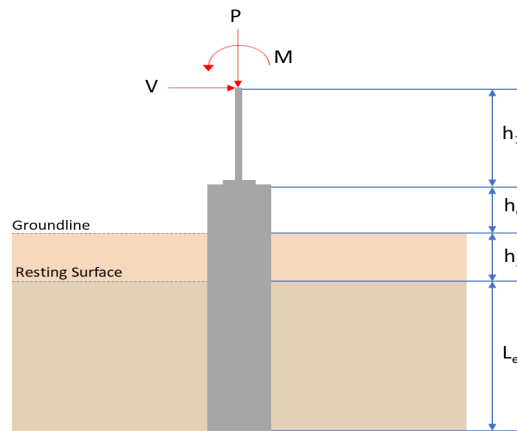

### Geometry

Pile shape: rectangular

$b = 48$  in - Pile width

$D = 48$  in - Pile depth

$L = 6.75$  ft - Total pile length

$h_1 = 0$  ft - Lateral load height from the top of the pile,

$h_2 = 0$  ft - Depth to resisting surface

$h_e = 0$  ft - Length of pile above the ground

### Tabulation of Soil Parameters

Layer	Label	Allowable Bearing Pressure ( $q_a$ ) (psf)	Allowable Lateral Pressure ( $R$ ) (psf/ft)
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000

### Tabulation of Loads

Load Component	ASD	LRFD
$P$ (kip)	8.058	12.969
$V_x$ (kip)	-4.756	-7.932
$V_z$ (kip)	-0.025	-0.041
$M_x$ (kipft)	-0.033	-0.054
$M_z$ (kipft)	37.606	63.031

### Material Properties

$f'_{ck} = 2.5$  ksi - Concrete strength.

### Required depth to resist lateral loads (ASD)

$H$  - Point of application of the lateral load

$$H = h_1 + h_2 + h_e$$

$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$

$$H = 0 \text{ ft}$$

### Considering x-direction:

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-4.756 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.75732 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(37.606 \text{ kipft}) + ((-4.756 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 5.9882 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_x^3 - \left( 14.14 \times \frac{H_o \times L_x}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,x} = 5.9371 \text{ ft}$  - Required depth in x-direction,

**Considering z-direction:**

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.025 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0039809 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.033 \text{ kipft}) + ((-0.025 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0052548 \text{ kipft/ft}$$

Required depth of embedment in earth:

$$L_z^3 - \left( 14.14 \times \frac{H_o \times L_z}{R} \right) - \left( 18.85 \times \frac{M_o}{R} \right) = 0$$

Solving the cubic equation:

$L_{e,z} = 0.64341 \text{ ft}$  - Required depth in z-direction,

**Minimum embedded depth required:**

$L_{e,req}$  - Depth of pile required,

$$L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$$

$$L_{e,req} = \text{MAX}[(5.9371 \text{ ft}), (0.64341 \text{ ft})]$$

$$L_{e,req} = 5.937 \text{ ft}$$

$L_e$  - Actual embedded length of pile,

$$L_e = L - h_e - h_2$$

$$L_e = (6.75 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$$

$$L_e = 6.75 \text{ ft}$$

**Ratio** - Embedded depth

$$\text{Ratio} = \frac{L_{e,req}}{L_e}$$

$$\text{Ratio} = \frac{(5.937 \text{ ft})}{(6.75 \text{ ft})}$$

$$\text{Ratio} = 0.87956$$

Status: **PASS**  
Ratio: **0.880**

### End-bearing Capacity (ASD)

$A$  - Pile cross-section area

$$A = b D$$

$$A = (48 \text{ in}) \times (48 \text{ in})$$

$$A = 16 \text{ ft}^2$$

$q$  - End-bearing pressure

$$q = \frac{P_v}{A}$$

$$q = \frac{(8.058 \text{ kip})}{(16 \text{ ft}^2)}$$

$$q = 0.50362 \text{ kip/ft}^2$$

**Check bearing capacity ratio:**

Ratio - Capacity

$$\text{Ratio} = \frac{q}{q_a}$$

$$\text{Ratio} = \frac{(0.50362 \text{ kip/ft}^2)}{(2000 \text{ psf})}$$

$$\text{Ratio} = 0.25181$$

Status: **PASS**  
Ratio: **0.250**

Czerniak

**Lateral Soil Pressure (ASD):**

$L/D$  - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(6.75 \text{ ft})}{(48 \text{ in})}$$

$$L/D = 1.6875$$

Since  $L/D \leq 10$ ,

Pile is short.

**Considering x-direction:**

$H_o = -0.75732 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 5.9882 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (5.9882 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (5.9882 \text{ kipft/ft})) + (4 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.704 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (5.9882 \text{ kipft/ft})) + (3 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 \times [(3 \times (5.9882 \text{ kipft/ft})) + (2 \times (-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = 0.1579 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (5.9882 \text{ kipft/ft})) + ((-0.75732 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = 0.90397 \text{ kip/ft}^2$$

**Check lateral soil pressure capacity:**

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.704 \text{ ft})}{2}$$

$$p_a = 0.3528 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(0.1579 \text{ kip/ft}^2)}{(0.3528 \text{ kip/ft}^2)}$$

$$Ratio = 0.44756$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.90397 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$Ratio = 0.89281$$

Status: **PASS**  
Ratio: **0.450**

Status: **PASS**  
Ratio: **0.890**

#### Considering z-direction:

$H_o = -0.0039809 \text{ kip/ft}$  - Lateral force per length of pile,

$M_o = 0.0052548 \text{ kipft/ft}$  - Overturning moment per length of pile,

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0052548 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.0052548 \text{ kipft/ft})) + (4 \times (-0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.9349 \text{ ft}$$

$p$  - Earth pressure against the pile at distance  $a/2$  from resting surface,

$$p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{0.75 \times [(4 \times (0.0052548 \text{ kipft/ft})) + (3 \times (-0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))]^2}{(6.75 \text{ ft})^2 \times [(3 \times (0.0052548 \text{ kipft/ft})) + (2 \times (-0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))]}$$

$$p = -0.0015393 \text{ kip/ft}^2$$

$s$  - Earth pressure against the pile at distance  $L_e$ ,

$$s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{6 \times [(2 \times (0.0052548 \text{ kipft/ft})) + ((-0.0039809 \text{ kip/ft}) \times (6.75 \text{ ft}))]}{(6.75 \text{ ft})^2}$$

$$s = -0.0021546 \text{ kip/ft}^2$$

#### Check lateral soil pressure capacity:

$p_a$  - Allowable lateral soil pressure at depth  $a/2$ ,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.9349 \text{ ft})}{2}$$

$$p_a = 0.37012 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{p}{p_a}$$

$$Ratio = \frac{(-0.0015393 \text{ kip/ft}^2)}{(0.37012 \text{ kip/ft}^2)}$$

$$Ratio = -0.004159$$

$p_s$  - Allowable lateral soil pressure at depth  $L_e$ ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.75 \text{ ft})$$

$$p_s = 1.0125 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(-0.0021546 \text{ kip/ft}^2)}{(1.0125 \text{ kip/ft}^2)}$$

$$Ratio = -0.002128$$

Status: **PASS**  
Ratio: **0.000**

Status: **PASS**  
Ratio: **0.000**



### Shear force and Bending moment (x-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-7.932 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -1.2631 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(63.031 \text{ kipft}) + ((-7.932 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 10.037 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(10.037 \text{ kipft/ft})}{(-1.2631 \text{ kip/ft})}$$

$$E = 7.9464 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (10.037 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-1.2631 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times 10.037) + (4 \times (-1.2631) \times 6.75)}$$

$$a = \frac{(-1.2631 \text{ kip/ft}) \times (48 \text{ in})}{(6 \times (10.037 \text{ kipft/ft})) + (4 \times (-1.2631 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.7034 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-1.2631 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.7034 \text{ ft})}{(6.75 \text{ ft})} \right)^2 \right] + \left[ 4 \times \left( \frac{3 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.7034 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 13.858 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-1.2631 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(7.9464 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.7034 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) - \left[ \left( \frac{4 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.7034 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (7.9464 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.7034 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 43.69 \text{ kipft}$$

#### Shear force and Bending moment (z-direction, LRFD)

$H_o$  - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.041 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.0065287 \text{ kip/ft}$$

$M_o$  - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.054 \text{ kipft}) + ((-0.041 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.0085987 \text{ kipft/ft}$$

$E$  - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.0085987 \text{ kipft/ft})}{(-0.0065287 \text{ kip/ft})}$$

$$E = 1.3171 \text{ ft}$$

$a$  - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.0085987 \text{ kipft/ft}) \times (6.75 \text{ ft})) + (3 \times (-0.0065287 \text{ kip/ft}) \times (6.75 \text{ ft})^2)}{(6 \times (0.0085987 \text{ kipft/ft})) + (4 \times (-0.0065287 \text{ kip/ft}) \times (6.75 \text{ ft}))}$$

$$a = 4.9351 \text{ ft}$$

$V_{max}$  - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[ 1 - \left[ 3 \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{L_e} \right)^2 \right] + \left[ 4 \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.0065287 \text{ kip/ft}) \times (48 \text{ in})) \times \left[ 1 - \left[ 3 \times \left( \frac{4 \times (1.3171 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.9351 \text{ ft})}{(6.75 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[ 4 \times \left( \frac{3 \times (1.3171 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.9351 \text{ ft})}{(6.75 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.02666 \text{ kip}$$

$M_{max}$  - Max bending moment located at depth  $a/2$ ,

$$M_{max} = (H_o \cdot b \cdot L_e) \left[ \left( \frac{E}{L_e} + \frac{a}{2 L_e} \right) \right. \\ \left. - \left[ \left( \frac{4E}{L_e} + 3 \right) \left( \frac{a}{2 L_e} \right)^3 \right] + \left[ \left( \frac{3E}{L_e} + 2 \right) \left( \frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.0065287 \text{ kip/ft}) \times (48 \text{ in}) \times (6.75 \text{ ft})) \times \left[ \left( \frac{(1.3171 \text{ ft})}{(6.75 \text{ ft})} + \frac{(4.9351 \text{ ft})}{2 \times (6.75 \text{ ft})} \right) \right. \\ \left. - \left[ \left( \frac{4 \times (1.3171 \text{ ft})}{(6.75 \text{ ft})} + 3 \right) \times \left( \frac{(4.9351 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^3 \right] + \left[ \left( \frac{3 \times (1.3171 \text{ ft})}{(6.75 \text{ ft})} + 2 \right) \times \left( \frac{(4.9351 \text{ ft})}{2 \times (6.75 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.074418 \text{ kipft}$$

### Minimum Reinforcement Check (LRFD)

#### Parameters:

$f'_{ck} = 2.5 \text{ ksi}$  - Concrete strength,

$f_{yk} = 60 \text{ ksi}$  - Longitudinal reinforcement strength,

$\phi = 0.65$  - Reduction factor for axial strength,

$\alpha = 0.8$  - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$  - Gross area of concrete,

#### Longitudinal reinforcement:

Required reinforcement due to axial load,  $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[ \frac{\frac{(12.969 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.165 \text{ in}^2$$

$A_{min}$  - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.165 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

$n_{rebar}$  - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

$A_{st}$  - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

<p>25.2.3</p> <p>25.7.2.2</p> <p>25.7.2.1</p>	<p style="text-align: center;"><math>Ratio = 0.96556</math></p> <p><math>s_{rebar} = \text{Min spacing of reinforcement,}</math></p> $s_{rebar} = \text{Max}[1.5, (1.5 d_{bar})]$ $s_{rebar} = \text{Max}[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ <p><b>Ties:</b></p> <p>Since longitudinal reinforcement is <math>\leq</math> No. 10ø: Use #3(0.375 in)</p> <p><math>s_{ties}</math> - Maximum spacing of ties,</p> $s_{ties} = \text{Min}[(16 d_{bar}), (48 d_{ties}), \text{Min}(D, b)]$ $s_{ties} = \text{Min}[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), \text{Min}((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ <p><b>Summary:</b></p> <p style="text-align: center;">Main reinforcement: <b>14 - #5 (0.625 in)</b> Ties: <b>#3(0.375 in) - 10 in</b></p>	<p>Status: <b>PASS</b> Ratio: <b>0.970</b></p>
<p>22.4.2.2</p>	<p><b>Axial Compression Strength (ACI 318-19, LRFD)</b></p> <p><math>\phi P_N</math> - Allowable axial compressive strength</p> $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$ $\phi P_N = 2675.2 \text{ kip}$ <p><i>Ratio</i> - Capacity</p> $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(12.969 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0048479$	<p>Status: <b>PASS</b> Ratio: <b>0.000</b></p>
<p>22.5.2.2</p> <p>22.5.5.1.3</p> <p>22.5.5.1.1</p>	<p><b>Shear Strength (ACI 318-19, LRFD)</b></p> <p><b>Parameters:</b></p> <p><math>b_w = 48 \text{ in}</math> - Effective width, <math>d</math> - Effective depth</p> $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ <p><math>\lambda_s</math> - size effect modification factor</p> $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = \text{MIN} \left[ \sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ <p>The following variables were converted to be consistent with empirical formula <math>f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}</math>,</p> <p><math>V_{c,max}</math> - Max shear strength of concrete</p> $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$	

$$V_{c,max} = 296.21 \text{ kip}$$

22.5.5.1.1(a) The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  $P = 12.969 \text{ kip} \rightarrow 12969 \text{ lbf}$ ,  
 $V_{c,a}$  - Shear strength of concrete (a)

$$V_{c,a} = \left[ 2 \lambda_s \sqrt{f'_{ck} + \frac{P}{6 A_g}} \right] b_w d$$

$$V_{c,a} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + \frac{(12969 \text{ lbf})}{6 \times (2304 \text{ in}^2)}} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,a} = 120.21 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{c,b}$  - Shear strength of concrete (b)

$$V_{c,b} = \left[ 2 \lambda_s \sqrt{f'_{ck} + (0.05 f'_{ck})} \right] b_w d$$

$$V_{c,b} = \left[ 2 \times (0.64282) \times \sqrt{(2500 \text{ psi}) + (0.05 \times (2500 \text{ psi}))} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{c,b} = 348.89 \text{ kip}$$

$V_c$  - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(296.21 \text{ kip}), (120.21 \text{ kip}), (348.89 \text{ kip})]$$

$$V_c = 120.21 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula  $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$ ,  
 $V_{s,a}$  - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$$

$$V_{s,a} = 737.28 \text{ kip}$$

$A_v$  - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3  $V_{s,b}$  - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 50.894 \text{ kip}$$

$V_s$  - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$$

$$V_s = 50.894 \text{ kip}$$

22.5.1.1  $\phi V_n$  - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((120.21 \text{ kip}) + (50.894 \text{ kip}))$$

$$\phi V_n = 111.22 \text{ kip}$$

**Considering x-direction:**

$V_{max}$  = 13.858 kip - Maximum shear force in the x-direction,

Ratio - Capacity

$$\text{Ratio} = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(13.858 \text{ kip})}{(111.22 \text{ kip})}$$

$$Ratio = 0.1246$$

Status: **PASS**  
Ratio: **0.120**

**Considering z-direction:**

$V_{max} = 0.02666 \text{ kip}$  - Maximum shear force in the z-direction,

Ratio - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(0.02666 \text{ kip})}{(111.22 \text{ kip})}$$

$$Ratio = 0.0002397$$

Status: **PASS**  
Ratio: **0.000**

**Flexural Strength (ACI 318-19, LRFD)**

$S_m$  - Section modulus

$$S_m = \frac{b D^2}{6}$$

$$S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$$

$$S_m = 18432 \text{ in}^3$$

$\lambda = 1$  - Concrete modification factor (Normal concrete),

Allowable flexural strength:

$M_n$  shall be the lesser of:

$\phi M_{n,1}$

$$\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$$

$$\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$$

$$\phi M_{n,1} = 249.600 \text{ kipft}$$

14.5.2.1b

$\phi M_{n,2}$

$$\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$$

$$\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$$

$$\phi M_{n,2} = 2121.6 \text{ kipft}$$

Therefore,

$\phi M_n$  - Allowable flexural strength,

$$\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$$

$$\phi M_n = \text{MIN}[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$$

$$\phi M_n = 249.6 \text{ kipft}$$

**Considering x-direction:**

$M_{max} = 43.69 \text{ kipft}$  - Maximum moment in the x-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$Ratio = \frac{(43.69 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.17504$$

Status: **PASS**  
Ratio: **0.180**

**Considering z-direction:**

$M_{max} = 0.074418 \text{ kipft}$  - Maximum moment in the z-direction,

Ratio - Capacity

$$Ratio = \frac{M_{max}}{\phi M_n}$$

$$\text{Ratio} = \frac{(0.074418 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$\text{Ratio} = 0.00029815$$

Status: **PASS**  
Ratio: **0.000**