

Project Details



Project Name: Greany

Date: Tue Aug 26 2025

Location: 3265 Ordway Rd, Cascade, MT 59421, USA


Number of Modules: 24

Unique ID: 2P-17-6TOP-SD-57-L-4Hx6W-9IH0

Number of Poles: 2

Date Sold:

Dealer: _____

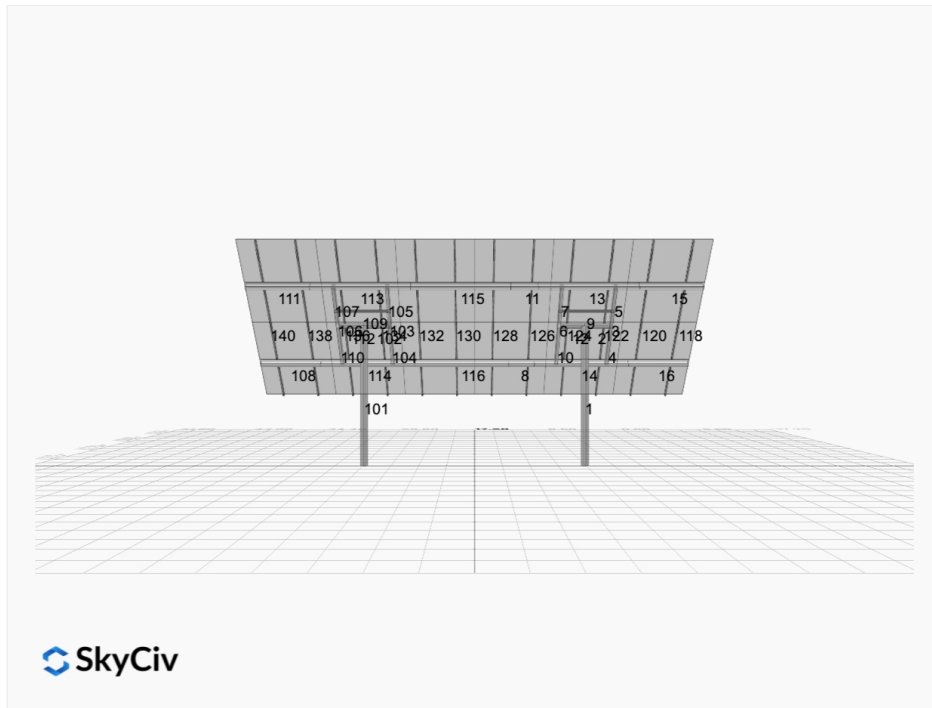

Array Dimensions N/S	15.03 ft
Array Dimensions E/W	34.40 ft
Winter Tilt Angle	50
Front Edge Clearance	5 ft


MT Solar Bill of Materials (2P-17-6TOP-SD-57-L-4Hx6W-9IH0)

Part	Short Description	BOM Qty
MTS-PC-6	6IN Pole Cap Assembly	2
MTS-HF-SD	H-Frame Assembly-SD	2
MTS-SD-Wing-57	57IN SD Wing	4
MTS-SD-Splice-57	57IN SD Splice	4
MTS-CLAMP-HOOK-4PK	Hook Clamp	6

Rail Bill of Materials

Part	Qty
Rails (180in)	12
Rail Attachment	24
Module Mid Clamp	36
Module End Clamp	24
Ground Lug	6

Site Details:

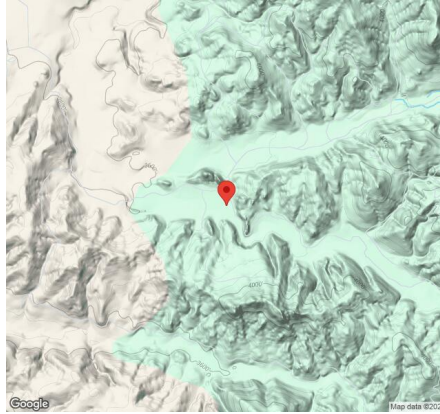

Site Address: 3265 Ordway Rd, Cascade, MT 59421, USA

Array Specification

Duty Classification:	SD
Module Width:	44.60 in
Module Length:	67.80in
Number of Rows:	4
Number of Columns:	6
Total Number of Modules:	24
Winter Tilt Angle:	50
Front Edge Clearance:	5
Total Array Height at Tilt:	16.52 ft
Total Frame Length:	34.00 ft
Module Info/Notes:	Silfab 440
Array Dimensions N/S:	15.03 ft
Array Dimensions E/W:	34.40 ft
Rail Length:	180.40 in
Rail Spacing:	2.87 ft

Support Specifications

Pole Size:	6in Pipe Sch 80
Pole Length above Grade:	10.76 ft
Number of Poles:	2
Pole Spacing:	17 ft

Foundation Specifications

Foundation Type:	Square
Foundation Dimensions:	48 x 48 in
Foundation Depth (below grade):	Pile 1: 6.25 ft Pile 2: 6.25 ft
Foundation Volume:	7.407 y ³

Site Info

Risk Category:	I
Exposure:	C
Soil Classification:	sand
Site Location:	3265 Ordway Rd, Cascade, MT 59421, USA
Wind Speed:	101 mph
Snow Load:	20 psf

Design Disclaimer



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



AutoDesigner Input


```
{ "wind_speed_override": null, "snow_load_override": null, "direct_snow_load": false, "add_angle_brace": false, "product_type": "Beam", "designer_name": "Jordan Solar", "designer_email": "janelle@jordansolar.net", "designer_phone": "4062065099", "project_id": "Greany", "site_address": "3265 Ordway Rd, Cascade, MT 59421, USA", "module_info": "Silfab 440", "module_width": 44.6, "module_length": 67.8, "number_rows": 4, "number_columns": 6, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": 15, "tilt_angle": 50, "ground_clearance": 5, "risk_category": "I", "exposure_category": "C", "frame_duty_override": "auto", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "48_Square", "foundation_type": "Square", "foundation_size": 48, "check_rails": false }
```

Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

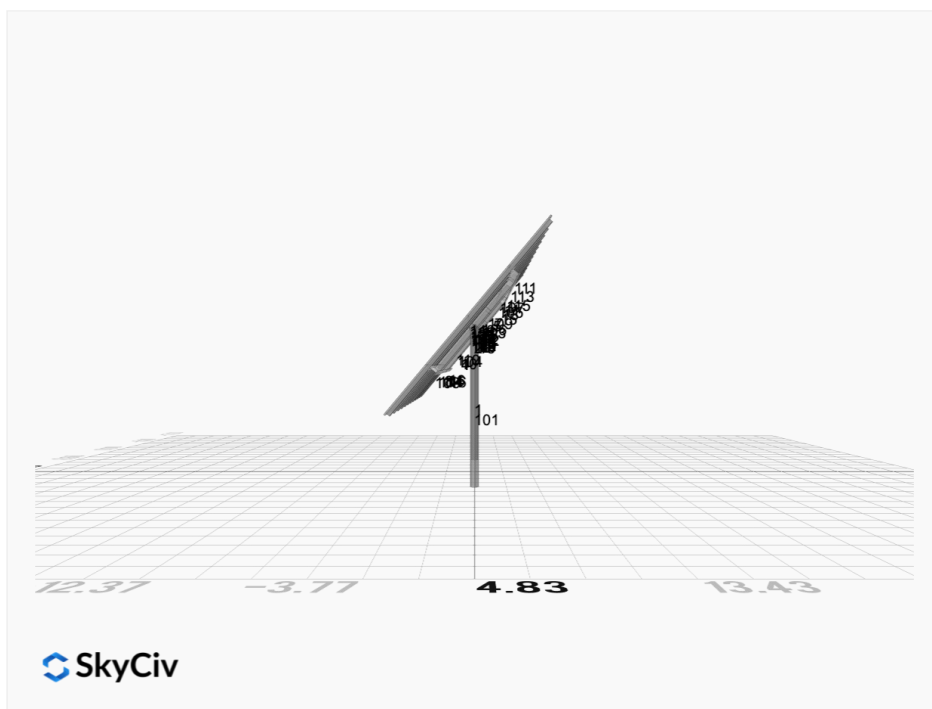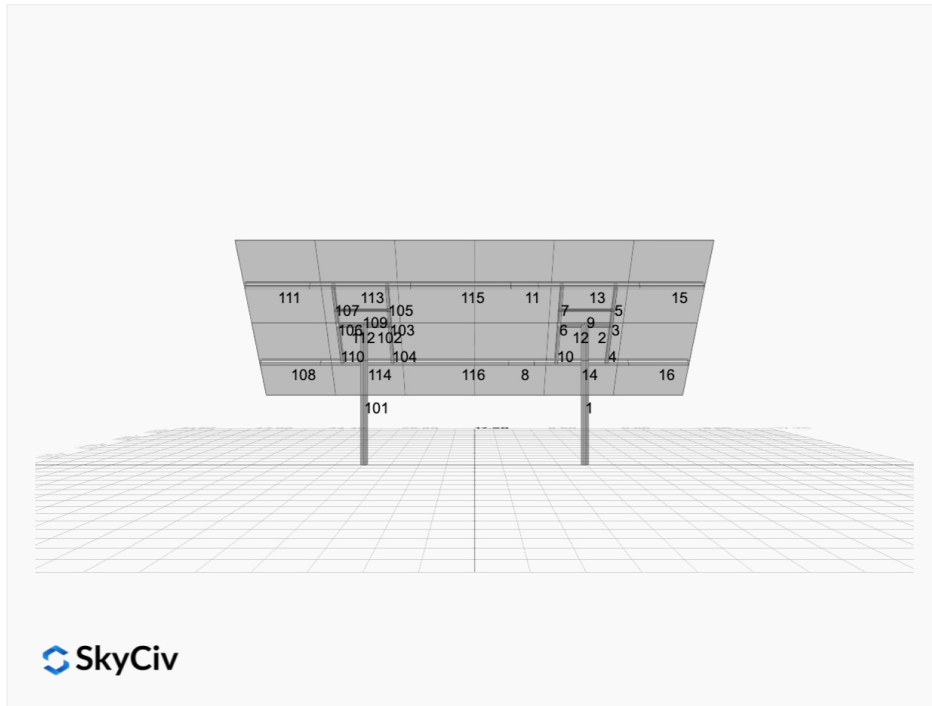

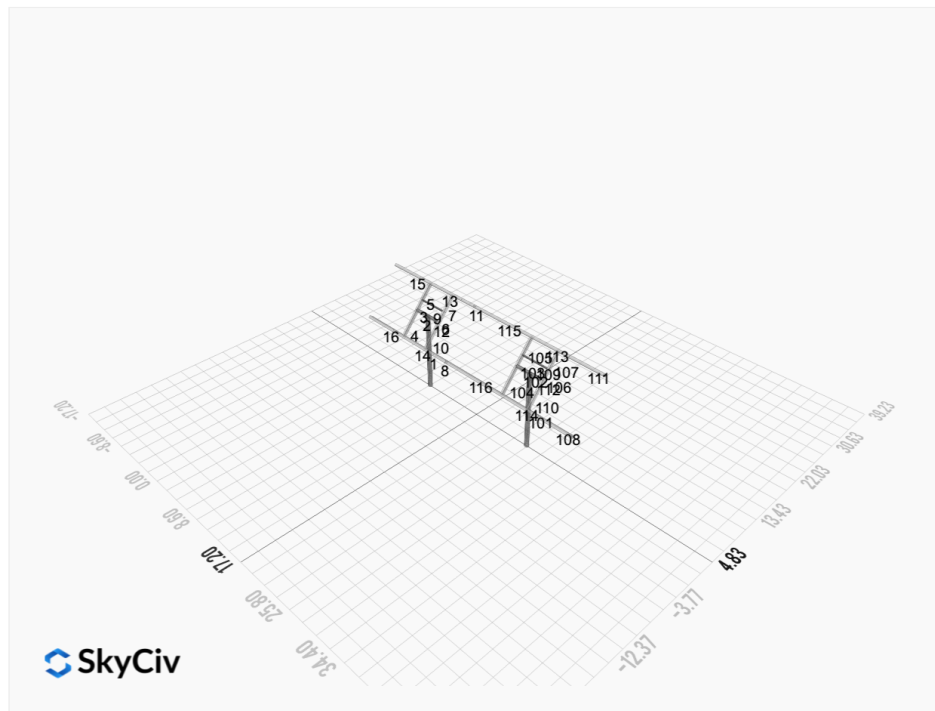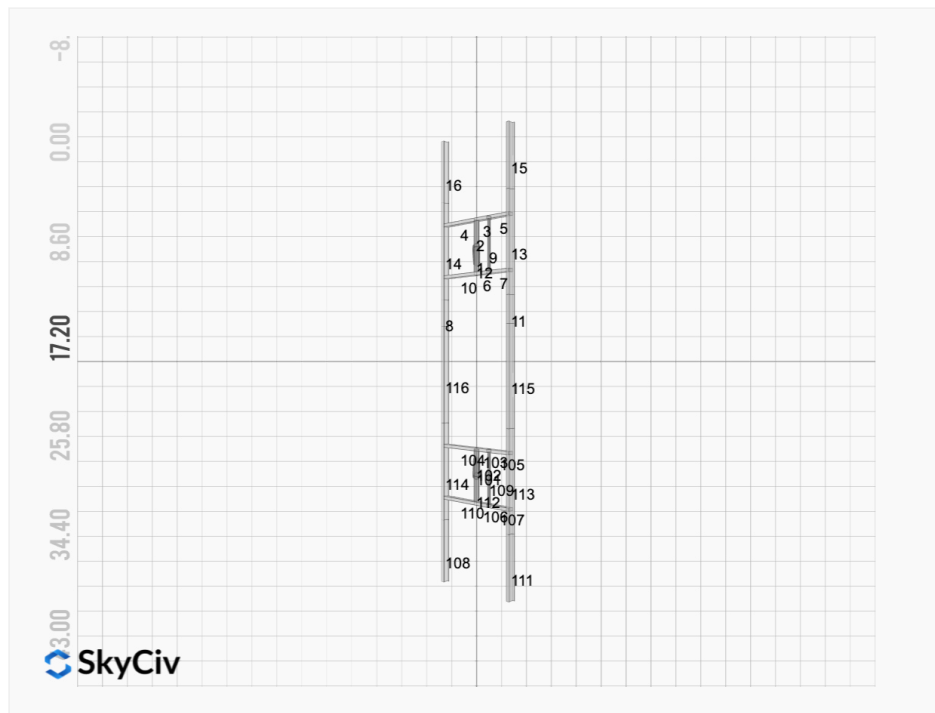


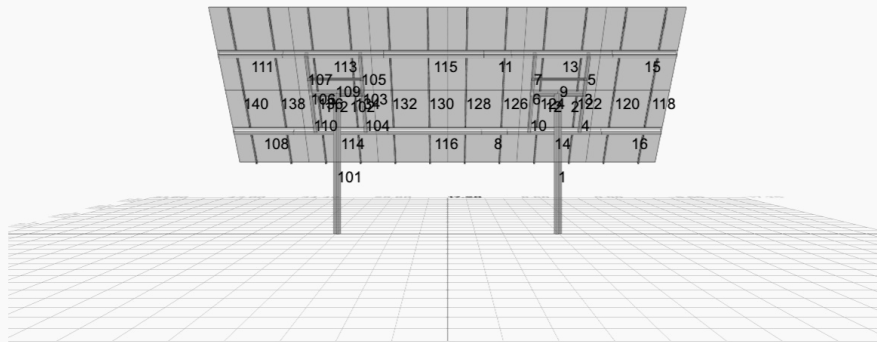

FEM Results (Envelope Worst Case for each member)

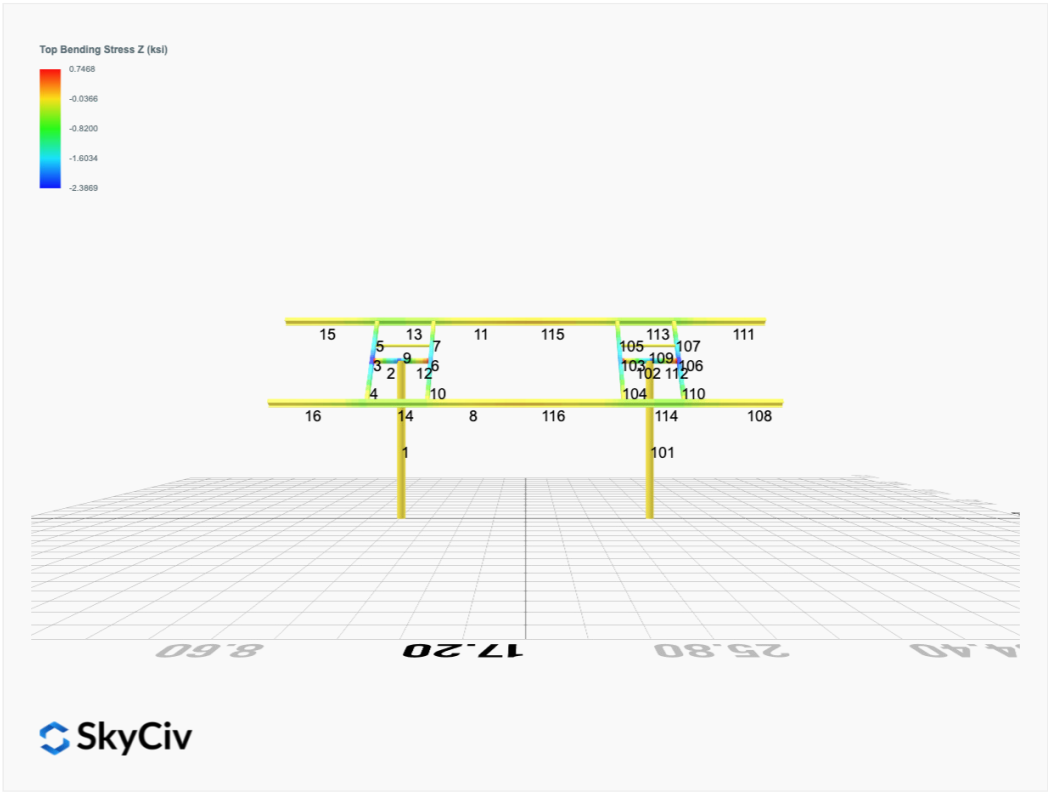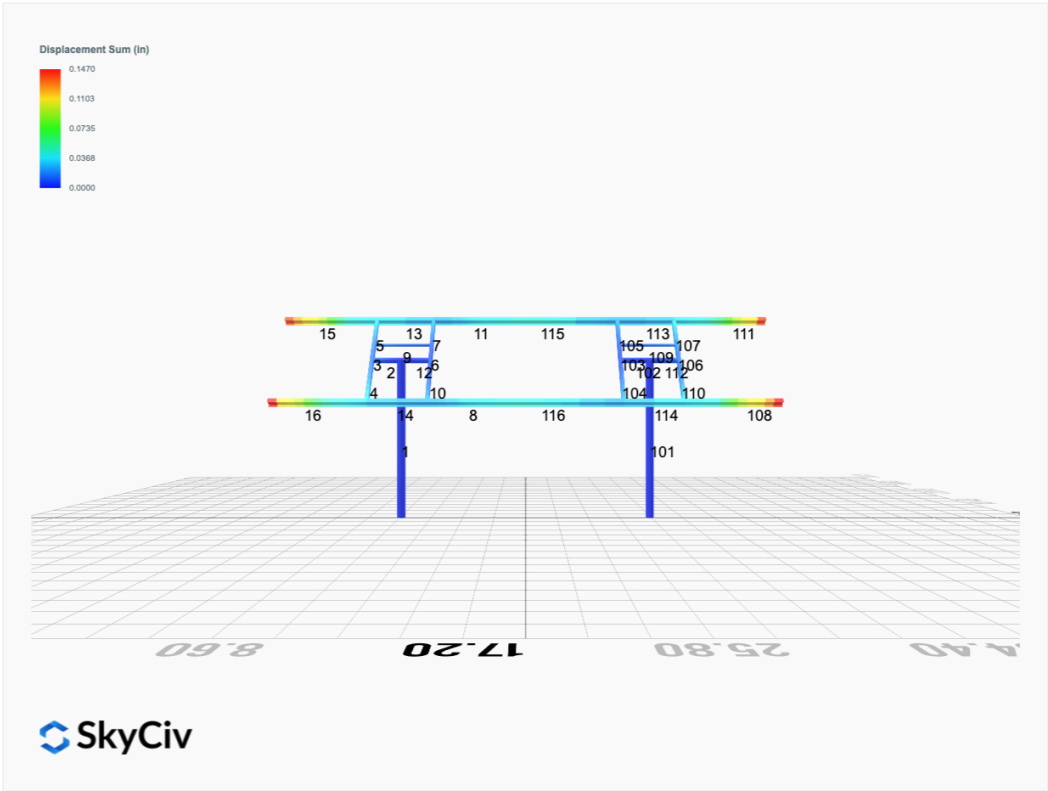


Top Bending Stress Y (ksi)

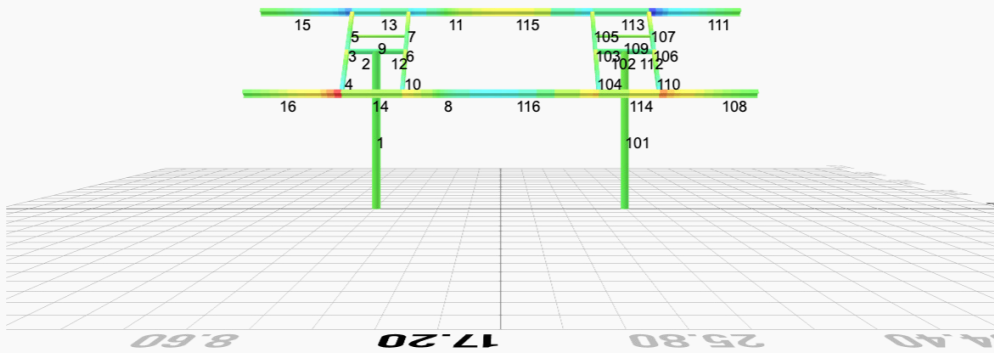


 SkyCiv

Shear Stress Y (ksi)

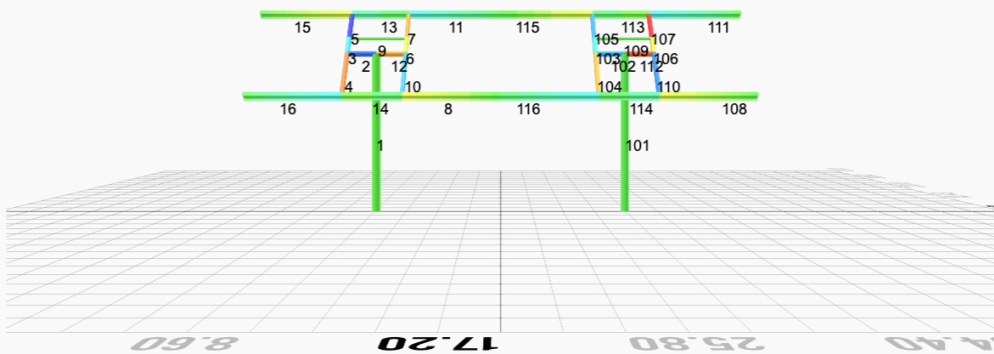

 SkyCiv

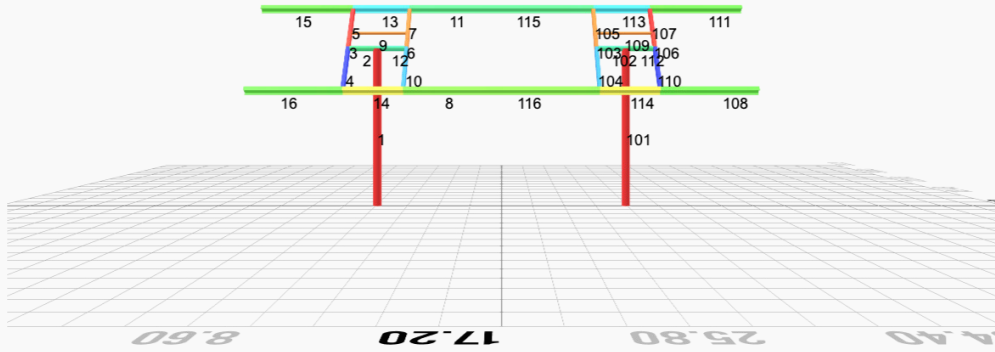

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 2. D + L	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 3. D + (S or Lr or R)	-0.0000	2.7028	-0.0593	-0.1908	0.1554	0.0173
ULS: 3. D + (S or Lr or R)	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	2.5222	-0.0545	-0.1755	0.1429	0.0171
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 5b. D + 0.7E	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	-0.0000	2.5222	-0.0545	-0.1755	0.1429	0.0171
ULS: 8. 0.6D + 0.7E	-0.0000	1.1881	-0.0241	-0.0777	0.0633	0.0098
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.3745	3.9727	-0.1450	-0.4585	0.5236	25.9708
ULS: 5a. D + 0.6W_Wind downforce Case B only	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.3745	-0.0122	0.0644	0.1982	-0.3131	-25.1348
ULS: 5a. D + 0.6W_Wind uplift Case B only	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7809	4.0165	-0.1331	-0.4222	0.4565	19.4829
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0000	2.5222	-0.0545	-0.1755	0.1429	0.0171
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.7809	1.0278	0.0240	0.0704	-0.1711	-18.8463
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0000	2.5222	-0.0545	-0.1755	0.1429	0.0171
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7809	3.4746	-0.1188	-0.3762	0.4191	19.4822
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.7809	0.4859	0.0382	0.1163	-0.2085	-18.8470
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	-0.0000	1.9802	-0.0402	-0.1296	0.1055	0.0163
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.3745	3.1806	-0.1289	-0.4067	0.4814	25.9643
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	-0.0000	1.1881	-0.0241	-0.0777	0.0633	0.0098
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.3745	-0.8043	0.0805	0.2500	-0.3554	-25.1414
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	-0.0000	1.1881	-0.0241	-0.0777	0.0633	0.0098

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.0583
Shear X	-3.9575
Shear Z	-0.2324
Moment X	-0.7351
Moment Y (Twist)	0.8471
Moment Z	43.9003

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.0165
Shear X	-2.3745
Shear Z	-0.1450
Moment X	-0.4585
Moment Y (Twist)	0.5236
Moment Z	25.9708

Reaction Forces for Foundation 2 (Node ID#101), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 2. D + L	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 3. D + (S or Lr or R)	0.0000	2.7028	0.0593	0.1908	-0.1555	0.0172
ULS: 3. D + (S or Lr or R)	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	2.5222	0.0545	0.1755	-0.1430	0.0169

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 5b. D + 0.7E	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	2.5222	0.0545	0.1755	-0.1430	0.0169
ULS: 8. 0.6D + 0.7E	0.0000	1.1881	0.0241	0.0777	-0.0634	0.0098
ULS: 5a. D + 0.6W_Wind downforce Case A only	-2.3745	3.9726	0.1450	0.4583	-0.5238	25.9706
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 5a. D + 0.6W_Wind uplift Case A only	2.3745	-0.0122	-0.0644	-0.1980	0.3132	-25.1348
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7809	4.0165	0.1331	0.4220	-0.4566	19.4827
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	2.5222	0.0545	0.1755	-0.1430	0.0169
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.7809	1.0278	-0.0240	-0.0702	0.1710	-18.8464
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	2.5222	0.0545	0.1755	-0.1430	0.0169
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-1.7809	3.4745	0.1188	0.3761	-0.4192	19.4820
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	1.7809	0.4859	-0.0382	-0.1161	0.2085	-18.8471
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	1.9802	0.0402	0.1296	-0.1056	0.0163
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-2.3745	3.1806	0.1289	0.4065	-0.4815	25.9641
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0000	1.1881	0.0241	0.0777	-0.0634	0.0098
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	2.3745	-0.8043	-0.0805	-0.2498	0.3554	-25.1413
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0000	1.1881	0.0241	0.0777	-0.0634	0.0098

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.0583
Shear X	-3.9575
Shear Z	0.2324
Moment X	0.7348
Moment Y (Twist)	0.8476
Moment Z	43.9006

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.
Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.0165
Shear X	-2.3745
Shear Z	0.1450
Moment X	0.4583
Moment Y (Twist)	0.5238
Moment Z	25.9706

Project Details

Design Code: AISC 360-16 LRFD
Provision: LRFD
Country: United States

User Name: sales@mtsolar.us
Project Name: Greany
Unit System: imperial



Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F _y (ksi)	F _u (ksi)
1	29000	50	65

Section Dimensions								
ID	Name	d (in)	t _w (in)					
1	2in Pipe Sch 40	2.38	0.15					
4	4in Pipe Sch 40	4.50	0.24					
8	6in Pipe Sch 80	6.63	0.43					
ID	Name	d (in)	b (in)	t _w (in)	t _b (in)	r (in)		
15	HSS5x3x1/8	5.00	3.00	0.12	0.12	0.12		
ID	Name	d (in)	t _w (in)	b _t (in)	b _b (in)	t _t (in)	t _b (in)	r (in)
18	W6x9	5.90	0.17	3.94	3.94	0.21	0.21	0.25

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I _{vo} (in ⁴)	I _{zo} (in ⁴)	I _w (in ⁶)	S _{vo} (in ³)	S _{zo} (in ³)

				-		-	-	
113	18	4.88	4.00	7.5 0	1.11,1.11,1.11,1.11,1.11,1.11,1.10,1.11,1.10,1.11,1.10,1.11,1.10,1.11,1.10,1.11,1.11,1.10,1.11,1.10,1.11,1.1 0,1.11,1.10,1.11,1.10,1.11	30 0	20 0	1
114	18	4.88	4.00	7.5 0	1.11,1.11,1.11,1.11,1.11,1.11,1.10,1.11,1.10,1.11,1.10,1.11,1.10,1.11,1.10,1.11,1.09,1.11,1.10,1.11,1.1 0,1.11,1.10,1.11,1.10,1.11	30 0	20 0	1
115	18	7.45	7.45	7.4 5	1.70,1.70,1.70,1.70,1.70,1.70,1.79,1.70,1.86,1.70,1.79,1.70,1.85,1.70,1.76,1.70,2.10,1.70,1.78,1.70,1.9 2,1.70,1.79,1.70,1.84,1.70	30 0	20 0	1
116	18	7.45	7.45	7.4 5	1.73,1.73,1.73,1.73,1.73,1.73,1.83,1.73,1.89,1.73,1.83,1.73,1.88,1.73,1.80,1.73,2.12,1.73,1.81,1.73,1.9 6,1.73,1.84,1.73,1.87,1.73	30 0	20 0	1

Member ID	$\Phi_t P_n$ (kip)	$\Phi_c P_n$ (kip)	$\Phi_b M_{zn}$ (k-ft)	$\Phi_b M_{yn}$ (k-ft)	$\Phi_v V_{yn}$ (kip)	$\Phi_v V_{zn}$ (kip)
1	378.22	124.46	62.23	62.23	113.47	113.47
2	142.83	141.72	16.17	16.17	42.85	42.85
3	79.65	74.89	10.99	6.26	29.14	16.61
4	79.65	72.84	10.99	6.26	29.14	16.61
5	79.65	74.30	10.99	6.26	29.14	16.61
6	79.65	74.89	10.99	6.26	29.14	16.61
7	79.65	74.30	10.99	6.26	29.14	16.61
8	120.60	115.40	23.36	6.45	30.09	45.74
9	48.35	43.11	2.85	2.85	14.51	14.51
10	79.65	72.84	10.99	6.26	29.14	16.61
11	120.60	115.40	23.36	6.45	30.09	45.74
12	142.83	141.72	16.17	16.17	42.85	42.85
13	120.60	84.02	19.32	6.45	30.09	45.74
14	120.60	84.02	19.23	6.45	30.09	45.74
15	120.60	34.69	23.36	6.45	30.09	45.74
16	120.60	34.69	23.36	6.45	30.09	45.74
101	378.22	124.46	62.23	62.23	113.47	113.47
102	142.83	141.72	16.17	16.17	42.85	42.85
103	79.65	74.89	10.99	6.26	29.14	16.61
104	79.65	72.84	10.99	6.26	29.14	16.61
105	79.65	74.30	10.99	6.26	29.14	16.61
106	79.65	74.89	10.99	6.26	29.14	16.61
107	79.65	74.30	10.99	6.26	29.14	16.61
108	120.60	34.69	23.36	6.45	30.09	45.74
109	48.35	43.11	2.85	2.85	14.51	14.51
110	79.65	72.84	10.99	6.26	29.14	16.61
111	120.60	34.69	23.36	6.45	30.09	45.74
112	142.83	141.72	16.17	16.17	42.85	42.85
113	120.60	84.02	19.31	6.45	30.09	45.74
114	120.60	84.02	19.25	6.45	30.09	45.74
115	120.60	59.18	23.36	6.45	30.09	45.74
116	120.60	59.18	23.36	6.45	30.09	45.74


Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.049	0.705	0.028	0.035	0.002	0.742	#13	0.618	Not Required	Pass
2	0.002	0.350	0.273	0.075	0.050	0.623	#13	0.052	Not Required	Pass
3	0.009	0.625	0.076	0.064	0.013	0.689	#13	0.044	Not Required	Pass
4	0.000	0.000	0.000	0.000	0.000	0.000	#13	0.000	Not Required	Pass

4	0.009	0.023	0.153	0.002	0.020	0.009	#13	0.070	Not Required	Pass
5	0.009	0.387	0.157	0.062	0.030	0.415	#13	0.073	Not Required	Pass
6	0.007	0.515	0.047	0.051	0.005	0.546	#13	0.044	Not Required	Pass
7	0.007	0.321	0.109	0.051	0.022	0.340	#13	0.073	Not Required	Pass
8	0.002	0.056	0.045	0.031	0.007	0.082	#13	0.088	Not Required	Pass
9	0.007	0.052	0.072	0.002	0.002	0.127	#13	0.198	Not Required	Pass
10	0.007	0.512	0.124	0.052	0.023	0.605	#13	0.078	Not Required	Pass
11	0.001	0.055	0.046	0.031	0.007	0.079	#13	0.059	Not Required	Pass
12	0.002	0.241	0.220	0.058	0.043	0.462	#13	0.034	Not Required	Pass
13	0.004	0.210	0.220	0.042	0.010	0.372	#13	0.177	Not Required	Pass
14	0.005	0.215	0.220	0.042	0.010	0.372	#13	0.265	Not Required	Pass
15	0.000	0.093	0.118	0.031	0.007	0.182	#21	Not Required	Not Required	Pass
16	0.000	0.093	0.118	0.031	0.007	0.182	#21	Not Required	Not Required	Pass
101	0.049	0.705	0.028	0.035	0.002	0.742	#13	0.618	Not Required	Pass
102	0.002	0.241	0.220	0.058	0.043	0.462	#13	0.034	Not Required	Pass
103	0.007	0.515	0.047	0.051	0.005	0.546	#13	0.044	Not Required	Pass
104	0.007	0.512	0.124	0.051	0.023	0.605	#13	0.078	Not Required	Pass
105	0.007	0.321	0.109	0.051	0.022	0.340	#13	0.073	Not Required	Pass
106	0.009	0.625	0.076	0.064	0.013	0.689	#13	0.044	Not Required	Pass
107	0.009	0.387	0.157	0.062	0.030	0.415	#13	0.073	Not Required	Pass
108	0.000	0.093	0.118	0.031	0.007	0.182	#21	Not Required	Not Required	Pass
109	0.007	0.052	0.072	0.002	0.002	0.127	#13	0.198	Not Required	Pass
110	0.009	0.623	0.155	0.063	0.026	0.669	#13	0.078	Not Required	Pass
111	0.000	0.093	0.118	0.031	0.007	0.182	#21	Not Required	Not Required	Pass
112	0.002	0.350	0.273	0.075	0.050	0.623	#13	0.052	Not Required	Pass
113	0.004	0.210	0.220	0.042	0.010	0.372	#13	0.177	Not Required	Pass
114	0.005	0.215	0.220	0.042	0.010	0.372	#13	0.265	Not Required	Pass
115	0.001	0.055	0.084	0.031	0.007	0.111	#21	0.329	Not Required	Pass
116	0.003	0.056	0.084	0.031	0.007	0.109	#21	0.493	Not Required	Pass

Definitions

Φ_t	Safety factor for tensile
Φ_c	Safety factor for compression
Φ_b	Safety factor for flexure
Φ_v	Safety factor for shear
E	Modulus of elasticity
F_y	Specified minimum yield stress
F_u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I_{yp}	Moment of inertia about the Y axes
I_{zp}	Moment of inertia about the Z axes
I_w	Warping constant
S_{yp}	Plastic section modulus about the Y axis
S_{zp}	Plastic section modulus about the Z axis
KL	Effective length
C_b	Buckling modification factor (from all load combinations)
L_b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P_n	Nominal axial strength (tension/compression)
M_n	Nominal flexural strength (about Z/Y axis)
V_n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M_z	Design ratio in case of bending about Z axis
M_y	Design ratio in case of bending about Y axis
V_y	Design ratio in case of shear along Y axis

V_z	Design ratio in case of shear along Z axis
(P,M_z,M_y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

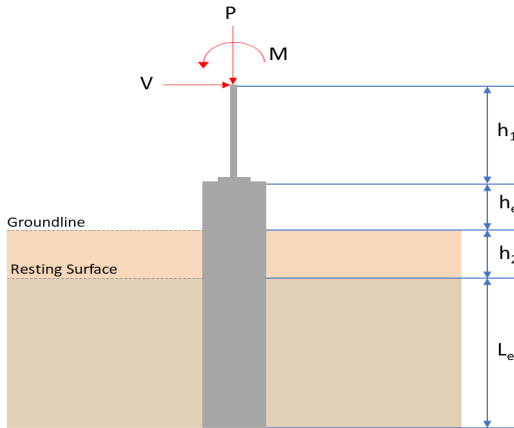REFERENCES	CALCULATIONS	RESULTS																											
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																												
	Pile Input  Geometry Pile shape: rectangular b = 48 in - Pile width D = 48 in - Pile depth L = 6.25 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>4.016</td><td>6.058</td></tr><tr><td>Vx (kip)</td><td>-2.375</td><td>-3.958</td></tr><tr><td>Vz (kip)</td><td>-0.145</td><td>-0.232</td></tr><tr><td>Mx (kipft)</td><td>-0.458</td><td>-0.735</td></tr><tr><td>Mz (kipft)</td><td>25.971</td><td>43.900</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	4.016	6.058	Vx (kip)	-2.375	-3.958	Vz (kip)	-0.145	-0.232	Mx (kipft)	-0.458	-0.735	Mz (kipft)	25.971	43.900	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ Considering x-direction: Ho - Lateral force per length of pile, $H_o = \frac{V_x}{1.57 \text{ } D}$ $H_o = \frac{(-2.375 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.37818 \text{ kip/ft}$	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																										
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																										
Load Component	ASD	LRFD																											
P (kip)	4.016	6.058																											
Vx (kip)	-2.375	-3.958																											
Vz (kip)	-0.145	-0.232																											
Mx (kipft)	-0.458	-0.735																											
Mz (kipft)	25.971	43.900																											

	M_o - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{1.57 D}$ $M_o = \frac{(25.971 \text{ kipft}) + ((-2.375 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 4.1355 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$ Solving the cubic equation: $L_{e,x} = 5.8332 \text{ ft}$ - Required depth in x-direction, Considering z-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(-0.145 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.023089 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.458 \text{ kipft}) + ((-0.145 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.07293 \text{ kipft/ft}$ Required depth of embedment in earth: $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$ Solving the cubic equation: $L_{e,z} = 1.5457 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(5.8332 \text{ ft}), (1.5457 \text{ ft})]$ $L_{e,req} = 5.833 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (6.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 6.25 \text{ ft}$ Ratio - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(5.833 \text{ ft})}{(6.25 \text{ ft})}$ $\text{Ratio} = 0.93328$	Status: PASS Ratio: 0.930
	End-bearing Capacity (ASD) A - Pile cross-section area $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ q - End-bearing pressure	

	$q = \frac{P_v}{A}$ $q = \frac{(4.016 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.251 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $\text{Ratio} = \frac{q}{q_a}$ $\text{Ratio} = \frac{(0.251 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $\text{Ratio} = 0.1255$	Status: PASS Ratio: 0.130
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(6.25 \text{ ft})}{(48 \text{ in})}$ $L/D = 1.5625$ Since $L/D \leq 10$, Pile is short. Considering x-direction: $H_o = -0.37818 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 4.1355 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (4.1355 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times (4.1355 \text{ kipft/ft})) + (4 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))}$ $a = 4.3104 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (4.1355 \text{ kipft/ft})) + (3 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))]^2}{(6.25 \text{ ft})^2 \times [(3 \times (4.1355 \text{ kipft/ft})) + (2 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))]}$ $p = 0.22333 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (4.1355 \text{ kipft/ft})) + ((-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))]}{(6.25 \text{ ft})^2}$ $s = 0.90737 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(4.3104 \text{ ft})}{2}$ $p_a = 0.32328 \text{ kip/ft}^2$ Ratio - Lateral soil capacity	

	$Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.22333 \text{ kip/ft}^2)}{(0.32328 \text{ kip/ft}^2)}$ $Ratio = 0.69083$ p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (6.25 \text{ ft})$ $p_s = 0.9375 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{s}{p_s}$ $Ratio = \frac{(0.90737 \text{ kip/ft}^2)}{(0.9375 \text{ kip/ft}^2)}$ $Ratio = 0.96786$	Status: PASS Ratio: 0.690 Status: PASS Ratio: 0.970
	Considering z-direction: $H_o = -0.023089 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.07293 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.07293 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (-0.023089 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times (0.07293 \text{ kipft/ft})) + (4 \times (-0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))}$ $a = 4.4629 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.07293 \text{ kipft/ft})) + (3 \times (-0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))]^2}{(6.25 \text{ ft})^2 \times [(3 \times (0.07293 \text{ kipft/ft})) + (2 \times (-0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))]}$ $p = -0.0054824 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.07293 \text{ kipft/ft})) + ((-0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))]}{(6.25 \text{ ft})^2}$ $s = 0.00023847 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(4.4629 \text{ ft})}{2}$ $p_a = 0.33472 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(-0.0054824 \text{ kip/ft}^2)}{(0.33472 \text{ kip/ft}^2)}$	

$$Ratio = -0.016379$$

Status: **PASS**
Ratio: **-0.020**

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.25 \text{ ft})$$

$$p_s = 0.9375 \text{ kip/ft}^2$$


Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.00023847 \text{ kip/ft}^2)}{(0.9375 \text{ kip/ft}^2)}$$

$$Ratio = 0.00025437$$

Status: **PASS**
Ratio: **0.000**

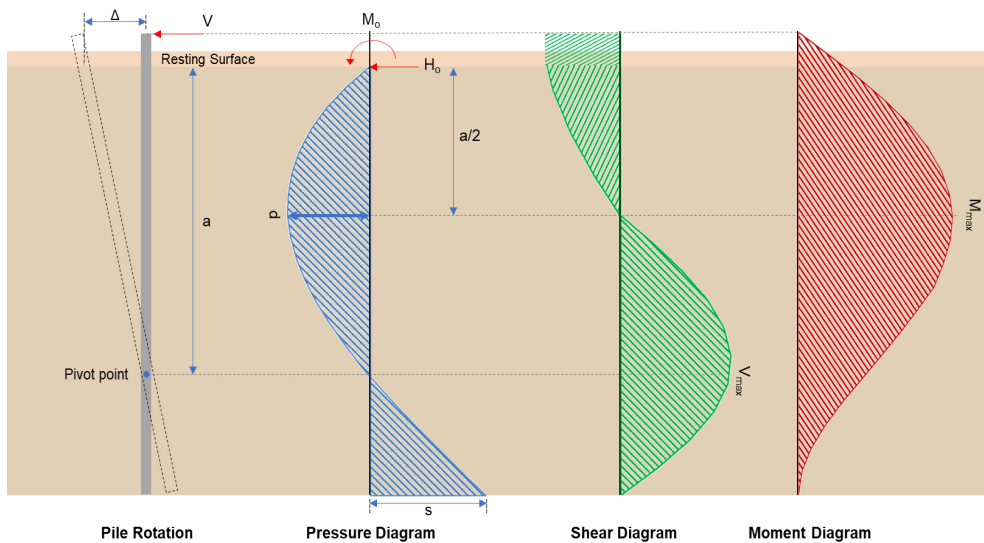

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.958 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.63025 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(43.9 \text{ kipft}) + ((-3.958 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.9904 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(6.9904 \text{ kipft/ft})}{(-0.63025 \text{ kip/ft})}$$

$$E = 11.091 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.9904 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (-0.63025 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times 6.9904 \text{ kipft/ft}) + (4 \times (-0.63025 \text{ kip/ft}) \times 6.25 \text{ ft})}$$

$$a = \frac{(-0.63025 \text{ kip/ft}) \times (48 \text{ in}) \times (6.25 \text{ ft})}{(6 \times (6.9904 \text{ kip/ft}) + (4 \times (-0.63025 \text{ kip/ft}) \times (6.25 \text{ ft}))}$$

$$a = 4.3089 \text{ ft}$$

V_{max} - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.63025 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (11.091 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.3089 \text{ ft})}{(6.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (11.091 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.3089 \text{ ft})}{(6.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 9.5796 \text{ kip}$$

M_{max} - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.63025 \text{ kip/ft}) \times (48 \text{ in}) \times (6.25 \text{ ft})) \times \left[\left(\frac{(11.091 \text{ ft})}{(6.25 \text{ ft})} + \frac{(4.3089 \text{ ft})}{2 \times (6.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (11.091 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.3089 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (11.091 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.3089 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 28.505 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(-0.232 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.036943 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.735 \text{ kipft}) + ((-0.232 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.11704 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.11704 \text{ kipft/ft})}{(-0.036943 \text{ kip/ft})}$$

$$E = 3.1681 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.11704 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (-0.036943 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times (0.11704 \text{ kipft/ft})) + (4 \times (-0.036943 \text{ kip/ft}) \times (6.25 \text{ ft}))}$$

$$a = 4.4625 \text{ ft}$$

V_{max} - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.036943 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.4625 \text{ ft})}{(6.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.4625 \text{ ft})}{(6.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.23098 \text{ kip}$$

M_{max} - Max bending moment located at depth a/2,

$$M_{max} = (H_o \ b \ L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.036943 \text{ kip/ft}) \times (48 \text{ in}) \times (6.25 \text{ ft})) \times \left[\left(\frac{(3.1681 \text{ ft})}{(6.25 \text{ ft})} + \frac{(4.4625 \text{ ft})}{2 \times (6.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.4625 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.4625 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.63941 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength,

$f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,

$\phi = 0.65$ - Reduction factor for axial strength,

$\alpha = 0.8$ - Alpha factor for axial strength,

$A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$$

$$A_{st,required} = \text{Min} \left[\frac{\frac{(6.058 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.395 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$$

$$A_{min} = \text{Max} [(-84.395 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$\text{Ratio} = \frac{A_{min}}{A_{st}}$$

$$\text{Ratio} = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

25.2.3	$s_{rebar} = 0.96556$ s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = Max[1.5, (1.5 d_{bar})]$ $s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq$ No. 10ø: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum spacing of ties, $s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$ $s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ Summary: Main reinforcement: 14 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in	Status: PASS Ratio: 0.970
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$ $\phi P_N = 2675.2 \text{ kip}$ $Ratio$ - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(6.058 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0022645$	Status: PASS Ratio: 0.000
22.5.2.2 22.5.1.3 22.5.1.1	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 48 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$	


		$V_{c,max} = 296.21 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 6.058 \text{ kip} \rightarrow 6058 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a)	$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(6058 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.29 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b)	$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$	
	V_c - Governing shear strength of concrete	$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = \text{Min}[(296.21 \text{ kip}), (119.29 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.29 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)	$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$	
	A_v - Ties rebar area,	$A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$	
22.5.8.5.3	$V_{s,b}$ - Shear strength of steel (b)	$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$	
	V_s - Governing shear strength of steel	$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$	
22.5.1.1	ϕV_n - Allowable shear strength	$\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.29 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.62 \text{ kip}$	
	Considering x-direction:		
	$V_{max} = 9.5796 \text{ kip}$ - Maximum shear force in the x-direction, $Ratio$ - Capacity	$Ratio = \frac{V_{max}}{\phi V_n}$	

	$Ratio = \frac{(9.5796 \text{ kip})}{(110.62 \text{ kip})}$ $Ratio = 0.086598$ Considering z-direction: $V_{max} = 0.23098 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.23098 \text{ kip})}{(110.62 \text{ kip})}$ $Ratio = 0.002088$ Status: PASS Ratio: 0.090	
14.5.2.1b	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = MIN[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = MIN[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ Considering x-direction: $M_{max} = 28.505 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $Ratio = \frac{M_{max}}{\phi M_n}$ $Ratio = \frac{(28.505 \text{ kipft})}{(249.6 \text{ kipft})}$ $Ratio = 0.1142$ Status: PASS Ratio: 0.110	
	Considering z-direction: $M_{max} = 0.63941 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity $Ratio = \frac{M_{max}}{\phi M_n}$	

$$Ratio = \frac{(0.63941 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.0025618$$

Status: **PASS**
Ratio: **0.000**

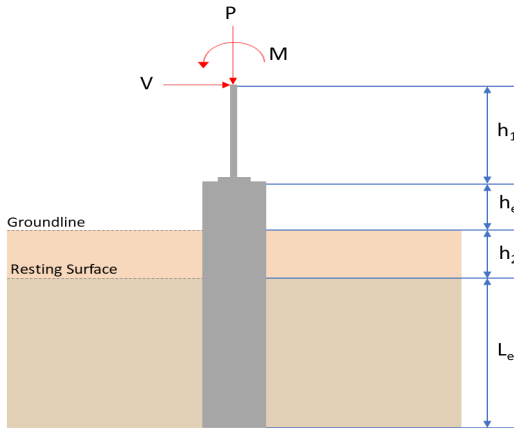REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: rectangular b = 48 in - Pile width D = 48 in - Pile depth L = 6.25 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><thead><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr></thead><tbody><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></tbody></table> Tabulation of Loads <table><thead><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr></thead><tbody><tr><td>P (kip)</td><td>4.016</td><td>6.058</td></tr><tr><td>Vx (kip)</td><td>-2.375</td><td>-3.958</td></tr><tr><td>Vz (kip)</td><td>0.145</td><td>0.232</td></tr><tr><td>Mx (kipft)</td><td>0.458</td><td>0.735</td></tr><tr><td>Mz (kipft)</td><td>25.971</td><td>43.901</td></tr></tbody></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	4.016	6.058	Vx (kip)	-2.375	-3.958	Vz (kip)	0.145	0.232	Mx (kipft)	0.458	0.735	Mz (kipft)	25.971	43.901	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	4.016	6.058																										
Vx (kip)	-2.375	-3.958																										
Vz (kip)	0.145	0.232																										
Mx (kipft)	0.458	0.735																										
Mz (kipft)	25.971	43.901																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$ $H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$ $H = 0 \text{ ft}$ Considering x-direction: Ho - Lateral force per length of pile, $H_o = \frac{V_x}{1.57 D}$ $H_o = \frac{(-2.375 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = -0.37818 \text{ kip/ft}$																											

	M_o - Moment per length of pile, $M_o = \frac{M_z + (V_x H)}{1.57 D}$ $M_o = \frac{(25.971 \text{ kipft}) + ((-2.375 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 4.1355 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$ Solving the cubic equation: $L_{e,x} = 5.8332 \text{ ft}$ - Required depth in x-direction, Considering z-direction: H_o - Lateral force per length of pile, $H_o = \frac{V_z}{1.57 b}$ $H_o = \frac{(0.145 \text{ kip})}{1.57 \times (48 \text{ in})}$ $H_o = 0.023089 \text{ kip/ft}$ M_o - Moment per length of pile, $M_o = \frac{M_x + (V_z H)}{1.57 b}$ $M_o = \frac{(0.458 \text{ kipft}) + ((0.145 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$ $M_o = 0.07293 \text{ kipft/ft}$ Required depth of embedment in earth: $L_z^3 - \left(14.14 \times \frac{H_o \times L_z}{R} \right) - \left(18.85 \times \frac{M_o}{R} \right) = 0$ Solving the cubic equation: $L_{e,z} = 2.0553 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = \text{MAX}[L_{e,x}, L_{e,z}]$ $L_{e,req} = \text{MAX}[(5.8332 \text{ ft}), (2.0553 \text{ ft})]$ $L_{e,req} = 5.833 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (6.25 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 6.25 \text{ ft}$ Ratio - Embedded depth $\text{Ratio} = \frac{L_{e,req}}{L_e}$ $\text{Ratio} = \frac{(5.833 \text{ ft})}{(6.25 \text{ ft})}$ $\text{Ratio} = 0.93328$	Status: PASS Ratio: 0.930
	End-bearing Capacity (ASD) A - Pile cross-section area $A = b D$ $A = (48 \text{ in}) \times (48 \text{ in})$ $A = 16 \text{ ft}^2$ q - End-bearing pressure	

	$q = \frac{P_v}{A}$ $q = \frac{(4.016 \text{ kip})}{(16 \text{ ft}^2)}$ $q = 0.251 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $\text{Ratio} = \frac{q}{q_a}$ $\text{Ratio} = \frac{(0.251 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $\text{Ratio} = 0.1255$	Status: PASS Ratio: 0.130
Czerniak	Lateral Soil Pressure (ASD): L/D - Length to least lateral dimension ratio, $L/D = \frac{L}{D}$ $L/D = \frac{(6.25 \text{ ft})}{(48 \text{ in})}$ $L/D = 1.5625$ Since $L/D \leq 10$, Pile is short. Considering x-direction: $H_o = -0.37818 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 4.1355 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (4.1355 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times (4.1355 \text{ kipft/ft})) + (4 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))}$ $a = 4.3104 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (4.1355 \text{ kipft/ft})) + (3 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))]^2}{(6.25 \text{ ft})^2 \times [(3 \times (4.1355 \text{ kipft/ft})) + (2 \times (-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))]}$ $p = 0.22333 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (4.1355 \text{ kipft/ft})) + ((-0.37818 \text{ kip/ft}) \times (6.25 \text{ ft}))]}{(6.25 \text{ ft})^2}$ $s = 0.90737 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(4.3104 \text{ ft})}{2}$ $p_a = 0.32328 \text{ kip/ft}^2$ Ratio - Lateral soil capacity	

	$Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.22333 \text{ kip/ft}^2)}{(0.32328 \text{ kip/ft}^2)}$ $Ratio = 0.69083$ p_s - Allowable lateral soil pressure at depth L_e, $p_s = R L_e$ $p_s = (150 \text{ psf/ft}) \times (6.25 \text{ ft})$ $p_s = 0.9375 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{s}{p_s}$ $Ratio = \frac{(0.90737 \text{ kip/ft}^2)}{(0.9375 \text{ kip/ft}^2)}$ $Ratio = 0.96786$	Status: PASS Ratio: 0.690 Status: PASS Ratio: 0.970
	Considering z-direction: $H_o = 0.023089 \text{ kip/ft}$ - Lateral force per length of pile, $M_o = 0.07293 \text{ kipft/ft}$ - Overturning moment per length of pile, a - Distance from resting surface to pivot point, $a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$ $a = \frac{(4 \times (0.07293 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (0.023089 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times (0.07293 \text{ kipft/ft})) + (4 \times (0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))}$ $a = 4.4629 \text{ ft}$ p - Earth pressure against the pile at distance $a/2$ from resting surface, $p = \frac{0.75 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$ $p = \frac{0.75 \times [(4 \times (0.07293 \text{ kipft/ft})) + (3 \times (0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))]^2}{(6.25 \text{ ft})^2 \times [(3 \times (0.07293 \text{ kipft/ft})) + (2 \times (0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))]}$ $p = 0.01987 \text{ kip/ft}^2$ s - Earth pressure against the pile at distance L_e, $s = \frac{6 [(2 M_o) + (H_o L_e)]}{L_e^2}$ $s = \frac{6 \times [(2 \times (0.07293 \text{ kipft/ft})) + ((0.023089 \text{ kip/ft}) \times (6.25 \text{ ft}))]}{(6.25 \text{ ft})^2}$ $s = 0.04457 \text{ kip/ft}^2$ Check lateral soil pressure capacity: p_a - Allowable lateral soil pressure at depth $a/2$, $p_a = R \frac{a}{2}$ $p_a = (150 \text{ psf/ft}) \times \frac{(4.4629 \text{ ft})}{2}$ $p_a = 0.33472 \text{ kip/ft}^2$ Ratio - Lateral soil capacity $Ratio = \frac{p}{p_a}$ $Ratio = \frac{(0.01987 \text{ kip/ft}^2)}{(0.33472 \text{ kip/ft}^2)}$	

$$Ratio = 0.059363$$

Status: **PASS**
Ratio: **0.060**

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (6.25 \text{ ft})$$

$$p_s = 0.9375 \text{ kip/ft}^2$$


Ratio - Lateral soil capacity

$$Ratio = \frac{s}{p_s}$$

$$Ratio = \frac{(0.04457 \text{ kip/ft}^2)}{(0.9375 \text{ kip/ft}^2)}$$

$$Ratio = 0.047541$$

Status: **PASS**
Ratio: **0.050**

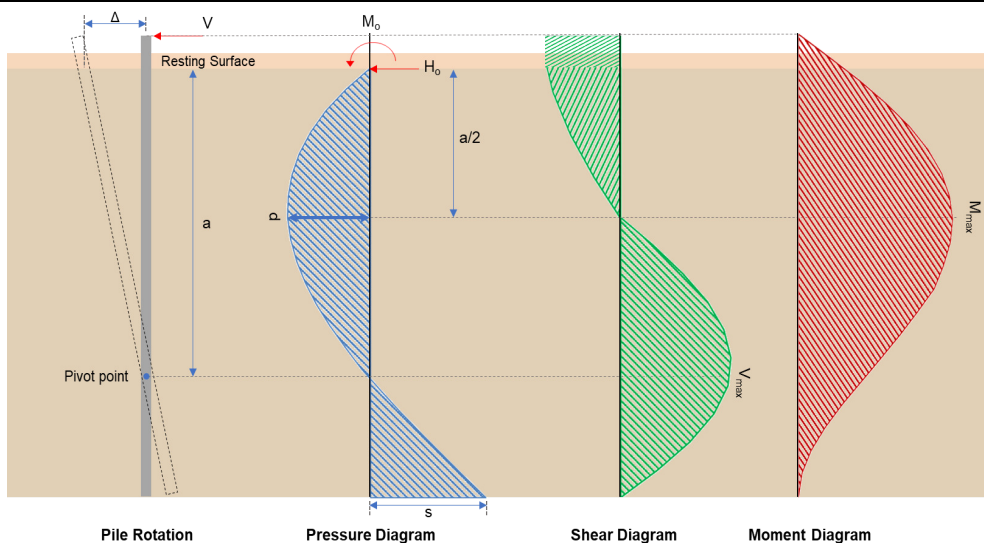

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{1.57 D}$$

$$H_o = \frac{(-3.958 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = -0.63025 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{1.57 D}$$

$$M_o = \frac{(43.901 \text{ kipft}) + ((-3.958 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 6.9906 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(6.9906 \text{ kipft/ft})}{(-0.63025 \text{ kip/ft})}$$

$$E = 11.092 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.9906 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (-0.63025 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times 6.9906) + (4 \times (-0.63025) \times 6.25)}$$

$$a = \frac{(-0.63025 \text{ kip/ft}) \times (48 \text{ in}) \times (6.25 \text{ ft})}{(6 \times (6.9906 \text{ kip/ft}) + (4 \times (-0.63025 \text{ kip/ft}) \times (6.25 \text{ ft}))}$$

$$a = 4.3089 \text{ ft}$$

V_{max} - Max shear force located at depth a,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.63025 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (11.092 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.3089 \text{ ft})}{(6.25 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (11.092 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.3089 \text{ ft})}{(6.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 9.5797 \text{ kip}$$

M_{max} - Max bending moment located at depth a/2,

$$M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 \right] + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right]$$

$$M_{max} = ((-0.63025 \text{ kip/ft}) \times (48 \text{ in}) \times (6.25 \text{ ft})) \times \left[\left(\frac{(11.092 \text{ ft})}{(6.25 \text{ ft})} + \frac{(4.3089 \text{ ft})}{2 \times (6.25 \text{ ft})} \right) - \left[\left(\frac{4 \times (11.092 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.3089 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (11.092 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.3089 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 28.506 \text{ kipft}$$

Shear force and Bending moment (z-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_z}{1.57 b}$$

$$H_o = \frac{(0.232 \text{ kip})}{1.57 \times (48 \text{ in})}$$

$$H_o = 0.036943 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_x + (V_z H)}{1.57 b}$$

$$M_o = \frac{(0.735 \text{ kipft}) + ((0.232 \text{ kip}) \times (0 \text{ ft}))}{1.57 \times (48 \text{ in})}$$

$$M_o = 0.11704 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(0.11704 \text{ kipft/ft})}{(0.036943 \text{ kip/ft})}$$

$$E = 3.1681 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (0.11704 \text{ kipft/ft}) \times (6.25 \text{ ft})) + (3 \times (0.036943 \text{ kip/ft}) \times (6.25 \text{ ft})^2)}{(6 \times (0.11704 \text{ kipft/ft})) + (4 \times (0.036943 \text{ kip/ft}) \times (6.25 \text{ ft}))}$$

$$a = 4.4625 \text{ ft}$$

V_{max} - Max shear force located at depth a,

$$V_{max} = (H_o b) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((0.036943 \text{ kip/ft}) \times (48 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.4625 \text{ ft})}{(6.25 \text{ ft})} \right)^2 \right] \right. \\ \left. + \left[4 \times \left(\frac{3 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.4625 \text{ ft})}{(6.25 \text{ ft})} \right)^3 \right] \right]$$

$$V_{max} = 0.23098 \text{ kip}$$

M_{max} - Max bending moment located at depth $a/2$,

$$M_{max} = (H_o \ b \ L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 \ L_e} \right) \right. \\ \left. - \left[\left(\frac{4 \ E}{L_e} + 3 \right) \left(\frac{a}{2 \ L_e} \right)^3 \right] + \left[\left(\frac{3 \ E}{L_e} + 2 \right) \left(\frac{a}{2 \ L_e} \right)^4 \right] \right]$$

$$M_{max} = ((0.036943 \text{ kip/ft}) \times (48 \text{ in}) \times (6.25 \text{ ft})) \times \left[\left(\frac{(3.1681 \text{ ft})}{(6.25 \text{ ft})} + \frac{(4.4625 \text{ ft})}{2 \times (6.25 \text{ ft})} \right) \right. \\ \left. - \left[\left(\frac{4 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 3 \right) \times \left(\frac{(4.4625 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^3 \right] + \left[\left(\frac{3 \times (3.1681 \text{ ft})}{(6.25 \text{ ft})} + 2 \right) \times \left(\frac{(4.4625 \text{ ft})}{2 \times (6.25 \text{ ft})} \right)^4 \right] \right]$$

$$M_{max} = 0.63941 \text{ kipft}$$

Minimum Reinforcement Check (LRFD)

Parameters:

$f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength,
 $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength,
 $\phi = 0.65$ - Reduction factor for axial strength,
 $\alpha = 0.8$ - Alpha factor for axial strength,
 $A_g = 2304 \text{ in}^2$ - Gross area of concrete,

Longitudinal reinforcement:

Required reinforcement due to axial load, $A_{st,required}$

$A_{st,required}$

$$A_{st,required} = Min \left[\frac{\frac{P}{\phi \ \alpha} - (0.85 \ f'_{ck} \ A_g)}{f_{yk} - (0.85 \ f'_{ck})}, (0.08 \ A_g) \right]$$

$$A_{st,required} = Min \left[\frac{\frac{(6.058 \text{ kip})}{(0.65) \times (0.8)} - (0.85 \times (2.5 \text{ ksi}) \times (2304 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (2304 \text{ in}^2)) \right]$$

$$A_{st,required} = -84.395 \text{ in}^2$$

A_{min} - Governing minimum reinforcement area,

$$A_{min} = Max [A_{st,required}, (0.0018 \ A_g)]$$

$$A_{min} = Max [(-84.395 \text{ in}^2), (0.0018 \times (2304 \text{ in}^2))]$$

$$A_{min} = 4.1472 \text{ in}^2$$

n_{rebar} - Required number of reinforcement,

$$n_{rebar} = \frac{A_{min}}{A_{rebar}}$$

$$n_{rebar} = \frac{(4.1472 \text{ in}^2)}{(0.3068 \text{ in}^2)}$$

$$n_{rebar} = 14$$

A_{st} - Actual total reinforcement area,

$$A_{st} = n_{rebar} \ \frac{\pi \ d_{bar}^2}{4}$$

$$A_{st} = (14) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$$

$$A_{st} = 4.2951 \text{ in}^2$$

Ratio - Capacity

$$Ratio = \frac{A_{min}}{A_{st}}$$

$$Ratio = \frac{(4.1472 \text{ in}^2)}{(4.2951 \text{ in}^2)}$$

Table 22.4.2.1

22.4.2.2, 10.6.1.1

25.2.3	$Ratio = 0.96556$ s_{rebar} - Minimum spacing of reinforcement, $s_{rebar} = Max[1.5, (1.5 d_{bar})]$ $s_{rebar} = Max[1.5, (1.5 \times (0.625 \text{ in}))]$ $s_{rebar} = 1.5 \text{ in}$ Ties: 25.7.2.2 Since longitudinal reinforcement is $\leq$ No. 10ø: Use #3(0.375 in) 25.7.2.1 s_{ties} - Maximum spacing of ties, $s_{ties} = Min[(16 d_{bar}), (48 d_{ties}), Min(D, b)]$ $s_{ties} = Min[(16 \times (0.625 \text{ in})), (48 \times (0.375 \text{ in})), Min((48 \text{ in}), (48 \text{ in}))]$ $s_{ties} = 10 \text{ in}$ Summary: Main reinforcement: 14 - #5 (0.625 in) Ties: #3(0.375 in) - 10 in	Status: PASS Ratio: 0.970
22.4.2.2	Axial Compression Strength (ACI 318-19, LRFD) ϕP_N - Allowable axial compressive strength $\phi P_N = \phi 0.80 [(0.85 f'_{ck} [A_g - A_{st}]) + (f_{yk} A_{st})]$ $\phi P_N = (0.65) \times 0.80 \times [(0.85 \times (2.5 \text{ ksi}) \times [(2304 \text{ in}^2) - (4.2951 \text{ in}^2)]) + ((60 \text{ ksi}) \times (4.2951 \text{ in}^2))]$ $\phi P_N = 2675.2 \text{ kip}$ $Ratio$ - Capacity $Ratio = \frac{P}{\phi P_N}$ $Ratio = \frac{(6.058 \text{ kip})}{(2675.2 \text{ kip})}$ $Ratio = 0.0022645$	Status: PASS Ratio: 0.000
22.5.2.2 22.5.1.3 22.5.1.1	Shear Strength (ACI 318-19, LRFD) Parameters: $b_w = 48 \text{ in}$ - Effective width, d - Effective depth $d = 0.80 D$ $d = 0.80 \times (48 \text{ in})$ $d = 38.4 \text{ in}$ λ_s - size effect modification factor $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{d}{10}}}, 1 \right]$ $\lambda_s = MIN \left[\sqrt{\frac{2}{1 + \frac{(38.4 \text{ in})}{10}}}, 1 \right]$ $\lambda_s = 0.64282$ The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,max}$ - Max shear strength of concrete $V_{c,max} = 5 \lambda_s \sqrt{f'_{ck}} b_w d$ $V_{c,max} = 5 \times (0.64282) \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$	

		$V_{c,max} = 296.21 \text{ kip}$	
22.5.5.1.1(a)	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $P = 6.058 \text{ kip} \rightarrow 6058 \text{ lbf}$, $V_{c,a}$ - Shear strength of concrete (a)	$V_{c,a} = \left[2 \lambda_s \sqrt{f'_{ck}} + \frac{P}{6 A_g} \right] b_w d$ $V_{c,a} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + \frac{(6058 \text{ lbf})}{6 \times (2304 \text{ in}^2)} \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,a} = 119.29 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{c,b}$ - Shear strength of concrete (b)	$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$ $V_{c,b} = \left[2 \times (0.64282) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{c,b} = 348.89 \text{ kip}$	
	V_c - Governing shear strength of concrete	$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$ $V_c = \text{Min}[(296.21 \text{ kip}), (119.29 \text{ kip}), (348.89 \text{ kip})]$ $V_c = 119.29 \text{ kip}$	
22.5.5.1.2	The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$, $V_{s,a}$ - Shear strength of steel (a)	$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$ $V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (48 \text{ in}) \times (38.4 \text{ in})$ $V_{s,a} = 737.28 \text{ kip}$	
	A_v - Ties rebar area,	$A_v = \frac{\pi d_{ties}^2}{4}$ $A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$ $A_v = 0.11045 \text{ in}^2$	
22.5.8.5.3	$V_{s,b}$ - Shear strength of steel (b)	$V_{s,b} = \frac{2 A_v f_{ywk} d}{s_{ties}}$ $V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (38.4 \text{ in})}{(10 \text{ in})}$ $V_{s,b} = 50.894 \text{ kip}$	
	V_s - Governing shear strength of steel	$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$ $V_s = \text{MIN}[(737.28 \text{ kip}), (50.894 \text{ kip})]$ $V_s = 50.894 \text{ kip}$	
22.5.1.1	ϕV_n - Allowable shear strength	$\phi V_n = \phi (V_c + V_s)$ $\phi V_n = (0.65) \times ((119.29 \text{ kip}) + (50.894 \text{ kip}))$ $\phi V_n = 110.62 \text{ kip}$	
	Considering x-direction: $V_{max} = 9.5797 \text{ kip}$ - Maximum shear force in the x-direction, $Ratio$ - Capacity	$Ratio = \frac{V_{max}}{\phi V_n}$	

	$Ratio = \frac{(9.5797 \text{ kip})}{(110.62 \text{ kip})}$ $Ratio = 0.086599$ Considering z-direction: $V_{max} = 0.23098 \text{ kip}$ - Maximum shear force in the z-direction, Ratio - Capacity $Ratio = \frac{V_{max}}{\phi V_n}$ $Ratio = \frac{(0.23098 \text{ kip})}{(110.62 \text{ kip})}$ $Ratio = 0.002088$ Status: PASS Ratio: 0.090	
14.5.2.1b	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{b D^2}{6}$ $S_m = \frac{(48 \text{ in}) \times (48 \text{ in})^2}{6}$ $S_m = 18432 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 18432.001 \text{ in}^3$ $\phi M_{n,1} = 249.600 \text{ kipft}$ $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (18432 \text{ in}^3)$ $\phi M_{n,2} = 2121.6 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = MIN[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = MIN[(249.6 \text{ kipft}), (2121.6 \text{ kipft})]$ $\phi M_n = 249.6 \text{ kipft}$ Considering x-direction: $M_{max} = 28.506 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $Ratio = \frac{M_{max}}{\phi M_n}$ $Ratio = \frac{(28.506 \text{ kipft})}{(249.6 \text{ kipft})}$ $Ratio = 0.11421$ Status: PASS Ratio: 0.110	
	Considering z-direction: $M_{max} = 0.63941 \text{ kipft}$ - Maximum moment in the z-direction, Ratio - Capacity $Ratio = \frac{M_{max}}{\phi M_n}$	

$$Ratio = \frac{(0.63941 \text{ kipft})}{(249.6 \text{ kipft})}$$

$$Ratio = 0.0025618$$

Status: **PASS**
Ratio: **0.000**