

Project Details



Project Name: Schaefer

Date: Wed Jul 02 2025

Location: 1833 Hersch Ave, Pagosa Springs, CO 81147, USA


Number of Modules: 12

Unique ID: 1P-0-6TOP-SD-57-L-4Hx3W-B2C1

Number of Poles: 1

Date Sold:

Dealer: _____

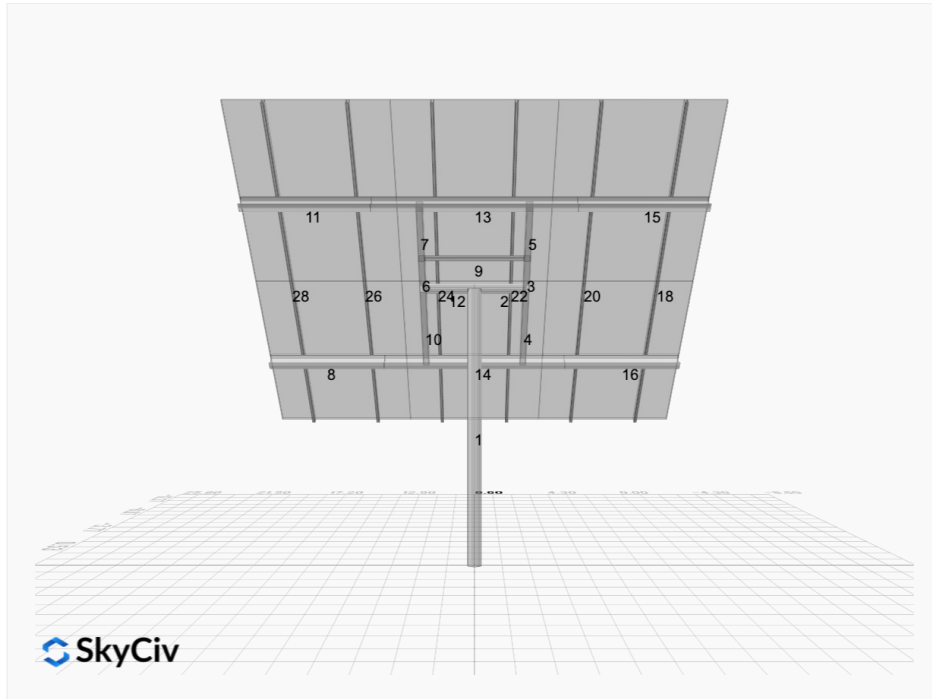

Array Dimensions N/S	15.03 ft
Array Dimensions E/W	17.20 ft
Winter Tilt Angle	50
Front Edge Clearance	5 ft

MT Solar Bill of Materials (1P-0-6TOP-SD-57-L-4Hx3W-B2C1)

Part	Short Description	BOM Qty
MTS-PC-6	6IN Pole Cap Assembly	1
MTS-HF-SD	H-Frame Assembly-SD	1
MTS-SD-Wing-57	57IN SD Wing	4
MTS-CLAMP-HOOK-4PK	Hook Clamp	3

Rail Bill of Materials

Part	Qty
Rails (180in)	6
Rail Attachment	12
Module Mid Clamp	18
Module End Clamp	12
Ground Lug	3

Site Details:



Site Address: 1833 Hersch Ave, Pagosa Springs, CO 81147, USA

Array Specification

Duty Classification:	SD
Module Width:	44.60 in
Module Length:	67.80in
Number of Rows:	4
Number of Columns:	3
Total Number of Modules:	12
Winter Tilt Angle:	50
Front Edge Clearance:	5
Total Array Height at Tilt:	16.52 ft
Total Frame Length:	17.00 ft
Module Info/Notes:	QCells 435
Array Dimensions N/S:	15.03 ft
Array Dimensions E/W:	17.20 ft
Rail Length:	180.40 in
Rail Spacing:	2.87 ft

Support Specifications

Pole Size:	6in Pipe Sch 40
Pole Length above Grade:	10.76 ft
Number of Poles:	1
Pole Spacing:	0

Foundation Specifications

Foundation Type:	Round
Foundation Dimensions:	Ø36 in
Foundation Depth (below grade):	Pile 1: 7.00 ft
Foundation Volume:	1.833 y ³

Site Info

Risk Category:	I
Exposure:	B
Soil Classification:	sand
Site Location:	1833 Hersch Ave, Pagosa Springs, CO 81147, USA
Wind Speed:	90 mph
Snow Load:	60 psf

Design Disclaimer



This software should be used for preliminary designs and should not be used as a final design unless reviewed, verified and designed by a qualified structural engineer.



AutoDesigner Input


```
{ "product_type": "Beam", "designer_name": "Bill Talley", "designer_email": "bill@shawsolar.com", "designer_phone": "8042485317", "project_id": "Schaefer", "site_address": "1833 Hersch Ave, Pagosa Springs, CO 81147, USA", "module_info": "QCells 435", "module_width": 44.6, "module_length": 67.8, "number_rows": 4, "number_columns": 3, "pole_mount_section": "4_40", "core_pipe_width": 65, "core_pipe_section": "2_40", "adjuster_section": "2_40", "core_beam_height": 65, "core_beam_section": "HSS3x2x1/8", "main_pipe_section": "2_12GA", "pole_spacing": 15, "tilt_angle": 50, "ground_clearance": 5, "risk_category": "I", "exposure_category": "B", "frame_duty_override": "auto", "pole_override": "auto", "soil_type": "sand", "customer_foundation_override": "36_Round", "foundation_type": "Round", "foundation_size": 36, "check_rails": false, "wind_speed_override": 90, "snow_load_override": 60, "direct_snow_load": false, "add_angle_brace": false }
```

Design Notes:



- AISC Deflection checks are set to L/1 due to structure design intent
- Foundation Soil Parameters used in this Autodesign are all estimates, proper geotechnical reports are required to confirm soil profiles
- Wind speeds, snow loads and other site specific results are based on ASCE 7 2016
- Steel frame design checks are based on AISC 360 2016 (LRFD)
- Foundation Design and Sizing is approximate only

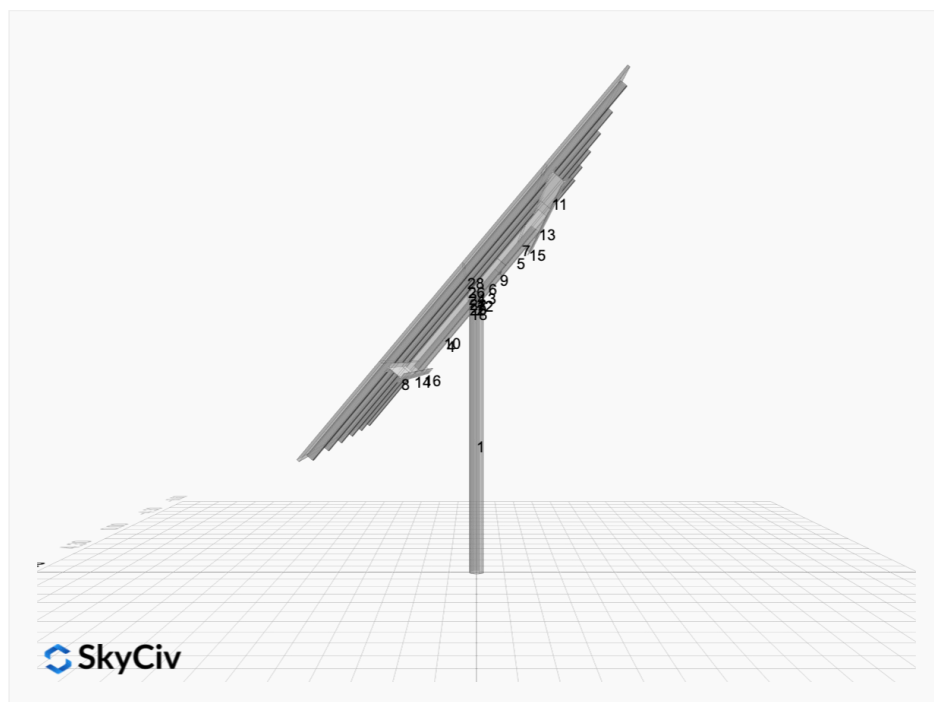
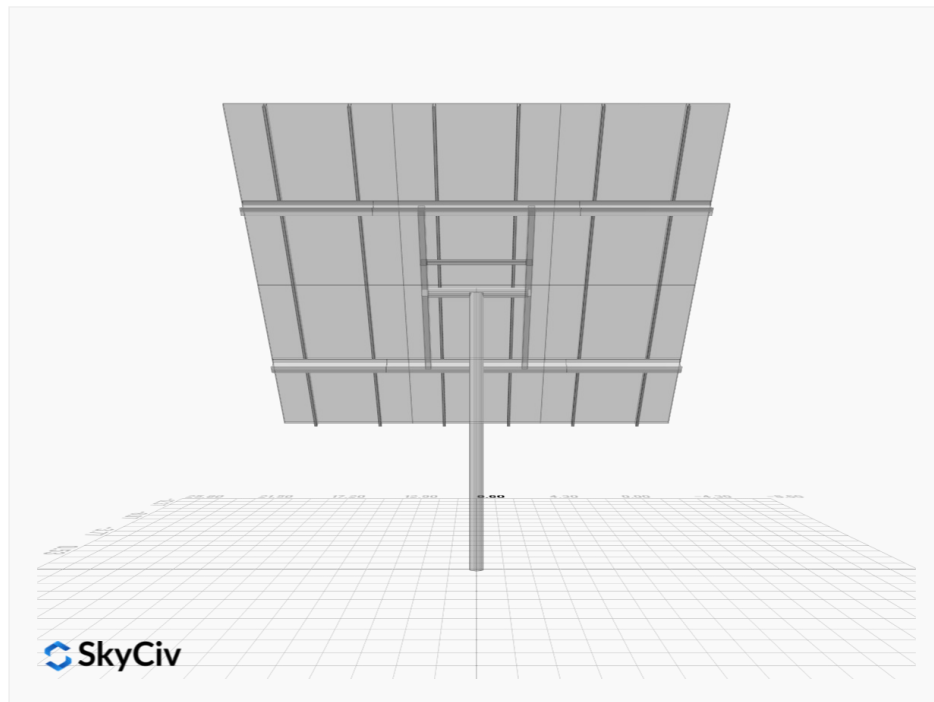


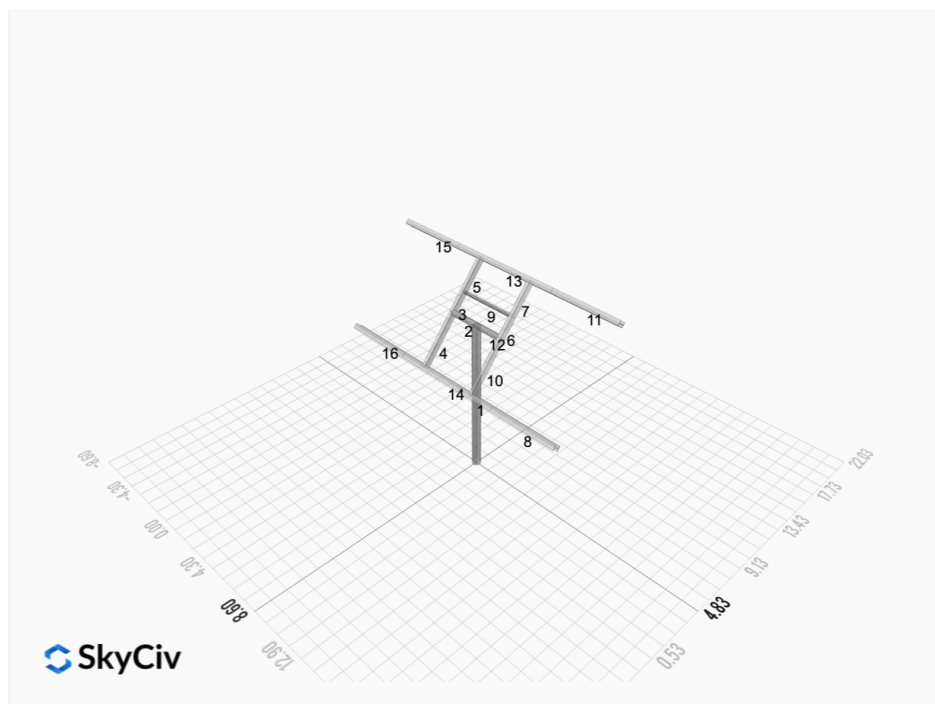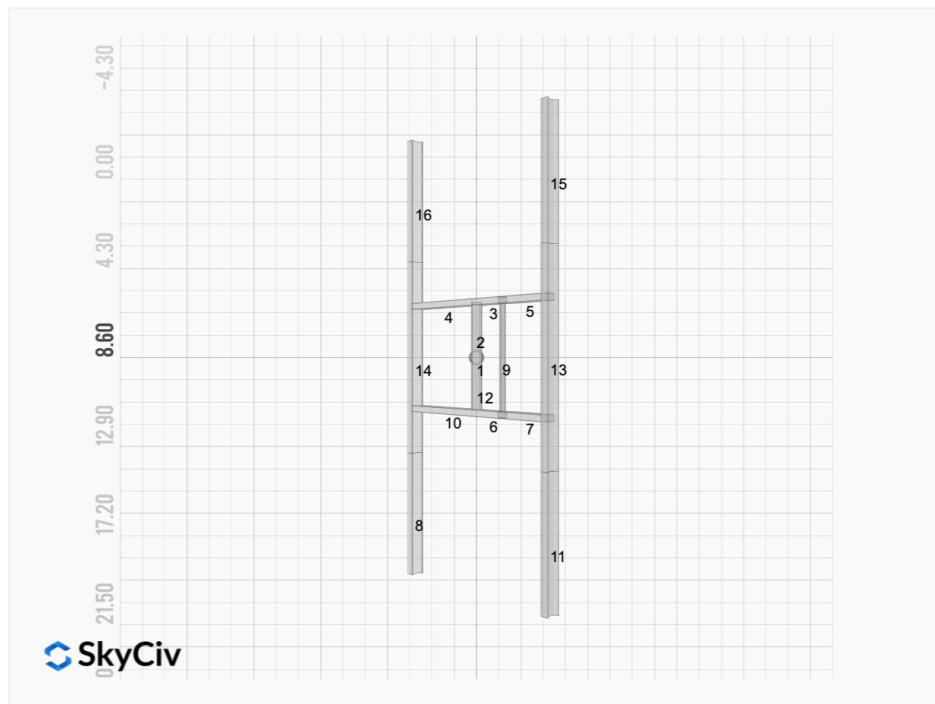


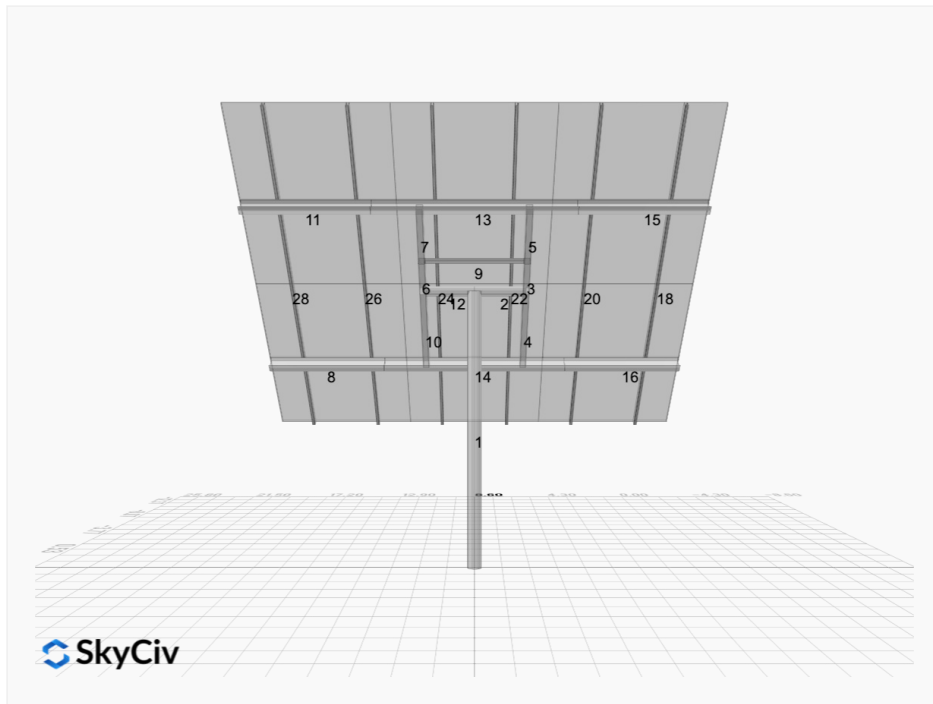

FEM Results (Envelope Worst Case for each member)

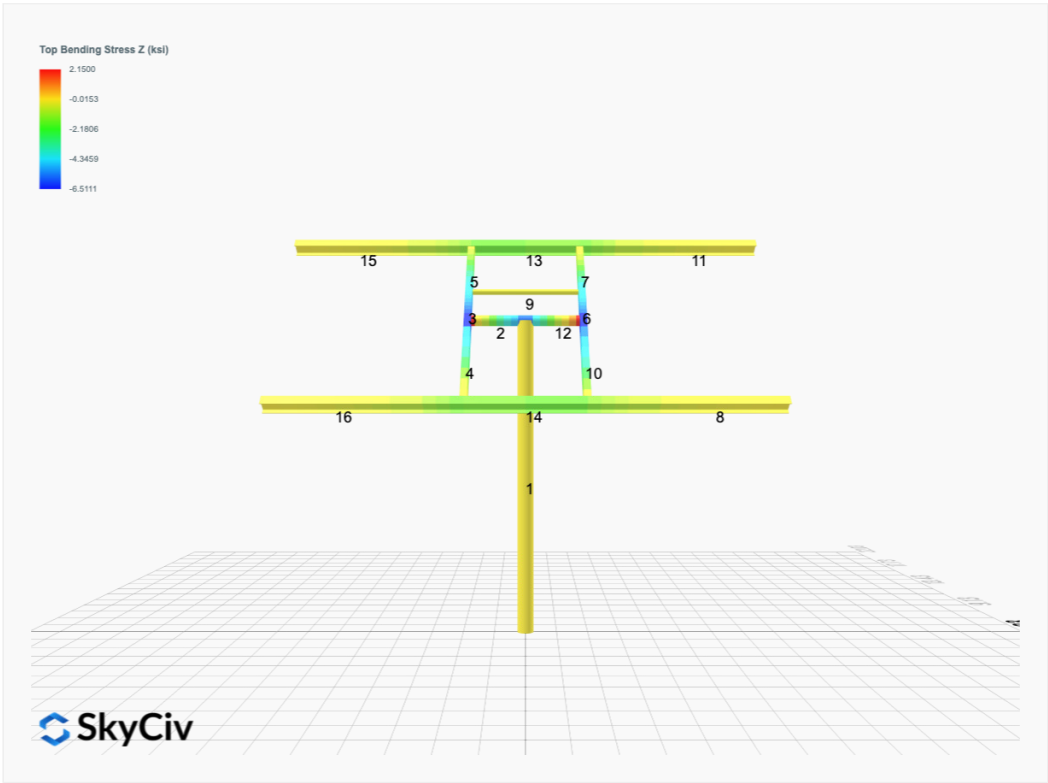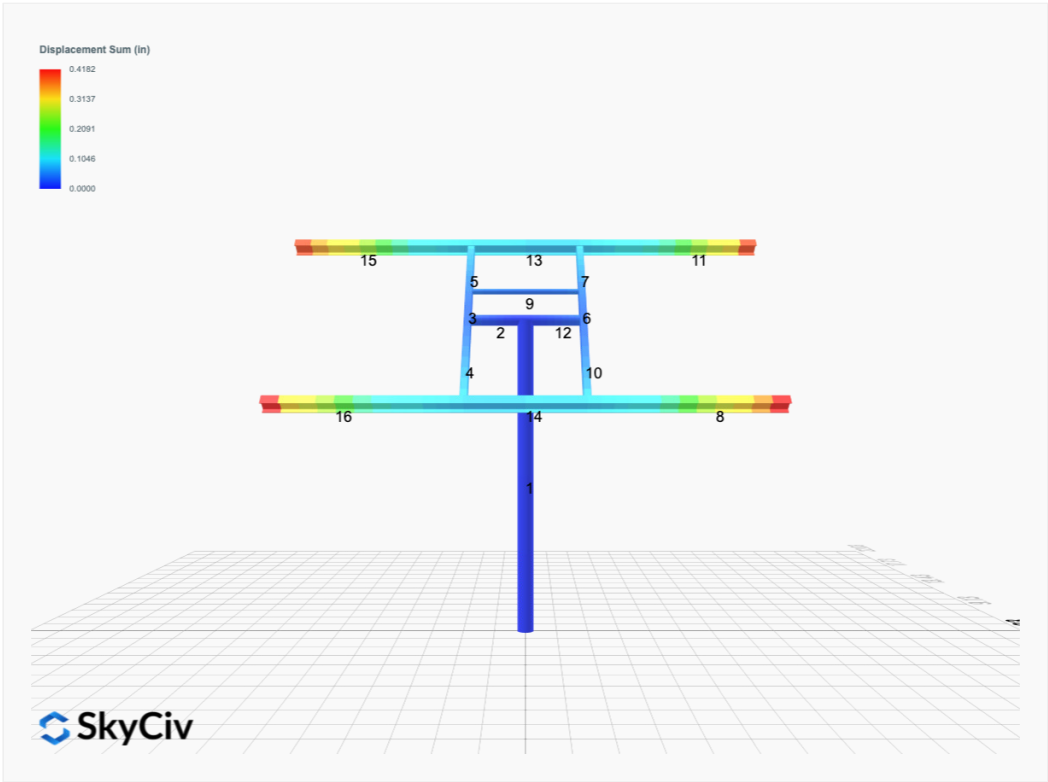

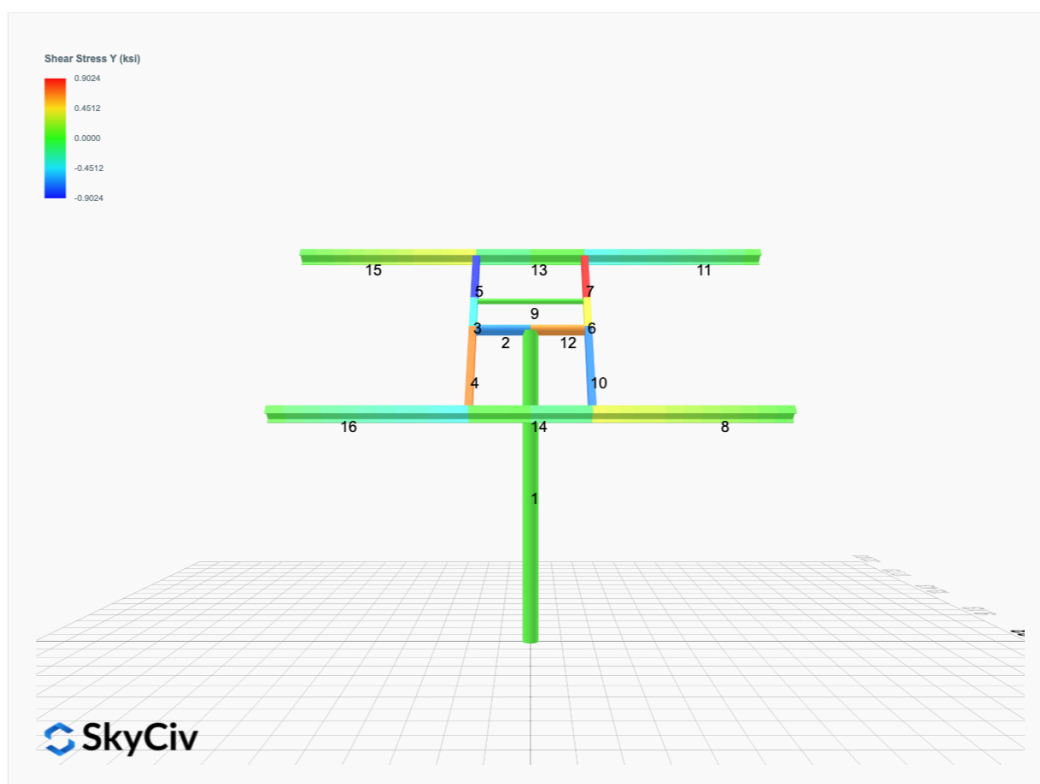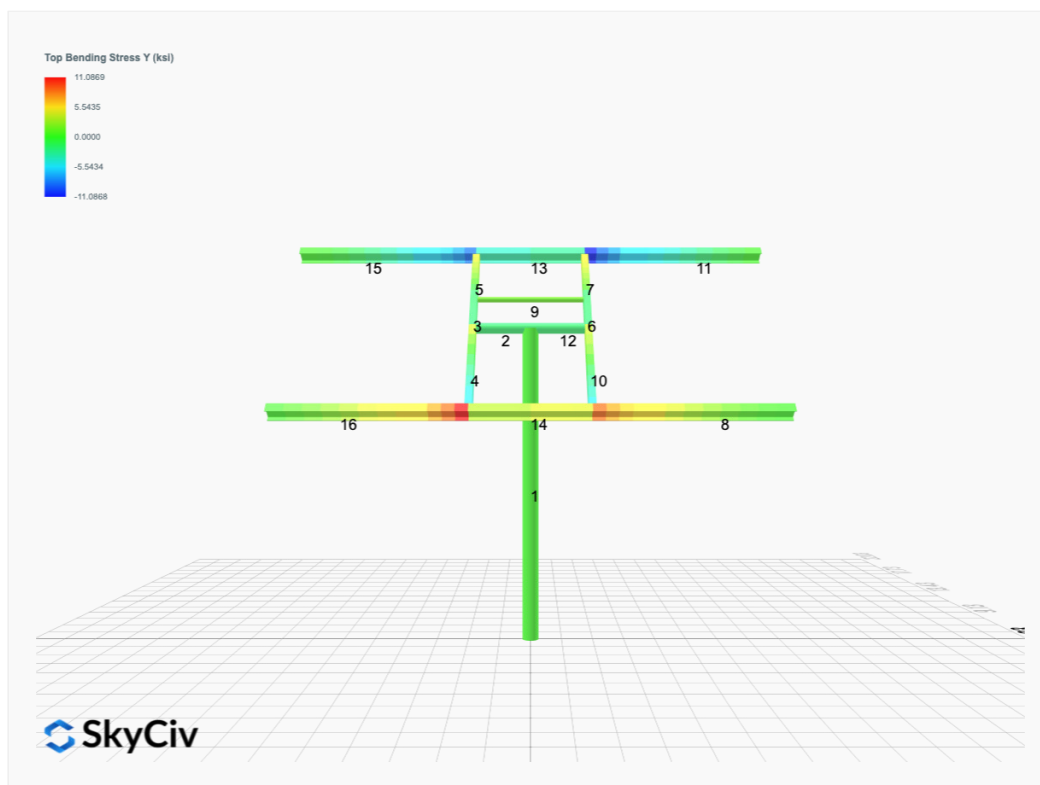

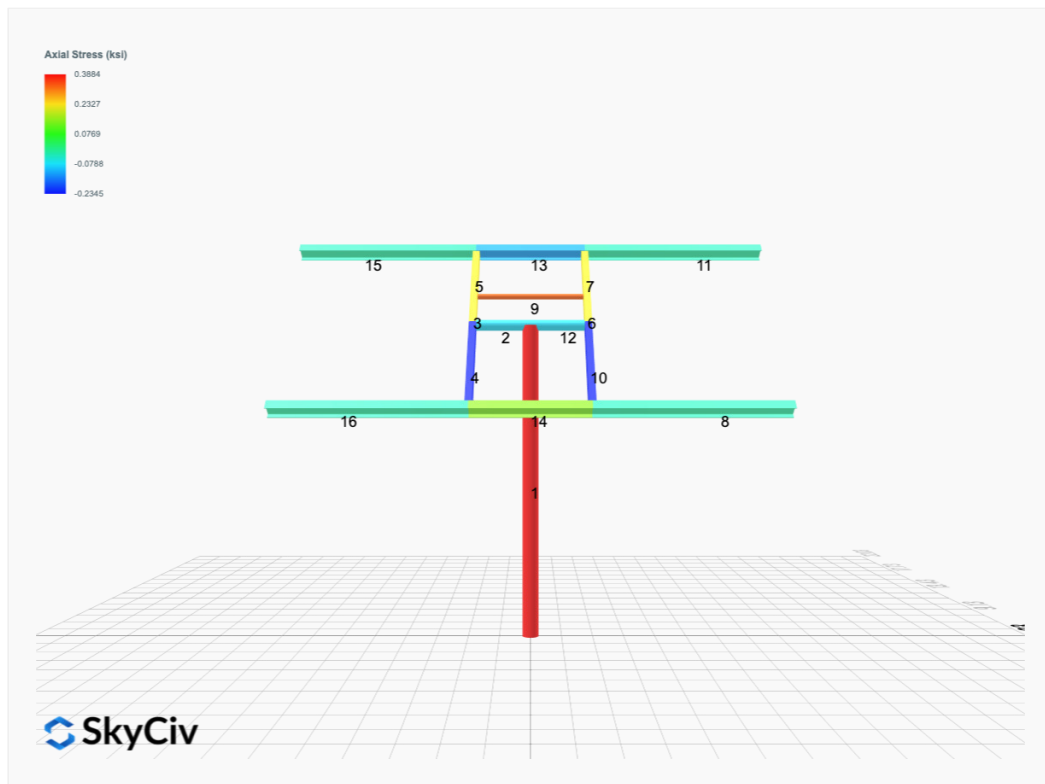

Reaction Forces for Foundation 1 (Node ID#1), (kip, kip-ft)

ASD Load Combination Results

Name	Fx	Fy	Fz	Mx	My	Mz
ULS: 1. D	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 2. D + L	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 3. D + (S or Lr or R)	0.0000	4.0446	0.0000	0.0000	-0.0000	0.0249
ULS: 3. D + (S or Lr or R)	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	3.5027	0.0000	0.0000	-0.0000	0.0227
ULS: 4. D + 0.75L + 0.75(S or Lr or R)	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 5b. D + 0.7E	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 6b. D + 0.75L + 0.75(0.7)E + 0.75S	0.0000	3.5027	0.0000	0.0000	-0.0000	0.0227
ULS: 8. 0.6D + 0.7E	0.0000	1.1261	0.0000	0.0000	-0.0000	0.0098
ULS: 5a. D + 0.6W_Wind downforce Case A only	-0.9975	2.7138	0.0000	0.0000	-0.0000	10.8504
ULS: 5a. D + 0.6W_Wind downforce Case B only	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 5a. D + 0.6W_Wind uplift Case A only	0.9975	1.0399	0.0000	0.0000	-0.0000	-10.6140
ULS: 5a. D + 0.6W_Wind uplift Case B only	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.7481	4.1304	0.0000	0.0000	-0.0000	8.1483
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	3.5027	0.0000	0.0000	-0.0000	0.0227
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.7481	2.8749	0.0000	0.0000	-0.0000	-7.9500
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	3.5027	0.0000	0.0000	-0.0000	0.0227
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case A only	-0.7481	2.5046	0.0000	0.0000	-0.0000	8.1419
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind downforce Case B only	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case A only	0.7481	1.2491	0.0000	0.0000	-0.0000	-7.9564
ULS: 6a. D + 0.75L + 0.75(0.6)W + 0.75(S or Lr or R)_Wind uplift Case B only	0.0000	1.8769	0.0000	0.0000	-0.0000	0.0163
ULS: 7. 0.6D + 0.6W_Wind downforce Case A only	-0.9975	1.9631	0.0000	0.0000	-0.0000	10.8439
ULS: 7. 0.6D + 0.6W_Wind downforce Case B only	0.0000	1.1261	0.0000	0.0000	-0.0000	0.0098
ULS: 7. 0.6D + 0.6W_Wind uplift Case A only	0.9975	0.2891	0.0000	0.0000	-0.0000	-10.6205
ULS: 7. 0.6D + 0.6W_Wind uplift Case B only	0.0000	1.1261	0.0000	0.0000	-0.0000	0.0098

Worst Case Reactions LRFD

These calculations are taken directly from the FEA via SkyCiv and are used in the Concrete Checks of the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	6.4181
Shear X	-1.6625
Shear Z	0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	18.5368

Worst Case Reactions ASD

These results are taken from the worst case values in the above table and are used in the Soil Checks in the Foundation Module.

Note: Worst case values are assumed as downforce wind load cases.

Result	Value (kip, kip-ft)
Axial	4.1304
Shear X	-0.9975
Shear Z	0.0000
Moment X	0.0000
Moment Y (Twist)	0.0000
Moment Z	10.8504

Project Details

Design Code: AISC 360-16 LRFD
Provision: LRFD
Country: United States

User Name: sales@mtsolar.us
Unit System: imperial



Design Input Information

Design Factors			
Φ_t	Φ_c	Φ_b	Φ_v
0.9	0.9	0.9	0.9

Design Materials			
ID	E (ksi)	F_y (ksi)	F_u (ksi)
1	29000	50	65

Section Dimensions								
ID	Name	d (in)	t_w (in)					
1	2in Pipe Sch 40	2.38	0.15					
4	4in Pipe Sch 40	4.50	0.24					
7	6in Pipe Sch 40	6.63	0.28					
ID	Name	d (in)	b (in)	t_w (in)	t_b (in)	r (in)		
15	HSS5x3x1/8	5.00	3.00	0.12	0.12	0.12		
ID	Name	d (in)	t_w (in)	b_t (in)	b_b (in)	t_t (in)	t_b (in)	r (in)
18	W6x9	5.90	0.17	3.94	3.94	0.21	0.21	0.25

Section Properties								
ID	Name	A (in ²)	J (in ⁴)	I_{yp} (in ⁴)	I_{zp} (in ⁴)	I_w (in ⁶)	S_{yp} (in ³)	S_{zp} (in ³)


15	120.60	34.69	23.36	6.45	30.09	45.74
16	120.60	34.69	23.36	6.45	30.09	45.74

Design Ratio

Member ID	P	M _z	M _y	V _y	V _z	(P,M _z ,M _y)	Worst LC	KL/r	δ	Status
1	0.074	0.438	0.000	0.022	0.000	0.466	#13	0.604	Not Required	Pass
2	0.005	0.287	0.125	0.072	0.019	0.391	#21	0.034	Not Required	Pass
3	0.014	0.392	0.085	0.039	0.005	0.483	#21	0.044	Not Required	Pass
4	0.013	0.388	0.282	0.039	0.046	0.575	#21	0.078	Not Required	Pass
5	0.014	0.243	0.295	0.039	0.059	0.322	#21	0.073	Not Required	Pass
6	0.014	0.392	0.085	0.039	0.005	0.483	#21	0.044	Not Required	Pass
7	0.014	0.243	0.295	0.039	0.059	0.322	#21	0.073	Not Required	Pass
8	0.000	0.064	0.209	0.021	0.012	0.273	#21	Not Required	Not Required	Pass
9	0.021	0.023	0.046	0.001	0.000	0.077	#21	0.198	Not Required	Pass
10	0.013	0.388	0.282	0.039	0.046	0.575	#21	0.078	Not Required	Pass
11	0.000	0.064	0.209	0.021	0.012	0.273	#21	Not Required	Not Required	Pass
12	0.005	0.287	0.125	0.072	0.019	0.391	#21	0.034	Not Required	Pass
13	0.008	0.158	0.391	0.029	0.017	0.544	#21	0.177	Not Required	Pass
14	0.009	0.161	0.391	0.029	0.017	0.545	#21	0.265	Not Required	Pass
15	0.000	0.064	0.209	0.021	0.012	0.273	#21	Not Required	Not Required	Pass
16	0.000	0.064	0.209	0.021	0.012	0.273	#21	Not Required	Not Required	Pass

Definitions

Φ _t	Safety factor for tensile
Φ _c	Safety factor for compression
Φ _b	Safety factor for flexure
Φ _v	Safety factor for shear
E	Modulus of elasticity
F _y	Specified minimum yield stress
F _u	Specified minimum tensile strength
A	Cross-sectional area
J	Torsional constant
I _{yp}	Moment of inertia about the Y axes
I _{zp}	Moment of inertia about the Z axes
I _w	Warping constant
S _{yp}	Plastic section modulus about the Y axis
S _{zp}	Plastic section modulus about the Z axis
KL	Effective length
C _b	Buckling modification factor (from all load combinations)
L _b	Length between braced points
LST	Limited slenderness for tension
LSC	Limited slenderness for compression
LD	Limited deflection
P _n	Nominal axial strength (tension/compression)
M _n	Nominal flexural strength (about Z/Y axis)
V _n	Nominal shear strength (along Z/Y axis)
P	Design ratio in case of axial force
M _z	Design ratio in case of bending about Z axis
M _y	Design ratio in case of bending about Y axis
V _y	Design ratio in case of shear along Y axis
V _z	Design ratio in case of shear along Z axis
(P,M _z ,M _y)	Design ratio in case of axial force and bending action
KL/r	Design ratio in case of section slenderness
δ	Design ratio in case of member deflection
OK	Capacity is provided
NG	Capacity is not provided

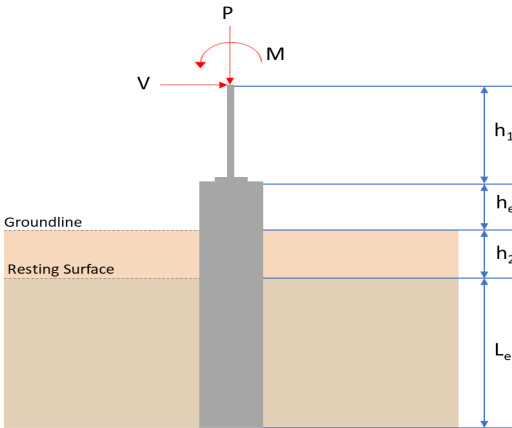REFERENCES	CALCULATIONS	RESULTS																										
	SkyCiv Foundation Design Pile Foundation Design Information : Design code : IBC 2021 (International Building Code) Unit System : Imperial																											
	Pile Input  Geometry Pile shape: round D = 36 in - Pile diameter L = 7 ft - Total pile length h1 = 0 ft - Lateral load height from the top of the pile, h2 = 0 ft - Depth to resisting surface he = 0 ft - Length of pile above the ground Tabulation of Soil Parameters <table><tr><th>Layer</th><th>Label</th><th>Allowable Bearing Pressure (qa) (psf)</th><th>Allowable Lateral Pressure (R) (psf/ft)</th></tr><tr><td>1</td><td>Sand, silty sand, clayey sand, silty gravel & clayey gravel</td><td>2000.000</td><td>150.000</td></tr></table> Tabulation of Loads <table><tr><th>Load Component</th><th>ASD</th><th>LRFD</th></tr><tr><td>P (kip)</td><td>4.130</td><td>6.418</td></tr><tr><td>Vx (kip)</td><td>-0.997</td><td>-1.662</td></tr><tr><td>Vz (kip)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mx (kipft)</td><td>0.000</td><td>0.000</td></tr><tr><td>Mz (kipft)</td><td>10.850</td><td>18.537</td></tr></table> Material Properties f'ck = 2.5 ksi - Concrete strength,	Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)	1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000	Load Component	ASD	LRFD	P (kip)	4.130	6.418	Vx (kip)	-0.997	-1.662	Vz (kip)	0.000	0.000	Mx (kipft)	0.000	0.000	Mz (kipft)	10.850	18.537	
Layer	Label	Allowable Bearing Pressure (qa) (psf)	Allowable Lateral Pressure (R) (psf/ft)																									
1	Sand, silty sand, clayey sand, silty gravel & clayey gravel	2000.000	150.000																									
Load Component	ASD	LRFD																										
P (kip)	4.130	6.418																										
Vx (kip)	-0.997	-1.662																										
Vz (kip)	0.000	0.000																										
Mx (kipft)	0.000	0.000																										
Mz (kipft)	10.850	18.537																										
	Required depth to resist lateral loads (ASD) H - Point of application of the lateral load $H = h_1 + h_2 + h_e$$H = (0 \text{ ft}) + (0 \text{ ft}) + (0 \text{ ft})$$H = 0 \text{ ft}$ Considering x-direction: Ho - Lateral force per length of pile, $H_o = \frac{V_x}{D}$$H_o = \frac{(-0.997 \text{ kip})}{(36 \text{ in})}$$H_o = -0.33233 \text{ kip/ft}$ Mo - Moment per length of pile,																											

	$M_o = \frac{M_z + (V_x H)}{D}$ $M_o = \frac{(10.85 \text{ kipft}) + ((-0.997 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$ $M_o = 3.6167 \text{ kipft/ft}$ Required depth of embedment in earth: $L_x^3 - \left(14.14 \times \frac{H_o \times L_x}{R}\right) - \left(18.85 \times \frac{M_o}{R}\right) = 0$ Solving the cubic equation: $L_{e,x} = 6.3468 \text{ ft}$ - Required depth in x-direction, Considering z-direction: $L_{e,z} = 0 \text{ ft}$ - Required depth in z-direction, Minimum embedded depth required: $L_{e,req}$ - Depth of pile required, $L_{e,req} = MAX[L_{e,x}, L_{e,z}]$ $L_{e,req} = MAX[(6.3468 \text{ ft}), (0 \text{ ft})]$ $L_{e,req} = 6.347 \text{ ft}$ L_e - Actual embedded length of pile, $L_e = L - h_e - h_2$ $L_e = (7 \text{ ft}) - (0 \text{ ft}) - (0 \text{ ft})$ $L_e = 7 \text{ ft}$ Ratio - Embedded depth $Ratio = \frac{L_{e,req}}{L_e}$ $Ratio = \frac{(6.347 \text{ ft})}{(7 \text{ ft})}$ $Ratio = 0.90671$	Status: PASS Ratio: 0.910
	End-bearing Capacity (ASD) A - Pile cross-section area $A = \pi \left(\frac{D}{2}\right)^2$ $A = \pi \times \left(\frac{(36 \text{ in})}{2}\right)^2$ $A = 7.0686 \text{ ft}^2$ q - End-bearing pressure $q = \frac{P_v}{A}$ $q = \frac{(4.13 \text{ kip})}{(7.0686 \text{ ft}^2)}$ $q = 0.58428 \text{ kip/ft}^2$ Check bearing capacity ratio: Ratio - Capacity $Ratio = \frac{q}{q_a}$ $Ratio = \frac{(0.58428 \text{ kip/ft}^2)}{(2000 \text{ psf})}$ $Ratio = 0.29214$	Status: PASS Ratio: 0.290
Czeraniak	Lateral Soil Pressure (ASD):	

L/D - Length to least lateral dimension ratio,

$$L/D = \frac{L}{D}$$

$$L/D = \frac{(7 \text{ ft})}{(36 \text{ in})}$$

$$L/D = 2.3333$$

Since $L/D \leq 10$,

Pile is short.

Considering x-direction:

$H_o = -0.33233 \text{ kip/ft}$ - Lateral force per length of pile,

$M_o = 3.6167 \text{ kipft/ft}$ - Overturning moment per length of pile,

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (3.6167 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-0.33233 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (3.6167 \text{ kipft/ft})) + (4 \times (-0.33233 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 4.8417 \text{ ft}$$

p - Earth pressure against the pile at distance $a/2$ from resting surface,

$$p = \frac{1.178 [(4 M_o) + (3 H_o L_e)]^2}{L_e^2 [(3 M_o) + (2 H_o L_e)]}$$

$$p = \frac{1.178 \times [(4 \times (3.6167 \text{ kipft/ft})) + (3 \times (-0.33233 \text{ kip/ft}) \times (7 \text{ ft}))]^2}{(7 \text{ ft})^2 \times [(3 \times (3.6167 \text{ kipft/ft})) + (2 \times (-0.33233 \text{ kip/ft}) \times (7 \text{ ft}))]}$$

$$p = 0.21749 \text{ kip/ft}^2$$

s - Earth pressure against the pile at distance L_e ,

$$s = \frac{9.425 [(2 M_o) + (H_o L_e)]}{L_e^2}$$

$$s = \frac{9.425 \times [(2 \times (3.6167 \text{ kipft/ft})) + ((-0.33233 \text{ kip/ft}) \times (7 \text{ ft}))]}{(7 \text{ ft})^2}$$

$$s = 0.94385 \text{ kip/ft}^2$$

Check lateral soil pressure capacity:

p_a - Allowable lateral soil pressure at depth $a/2$,

$$p_a = R \frac{a}{2}$$

$$p_a = (150 \text{ psf/ft}) \times \frac{(4.8417 \text{ ft})}{2}$$

$$p_a = 0.36313 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{p}{p_a}$$

$$\text{Ratio} = \frac{(0.21749 \text{ kip/ft}^2)}{(0.36313 \text{ kip/ft}^2)}$$

$$\text{Ratio} = 0.59893$$

p_s - Allowable lateral soil pressure at depth L_e ,

$$p_s = R L_e$$

$$p_s = (150 \text{ psf/ft}) \times (7 \text{ ft})$$

$$p_s = 1.05 \text{ kip/ft}^2$$

Ratio - Lateral soil capacity

$$\text{Ratio} = \frac{s}{p_s}$$


$$= \frac{(0.94385 \text{ kip/ft}^2)}{(1.05 \text{ kip/ft}^2)}$$

Status: **PASS**
Ratio: **0.600**

$$Ratio = \frac{0.900}{(1.05 \text{ kip/ft}^2)}$$

$$Ratio = 0.8989$$

Status: **PASS**
Ratio: **0.900**

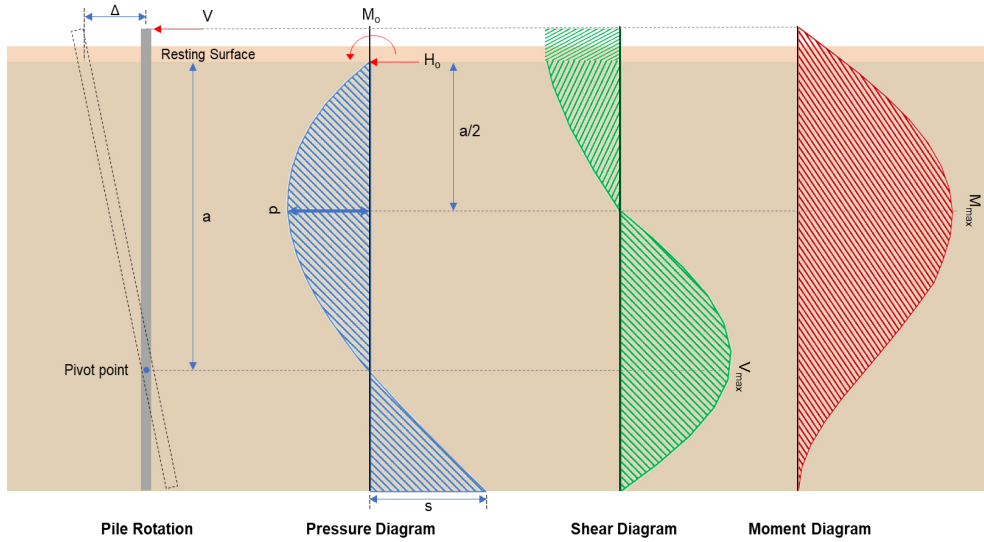

Shear force and Bending moment (x-direction, LRFD)

H_o - Lateral force per length of pile,

$$H_o = \frac{V_x}{D}$$

$$H_o = \frac{(-1.662 \text{ kip})}{(36 \text{ in})}$$

$$H_o = -0.554 \text{ kip/ft}$$

M_o - Moment per length of pile,

$$M_o = \frac{M_z + (V_x H)}{D}$$

$$M_o = \frac{(18.537 \text{ kipft}) + ((-1.662 \text{ kip}) \times (0 \text{ ft}))}{(36 \text{ in})}$$

$$M_o = 6.179 \text{ kipft/ft}$$

E - Distance from lateral load to resisting surface,

$$E = \frac{M_o}{H_o}$$

$$E = \frac{(6.179 \text{ kipft/ft})}{(-0.554 \text{ kip/ft})}$$

$$E = 11.153 \text{ ft}$$

a - Distance from resting surface to pivot point,

$$a = \frac{(4 M_o L_e) + (3 H_o L_e^2)}{(6 M_o) + (4 H_o L_e)}$$

$$a = \frac{(4 \times (6.179 \text{ kipft/ft}) \times (7 \text{ ft})) + (3 \times (-0.554 \text{ kip/ft}) \times (7 \text{ ft})^2)}{(6 \times (6.179 \text{ kipft/ft})) + (4 \times (-0.554 \text{ kip/ft}) \times (7 \text{ ft}))}$$

$$a = 4.8387 \text{ ft}$$

V_{max} - Max shear force located at depth a ,

$$V_{max} = (H_o D) \left[1 - \left[3 \left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{L_e} \right)^2 \right] + \left[4 \left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{L_e} \right)^3 \right] \right]$$

$$V_{max} = ((-0.554 \text{ kip/ft}) \times (36 \text{ in})) \times \left[1 - \left[3 \times \left(\frac{4 \times (11.153 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left(\frac{(4.8387 \text{ ft})}{(7 \text{ ft})} \right)^2 \right] + \left[4 \times \left(\frac{3 \times (11.153 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left(\frac{(4.8387 \text{ ft})}{(7 \text{ ft})} \right)^3 \right] \right]$$

	$V_{max} = 5.7818 \text{ kip}$ M_{max} - Max bending moment located at depth $a/2$, $M_{max} = (H_o D L_e) \left[\left(\frac{E}{L_e} + \frac{a}{2 L_e} \right) - \left[\left(\frac{4 E}{L_e} + 3 \right) \left(\frac{a}{2 L_e} \right)^3 + \left[\left(\frac{3 E}{L_e} + 2 \right) \left(\frac{a}{2 L_e} \right)^4 \right] \right] \right]$ $M_{max} = ((-0.554 \text{ kip/ft}) \times (36 \text{ in}) \times (7 \text{ ft})) \times \left[\left(\frac{(11.153 \text{ ft})}{(7 \text{ ft})} + \frac{(4.8387 \text{ ft})}{2 \times (7 \text{ ft})} \right) - \left[\left(\frac{4 \times (11.153 \text{ ft})}{(7 \text{ ft})} + 3 \right) \times \left(\frac{(4.8387 \text{ ft})}{2 \times (7 \text{ ft})} \right)^3 + \left[\left(\frac{3 \times (11.153 \text{ ft})}{(7 \text{ ft})} + 2 \right) \times \left(\frac{(4.8387 \text{ ft})}{2 \times (7 \text{ ft})} \right)^4 \right] \right] \right]$ $M_{max} = 19.181 \text{ kipft}$	
Table 22.4.2.1 22.4.2.2, 10.6.1.1	Minimum Reinforcement Check (LRFD) Parameters: $f'_{ck} = 2.5 \text{ ksi}$ - Concrete strength, $f_{yk} = 60 \text{ ksi}$ - Longitudinal reinforcement strength, $\phi = 0.65$ - Reduction factor for axial strength, $\alpha = 0.85$ - Alpha factor for axial strength, $A_g = 1017.9 \text{ in}^2$ - Gross area of concrete, Longitudinal reinforcement: Required reinforcement due to axial load, $A_{st,required}$ $A_{st,required} = \text{Min} \left[\frac{\frac{P}{\phi \alpha} - (0.85 f'_{ck} A_g)}{f_{yk} - (0.85 f'_{ck})}, (0.08 A_g) \right]$ $A_{st,required} = \text{Min} \left[\frac{\frac{(6.418 \text{ kip})}{(0.65) \times (0.85)} - (0.85 \times (2.5 \text{ ksi}) \times (1017.9 \text{ in}^2))}{(60 \text{ ksi}) - (0.85 \times (2.5 \text{ ksi}))}, (0.08 \times (1017.9 \text{ in}^2)) \right]$ $A_{st,required} = -37.173 \text{ in}^2$ A_{min} - Governing minimum reinforcement area, $A_{min} = \text{Max} [A_{st,required}, (0.0018 A_g)]$ $A_{min} = \text{Max} [(-37.173 \text{ in}^2), (0.0018 \times (1017.9 \text{ in}^2))]$ $A_{min} = 1.8322 \text{ in}^2$ n_{rebar} - Required number of reinforcement, $n_{rebar} = \frac{A_{min}}{A_{rebar}}$ $n_{rebar} = \frac{(1.8322 \text{ in}^2)}{(0.3068 \text{ in}^2)}$ $n_{rebar} = 6$ A_{st} - Actual total reinforcement area, $A_{st} = n_{rebar} \frac{\pi d_{bar}^2}{4}$ $A_{st} = (6) \times \frac{\pi \times (0.625 \text{ in})^2}{4}$ $A_{st} = 1.8408 \text{ in}^2$ Ratio - Capacity $\text{Ratio} = \frac{A_{min}}{A_{st}}$ $\text{Ratio} = \frac{(1.8322 \text{ in}^2)}{(1.8408 \text{ in}^2)}$ $\text{Ratio} = 0.99533$	
25.2.3	s_{rebar} - Minimum spacing of reinforcement,	Status: PASS Ratio: 1.000

$$V_{c,a} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + \frac{(6418 \text{ lbf})}{6 \times (1017.9 \text{ in}^2)} \right] \times (36 \text{ in}) \times (28.8 \text{ in})$$

$$V_{c,a} = 75.527 \text{ kip}$$

22.5.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{c,b}$ - Shear strength of concrete (b)

$$V_{c,b} = \left[2 \lambda_s \sqrt{f'_{ck}} + (0.05 f'_{ck}) \right] b_w d$$

$$V_{c,b} = \left[2 \times (0.71796) \times \sqrt{(2500 \text{ psi})} + (0.05 \times (2500 \text{ psi})) \right] \times (36 \text{ in}) \times (28.8 \text{ in})$$

$$V_{c,b} = 204.04 \text{ kip}$$

V_c - Governing shear strength of concrete

$$V_c = \text{Min}[V_{c,max}, V_{c,a}, V_{c,b}]$$

$$V_c = \text{Min}[(186.09 \text{ kip}), (75.527 \text{ kip}), (204.04 \text{ kip})]$$

$$V_c = 75.527 \text{ kip}$$

22.5.1.2 The following variables were converted to be consistent with empirical formula $f'_{ck} = 2.5 \text{ ksi} \rightarrow 2500 \text{ psi}$,
 $V_{s,a}$ - Shear strength of steel (a)

$$V_{s,a} = 8 \sqrt{f'_{ck}} b_w d$$

$$V_{s,a} = 8 \times \sqrt{(2500 \text{ psi})} \times (36 \text{ in}) \times (28.8 \text{ in})$$

$$V_{s,a} = 414.72 \text{ kip}$$

A_v - Ties rebar area,

$$A_v = \frac{\pi d_{ties}^2}{4}$$

$$A_v = \frac{\pi \times (0.375 \text{ in})^2}{4}$$

$$A_v = 0.11045 \text{ in}^2$$

22.5.8.5.3 $V_{s,b}$ - Shear strength of steel (b)

$$V_{s,b} = \frac{2 A_v f_{yw} d}{s_{ties}}$$

$$V_{s,b} = \frac{2 \times (0.11045 \text{ in}^2) \times (60 \text{ ksi}) \times (28.8 \text{ in})}{(10 \text{ in})}$$

$$V_{s,b} = 38.17 \text{ kip}$$

V_s - Governing shear strength of steel

$$V_s = \text{MIN}[V_{s,a}, V_{s,b}]$$

$$V_s = \text{MIN}[(414.72 \text{ kip}), (38.17 \text{ kip})]$$

$$V_s = 38.17 \text{ kip}$$

22.5.1.1 ϕV_n - Allowable shear strength

$$\phi V_n = \phi (V_c + V_s)$$

$$\phi V_n = (0.65) \times ((75.527 \text{ kip}) + (38.17 \text{ kip}))$$

$$\phi V_n = 73.904 \text{ kip}$$

Considering x-direction:

$V_{max} = 5.7818 \text{ kip}$ - Maximum shear force in the x-direction,
 $Ratio$ - Capacity

$$Ratio = \frac{V_{max}}{\phi V_n}$$

$$Ratio = \frac{(5.7818 \text{ kip})}{(73.904 \text{ kip})}$$

$$Ratio = 0.078235$$

Status: **PASS**
 Ratio: **0.078**

		Ratio: 0.080
	Flexural Strength (ACI 318-19, LRFD) S_m - Section modulus $S_m = \frac{\pi D^3}{32}$ $S_m = \frac{\pi \times (36 \text{ in})^3}{32}$ $S_m = 4580.4 \text{ in}^3$ $\lambda = 1$ - Concrete modification factor (Normal concrete), Allowable flexural strength: M_n shall be the lesser of: $\phi M_{n,1}$ $\phi M_{n,1} = \phi \times 5 \times \lambda \times \sqrt{f'_c} \times S_m$ $\phi M_{n,1} = 0.65 \times 5 \times 1 \times \sqrt{(2.5 \text{ ksi})} \times 4580.442 \text{ in}^3$ $\phi M_{n,1} = 62.027 \text{ kipft}$ 14.5.2.1b $\phi M_{n,2}$ $\phi M_{n,2} = \phi \times 0.85 \times f'_{ck} \times S_m$ $\phi M_{n,2} = (0.65) \times 0.85 \times (2.5 \text{ ksi}) \times (4580.4 \text{ in}^3)$ $\phi M_{n,2} = 527.23 \text{ kipft}$ Therefore, ϕM_n - Allowable flexural strength, $\phi M_n = \text{MIN}[\phi M_{n,1}, \phi M_{n,2}]$ $\phi M_n = \text{MIN}[(62.027 \text{ kipft}), (527.23 \text{ kipft})]$ $\phi M_n = 62.027 \text{ kipft}$ Considering x-direction: $M_{max} = 19.181 \text{ kipft}$ - Maximum moment in the x-direction, Ratio - Capacity $\text{Ratio} = \frac{M_{max}}{\phi M_n}$ $\text{Ratio} = \frac{(19.181 \text{ kipft})}{(62.027 \text{ kipft})}$ $\text{Ratio} = 0.30924$	Status: PASS Ratio: 0.310